



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

Read Write Antenna V720-H01-E



V720-H01-E

■ Product Description

OMRON's medium-range Read Write Antenna has a maximum communication distance of 25 cm with OMRON smart labels. Combined with the V720-CD1D, the V720-H01-E provides a complete RFID system.

■ Features


- Communication frequency: 13.56 MHz
- Conforms to the international standard ISO 15693 for contactless IC cards.
- Conforms to EC Directives and FCC.
- Provides a communication distance of 25 cm.
- Mounting on metal is possible.
- Various lengths of cables prepared.

■ Benefits

- Easy installation.
- High reading accuracy even in dirty or dusty environments.

Note: Ask about applications requiring special Antenna designs.

Dimensions of the Read Write Antenna

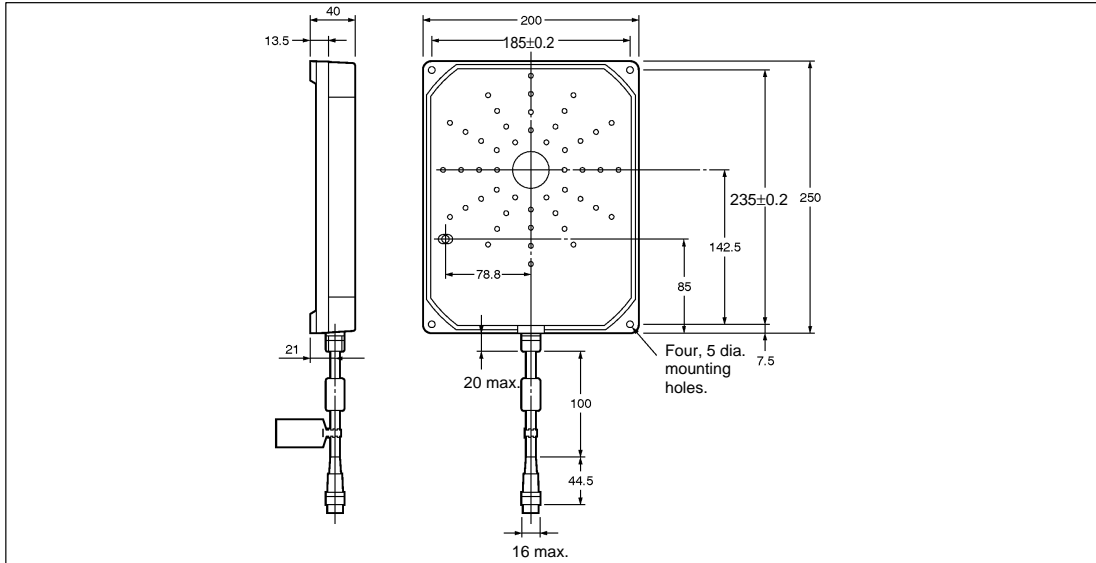

■ General Specifications

Item	Specifications
Communication frequency	13.56 MHz
Ambient temperature in operation	-20 to 55°C (with no icing)
Ambient temperature in storage	-35 to 65°C (with no icing)
Ambient humidity in operation	35% to 85% (with no condensation)
Insulation resistance	20 MΩ min. (at 100 VDC) between rear plate and casing
Dielectric strength	1,000 VAC (50/60 Hz) for 1 minute between rear plate and casing
Degree of protection	IEC60529 IP40 (except connector)
Vibration resistance	Destruction: 10 to 150 Hz, 1.5-mm double amplitude at 100 m/s ² in X, Y, and Z directions twice each for 8 minutes
Shock resistance	Destruction: 150 m/s ² three times each in X, Y, and Z directions
Cable length	0.1 m (use an extension cable to connect to the ID Controller up to 50.1 m)
LED indicators	Power supply: Green Communications: Orange
Weight	Approx. 800 g
Applicable standards	ETS 300 330, ETS 300 683, FCC Part 15 Subpart C

Cat. No. RF502-E1-1 **In the interest of product improvement, specifications are subject to change without notice.**

OMRON Corporation

Card Business Promotion Division

14th Fl., Gate City Osaki West Tower

1-11-1 Osaki, Shinagawa-ku,

Tokyo 141-0032 Japan

Tel: (81)3-5435-2016/Fax: (81)3-5435-2017

Printed in Japan
0100-3M (0100)Ⓐ



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com