ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.


- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Optics in Motion OIM202* at our website: ***Click HERE***

OIM202-Two Inch FSM

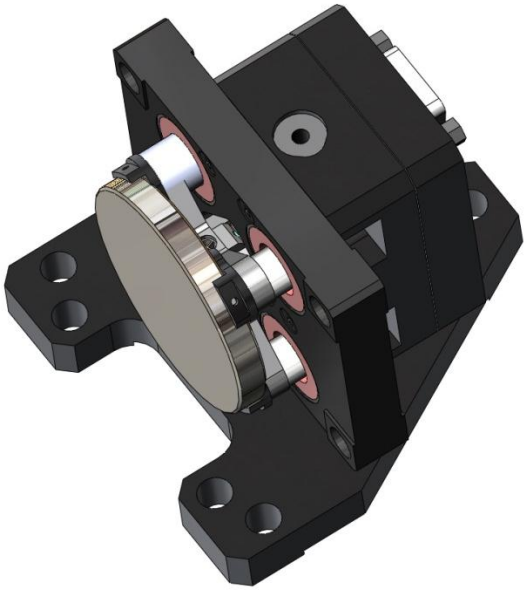

Model OIM202 features a low inertia carrier that holds glass 2.0" mirror substrates. Standard coatings are protected gold, aluminum, and silver. We can also mount any 2.0" mirror up to 0.375" thick.

A built in high precision optical sensor monitors mirror angle. The compact optical head is attached to a servo controller using a supplied 6 foot cable. The user inputs analog mirror command to the controller to steer the mirror.

FEATURES:

- Flexure suspension allows stiction free motion of the mirror with an infinite fatigue lifetime
- Built in optical sensor allows the user to monitor both axes of mirror motion
- Moving magnet design allows coils to be heat sunk to the mirror base structure
- New coil design eliminates coil overheating problems, no need to monitor coil temperature
- Available with a thin 1/4th wave or a thicker 1/10th wave substrate
- Mirror coating to customer requirements
- Mirror mounted using low out-gassing RTV
- Useable aperture up to 2.0" (mirror CA dependent)
- Higher performance than our standard OIM100 series fast steering mirror
- Lower inertia, and higher motor strength
- Angular range of +/-1.5 to +/-3.0 degrees mechanical

Optics In Motion LLC, 4223 Rutgers Ave, Long Beach, CA 90808
(562) 481-7103, E-Mail: sales@opticsinmotion.net

Mirror Specifications

Specification	Typical	Units
Dynamic Performance		
Mirror Angular Range (mechanical)	+/- 1.5 to +/-3.0	degrees
Angular resolution	<0.6 to <1.2	urads
3dB Bandwidth (user adjustable, factory set for 400Hz)	> 650	Hz
Linearity	1 to 2	% Full Scale
Step Response (1 mrad step)	<7	ms
Mirror Substrate		
Material	Fused Silica	
Mirror substrate size	2.0" dia x 0.125" (1/4th wave) or 2.0 dia x 0.25" (1/10th wav)	
Coating (Standard)	Protected Aluminum	
Reflectivity	>85% from 400 – 700nm	
Wavefront quality	λ/10 @ 633nm	waves
Clear Aperture	1.80" (90% C.A.)	inches
Electrical		
Peak power	30	Watts
Mechanical		
Mirror head size	3.0 X 2.3 X 2.2	inches
Weight, no foot	10.5	oz
Weight with foot	14.0	oz
Controller size	2.0 X 4.0 X 6.1	inches
Weight	21	oz
Head to Controller Cable Weight	8.0	oz

Complete mirror system
(mirror head, controller, cables, and power supply)

Includes:
Fast Steering Mirror Head
Protected aluminum, gold, or silver coated mirror substrate*
Analog Servo Controller
6 foot cable FSM to Controller
Table top power supply

***** Contact Optics In Motion to obtain a price for other mirror coatings (protected silver, multilayer …).

Optics In Motion LLC, 4223 Rutgers Ave, Long Beach, CA 90808
(562) 481-7103, E-Mail: sales@opticsinmotion.net

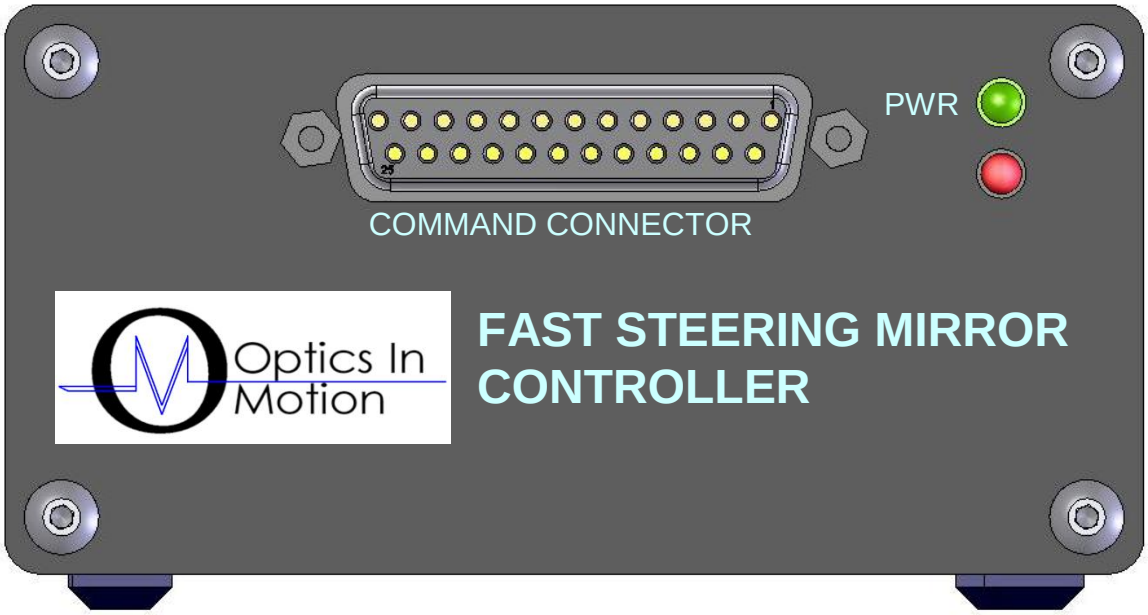


Figure 1: Controller Front View



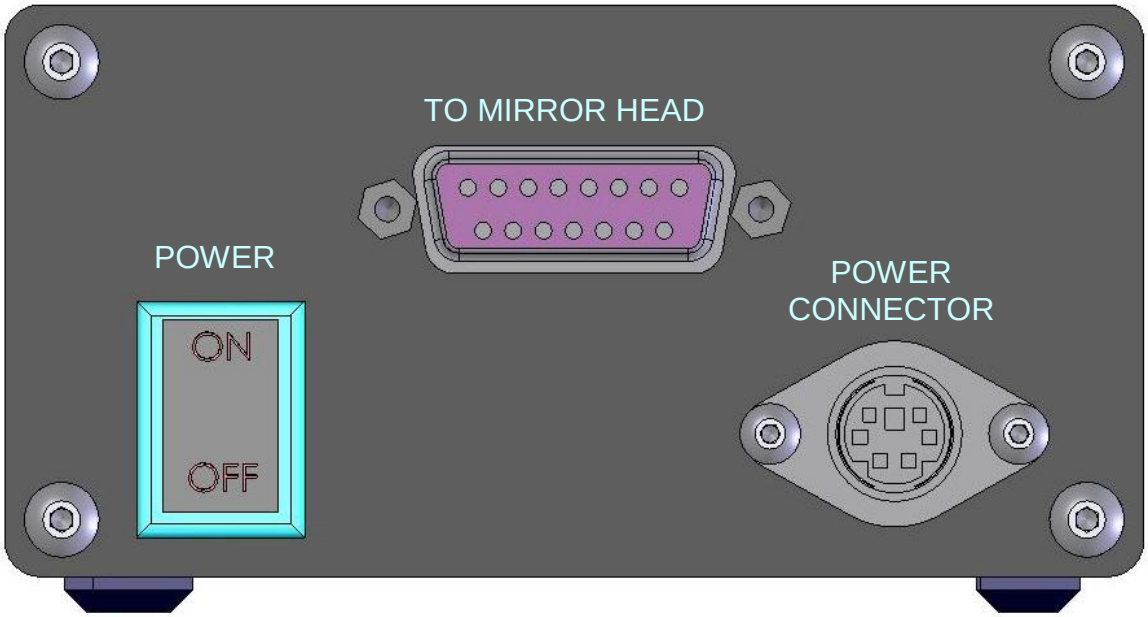



Figure 2: Controller Rear View


Optics In Motion LLC, 4223 Rutgers Ave, Long Beach, CA 90808
(562) 481-7103, E-Mail: sales@opticsinmotion.net

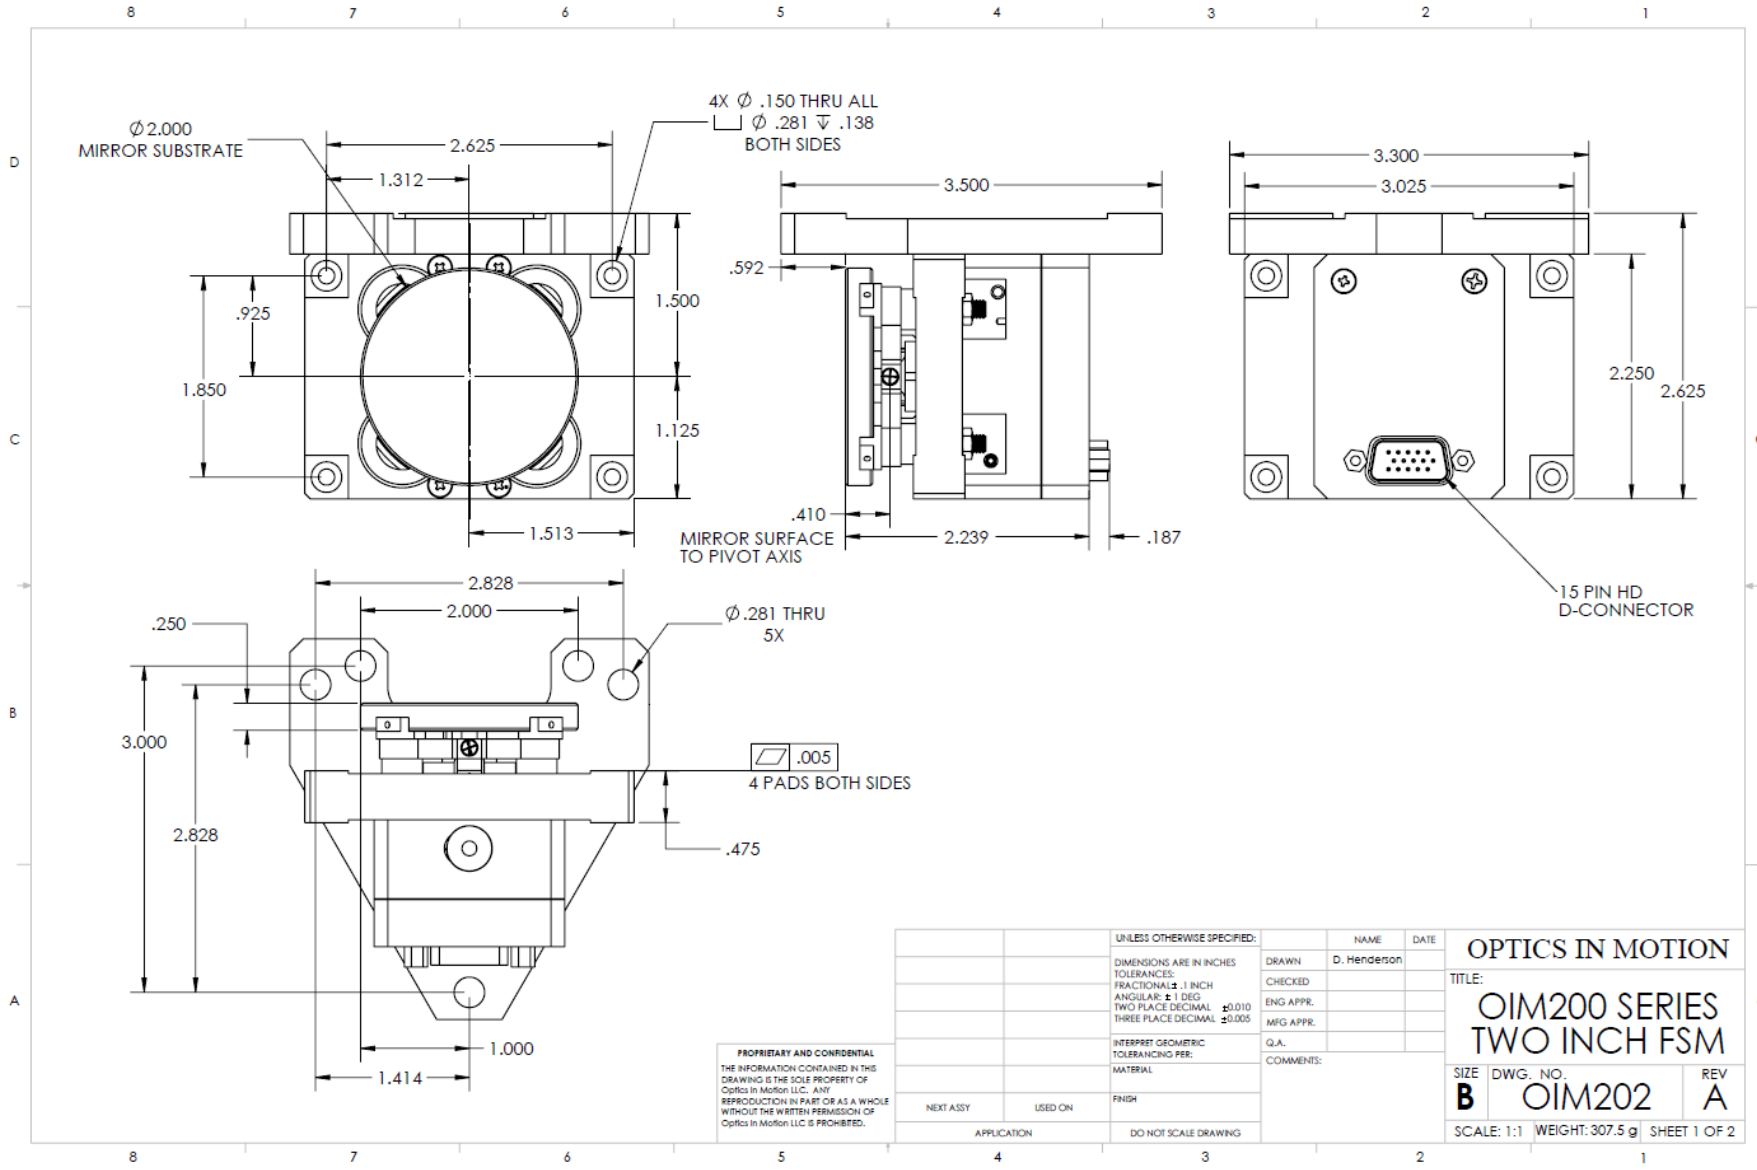


Optics In Motion LLC, 4223 Rutgers Ave, Long Beach, CA 90808
(562) 481-7103, E-Mail: sales@opticsinmotion.net

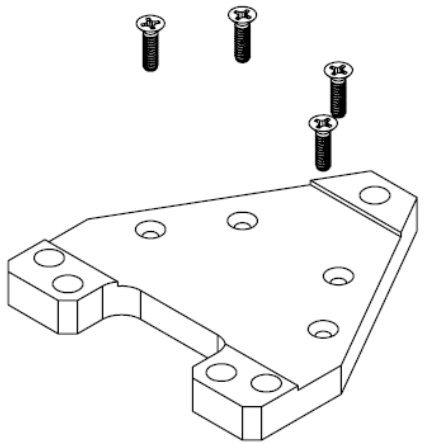

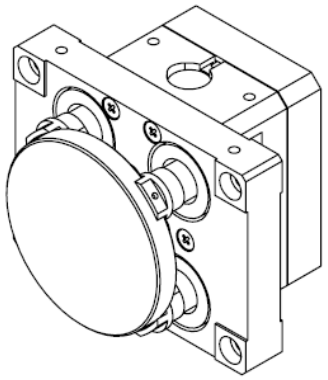

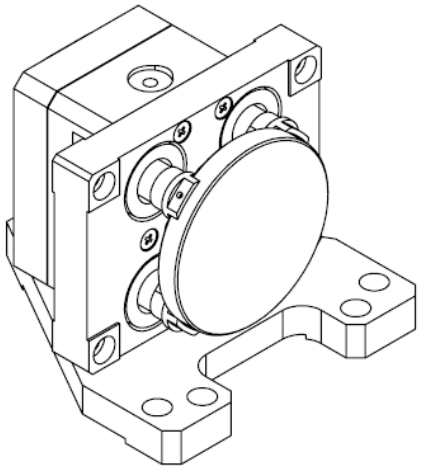

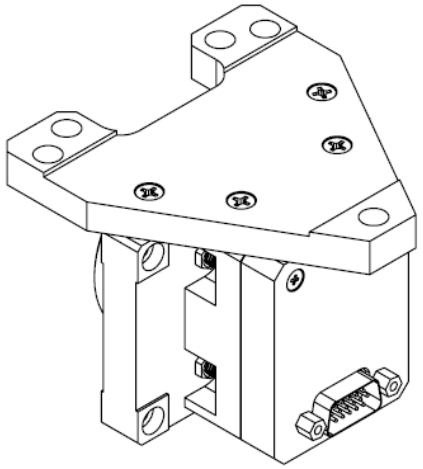

OPTICAL TABLE MOUNTING FOOT REMOVAL ILLUSTRATION

OPTICS IN MOTION		
TITLE: OIM200 SERIES TWO INCH FSM		
SIZE B	DWG. NO. OIM202	REV A
SCALE: 1:1	WEIGHT:	SHEET 2 OF 2

Optics In Motion LLC, 4223 Rutgers Ave, Long Beach, CA 90808
(562) 481-7103, E-Mail: sales@opticsinmotion.net

Command Connector Wiring Table

25-Socket Sub-miniature D Connector

Pin Number	Signal Name	I/O Type	Description
1	X ERROR	Output	X summing junction error voltage output, difference between commanded and actual position. (referenced to ground)
2	INT/EXT SWITCH	Input	Normally low TTL input. High level switches the position feedback input from local to external. (used with input pins 10,11 and 17, 5)
3	X- COMMAND	Input	X mirror position command. Low side of differential command input. Range +/-10 Volts.
4	X+ COMMAND	Input	X mirror position command. High side of differential command input. Range +/-10 Volts.
5	X- EXTERNAL	Input	X external mirror position. Low side of differential position input (from external quad or similar position sensor)
6	GND	Output	Ground Reference
7	-15 VOLTS	Output	-15 VDC for external loads of less than 100ma.
8	RESERVED		
9	N/C		
10	Y+ EXTERNAL	Input	Y external mirror position. High side of differential position input (from external quad or similar position sensor)
11	Y- EXTERNAL	Input	Y external mirror position. Low side of differential position input (from external quad or similar position sensor)
12	Y- COMMAND	Input	Y mirror position command. Low side of differential command input. Range +/-10 Volts.
13	Y+ COMMAND	Input	Y mirror position command. High side of differential command input. Range +/-10 Volts.
14	X POSITION	Output	X mirror angular position readout from local position sensor. (referenced to ground)
15	+5 VOLTS	Output	5 VDC for external loads of less than 100ma.
16	GND	Output	Ground Reference
17	X+ EXTERNAL	Input	X external mirror position Low side of differential position input (from external quad or similar position sensor)
18	RESERVED		
19	+15 VOLTS	Output	+15 VDC for external loads of less than 100ma.
20	GND	Output	Ground Reference
21	RESERVED		
22	GND	Output	Ground Reference
23	Y POSITION	Output	Y mirror angular position readout from local position sensor. (referenced to ground)
24	Y ERROR	Output	Y summing junction error voltage output, difference between commanded and actual position. (referenced to ground)
25	RESERVED		

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP