ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

**Artisan Technology Group**
(217) 352-9330 | sales@artisantg.com | artisantg.com

**Full-service, independent repair center**
with experienced engineers and technicians on staff.

**We buy your excess, underutilized, and idle equipment**
along with credit for buybacks and trade-ins.

**Custom engineering**
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

**Expert team | Trust guarantee | 100% satisfaction**

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Opto-22 G4ODC5* at our website: *Click HERE*

# G4 DIGITAL DC OUTPUT MODULES

## Features

- 4000 volts optical isolation (transient)
- Built-in LED status indicator
- Logic levels of 5, 15, and 24 VDC
- Removable fuse
- Ability to withstand one-second surge of 5 amps
- Operating temperature: -30 °C to 70 °C
- UL recognized, CSA certified, CE approved
- Passes NEMA Showering Arc Test (ICS 2-230)
- Meets IEEE Surge Withstand Specification (IEEE-472)




G4ODC5

## DESCRIPTION

Opto 22's G4 DC output modules are used to control or switch DC loads. Each module provides up to 4000 volts of optical isolation (transient) between field devices and control logic.

The G4ODC5MA is a special module featuring a manual-on/manualoff/automatic switch, ideal for diagnostic testing of control applications.

Typical applications for DC output modules include switching loads such as DC relays, solenoids, motor starters, lamps, and indicators.

### Compatible with Raspberry Pi

The following G4 digital DC output modules can be used with the Digital I/O Carrier Board for Raspberry Pi® (part number OPTO-P1-40P) to monitor and control industrial devices with your Raspberry Pi:

- G4ODC5
- G4ODC5A
- G4ODC5MA

## Part Numbers

| Part | Description |
|---|---|
| G4ODC5* | G4 DC Output 5–60 VDC, 5 VDC Logic |
| G4ODC5FM | G4 DC Output 5–60 VDC, 5 VDC Logic, Factory Mutual approved |
| G4ODC5A* | G4 DC Output 5–200 VDC, 5 VDC Logic |
| G4ODC5AFM | G4 DC Output 5–200 VDC, 5 VDC Logic, Factory Mutual approved |
| G4ODC5MA* | G4 DC Output 5–60 VDC, 5 VDC Logic with Manual/Auto Switch |
| G4ODC15 | G4 DC Output 5–60 VDC, 15 VDC Logic |
| G4ODC24 | G4 DC Output 5–60 VDC, 24 VDC Logic |
| G4ODC24A | G4 DC Output 5–200 VDC, 24 VDC Logic |

* Compatible with Raspberry Pi

Raspberry Pi® is a trademark of the Raspberry Pi Foundation.



© 2001–2018 Opto 22. All rights reserved. Dimensions and specifications are subject to change. Brand or product names used herein are trademarks or registered trademarks of their respective companies or organizations.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

## SPECIFICATIONS

| | Units | G4ODC5*<br>G4ODC5FM** | G4ODC5A*<br>G4ODC5AFM** | G4ODC5MA* | G4ODC15*** | G4ODC24*** | G4ODC24A*** |
|---|---|---|---|---|---|---|---|
| Maximum line voltage | VDC | 60 | 200 | 60 | 60 | 60 | 200 |
| Output voltage range | VDC | 5–60 | 5–200 | 5–60 | 5–60 | 5–60 | 5–200 |
| Key feature | — | — | — | Diagnostic switch | — | — | — |
| Current rating:<br>At 45 °C ambient<br>At 70 °C ambient | <br>A<br>A | <br>3<br>2 | <br>1<br>0.55 | <br>3<br>2 | <br>3<br>2 | <br>3<br>2 | <br>1<br>0.55 |
| Isolation input-to-output (transient):<br>1 ms<br>1 minute | volts | <br>4000<br>1500 | <br>4000<br>1500 | <br>4000<br>1500 | <br>4000<br>1500 | <br>4000<br>1500 | <br>4000<br>1500 |
| Off-state leakage at maximum voltage | mA | 1 | 1 | 1 | 1 | 1 | 1 |
| Control resistance ($R_c$ in schematic) | W | 220 | 220 | 220 | 1 K | 2.2 K | 2.2 K |
| One-second surge | A | 5 | 5 | 5 | 5 | 5 | 5 |
| Turn-on time | micro-seconds | 100 | 100 | 100 | 100 | 100 | 100 |
| Turn-off time | micro-seconds | 750 | 750 | 750 | 750 | 750 | 750 |
| Output voltage drop maximum peak | V | 1.6 | 1.6 | 1.6 | 1.6 | 1.6 | 1.6 |
| Nominal logic voltage | VDC | 5 | 5 | 5 | 15 | 24 | 24 |
| Logic voltage range | VDC | 4–8 | 4–8 | 4–8 | 10.5–16 | 19.5–32 | 19.5–32 |
| Logic pickup voltage | VDC | 4 | 4 | 4 | 10.5 | 19.5 | 19.5 |
| Logic dropout voltage | VDC | 1 | 1 | 1 | 1 | 1 | 1 |
| Logic input current at nominal logic voltage | mA | 12 | 12 | 12 | 15 | 18 | 18 |
| Temperature:<br>Operating<br>Storage | <br>°C<br>°C | <br>-30 to +70<br>-30 to +85 | <br>-30 to +70<br>-30 to +85 | <br>-30 to +70<br>-30 to +85 | <br>-30 to +70<br>-30 to +85 | <br>-30 to +70<br>-30 to +85 | <br>-3- to +70<br>-30 to +85 |

* Compatible with Raspberry Pi
** Part numbers ending in FM are Factory Mutual approved
*** Not for use with Opto 22 brains




© 2001–2018 Opto 22. All rights reserved. Dimensions and specifications are subject to change. Brand or product names used herein are trademarks or registered trademarks of their respective companies or organizations.


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

# DIMENSIONS

## All Models Except MA

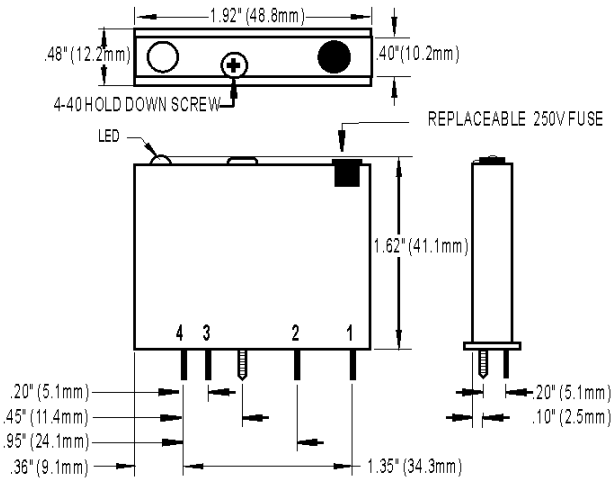


## MA Models

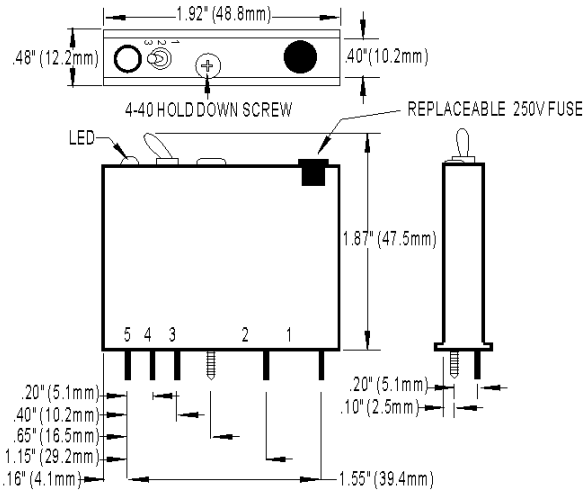





© 2001–2018 Opto 22. All rights reserved. Dimensions and specifications are subject to change. Brand or product names used herein are trademarks or registered trademarks of their respective companies or organizations.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


# SCHEMATICS

## All Models Except MA

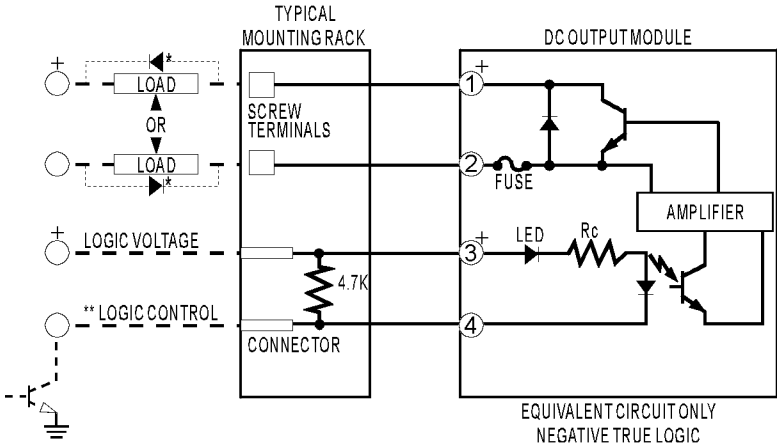


* Commutation diode must be used on inductive loads. Typically, use diode IN4005.
** Control line is compatible with totem pole or tri-state output device.

## MA Models

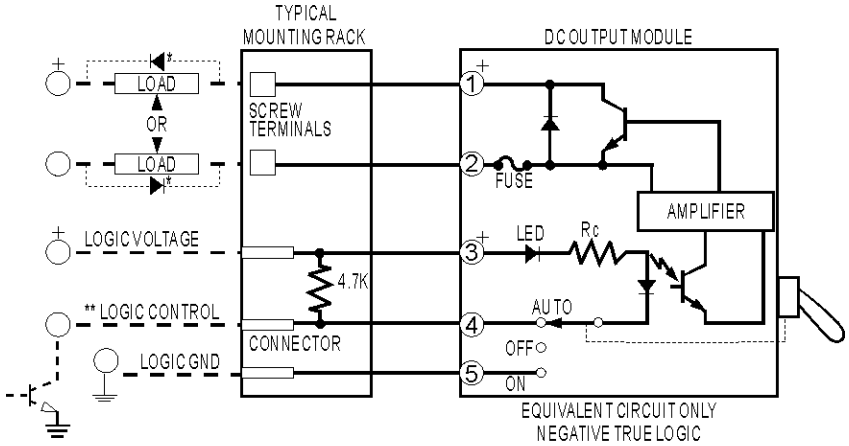


* Commutation diode must be used on inductive loads. Typically, use diode IN4005.
** Control line is compatible with totem pole or tri-state output device.



© 2001–2018 Opto 22. All rights reserved. Dimensions and specifications are subject to change. Brand or product names used herein are trademarks or registered trademarks of their respective companies or organizations.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

# More about Opto 22

OPTO 22

## PRODUCTS

Opto 22 develops and manufactures reliable, easy-to-use, open standards-based hardware and software products.

Industrial automation, process control, building automation, industrial refrigeration, remote monitoring, data acquisition, and industrial internet of things (IIoT) applications worldwide all rely on Opto 22.

### *groov* EPIC® System

Opto 22's *groov* Edge Programmable Industrial Controller (EPIC) system is the culmination of over 40 years of experience in designing products for the automation industry.

*groov* EPIC gives you an industrially hardened system with guaranteed-for-life I/O, a flexible Linux®-based controller with gateway functions, and software for your IIoT application or any application.

#### *groov* EPIC I/O

I/O provides the local connection to sensors and equipment. *groov* I/O offers up to 24 channels on each I/O module, with a spring-clamp terminal strip, integrated wireway, and swing-away cover.

Opto 22 I/O is so reliable, we can afford to guarantee it for life. *groov* I/O is hot swappable, UL Hazardous Locations approved, and ATEX compliant.



#### *groov* EPIC Controller

The heart of the system is the *groov* EPIC controller. It handles a wide range of digital, analog, and serial functions for data collection, remote monitoring, process control, and discrete and hybrid manufacturing.

In addition, the EPIC provides secure data communications among physical assets, control systems, software applications, online services, and more, both on premises and in the cloud.

Configuring and troubleshooting I/O and networking is easier with the EPIC's integrated high-resolution touchscreen. Authorized users can see your *groov* View HMI locally on the touchscreen or on a monitor connected via the HDMI or USB ports.

#### *groov* EPIC Software

Software includes:

- Flowchart-based PAC Control for control programming, or build your own custom application with optional secure shell access
- *groov* View for building and viewing your own device-independent HMI
- Node-RED for creating simple logic flows from pre-built nodes
- Ignition Edge® from Inductive Automation®, with OPC-UA drivers to Allen-Bradley®, Siemens®, and other control systems, and MQTT/Sparkplug communications for efficient IIoT data transfer

### *groov* Edge Appliance




Visualization, data handling, and connectivity in a compact, industrial box: that's the *groov* Edge Appliance. Included are:

- *groov* View for building and viewing operator interfaces on PCs and mobile
- Node-RED for building simple logic flows
- Ignition Edge® from Inductive Automation®, for OPC-UA drivers and MQTT/Sparkplug IIoT communications

### Older products

From solid state relays (our first products) to world-famous G4 and SNAP I/O, to SNAP PAC controllers, Opto 22 products last a long time. You can count on us to give you the reliability and service you expect.

## QUALITY

Founded in 1974, Opto 22 has established a worldwide reputation for high-quality products. All are made in the U.S.A. at our manufacturing facility in Temecula, California.

Because we test each product twice before it leaves our factory rather than testing a sample of each batch, we can guarantee most solid-state relays and optically isolated I/O modules for life.

## FREE PRODUCT SUPPORT

Opto 22's California-based Product Support Group offers free, comprehensive technical support for Opto 22 products from engineers with decades of training and experience. Support is available in English and Spanish by phone or email, Monday–Friday, 7 a.m. to 5 p.m. PST.

Support is always available on our website, including how-to videos, user's guides, the Opto 22 KnowledgeBase, troubleshooting tips, and OptoForums. In addition, free hands-on training is available at our Temecula, California headquarters, and you can register online.

## PURCHASING OPTO 22 PRODUCTS

Opto 22 products are sold directly and through a worldwide network of distributors, partners, and system integrators. For more information, contact Opto 22 headquarters at **800-321-6786** (toll-free in the U.S. and Canada) or **+1-951-695-3000**, or visit our website at www.opto22.com.

**OPTO 22** • www.opto22.com
43044 Business Park Dr. Temecula, CA 92590-3614

**SALES** • sales@opto22.com
800-321-6786 • 1-951-695-3000

**SUPPORT** • support@opto22.com
800-835-6786 • 1-951-695-3080

MADE IN THE USA

© 2006–2018 Opto 22. All rights reserved. Dimensions and specifications are subject to change. Brand or product names used herein are trademarks or registered trademarks of their respective companies or organizations.

Form 1335-180323

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

**Artisan Technology Group** is an independent supplier of quality pre-owned equipment

## Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

## Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP