

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.


Visit our website - *Click HERE*

2-Phase Stepping Motors
PK Series

●Connection Information●
Technical reference ➜ Page G-1
Safety standards ➜ Page H-2

In 2-Phase **PK** Series, in addition to a standard type with a resolution of 200 steps per revolution (1.8˚/step), a high-resolution type (Resolution: 400 steps per revolution) and a geared type (high torque, higher resolution) are also available. The dedicated driver is required separately to operate the motor.

RoHS

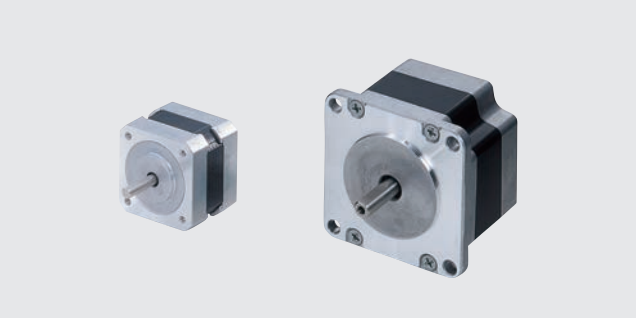


Features

●Wide Variety

A high-resolution type, high-torque, high-efficiency type, high-torque type, standard type, standard type with terminal box and **SH** geared type are also available.

◇High-Resolution Type


The basic step angle is 0.9˚, which is half that of the standard type. 400 steps per rotation is possible. This motor achieves high resolution, improved stopping accuracy and low vibration.

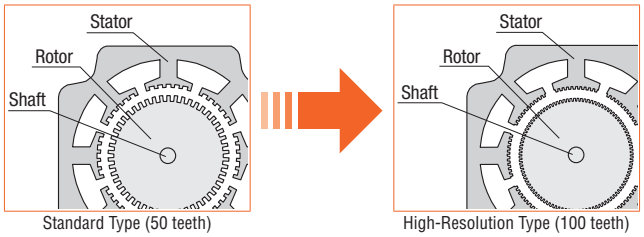

Standard Type (50 teeth) — High-Resolution Type (100 teeth)

The small basic step angle allows the torque to increase sharply while minimizing the negative effect of frictional load.

Comparison of Angle – Torque Characteristics

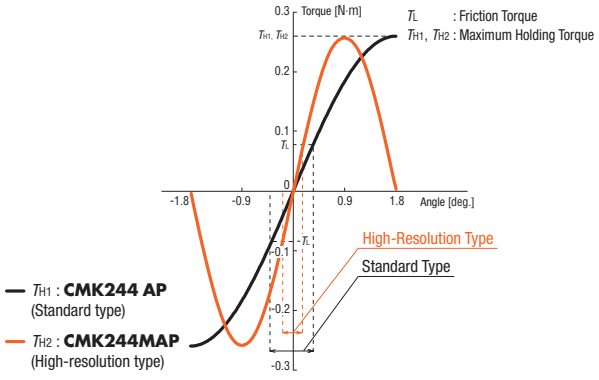

• Avoidance of Resonance Regions


If the used pulse speed is within a resonance region, vibration can increase. Resonance regions can be avoided by switching to a high-resolution type.

◇High-Torque, High-Efficiency Type


• Lower Heat Generation

Utilizing the latest in motor technology, the high-torque, high-efficiency type stepping motors are able to achieve a significant reduction in the amount of heat generated from the motor. (There is a 50% reduction in temperature rise compared with conventional models.)

Motor Case Temperature under the Same Operating Conditions

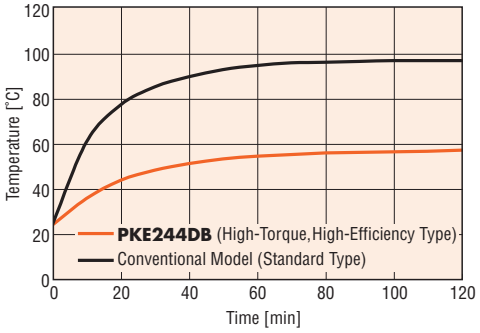

Temperature Distribution by Thermography

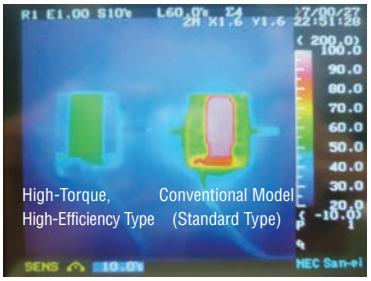


●Comparison under the Same Operating Conditions

• Lower Power Consumption

This model has achieved a 31% reduction* in power consumption through energy savings and a reduction of 10 kg/per year in CO_2 emissions.


Power Consumption

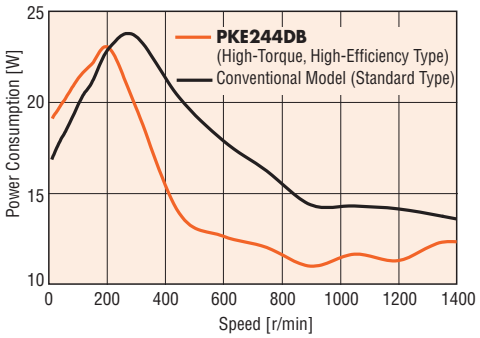

*450 r/min, continuous operation

◇High-Torque Type

The high-torque type provides, on average, 1.5 times higher torque than a standard stepping motor. By utilizing a larger rotor diameter, larger magnets can be used to significantly increase the output torque.




Motor structure
(Cross section perpendicular to shaft)

◇Standard Type

The basic model offers an optimal balance of torque, low vibration and noise reduction.


◇Standard Type with Cable

The motor conforms to the IP54 standard to changing the lead wire outlet form lead wire to cable and cable clamp (excluding the mounting surface.)

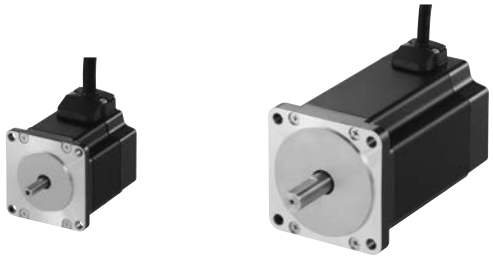


◇Standard Type with Terminal Box

Terminal boxes have excellent watertightness and dust-resistance. This product conforms to the IP65 motor specification for the degree of protection (excluding shaft penetration).

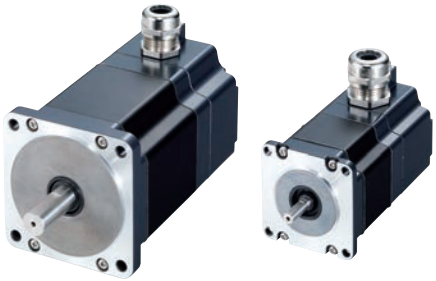


• Terminal-Block Connection Design

The motor can be wired directly from its terminal block.

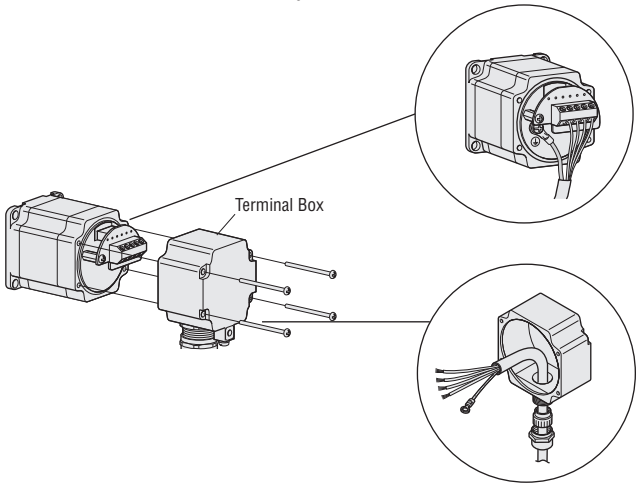

• No Motor/Driver Relay


Since the motor cable can be connected directly to the driver terminals, there is no need for wire connection or soldering on a relay terminal block.

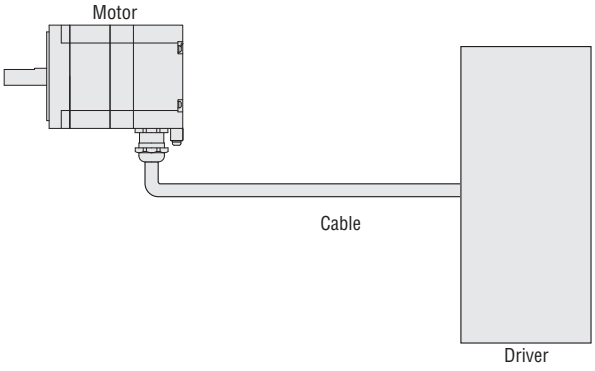

◇**SH** Geared Type

This geared type is effective for reducing speed, increasing torque, higher resolution and low vibration.
Eight types of gear ratios are available.

Motor Lineup


Type	Features	Frame Size			
		28 mm	42 mm	50 mm	56.4 mm
High-Resolution Type	These have half the basic step angle of the standard type, increasing resolution and stopping accuracy.		 Page A-286, A-287		 Page A-291, A-293
High-Torque, High-Efficiency Type	It achieves lower heat generation and lower power consumption with high-efficiency technology. It uses a high-torque designed motor.		 Page A-297, A-298		
High-Torque Type	A high-torque motor generates higher torque of more than 1.5 times compared with the conventional standard type motor.				
Standard Type	These are standard type motors with a wide variety of current specifications.		 Page A-303, A-304	 Page A-308	 Page A-309, A-311
SH Geared Type	These are effective for deceleration, increased torque, increased resolution, and vibration suppression. They have a wide variety of gear ratios.		 Page A-323		
TH Geared Type	A geared motor achieving both low backlash and low cost.		 Page A-327, A-328		
PL Geared Type **PS** Geared Type	A geared stepping motor with planetary gear mechanism offering low backlash, high strength.	 Page A-331	 Page A-332		

60 mm	85 (90) mm	With Encoder	With Cable	With Terminal Box	Connection Type	
					Bipolar	Unipolar
		 Page A-288, A-294	–	–	●	●
		–	–	–	●	●
 Page A-300, A-301		–	–	–	●	●
	 Page A-315, A-316	 Page A-305, A-312	 Page A-318, A-319	 Page A-320, A-321	● (Except for frame size 50 mm)	●
 Page A-324	 Page A-325	–	–	–	–	●
 Page A-329, A-330		–	–	–	●	●
 Page A-333		–	–	–	●	–

System Configuration

These accessories enable 2-phase **PK** Series products to be used for various operations.

✻ Not supplied

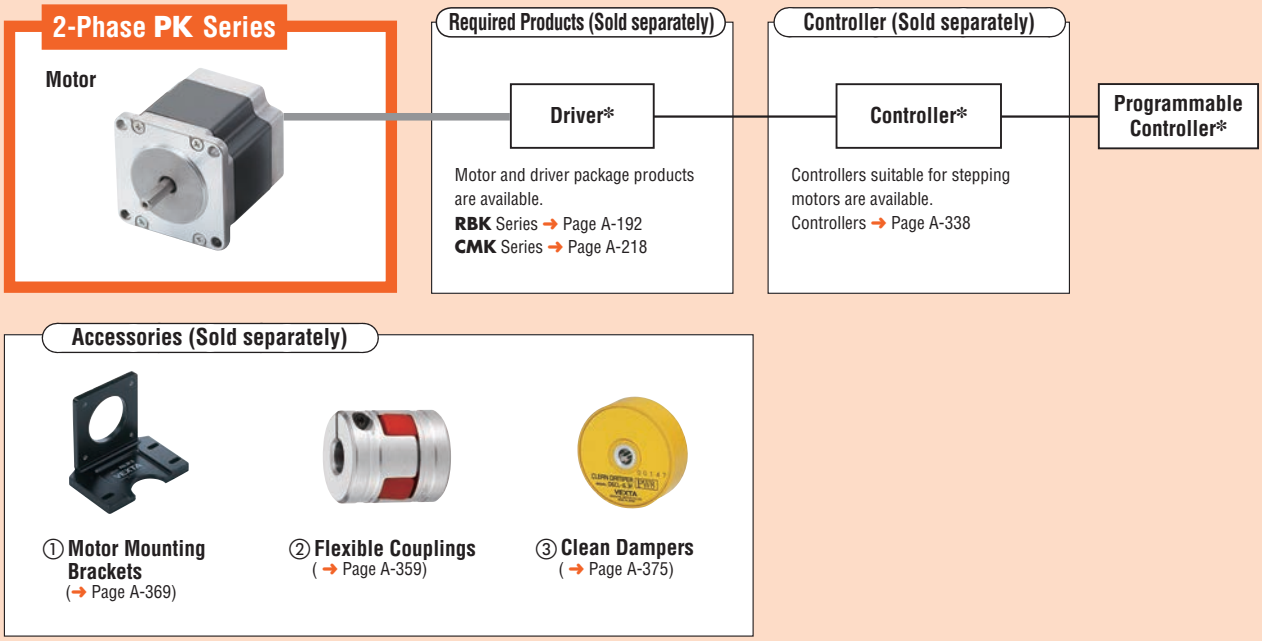

Number	Name	Overview
①	Motor Mounting Brackets	Dedicated mounting bracket for the motor.
②	Flexible Couplings	Coupling that connects the motor shaft to the driven shaft.
③	Clean Dampers	Dedicated damper for suppressing stepping motor vibration.

●System Configuration Example

2-Phase PK Series	+	Sold Separately		
		Motors Mounting Bracket	Flexible Coupling	Clean Damper
PK264-01B		PAL2P-2	MC20F0408	D6CL-6.3F

●The system configuration shown above is an example. Other combinations are available.

Product Number Code

●High-Torque, High-Efficiency Type

PKE 2 4 3 D B - L
① ② ③ ④ ⑤ ⑥ ⑦

①	Series Name	**PKE**: **PK** Series High-Torque, High-Efficiency Type
②		**2**: 2-Phase
③	Motor Frame Size	**4**: 42 mm
④	Motor Case Length	
⑤	Number of Lead Wires	Blank: 6 **D**: 4
⑥	Motor Shaft Type	**A**: Single Shaft **B**: Double Shaft
⑦	Connection Cable	**L**: Included (0.6 m)

●High-Torque Type

PK 2 6 4 J D B
① ② ③ ④ ⑤ ⑥ ⑦

①	Series Name	**PK**: **PK** Series
②		**2**: 2-Phase
③	Motor Frame Size	**6**: 60 mm
④	Motor Case Length	
⑤	Motor Type	**J**: High-Torque Type
⑥	Number of Lead Wires	Blank: 6 **D**: 4
⑦	Motor Shaft Type	**A**: Single Shaft **B**: Double Shaft

●Standard Type with Cable
Standard Type with Terminal Box

PK 2 9 6 E A T

① ② ③ ④ ⑤ ⑥ ⑦

①	Series Name	**PK**: **PK** Series
②	**2**: 2-Phase	
③	Motor Frame Size	**6**: 56.4 mm **9**: 85 mm
④	Motor Case Length	
⑤	Number of Lead Wires or Motor Terminals	**D**, **D1**: 4 Leads, 4 Terminals **E**: 8 Terminals
⑥	Motor Shaft Type	**A**: Single Shaft
⑦	Motor Type	**W**: With Cable **T**: With Terminal Box

●Standard Type (Bipolar 4 lead wires)

PK 2 4 4 D A

① ② ③ ④ ⑤ ⑦

PK 2 6 4 D 14 A

① ② ③ ④ ⑤ ⑥ ⑦

①	Series Name	**PK**: **PK** Series
②	**2**: 2-Phase	
③	Motor Frame Size	**4**: 42 mm **6**: 56.4 mm **9**: 85 mm
④	Motor Case Length	
⑤	Number of Lead Wires	**D**: 4
⑥	Winding Specifications	**14**: Rated Current 1.4 A/Phase **28**: Rated Current 2.8 A/Phase
⑦	Motor Shaft Type	**A**: Single Shaft **B**: Double Shaft

●High-Resolution Type, Standard Type

PK 2 6 6 M - 0 1 B

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

①	Series Name	**PK**: **PK** Series
②	**2**: 2-Phase	
③	Motor Frame Size	**4**: 42 mm **5**: 50 mm **6**: 56.4 mm **9**: 85 mm
④	Motor Case Length	
⑤	Motor Type	Blank: Standard Type (1.8°/Step) **M**: High-Resolution Type (0.9°/Step)
⑥	Reference Number	
⑦	Winding Specifications	
⑧	Motor Shaft Type	**A**: Single Shaft **B**: Double Shaft

●High-Resolution Type with Encoder
Standard Type with Encoder

PK 2 6 6 M - 0 1 A R22 - L

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

①	Series Name	**PK**: **PK** Series
②	**2**: 2-Phase	
③	Motor Frame Size	**4**: 42 mm **6**: 56.4 mm
④	Motor Case Length	
⑤	Motor Type	Blank: Standard Type (1.8°/step) **M**: High-Resolution Type (0.9°/step)
⑥	Reference Number	
⑦	Winding Specifications	
⑧	Motor Shaft Type	**A**: Single Shaft **B**: Double Shaft
⑨	Encoder Resolution	**R21**: 200 P/R **R22**: 400 P/R
⑩	Encoder Cable	**L**: Included (0.6 m)

●Geared Type

PK 2 6 4 A E - SG 10

① ② ③ ④ ⑦ ⑥ ⑧ ⑨

PK 2 6 6 P D B - P 10 - L

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

①	Series	**PK**: **PK** Series
②	**2**: 2-Phase	
③	Motor Frame Size	**2**: 28 mm **4**: 42 mm **6**: 60 mm **9**: 90 mm
④	Motor Case Length	
⑤	Motor Type	
⑥	Number of Lead Wires	**1** or **2**: 6 Leads **D**: 4 Leads **E**: 8 Leads
⑦	Shaft Type	**A**: Single Shaft **B**: Double Shaft
⑧	Gearhead Type	**SG**: **SH** Geared Type **T**: **TH** Geared Type **PS**: **PS** Geared Type **P**: **PL** Geared type
⑨	Gear Ratio	
⑩	Connection Cable	**L**: Included (0.6 m)

Product Line

High-Resolution Type (4 lead wires)

Product Name (Single shaft)	Product Name (Double shaft)
PK243MD15A	PK243MD15B
PK244MD15A	PK244MD15B
PK245MD15A	PK245MD15B
PK264MD14A	PK264MD14B
PK264MD28A	PK264MD28B
PK264MD42A	PK264MD42B
PK266MD14A	PK266MD14B
PK266MD28A	PK266MD28B
PK266MD42A	PK266MD42B
PK268MD14A	PK268MD14B
PK268MD28A	PK268MD28B
PK268MD42A	PK268MD42B

High-Resolution Type (6 lead wires)

Product Name (Single shaft)	Product Name (Double shaft)
PK243M-01A	PK243M-01B
PK243M-02A	PK243M-02B
PK243M-03A	PK243M-03B
PK244M-01A	PK244M-01B
PK244M-02A	PK244M-02B
PK244M-03A	PK244M-03B
PK245M-01A	PK245M-01B
PK245M-02A	PK245M-02B
PK245M-03A	PK245M-03B
PK264M-01A	PK264M-01B
PK264M-02A	PK264M-02B
PK264M-03A	PK264M-03B
PK264M-E2.0A	PK264M-E2.0B
PK266M-01A	PK266M-01B
PK266M-02A	PK266M-02B
PK266M-03A	PK266M-03B
PK266M-E2.0A	PK266M-E2.0B
PK268M-01A	PK268M-01B
PK268M-02A	PK268M-02B
PK268M-03A	PK268M-03B
PK268M-E2.0A	PK268M-E2.0B

High-Resolution Type with Encoder (6 lead wires)

Product Name (Single shaft)
PK243M-01AR22-L
PK243M-02AR22-L
PK243M-03AR22-L
PK244M-01AR22-L
PK244M-02AR22-L
PK244M-03AR22-L
PK245M-01AR22-L
PK245M-02AR22-L
PK245M-03AR22-L
PK264M-01AR22-L
PK264M-02AR22-L
PK264M-03AR22-L
PK264MEAR22-L
PK266M-01AR22-L
PK266M-02AR22-L
PK266M-03AR22-L
PK266MEAR22-L
PK268M-01AR22-L
PK268M-02AR22-L
PK268M-03AR22-L
PK268MEAR22-L

High-Torque, High-Efficiency Type (4 lead wires)

Product Name (Single shaft)	Product Name (Double shaft)
PKE243DA-L	PKE243DB-L
PKE244DA-L	PKE244DB-L
PKE245DA-L	PKE245DB-L

High-Torque, High-Efficiency Type (6 lead wires)

Product Name (Single shaft)	Product Name (Double shaft)
PKE243A-L	PKE243B-L
PKE244A-L	PKE244B-L
PKE245A-L	PKE245B-L

High-Torque Type (4 lead wires)

Product Name (Single shaft)	Product Name (Double shaft)
PK264JDA	PK264JDB
PK266JDA	PK266JDB
PK267JDA	PK267JDB
PK269JDA	PK269JDB

High-Torque Type (6 lead wires)

Product Name (Single shaft)	Product Name (Double shaft)
PK264JA	PK264JB
PK266JA	PK266JB
PK267JA	PK267JB
PK269JA	PK269JB

Standard Type (4 lead wires)

Product Name (Single shaft)	Product Name (Double shaft)
PK243DA	PK243DB
PK244DA	PK244DB
PK245DA	PK245DB
PK264D14A	PK264D14B
PK264D28A	PK264D28B
PK264DA	PK264DB
PK266D14A	PK266D14B
PK266D28A	PK266D28B
PK266DA	PK266DB
PK268D14A	PK268D14B
PK268D28A	PK268D28B
PK268DA	PK268DB
PK296DA	PK296DB
PK299DA	PK299DB
PK2913DA	PK2913DB

Standard Type (6 lead wires)

Product Name (Single shaft)	Product Name (Double shaft)
PK243-01A	PK243-01B
PK243-02A	PK243-02B
PK243-03A	PK243-03B
PK244-01A	PK244-01B
PK244-02A	PK244-02B
PK244-03A	PK244-03B
PK244-04A	PK244-04B
PK245-01A	PK245-01B
PK245-02A	PK245-02B
PK245-03A	PK245-03B
PK256-02A	PK256-02B
PK258-02A	PK258-02B
PK264-01A	PK264-01B
PK264-02A	PK264-02B
PK264-03A	PK264-03B
PK264-E2.0A	PK264-E2.0B
PK266-01A	PK266-01B
PK266-02A	PK266-02B
PK266-03A	PK266-03B
PK266-E2.0A	PK266-E2.0B
PK268-01A	PK268-01B
PK268-02A	PK268-02B
PK268-03A	PK268-03B
PK268-E2.0A	PK268-E2.0B
PK296-E4.5A	PK296-E4.5B
PK299-E4.5A	PK299-E4.5B
PK2913-E4.0A	PK2913-E4.0B

Standard Type with Encoder (6 lead wires)

Product Name (Single shaft)
PK243-01AR21-L
PK243-01AR22-L
PK243-02AR21-L
PK243-02AR22-L
PK243-03AR21-L
PK243-03AR22-L
PK244-01AR21-L
PK244-01AR22-L
PK244-02AR21-L
PK244-02AR22-L
PK244-03AR21-L
PK244-03AR22-L
PK245-01AR21-L
PK245-01AR22-L
PK245-02AR21-L
PK245-02AR22-L
PK245-03AR21-L
PK245-03AR22-L
PK264-01AR21-L
PK264-01AR22-L
PK264-02AR21-L
PK264-02AR22-L
PK264-03AR21-L
PK264-03AR22-L
PK264EAR21-L
PK264EAR22-L
PK266-01AR21-L
PK266-01AR22-L
PK266-02AR21-L
PK266-02AR22-L
PK266-03AR21-L
PK266-03AR22-L
PK266EAR21-L
PK266EAR22-L
PK268-01AR21-L
PK268-01AR22-L
PK268-02AR21-L
PK268-02AR22-L
PK268-03AR21-L
PK268-03AR22-L
PK268EAR21-L
PK268EAR22-L

Standard Type with Cable

Product Name (Single shaft)
PK264DW
PK266DW
PK268DW
PK296DW
PK299DW
PK2913DW

Standard Type with Terminal Box

Product Name (Single shaft)
PK264DAT
PK264D1T
PK266DAT
PK266D1T
PK268DAT
PK268D1T
PK296DT
PK296EAT
PK299DT
PK299EAT
PK2913DT
PK2913EAT

SH Geared Type (6 lead wires)

Product Name (Single shaft)	Product Name (Double shaft)
PK243A1-SG3.6	PK243B1-SG3.6
PK243A1-SG7.2	PK243B1-SG7.2
PK243A1-SG9	PK243B1-SG9
PK243A1-SG10	PK243B1-SG10
PK243A1-SG18	PK243B1-SG18
PK243A1-SG36	PK243B1-SG36
PK243A1-SG50	PK243B1-SG50
PK243A1-SG100	PK243B1-SG100
PK264AE-SG3.6	PK264BE-SG3.6
PK264AE-SG7.2	PK264BE-SG7.2
PK264AE-SG9	PK264BE-SG9
PK264AE-SG10	PK264BE-SG10
PK264AE-SG18	PK264BE-SG18
PK264AE-SG36	PK264BE-SG36
PK264A2-SG3.6	PK264B2-SG3.6
PK264A2-SG7.2	PK264B2-SG7.2
PK264A2-SG9	PK264B2-SG9
PK264A2-SG10	PK264B2-SG10
PK264A2-SG18	PK264B2-SG18
PK264A2-SG36	PK264B2-SG36
PK264A2-SG50	PK264B2-SG50
PK264A2-SG100	PK264B2-SG100
PK296AE-SG3.6	PK296BE-SG3.6
PK296AE-SG7.2	PK296BE-SG7.2
PK296AE-SG9	PK296BE-SG9
PK296AE-SG10	PK296BE-SG10
PK296AE-SG18	PK296BE-SG18
PK296AE-SG36	PK296BE-SG36

TH Geared Type (4 lead wires)

Product Name (Single shaft)	Product Name (Double shaft)
PK243DA-T3.6	PK243DB-T3.6
PK243DA-T7.2	PK243DB-T7.2
PK243DA-T10	PK243DB-T10
PK243DA-T20	PK243DB-T20
PK243DA-T30	PK243DB-T30
PK264DA-T3.6	PK264DB-T3.6
PK264DA-T7.2	PK264DB-T7.2
PK264DA-T10	PK264DB-T10
PK264DA-T20	PK264DB-T20
PK264DA-T30	PK264DB-T30

TH Geared Type (6 lead wires)

Product Name (Single shaft)	Product Name (Double shaft)
PK243A1-T3.6	PK243B1-T3.6
PK243A1-T7.2	PK243B1-T7.2
PK243A1-T10	PK243B1-T10
PK243A1-T20	PK243B1-T20
PK243A1-T30	PK243B1-T30
PK264A2-T3.6	PK264B2-T3.6
PK264A2-T7.2	PK264B2-T7.2
PK264A2-T10	PK264B2-T10
PK264A2-T20	PK264B2-T20
PK264A2-T30	PK264B2-T30

PS Geared Type (4 lead wires)

Product Name (Single shaft)	Product Name (Double shaft)
PK223PDA-PS5-L	PK223PDB-PS5-L
PK223PDA-PS10-L	PK223PDB-PS10-L

PL Geared Type (4 lead wires)

Product Name (Single shaft)	Product Name (Double shaft)
PK244PDA-P5-L	PK244PDB-P5-L
PK244PDA-P10-L	PK244PDB-P10-L
PK244PDA-P36-L	PK244PDB-P36-L
PK266PDA-P5-L	PK266PDB-P5-L
PK266PDA-P10-L	PK266PDB-P10-L
PK264PDA-P36-L	PK264PDB-P36-L

The following items are included in each product.
Motor, Connection Cable*1,
Mounting Screws for Motor*2, Operating Manual
*1 Only products that have product names that end in "**L**"
*2 **SH** geared type only

Step Angle 0.9° Frame Size 42 mm (4 lead wires)


High-Resolution Type

Specifications RoHS


Product Name Single Shaft Double Shaft	Connection Type	Maximum Holding Torque N·m	Rotor Inertia J: kg·m²	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Basic Step Angle	Wirings and Connections (See Page A-334)
PK243MD15A **PK243MD15B**	Bipolar	0.2	35×10^{-7}	1.5	2.52	1.68	3	0.9°	1
PK244MD15A **PK244MD15B**		0.31	54×10^{-7}		3.15	2.1	5.4		
PK245MD15A **PK245MD15B**		0.38	68×10^{-7}		3.18	2.12	5.1		

Speed – Torque Characteristics


PK243MD15A/PK243MD15B

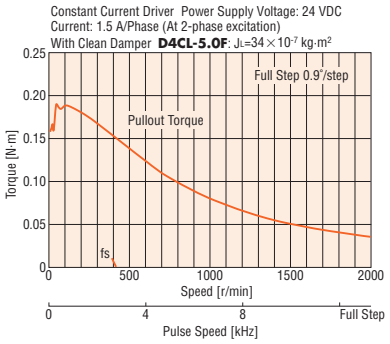

PK244MD15A/PK244MD15B

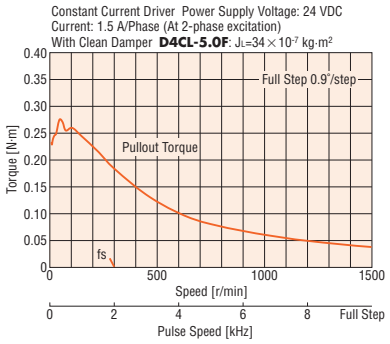

PK245MD15A/PK245MD15B

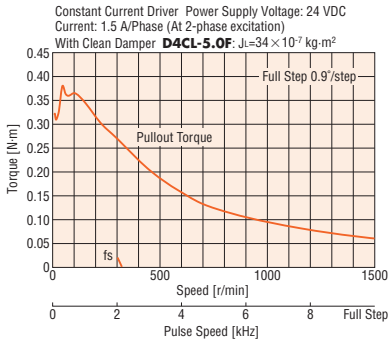


Note

●Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

Dimensions (Unit = mm)

Product Name	L1	L2	Mass kg
PK243MD15A	33	–	0.24
PK243MD15B		48	
PK244MD15A	39	–	0.3
PK244MD15B		54	
PK245MD15A	47	–	0.37
PK245MD15B		62	

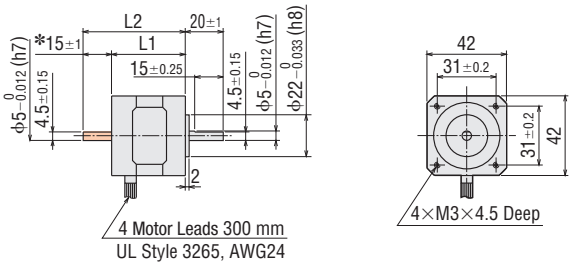

*The length of the shaft flat on the double shaft model is 15±0.25.

●These dimensions are for double shaft models.
For single shaft models, ignore the shaft in the shaded areas.

Step Angle 0.9° Frame Size 42 mm (6 lead wires)

High-Resolution Type

Specifications RoHS


Product Name Single Shaft Double Shaft	Connection Type	Maximum Holding Torque N·m	Rotor Inertia J: kg·m^2	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Basic Step Angle	Wirings and Connections (See Page A-334)	Corresponding Motor/Driver Package Product Name	Package Product Speed-Torque Characteristics Page
PK243M-01A	Bipolar (Series)	0.2	35×10^{-7}	0.67	5.6	8.4	15.2	0.9°	3	–	–
PK243M-01B	Unipolar	0.16		0.95	4	4.2	3.8		2	**CMK243M□P**	A–222
PK243M-02A	Bipolar (Series)	0.2		0.42	8.4	20	38.8		3	–	–
PK243M-02B	Unipolar	0.16		0.6	6	10	9.7		2	–	–
PK243M-03A	Bipolar (Series)	0.2		0.22	17	77	136		3	–	–
PK243M-03B	Unipolar	0.16		0.31	12	38.5	34		2	–	–
PK244M-01A	Bipolar (Series)	0.31	54×10^{-7}	0.85	5.6	6.6	17.2		3	–	–
PK244M-01B	Unipolar	0.26		1.2	4	3.3	4.3		2	**CMK244M□P**	A–222
PK244M-02A	Bipolar (Series)	0.31		0.57	8.6	15	38.8		3	–	–
PK244M-02B	Unipolar	0.26		0.8	6	7.5	9.7		2	–	–
PK244M-03A	Bipolar (Series)	0.31		0.28	17	60	152		3	–	–
PK244M-03B	Unipolar	0.26		0.4	12	30	38		2	–	–
PK245M-01A	Bipolar (Series)	0.38	68×10^{-7}	0.85	5.6	6.6	15.6		3	–	–
PK245M-01B	Unipolar	0.32		1.2	4	3.3	3.9		2	**CMK245M□P**	A–222
PK245M-02A	Bipolar (Series)	0.38		0.57	8.6	15	39.6		3	–	–
PK245M-02B	Unipolar	0.32		0.8	6	7.5	9.9		2	–	–
PK245M-03A	Bipolar (Series)	0.38		0.28	17	60	128		3	–	–
PK245M-03B	Unipolar	0.32		0.4	12	30	32		2	–	–

●**A** or **B** indicating motor shaft type is entered where the box □ is located within the product name.
●For the speed – torque characteristics of the motors in the table above, see the characteristics of the corresponding motor and driver package. If there is no corresponding package name, refer to the following characteristics.

Dimensions (Unit = mm)

Product Name	L1	L2	Mass kg
PK243M-0□A	33	–	0.24
PK243M-0□B		48	
PK244M-0□A	39	–	0.3
PK244M-0□B		54	
PK245M-0□A	47	–	0.37
PK245M-0□B		62	

●A number indicating the motor specification is entered where the box □ is located within the product name.

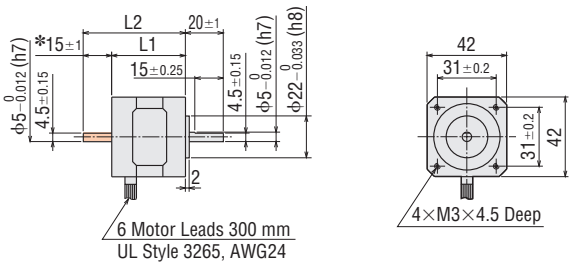

✻The length of the shaft flat on the double shaft model is 15±0.25.
●These dimensions are for double shaft models.
For single shaft models, ignore the shaft in the shaded ▭ areas.

Step Angle 0.9° Frame Size 42 mm (6 lead wires)

High-Resolution Type with Encoder

Specifications RoHS


Product Name Single Shaft	Connection Type	Maximum Holding Torque N·m	Rotor Inertia J: kg·m^2	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Basic Step Angle	Wirings and Connections (See Page A-334)
PK243M-01AR22-L	Bipolar (Series)	0.2	35×10^{-7}	0.67	5.6	8.4	15.2	0.9°	3
	Unipolar	0.16		0.95	4	4.2	3.8		2
PK243M-02AR22-L	Bipolar (Series)	0.2		0.42	8.4	20	38.8		3
	Unipolar	0.16		0.6	6	10	9.7		2
PK243M-03AR22-L	Bipolar (Series)	0.2		0.22	17	77	136		3
	Unipolar	0.16		0.31	12	38.5	34		2
PK244M-01AR22-L	Bipolar (Series)	0.31	54×10^{-7}	0.85	5.6	6.6	17.2		3
	Unipolar	0.26		1.2	4	3.3	4.3		2
PK244M-02AR22-L	Bipolar (Series)	0.31		0.57	8.6	15	38.8		3
	Unipolar	0.26		0.8	6	7.5	9.7		2
PK244M-03AR22-L	Bipolar (Series)	0.31		0.28	17	60	152		3
	Unipolar	0.26		0.4	12	30	38		2
PK245M-01AR22-L	Bipolar (Series)	0.38	68×10^{-7}	0.85	5.6	6.6	15.6		3
	Unipolar	0.32		1.2	4	3.3	3.9		2
PK245M-02AR22-L	Bipolar (Series)	0.38		0.57	8.6	15	39.6		3
	Unipolar	0.32		0.8	6	7.5	9.9		2
PK245M-03AR22-L	Bipolar (Series)	0.38		0.28	17	60	128		3
	Unipolar	0.32		0.4	12	30	32		2

- "**R22**" in the product name indicate the encoder resolution.
  R22: 400 pulses/revolution
- Encoder cable (0.6 m) is included.

Dimensions (Unit = mm)

Product Name	Motor Product Name	L1	L2	Mass kg
PK243M-0□AR22-L	PK243M-0□AR22	33	51.3	0.26
PK244M-0□AR22-L	PK244M-0□AR22	39	57.3	0.32
PK245M-0□AR22-L	PK245M-0□AR22	47	65.3	0.39


- A number indicating the motor specification is entered where the box □ is located within the product name.

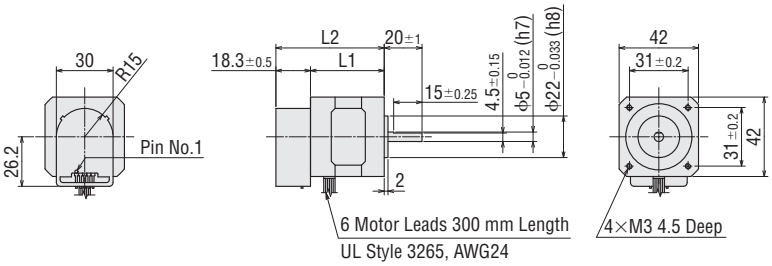

- Applicable Encoder Connector

Connector Product Name	Manufacturer
640442-5	Tyco Electronics Japan G. K.
HEDS-8903 (For 3-Channel: 5-lead wires)	Avago Technologies Limited
2695 Series (Housing)	Molex
2759 Series (Contact)	

- Included
  Encoder Cable

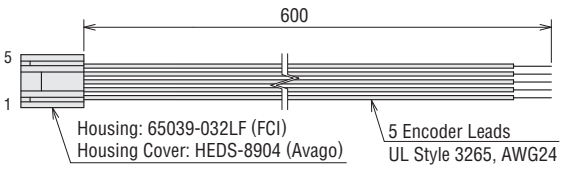


Encoder Specifications


➜ Page A-336

Speed – Torque Characteristics


PK243M-01A/PK243M-01B
PK243M-01AR22-L
Bipolar (Series)

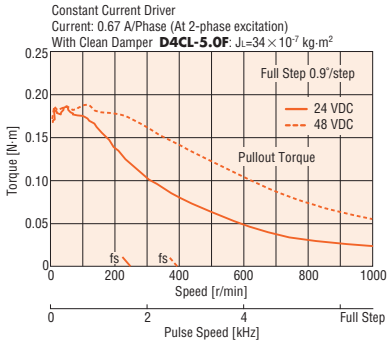


PK243M-02A/PK243M-02B
PK243M-02AR22-L
Bipolar (Series)

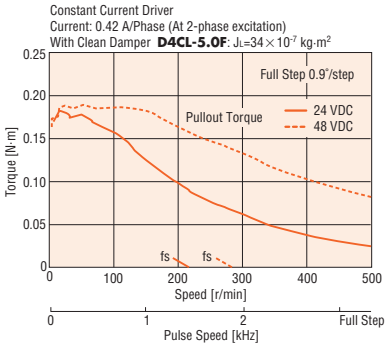


PK243M-02A/PK243M-02B
PK243M-02AR22-L
Unipolar

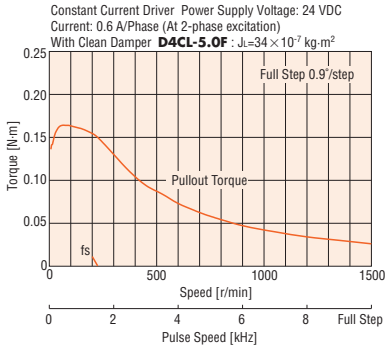


PK243M-03A/PK243M-03B
PK243M-03AR22-L
Bipolar (Series)

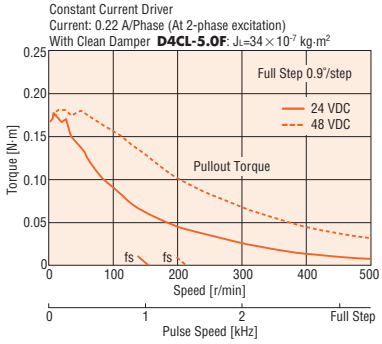


PK243M-03A/PK243M-03B
PK243M-03AR22-L
Unipolar

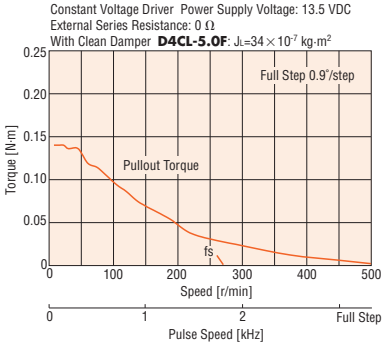


PK244M-01A/PK244M-01B
PK244M-01AR22-L
Bipolar (Series)

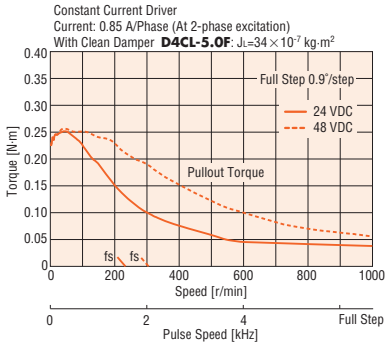


PK244M-02A/PK244M-02B
PK244M-02AR22-L
Bipolar (Series)

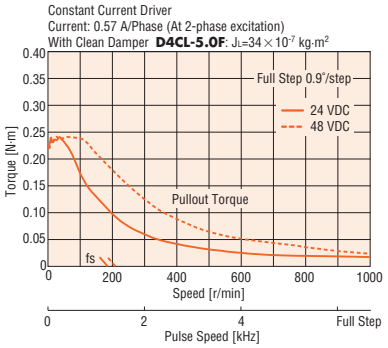

PK244M-02A/PK244M-02B
PK244M-02AR22-L
Unipolar

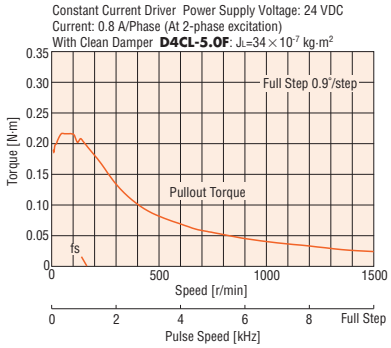

PK244M-03A/PK244M-03B
PK244M-03AR22-L
Unipolar

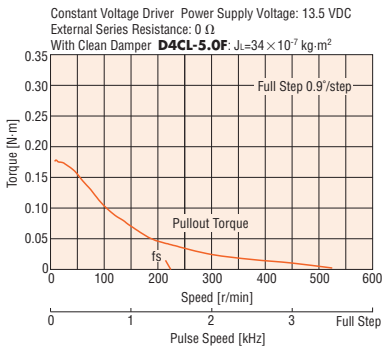


Note

●Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

Speed – Torque Characteristics


PK245M-01A/PK245M-01B
PK245M-01AR22-L

Bipolar (Series)

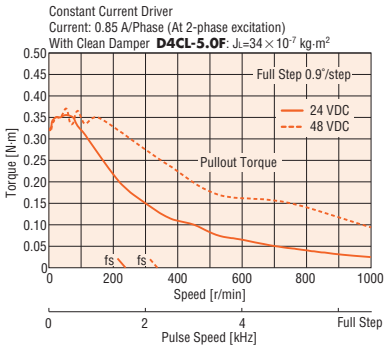


PK245M-02A/PK245M-02B
PK245M-02AR22-L

Bipolar (Series)

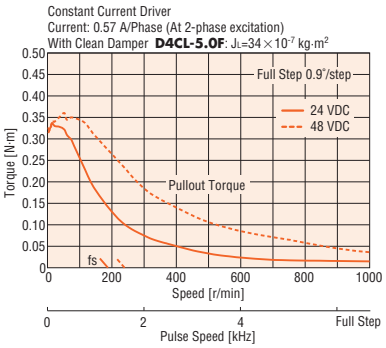


PK245M-02A/PK245M-02B
PK245M-02AR22-L

Unipolar

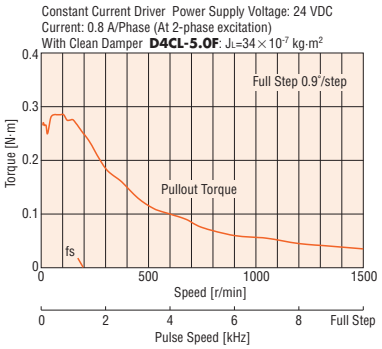

PK245M-03A/PK245M-03B
PK245M-03AR22-L

Unipolar

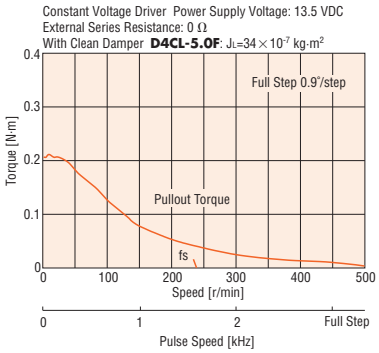

Note

●Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

Step Angle 0.9° Frame Size 56.4 mm (4 lead wires)


High-Resolution Type

Specifications RoHS


Product Name Single Shaft Double Shaft	Connection Type	Maximum Holding Torque N·m	Rotor Inertia J: kg·m^2	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Basic Step Angle	Wirings and Connections (See Page A-334)
PK264MD14A **PK264MD14B**	Bipolar	0.48	120×10^{-7}	1.4	3.92	2.8	6.8	0.9°	1
PK264MD28A **PK264MD28B**				2.8	1.96	0.7	1.7		
PK264MD42A **PK264MD42B**				4.2	1.26	0.3	0.75		
PK266MD14A **PK266MD14B**		1.17	300×10^{-7}	1.4	5.04	3.6	12.8		
PK266MD28A **PK266MD28B**				2.8	2.52	0.9	3.2		
PK266MD42A **PK266MD42B**				4.2	1.68	0.4	1.45		
PK268MD14A **PK268MD14B**		1.75	480×10^{-7}	1.4	6.02	4.3	19.4		
PK268MD28A **PK268MD28B**				2.8	3.16	1.13	4.8		
PK268MD42A **PK268MD42B**				4.2	2.1	0.5	2.1		

Speed – Torque Characteristics


PK264MD14A/PK264MD14B

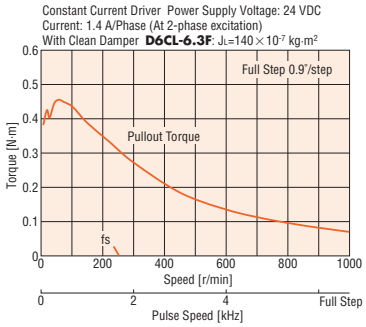


PK264MD28A/PK264MD28B

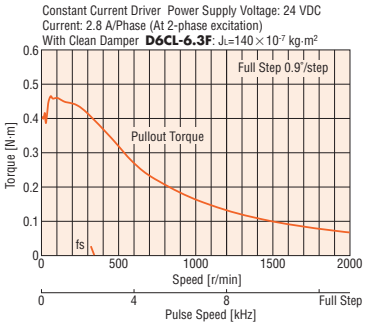


PK264MD42A/PK264MD42B

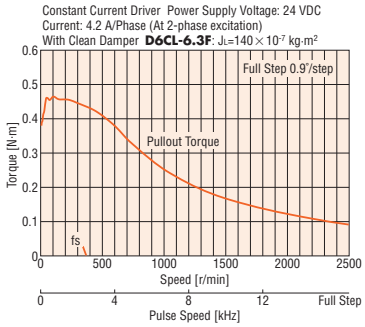


PK266MD14A/PK266MD14B

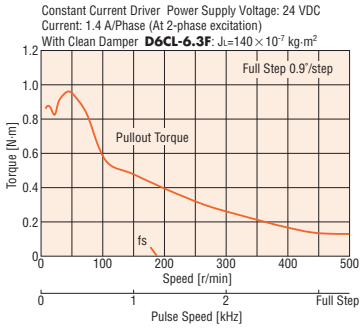


PK266MD28A/PK266MD28B

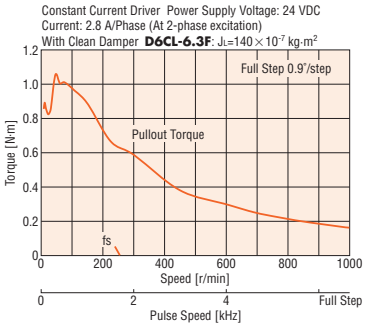


PK266MD42A/PK266MD42B

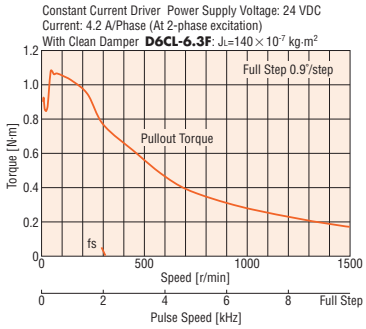


PK268MD14A/PK268MD14B

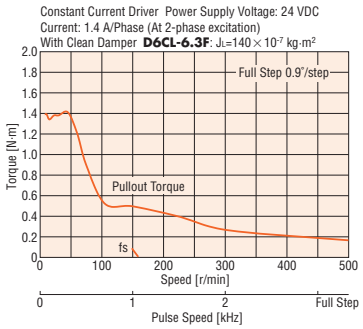

PK268MD28A/PK268MD28B

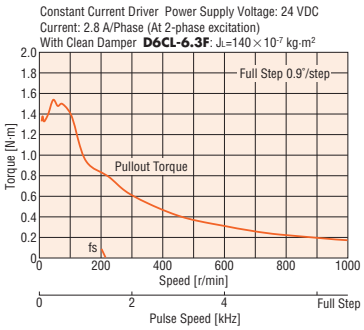

PK268MD42A/PK268MD42B

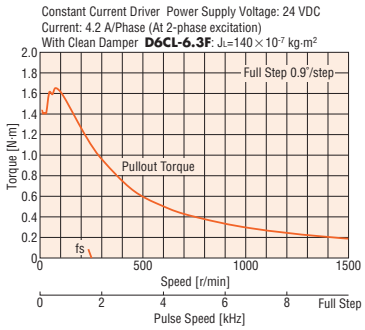


Note

●Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

Dimensions (Unit = mm)

Product Name	L1	L2	Mass kg
PK264MD□A	39	–	0.45
PK264MD□B		55	
PK266MD□A	54	–	0.7
PK266MD□B		70	
PK268MD□A	76	–	1
PK268MD□B		92	

●A number indicating the motor specification is entered where the box □ is located within the product name.

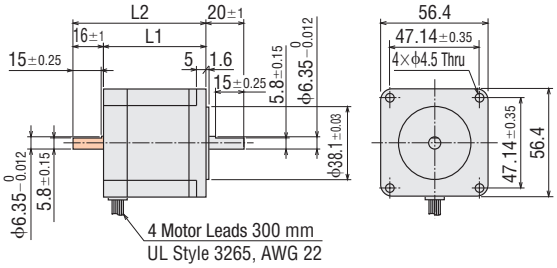

●These dimensions are for double shaft models.
For single shaft models, ignore the shaft in the shaded ▭ areas.

Step Angle 0.9° Frame Size 56.4 mm (6 or 8 lead wires)

High-Resolution Type

Specifications RoHS


Product Name Single Shaft Double Shaft	Connection Type	Maximum Holding Torque N·m	Rotor Inertia J: kg·m^2	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Basic Step Angle	Wirings and Connections (See Page A-334)	Corresponding Motor/Driver Package Product Name	Package Product Speed-Torque Characteristics Page
PK264M-01A **PK264M-01B**	Bipolar (Series)	0.48	120×10^{-7}	0.71	8.1	11.4	26	0.9°	3	–	–
	Unipolar	0.39		1	5.7	5.7	6.5		2	–	–
PK264M-02A **PK264M-02B**	Bipolar (Series)	0.48		1.4	3.9	2.8	6.8		3	–	–
	Unipolar	0.39		2	2.8	1.4	1.7		2	**CMK264M□P**	A–222
PK264M-03A **PK264M-03B**	Bipolar (Series)	0.48		2.1	2.6	1.26	3		3	–	–
	Unipolar	0.39		3	1.9	0.63	0.75		2	–	–
PK264M-E2.0A **PK264M-E2.0B**	Bipolar (Parallel)	0.48		2.8	1.96	0.7	1.7		6	–	–
	Bipolar (Series)	0.48		1.4	3.9	2.8	6.8		5	–	–
	Unipolar	0.39		2	2.8	1.4	1.7		4	–	–
PK266M-01A **PK266M-01B**	Bipolar (Series)	1.17	300×10^{-7}	0.71	11	14.8	50.8		3	–	–
	Unipolar	0.9		1	7.4	7.4	12.7		2	–	–
PK266M-02A **PK266M-02B**	Bipolar (Series)	1.17		1.4	5	3.6	12.8		3	–	–
	Unipolar	0.9		2	3.6	1.8	3.2		2	**CMK266M□P**	A–222
PK266M-03A **PK266M-03B**	Bipolar (Series)	1.17		2.1	3.2	1.5	5.8		3	–	–
	Unipolar	0.9		3	2.3	0.75	1.45		2	–	–
PK266M-E2.0A **PK266M-E2.0B**	Bipolar (Parallel)	1.17		2.8	2.52	0.9	3.2		6	–	–
	Bipolar (Series)	1.17		1.4	5	3.6	12.8		5	–	–
	Unipolar	0.9		2	3.6	1.8	3.2		4	–	–
PK268M-01A **PK268M-01B**	Bipolar (Series)	1.75	480×10^{-7}	0.71	12	17.2	77.6		3	–	–
	Unipolar	1.35		1	8.6	8.6	19.4		2	–	–
PK268M-02A **PK268M-02B**	Bipolar (Series)	1.75		1.4	6.3	4.5	19.2		3	–	–
	Unipolar	1.35		2	4.5	2.25	4.8		2	**CMK268M□P**	A–222
PK268M-03A **PK268M-03B**	Bipolar (Series)	1.75		2.1	4.2	2	8.4		3	–	–
	Unipolar	1.35		3	3	1	2.1		2	–	–
PK268M-E2.0A **PK268M-E2.0B**	Bipolar (Parallel)	1.75		2.8	3.16	1.13	4.8		6	–	–
	Bipolar (Series)	1.75		1.4	6.3	4.5	19.2		5	–	–
	Unipolar	1.35		2	4.5	2.25	4.8		4	–	–

●**A** or **B** indicating motor shaft type is entered where the box □ is located within the product name.
●For the speed – torque characteristics of the motors in the table above, see the characteristics of the corresponding motor and driver package. If there is no corresponding package name, refer to the following characteristics.

Dimensions (Unit = mm)

Product Name	L1	L2	Mass kg
PK264M-0□A **PK264M-E2.0A**	39	–	0.45
PK264M-0□B **PK264M-E2.0B**		55	
PK266M-0□A **PK266M-E2.0A**	54	–	0.7
PK266M-0□B **PK266M-E2.0B**		70	
PK268M-0□A **PK268M-E2.0A**	76	–	1.0
PK268M-0□B **PK268M-E2.0B**		92	

●A number indicating the motor specification is entered where the box □ is located within the product name.

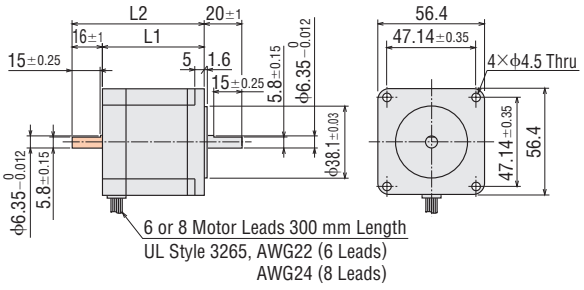

●These dimensions are for double shaft models.
For single shaft models, ignore the shaft in the shaded ▭ areas.

Step Angle 0.9° Frame Size 56.4 mm (6 or 8 lead wires)

High-Resolution Type with Encoder

Specifications RoHS


Product Name Single Shaft	Connection Type	Maximum Holding Torque N·m	Rotor Inertia J: kg·m^2	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Basic Step Angle	Wirings and Connections (See Page A-334)
PK264M-01AR22-L	Bipolar (Series)	0.48	120×10^{-7}	0.71	8.1	11.4	26	0.9°	3
	Unipolar	0.39		1	5.7	5.7	6.5		2
PK264M-02AR22-L	Bipolar (Series)	0.48		1.4	3.9	2.8	6.8		3
	Unipolar	0.39		2	2.8	1.4	1.7		2
PK264M-03AR22-L	Bipolar (Series)	0.48		2.1	2.6	1.26	3		3
	Unipolar	0.39		3	1.9	0.63	0.75		2
PK264MEAR22-L	Bipolar (Parallel)	0.48		2.8	1.96	0.7	1.7		6
	Bipolar (Series)	0.48		1.4	3.9	2.8	6.8		5
	Unipolar	0.39		2	2.8	1.4	1.7		4
PK266M-01AR22-L	Bipolar (Series)	1.17	300×10^{-7}	0.71	11	14.8	50.8		3
	Unipolar	0.9		1	7.4	7.4	12.7		2
PK266M-02AR22-L	Bipolar (Series)	1.17		1.4	5	3.6	12.8		3
	Unipolar	0.9		2	3.6	1.8	3.2		2
PK266M-03AR22-L	Bipolar (Series)	1.17		2.1	3.2	1.5	5.8		3
	Unipolar	0.9		3	2.3	0.75	1.45		2
PK266MEAR22-L	Bipolar (Parallel)	1.17		2.8	2.52	0.9	3.2		6
	Bipolar (Series)	1.17		1.4	5	3.6	12.8		5
	Unipolar	0.9		2	3.6	1.8	3.2		4
PK268M-01AR22-L	Bipolar (Series)	1.75	480×10^{-7}	0.71	12	17.2	77.6		3
	Unipolar	1.35		1	8.6	8.6	19.4		2
PK268M-02AR22-L	Bipolar (Series)	1.75		1.4	6.3	4.5	19.2		3
	Unipolar	1.35		2	4.5	2.25	4.8		2
PK268M-03AR22-L	Bipolar (Series)	1.75		2.1	4.2	2	8.4		3
	Unipolar	1.35		3	3	1	2.1		2
PK268MEAR22-L	Bipolar (Parallel)	1.75		2.8	3.16	1.13	4.8		6
	Bipolar (Series)	1.75		1.4	6.3	4.5	19.2		5
	Unipolar	1.35		2	4.5	2.25	4.8		4

●"**R22**" in the product name indicates the encoder resolution.
R22: 400 pulses/revolution
●Encoder cable (0.6 m) is included.

Dimensions (Unit = mm)

Product Name	Motor Product Name	L1	L2	Mass kg
PK264M-0□AR22-L	PK264M-0□AR22	39	57.3	0.47
PK264MEAR22-L	PK264MEAR22			
PK266M-0□AR22-L	PK266M-0□AR22	54	72.3	0.72
PK266MEAR22-L	PK266MEAR22			
PK268M-0□AR22-L	PK268M-0□AR22	76	94.3	1.02
PK268MEAR22-L	PK268MEAR22			


●A number indicating the motor specification is entered where the box □ is located within the product name.

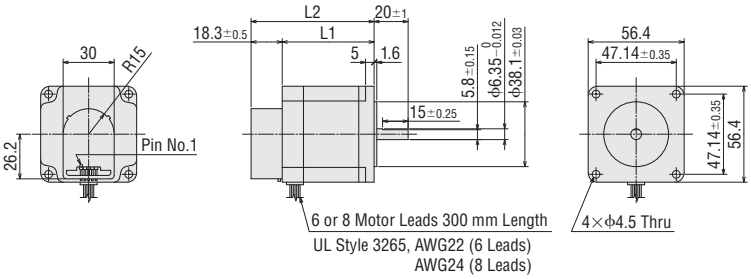

●Applicable Encoder Connector

Connector Product Name	Manufacturer
640442-5	Tyco Electronics Japan G. K.
HEDS-8903 (For 3-Channel: 5-lead wires)	Avago Technologies Limited
2695 Series (Housing)	Molex
2759 Series (Contact)	

●Included
Encoder Cable

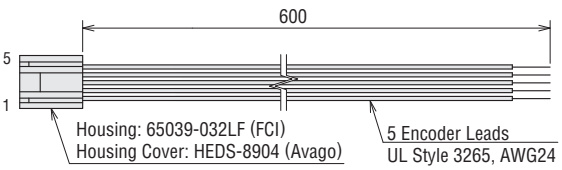


Encoder Specifications


➜ Page A-336

Speed – Torque Characteristics


PK264M-01A/PK264M-01B
PK264M-01AR22-L
Bipolar (Series)

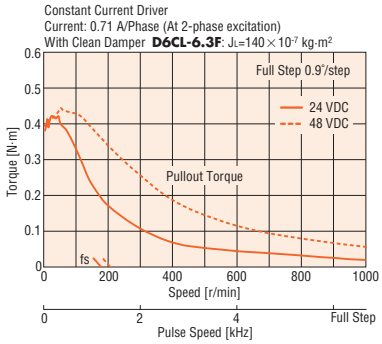


PK264M-01A/PK264M-01B
PK264M-01AR22-L
Unipolar

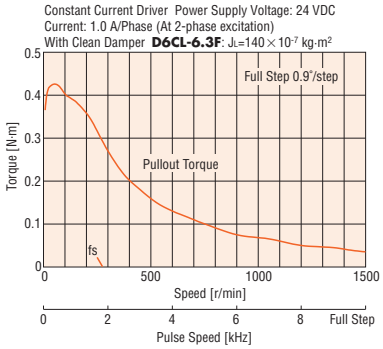


PK264M-02A/PK264M-02B
PK264M-02AR22-L
Bipolar (Series)

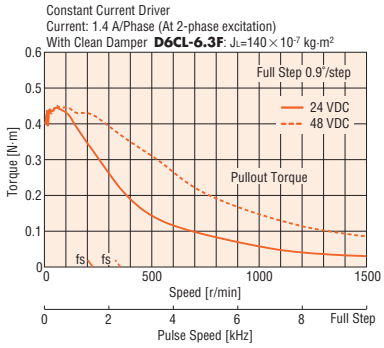


PK264M-03A/PK264M-03B
PK264M-03AR22-L
Bipolar (Series)

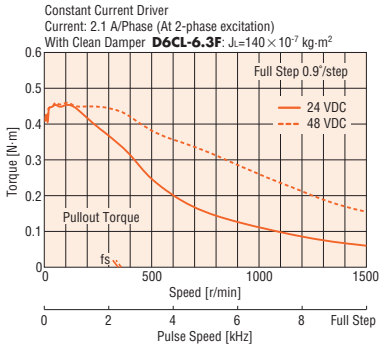


PK264M-03A/PK264M-03B
PK264M-03AR22-L
Unipolar

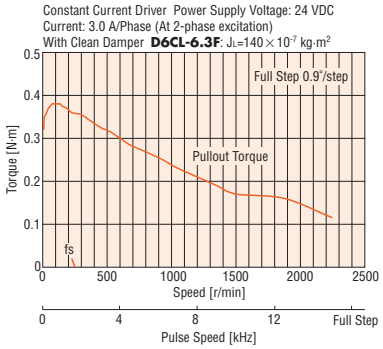


PK264M-E2.0A/PK264M-E2.0B
PK264MEAR22-L
Bipolar (Parallel)

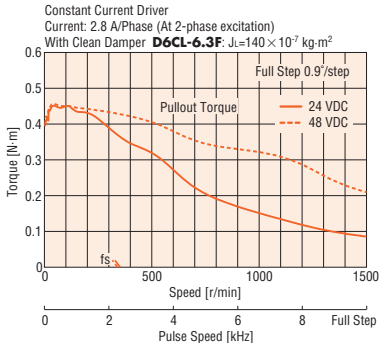


PK266M-01A/PK266M-01B
PK266M-01AR22-L
Bipolar (Series)

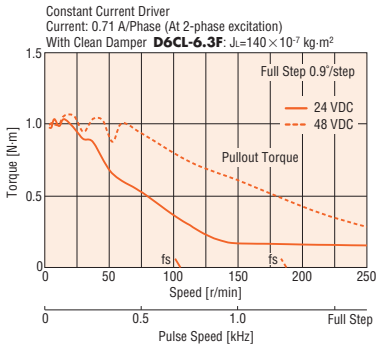


PK266M-01A/PK266M-01B
PK266M-01AR22-L
Unipolar

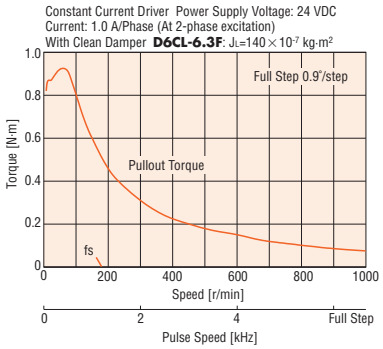


PK266M-02A/PK266M-02B
PK266M-02AR22-L
Bipolar (Series)

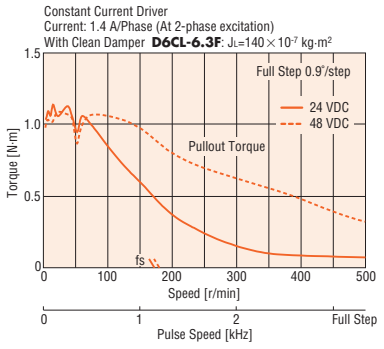


PK266M-03A/PK266M-03B
PK266M-03AR22-L
Bipolar (Series)

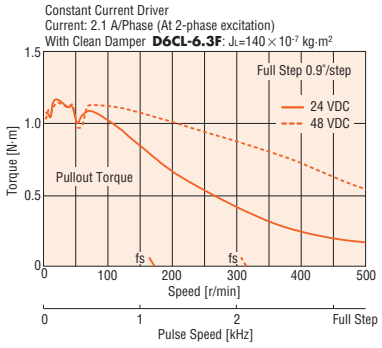

PK266M-03A/PK266M-03B
PK266M-03AR22-L
Unipolar

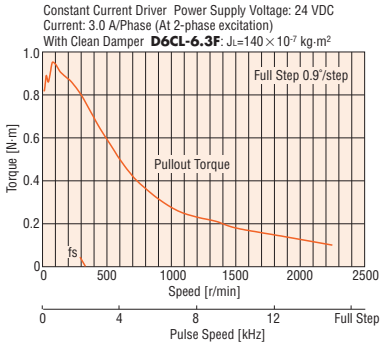

PK266M-E2.0A/PK266M-E2.0B
PK266MEAR22-L
Bipolar (Parallel)

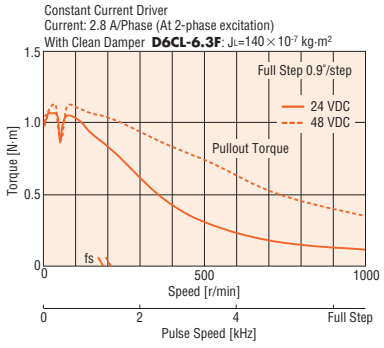


Note


●Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

Speed – Torque Characteristics


PK268M-01A/PK268M-01B
PK268M-01AR22-L
Bipolar (Series)

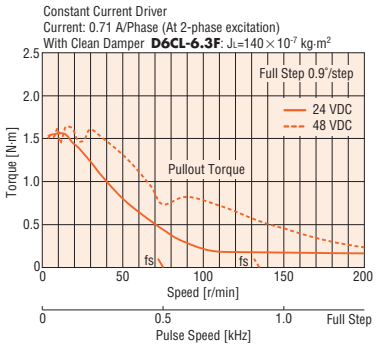


PK268M-01A/PK268M-01B
PK268M-01AR22-L
Unipolar

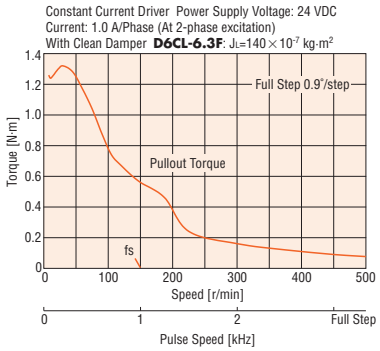


PK268M-02A/PK268M-02B
PK268M-02AR22-L
Bipolar (Series)

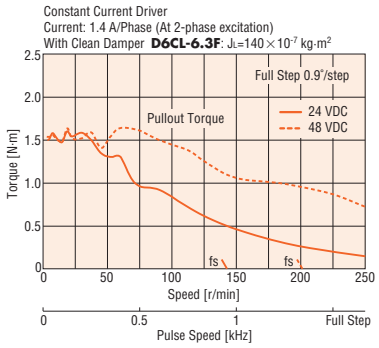


PK268M-03A/PK268M-03B
PK268M-03AR22-L
Bipolar (Series)

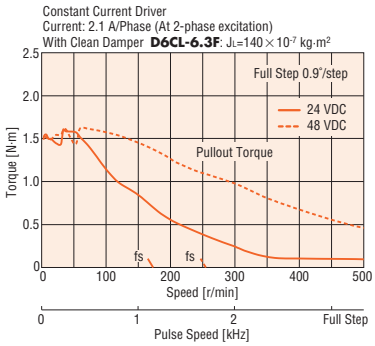

PK268M-03A/PK268M-03B
PK268M-03AR22-L
Unipolar

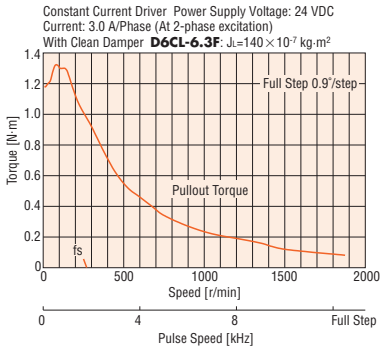

PK268M-E2.0A/PK268M-E2.0B
PK268MEAR22-L
Bipolar (Parallel)

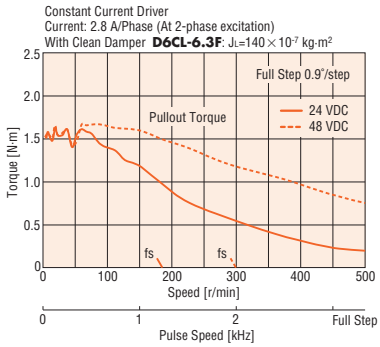

Note

●Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

Step Angle 1.8° Frame Size 42 mm (4 lead wires)

High-Torque, High-Efficiency Type


Specifications RoHS

Product Name Single Shaft Double Shaft	Connection Type	Maximum Holding Torque N·m	Rotor Inertia J: kg·m^2	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Basic Step Angle	Wirings and Connections (See Page A-334)
PKE243DA-L **PKE243DB-L**	Bipolar	0.3	36×10^{-7}	1.5	1.93	1.29	3.7	1.8°	1
PKE244DA-L **PKE244DB-L**		0.48	57×10^{-7}		3.9	2.6	6.25		
PKE245DA-L **PKE245DB-L**		0.55	83×10^{-7}		2.9	1.94	7		


●Connection cable (0.6 m) is included.

Speed – Torque Characteristics


PKE243DA-L/PKE243DB-L

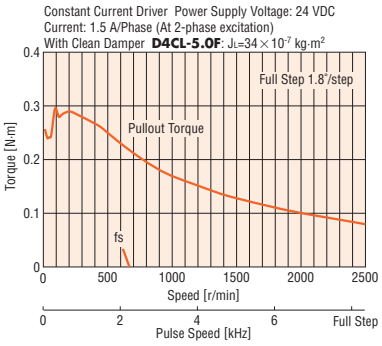

PKE244DA-L/PKE244DB-L

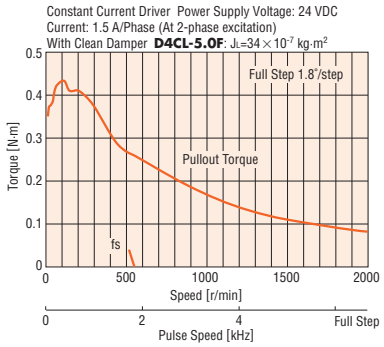

PKE245DA-L/PKE245DB-L

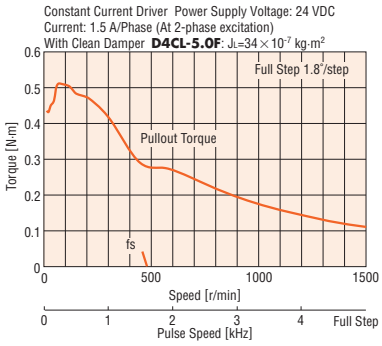


Note

●Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

Dimensions (Unit = mm)

Product Name	Motor Product Name	L1	L2	Mass kg
PKE243DA-L	PKE243DA	33	–	0.25
PKE243DB-L	PKE243DB		48	
PKE244DA-L	PKE244DA	39	–	0.3
PKE244DB-L	PKE244DB		54	
PKE245DA-L	PKE245DA	47	–	0.39
PKE245DB-L	PKE245DB		62	


●Applicable Connector
Connector Housing: 51103-0600 (Molex)
Contact: 50351-8100 (Molex)

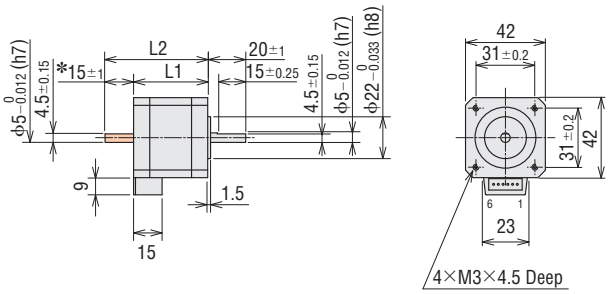

*The length of the shaft flat on the double shaft model is 15±0.25.

●These dimensions are for double shaft models.
For single shaft models, ignore the shaft in shaded areas.

●Included
Connection Cable
Product Name: **LC2B06B**

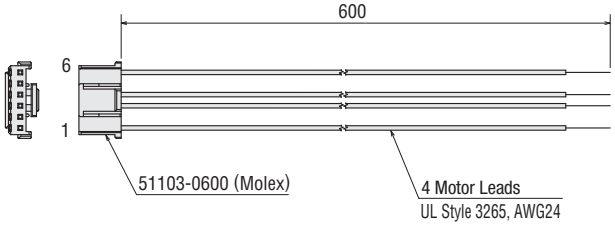

Accessories (Sold separately)

Connection cable and motor connector set are available as accessories.

●Connection cable ➜ Page A-358
●Motor connector set ➜ Page A-358

Step Angle 1.8° Frame Size 42 mm (6 lead wires)

High-Torque, High-Efficiency Type


Specifications RoHS

Product Name Single Shaft Double Shaft	Connection Type	Maximum Holding Torque N·m	Rotor Inertia J: kg·m^2	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Basic Step Angle	Wirings and Connections (See Page A-334)
PKE243A-L **PKE243B-L**	Bipolar (Series)	0.3	36×10^{-7}	0.67	4.42	6.6	18.8	1.8°	3
	Unipolar	0.24		0.95	3.14	3.3	4.7		2
PKE244A-L **PKE244B-L**	Bipolar (Series)	0.48	57×10^{-7}	0.85	6.8	8	19.4		3
	Unipolar	0.39		1.2	4.8	4	4.85		2
PKE245A-L **PKE245B-L**	Bipolar (Series)	0.55	83×10^{-7}	0.85	4.59	5.4	19.2		3
	Unipolar	0.44		1.2	3.24	2.7	4.8		2


●Connection cable (0.6 m) is included.

Speed – Torque Characteristics


PKE243A-L/PKE243B-L
Bipolar (Series)

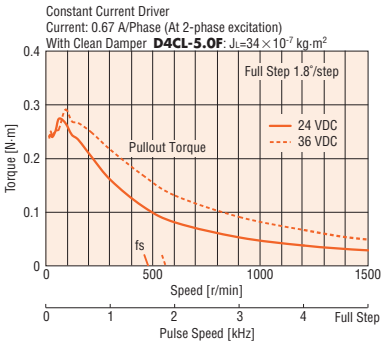


PKE243A-L/PKE243B-L
Unipolar

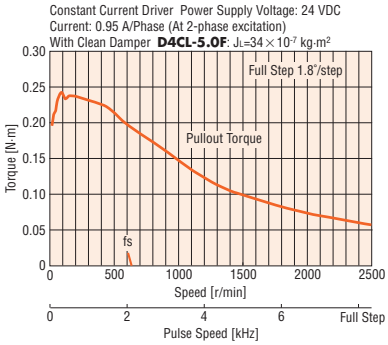


PKE244A-L/PKE244B-L
Bipolar (Series)

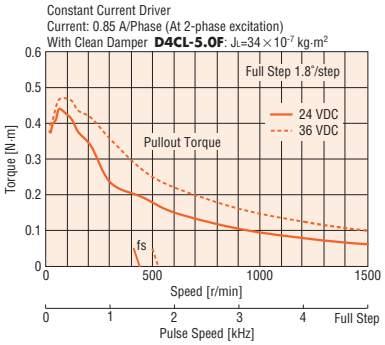


PKE244A-L/PKE244B-L
Unipolar

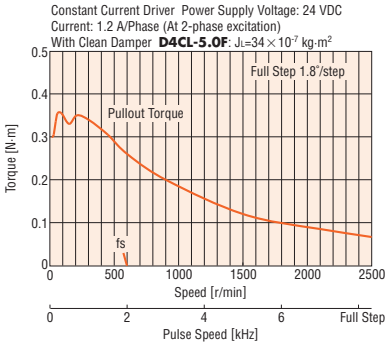

PKE245A-L/PKE245B-L
Bipolar (Series)

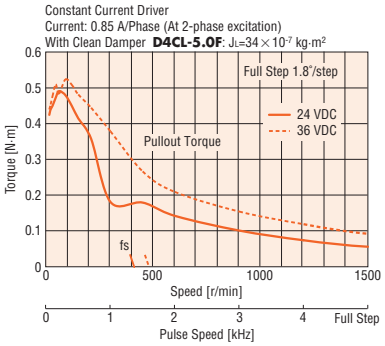

PKE245A-L/PKE245B-L
Unipolar

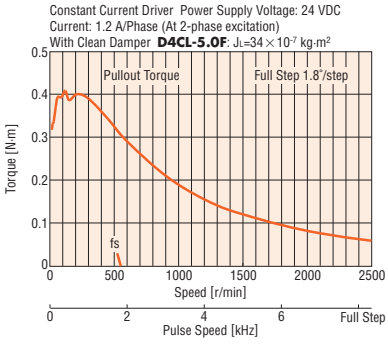


Note

●Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

Dimensions (Unit = mm)


Product Name	Motor Product Name	L1	L2	Mass kg
PKE243A-L	PKE243A	33	–	0.25
PKE243B-L	PKE243B		48	
PKE244A-L	PKE244A	39	–	0.3
PKE244B-L	PKE244B		54	
PKE245A-L	PKE245A	47	–	0.39
PKE245B-L	PKE245B		62	

●Applicable Connector
Connector Housing: 51103-0600 (Molex)
Contact: 50351-8100 (Molex)

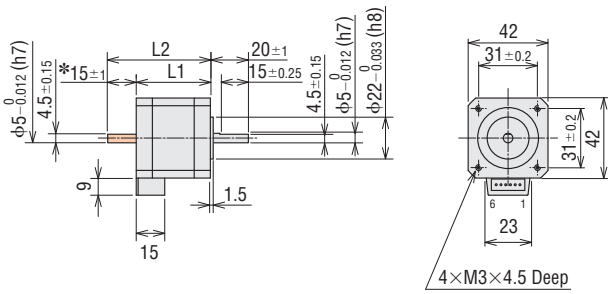

✻The length of the shaft flat on the double shaft model is 15±0.25.
●These dimensions are for double shaft models.
For single shaft models, ignore the shaft in shaded ▭ areas.

●Included
Connection Cable
Product Name: **LC2U06B**

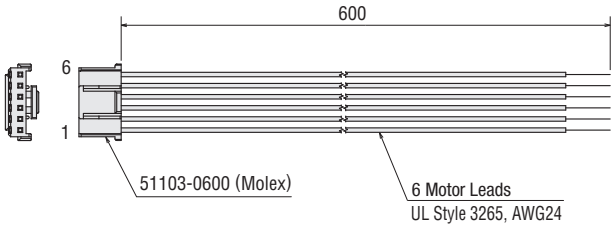

Accessories (Sold separately)

Connection cable and motor connector set are available as accessories.
●Connection cable ➜ Page A-358
●Motor connector set ➜ Page A-358

Step Angle 1.8° Frame Size 60 mm (4 lead wires)


High-Torque Type

Specifications RoHS


Product Name Single Shaft Double Shaft	Connection Type	Maximum Holding Torque N·m	Rotor Inertia J: kg·m^2	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Basic Step Angle	Wirings and Connections (See Page A-334)
PK264JDA **PK264JDB**	Bipolar	1.06	280×10^{-7}	2.8	2.1	0.73	1.8	1.8°	1
PK266JDA **PK266JDB**		1.75	450×10^{-7}		2.8	1	3.05		
PK267JDA **PK267JDB**		2.2	570×10^{-7}		3.4	1.2	3.54		
PK269JDA **PK269JDB**		3.1	900×10^{-7}		4.2	1.49	5.7		

Speed – Torque Characteristics


PK264JDA/PK264JDB

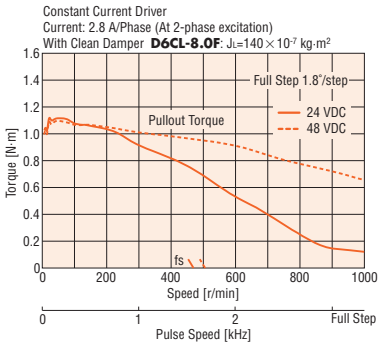


PK266JDA/PK266JDB

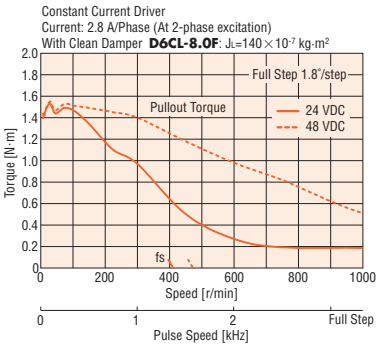

PK267JDA/PK267JDB

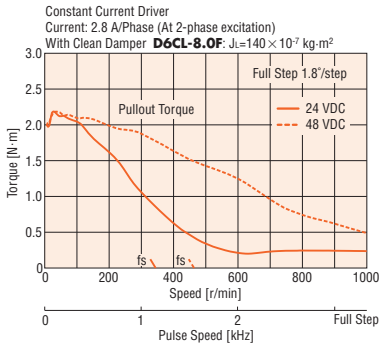

PK269JDA/PK269JDB

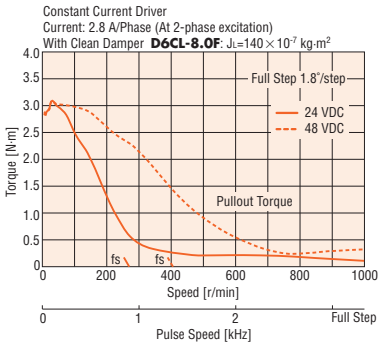


Note

●Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

Dimensions (Unit = mm)

Product Name	L1	L2	Mass kg
PK264JDA	43.5	–	0.6
PK264JDB		66.5	
PK266JDA	54	–	0.83
PK266JDB		77	
PK267JDA	65	–	1.02
PK267JDB		88	
PK269JDA	85	–	1.43
PK269JDB		108	

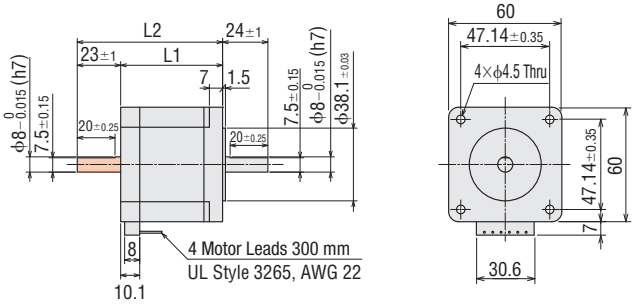

●These dimensions are for double shaft models.
For single shaft models, ignore the shaft in the shaded areas.

Step Angle 1.8° Frame Size 60 mm (6 lead wires)


High-Torque Type

Specifications RoHS


Product Name Single Shaft Double Shaft	Connection Type	Maximum Holding Torque N·m	Rotor Inertia J: kg·m²	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Basic Step Angle	Wirings and Connections (See Page A-334)
PK264JA **PK264JB**	Bipolar (Series)	1.06	280×10^{-7}	1.4	4.1	2.92	7.2	1.8°	3
	Unipolar	0.75		2	2.9	1.46	1.8		2
PK266JA **PK266JB**	Bipolar (Series)	1.75	450×10^{-7}	1.4	5.6	4	12.2		3
	Unipolar	1.35		2	4	2	3.05		2
PK267JA **PK267JB**	Bipolar (Series)	2.2	570×10^{-7}	1.4	6.7	4.8	14.2		3
	Unipolar	1.7		2	4.8	2.4	3.54		2
PK269JA **PK269JB**	Bipolar (Series)	3.1	900×10^{-7}	1.4	8.3	5.96	22.8		3
	Unipolar	2.2		2	6	2.98	5.7		2

Speed – Torque Characteristics


PK264JA/PK264JB
Bipolar (Series)

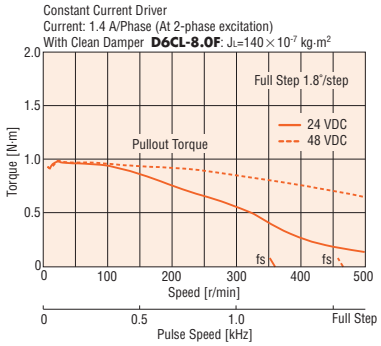


PK264JA/PK264JB
Unipolar

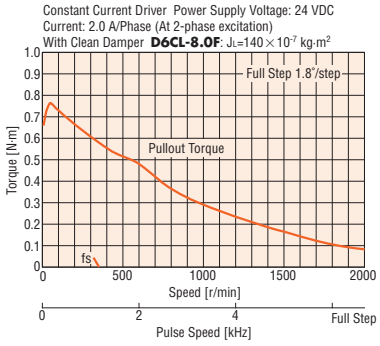


PK266JA/PK266JB
Bipolar (Series)

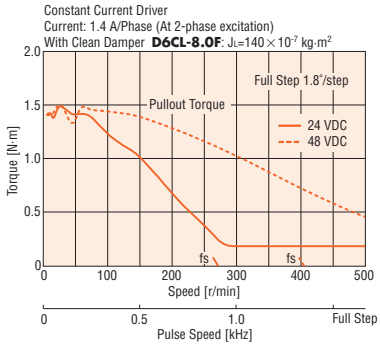


PK266JA/PK266JB
Unipolar

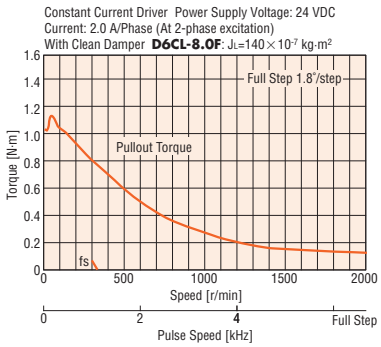


PK267JA/PK267JB
Bipolar (Series)

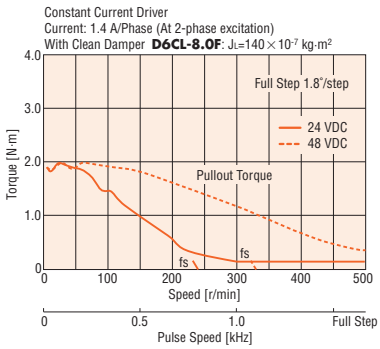


PK267JA/PK267JB
Unipolar

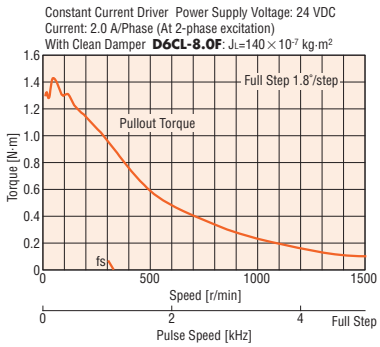

PK269JA/PK269JB
Bipolar (Series)

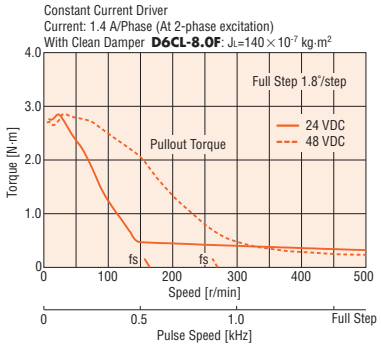

PK269JA/PK269JB
Unipolar

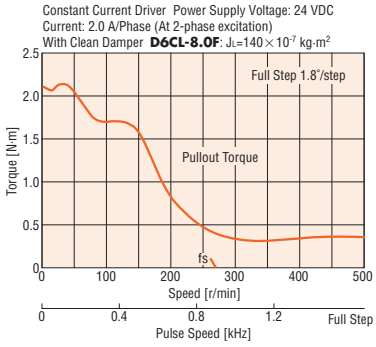


Note

●Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

Dimensions (Unit = mm)

Product Name	L1	L2	Mass kg
PK264JDA	43.5	–	0.6
PK264JDB		66.5	
PK266JDA	54	–	0.83
PK266JDB		77	
PK267JDA	65	–	1.02
PK267JDB		88	
PK269JDA	85	–	1.43
PK269JDB		108	

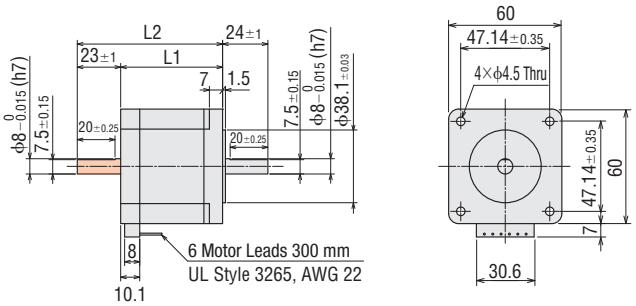

●These dimensions are for double shaft models.
For single shaft models, ignore the shaft in the shaded ▭ areas.

Step Angle 1.8° Frame Size 42 mm (4 lead wires)


Standard Type

Specifications RoHS


Product Name Single Shaft Double Shaft	Connection Type	Maximum Holding Torque N·m	Rotor Inertia J: kg·m^2	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Basic Step Angle	Wirings and Connections (See Page A-334)
PK243DA **PK243DB**	Bipolar	0.2	35×10^{-7}	1.5	2.4	1.6	1.75	1.8°	1
PK244DA **PK244DB**		0.33	54×10^{-7}		3.45	2.3	3.9		
PK245DA **PK245DB**		0.43	68×10^{-7}		3.15	2.1	3.1		

Speed – Torque Characteristics


PK243DA/PK243DB

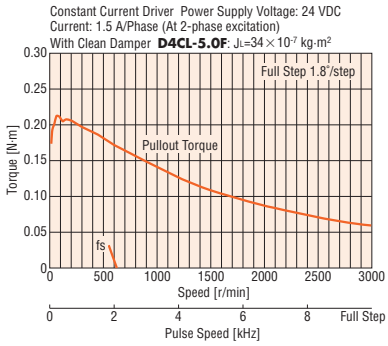

PK244DA/PK244DB

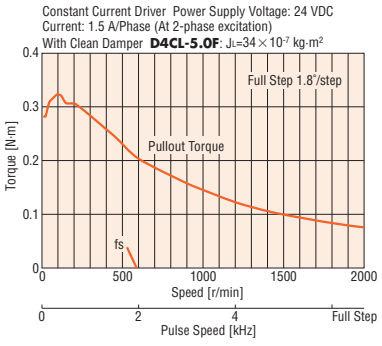

PK245DA/PK245DB

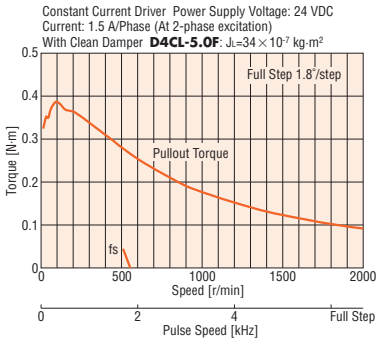


Note

●Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

Dimensions (Unit = mm)

Product Name	L1	L2	Mass kg
PK243DA	33	–	0.21
PK243DB		48	
PK244DA	39	–	0.27
PK244DB		54	
PK245DA	47	–	0.35
PK245DB		62	

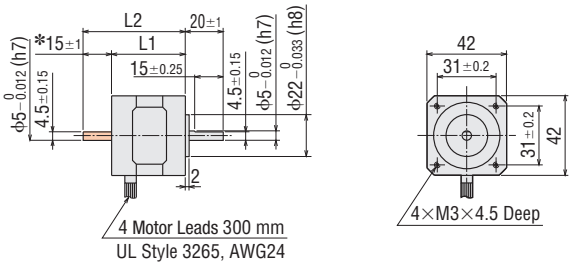

*The length of the shaft flat on the double shaft model is 15±0.25.

●These dimensions are for double shaft models.

For single shaft models, ignore the shaft in the shaded ▭ areas.

Step Angle 1.8° Frame Size 42 mm (6 lead wires)

Standard Type

Specifications RoHS


Product Name Single Shaft Double Shaft	Connection Type	Maximum Holding Torque N·m	Rotor Inertia J: kg·m^2	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Basic Step Angle	Wirings and Connections (See Page A-334)	Corresponding Motor/Driver Package Product Name	Package Product Speed-Torque Characteristics Page
PK243-01A	Bipolar (Series)	0.2	35×10^{-7}	0.67	5.6	8.4	10	1.8°	3	–	–
PK243-01B	Unipolar	0.16		0.95	4	4.2	2.5		2	**CMK243□P**	A-226
PK243-02A	Bipolar (Series)	0.2		0.28	13	48	60		3	–	–
PK243-02B	Unipolar	0.16		0.4	9.6	24	15		2	–	–
PK243-03A	Bipolar (Series)	0.2		0.22	17	77	84		3	–	–
PK243-03B	Unipolar	0.16		0.31	12	38.5	21		2	–	–
PK244-01A	Bipolar (Series)	0.33	54×10^{-7}	0.85	5.6	6.6	12.8		3	–	–
PK244-01B	Unipolar	0.26		1.2	4	3.3	3.2		2	**CMK244□P**	A-226
PK244-02A	Bipolar (Series)	0.33		0.57	8.6	15	26.8		3	–	–
PK244-02B	Unipolar	0.26		0.8	6	7.5	6.7		2	–	–
PK244-03A	Bipolar (Series)	0.33		0.28	17	60	120		3	–	–
PK244-03B	Unipolar	0.26		0.4	12	30	30		2	–	–
PK245-01A	Bipolar (Series)	0.43	68×10^{-7}	0.85	5.6	6.6	11.2		3	–	–
PK245-01B	Unipolar	0.32		1.2	4	3.3	2.8		2	**CMK245□P**	A-226
PK245-02A	Bipolar (Series)	0.43		0.57	8.6	15	28.4		3	–	–
PK245-02B	Unipolar	0.32		0.8	6	7.5	7.1		2	–	–
PK245-03A	Bipolar (Series)	0.43		0.28	17	60	100		3	–	–
PK245-03B	Unipolar	0.32		0.4	12	30	25		2	–	–

●**A** or **B** indicating motor shaft type is entered where the box □ is located within the product name.
●For the speed – torque characteristics of the motors in the table above, see the characteristics of the corresponding motor and driver package. If there is no corresponding package name, refer to the following characteristics.

Dimensions (Unit = mm)

Product Name	L1	L2	Mass kg
PK243-0□A	33	–	0.21
PK243-0□B		48	
PK244-0□A	39	–	0.27
PK244-0□B		54	
PK245-0□A	47	–	0.35
PK245-0□B		62	

●A number indicating the motor specification is entered where the box □ is located within the product name.

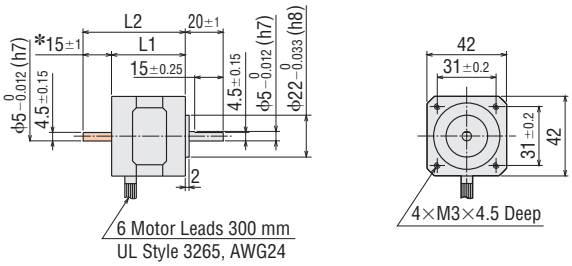

*The length of the shaft flat on the double shaft model is 15±0.25.
●These dimensions are for double shaft models.
For single shaft models, ignore the shaft in the shaded areas.

Step Angle 1.8° Frame Size 42 mm (6 lead wires)

Standard Type with Encoder

Specifications RoHS

Product Name Single Shaft	Connection Type	Maximum Holding Torque N·m	Rotor Inertia J: kg·m^2	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Basic Step Angle	Wirings and Connections (See Page A-334)
PK243-01AR21-L	Bipolar (Series)	0.2	35×10^{-7}	0.67	5.6	8.4	10	1.8°	3
PK243-01AR22-L	Unipolar	0.16		0.95	4	4.2	2.5		2
PK243-02AR21-L	Bipolar (Series)	0.2		0.28	13	48	60		3
PK243-02AR22-L	Unipolar	0.16		0.4	9.6	24	15		2
PK243-03AR21-L	Bipolar (Series)	0.2		0.22	17	77	84		3
PK243-03AR22-L	Unipolar	0.16		0.31	12	38.5	21		2
PK244-01AR21-L	Bipolar (Series)	0.33	54×10^{-7}	0.85	5.6	6.6	12.8		3
PK244-01AR22-L	Unipolar	0.26		1.2	4	3.3	3.2		2
PK244-02AR21-L	Bipolar (Series)	0.33		0.57	8.6	15	26.8		3
PK244-02AR22-L	Unipolar	0.26		0.8	6	7.5	6.7		2
PK244-03AR21-L	Bipolar (Series)	0.33		0.28	17	60	120		3
PK244-03AR22-L	Unipolar	0.26		0.4	12	30	30		2
PK245-01AR21-L	Bipolar (Series)	0.43	68×10^{-7}	0.85	5.6	6.6	11.2		3
PK245-01AR22-L	Unipolar	0.32		1.2	4	3.3	2.8		2
PK245-02AR21-L	Bipolar (Series)	0.43		0.57	8.6	15	28.4		3
PK245-02AR22-L	Unipolar	0.32		0.8	6	7.5	7.1		2
PK245-03AR21-L	Bipolar (Series)	0.43		0.28	17	60	100		3
PK245-03AR22-L	Unipolar	0.32		0.4	12	30	25		2


●"**R21**" and in the product name indicate the encoder resolution.
R21: 200 pulses/revolution 400 pulses/revolution
●Encoder cable (0.6 m) is included.

R22もFuturaボールドにしました

Dimensions (Unit = mm)

Product Name	Motor Product Name	L1	L2	Mass kg
PK243-0□AR21-L	PK243-0□AR21	33	51.3	0.24
PK243-0□AR22-L	PK243-0□AR22			
PK244-0□AR21-L	PK244-0□AR21	39	57.3	0.29
PK244-0□AR22-L	PK244-0□AR22			
PK245-0□AR21-L	PK245-0□AR21	47	65.3	0.37
PK245-0□AR22-L	PK245-0□AR22			


●A number indicating the motor specification is entered where the box □ is located within the product name.

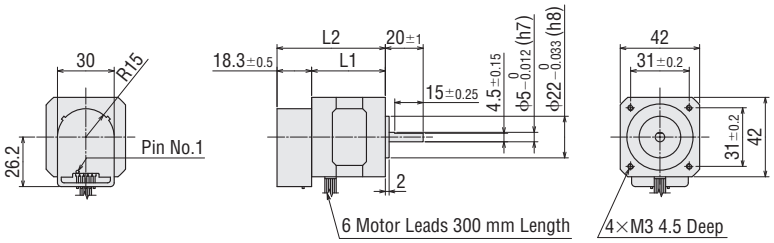

●Applicable Encoder Connector

Connector Product Name	Manufacturer
640442-5	Tyco Electronics Japan G. K.
HEDS-8903 (For 3-Channel: 5-lead wires)	Avago Technologies Limited
2695 Series (Housing)	Molex
2759 Series (Contact)	

●Included
Encoder Cable

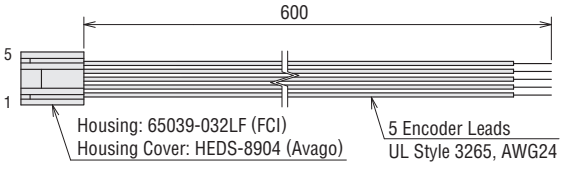


Encoder Specifications


➜ Page A-336

Speed – Torque Characteristics


PK243-01A/PK243-01B
PK243-01AR21-L/PK243-01AR22-L
Bipolar (Series)

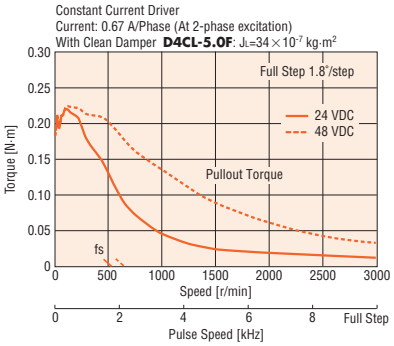


PK243-02A/PK243-02B
PK243-02AR21-L/PK243-02AR22-L
Bipolar (Series)

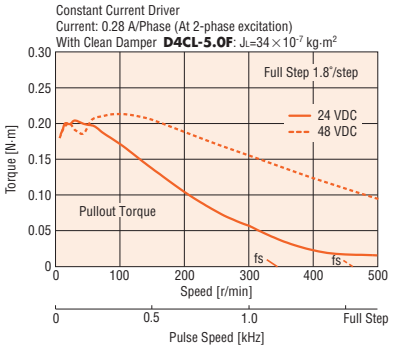


PK243-02A/PK243-02B
PK243-02AR21-L/PK243-02AR22-L
Unipolar

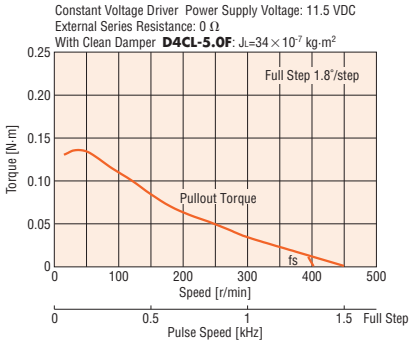


PK243-03A/PK243-03B
PK243-03AR21-L/PK243-03AR22-L
Bipolar (Series)

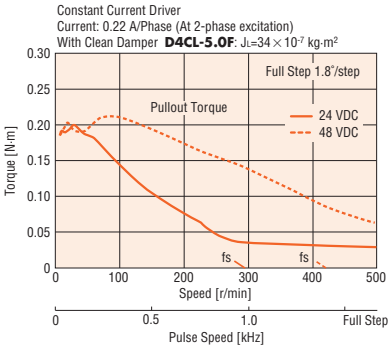


PK243-03A/PK243-03B
PK243-03AR21-L/PK243-03AR22-L
Unipolar

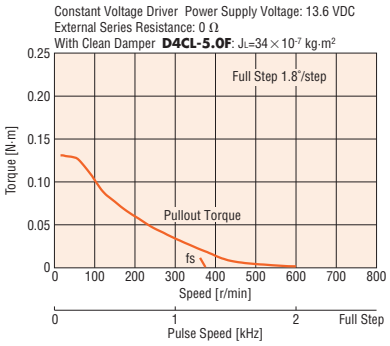


PK244-01A/PK244-01B
PK244-01AR21-L/PK244-01AR22-L
Bipolar (Series)

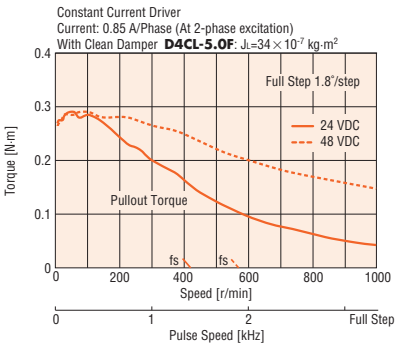


PK244-02A/PK244-02B
PK244-02AR21-L/PK244-02AR22-L
Bipolar (Series)

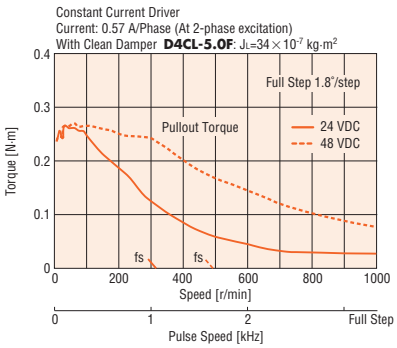

PK244-02A/PK244-02B
PK244-02AR21-L/PK244-02AR22-L
Unipolar

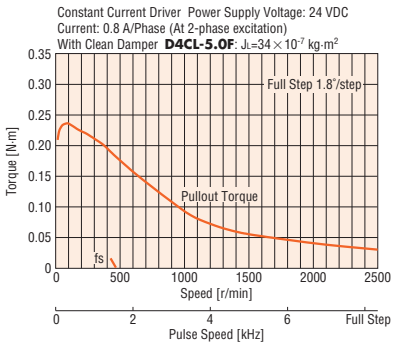


PK244-03A/PK244-03B
PK244-03AR21-L/PK244-03AR22-L
Unipolar

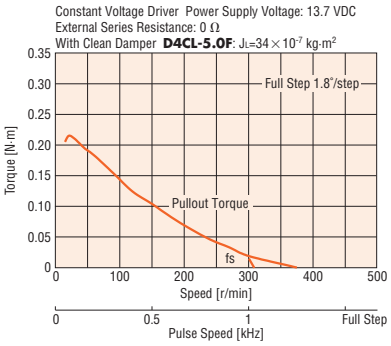


Note

●Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.


PK245-01A/PK245-01B
PK245-01AR21-L/PK245-01AR22-L
Bipolar (Series)

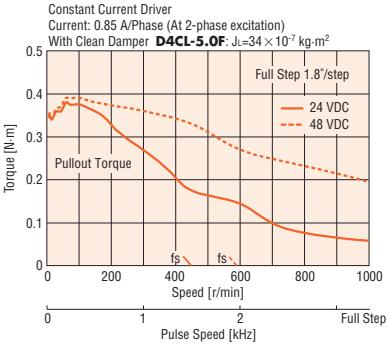


PK245-02A/PK245-02B
PK245-02AR21-L/PK245-02AR22-L
Bipolar (Series)

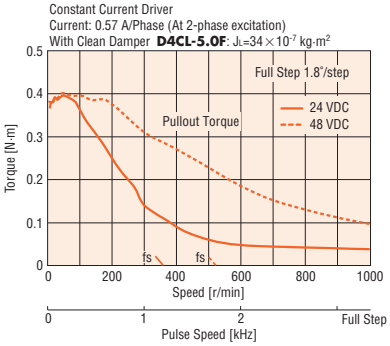

PK245-02A/PK245-02B
PK245-02AR21-L/PK245-02AR22-L
Unipolar

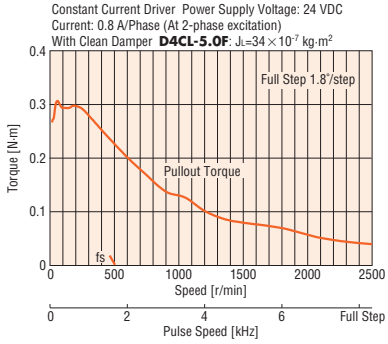

PK245-03A/PK245-03B
PK245-03AR21-L/PK245-03AR22-L
Unipolar

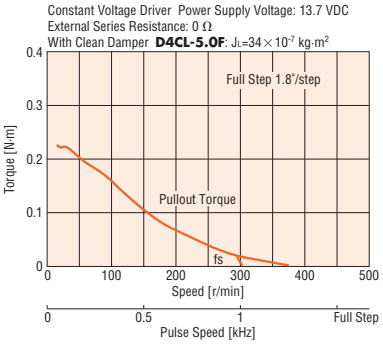

Note

●Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

Step Angle 1.8° Frame Size 50 mm (6 lead wires)

Standard Type

Specifications RoHS


Product Name Single Shaft Double Shaft	Connection Type	Maximum Holding Torque N·m	Rotor Inertia J: kg·m²	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Basic Step Angle	Wirings and Connections (See Page A-334)	Corresponding Motor/Driver Package Product Name	Package Product Speed-Torque Characteristics Page
PK256-02A	Bipolar (Series)	0.84	230×10^{-7}	1.4	4.2	3	5.6	1.8°	3	–	–
PK256-02B	Unipolar	0.6		2	3	1.5	1.4		2	**CMK256□P**	A-226
PK258-02A	Bipolar (Series)	1.56	420×10^{-7}	1.4	6.7	4.8	11.5		3	–	–
PK258-02B	Unipolar	1.2		2	4.8	2.4	2.87		2	**CMK258□P**	A-226

●**A** or **B** indicating motor shaft type is entered where the box □ is located within the product name.
●For the speed – torque characteristics of the motors in the table above, see the characteristics of the corresponding motor and driver package. If there is no corresponding package name, refer to the following characteristics.

Speed – Torque Characteristics


PK256-02A/PK256-02B

Bipolar (Series)

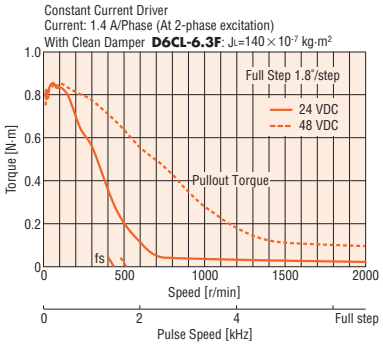

PK258-02A/PK258-02B

Bipolar (Series)

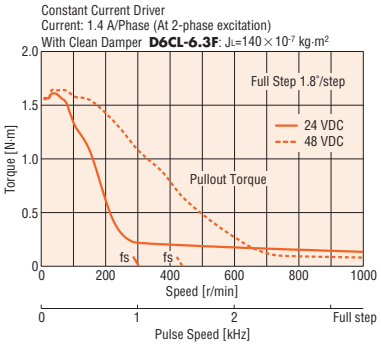


Note

●Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

Dimensions (Unit = mm)

Product Name	L1	L2	Mass kg
PK256-02A	51.5	–	0.53
PK256-02B		67.5	
PK258-02A	81	–	0.89
PK258-02B		97	

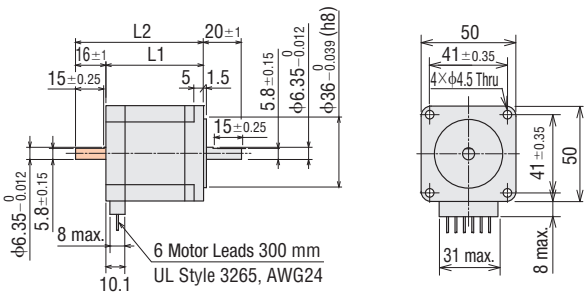

●These dimensions are for double shaft models.
For single shaft models, ignore the shaft in the shaded areas.

Step Angle 1.8° Frame Size 56.4 mm (4 lead wires)

Standard Type


Specifications RoHS

Product Name Single Shaft Double Shaft	Connection Type	Maximum Holding Torque N·m	Rotor Inertia J: kg·m^2	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Basic Step Angle	Wirings and Connections (See Page A-334)	Corresponding Motor/Driver Package Product Name	Package Product Speed-Torque Characteristics Page
PK264D14A **PK264D14B**	Bipolar	0.48	120×10^{-7}	1.4	3.92	2.8	5.6	1.8°	1	–	–
PK264D28A **PK264D28B**				2.8	1.96	0.7	1.4			–	–
PK264DA **PK264DB**				4.2	1.26	0.3	0.6			**RBK264**□	A-200
PK266D14A **PK266D14B**		1.17	300×10^{-7}	1.4	5.04	3.6	10			–	–
PK266D28A **PK266D28B**				2.8	2.52	0.9	2.5			–	–
PK266DA **PK266DB**				4.2	1.68	0.4	1.1			**RBK266**□	A-200
PK268D14A **PK268D14B**		1.75	480×10^{-7}	1.4	6.02	4.3	14.4			–	–
PK268D28A **PK268D28B**				2.8	3.16	1.13	3.6			–	–
PK268DA **PK268DB**				4.2	2.1	0.5	1.6			**RBK268**□	A-200


- **A** or **B** indicating motor shaft type is entered where the box □ is located within the product name.
- For the speed – torque characteristics of the motors in the table above, see the characteristics of the corresponding motor and driver package. If there is no corresponding package name, refer to the following characteristics.

Speed – Torque Characteristics


PK264D14A/PK264D14B

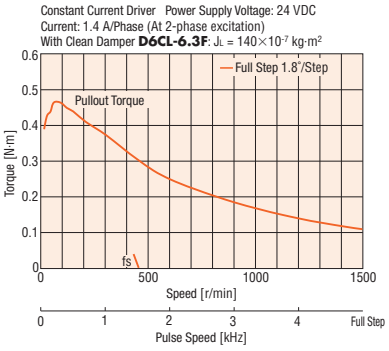


PK266D14A/PK266D14B

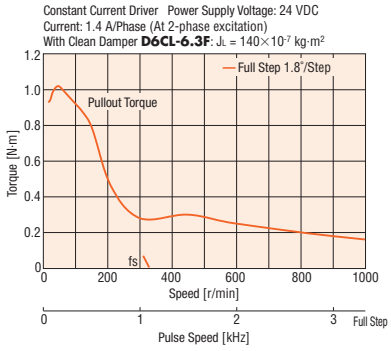


PK268D14A/PK268D14B

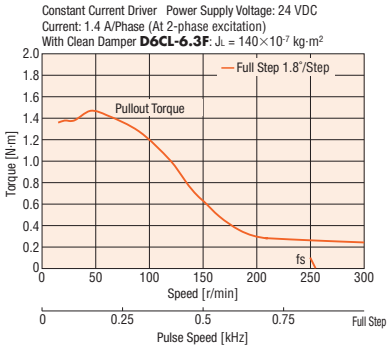


PK264D28A/PK264D28B

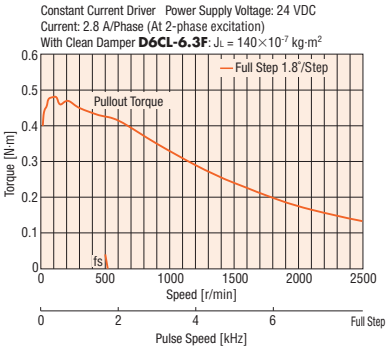

PK266D28A/PK266D28B

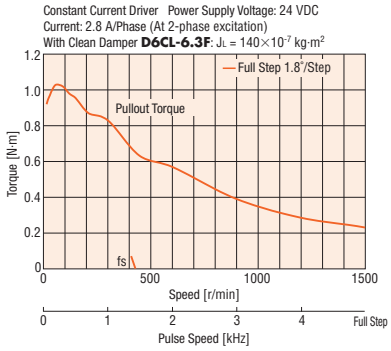

PK268D28A/PK268D28B

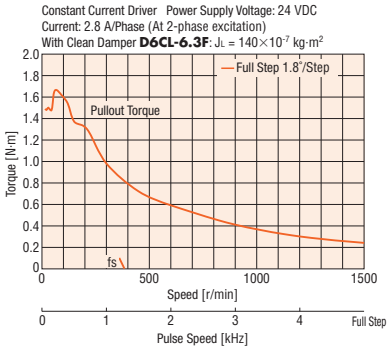


Note

- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

Dimensions (Unit = mm)

Product Name	L1	L2	Mass kg
PK264D14A	39	–	0.45
PK264D28A			
PK264DA			
PK264D14B		55	
PK264D28B			
PK264DB			
PK266D14A	54	–	0.7
PK266D28A			
PK266DA			
PK266D14B		70	
PK266D28B			
PK266DB			
PK268D14A	76	–	1.0
PK268D28A			
PK268DA			
PK268D14B		92	
PK268D28B			
PK268DB			

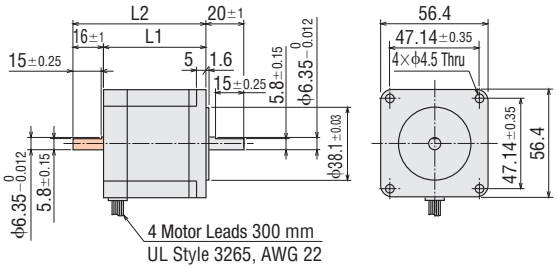

●These dimensions are for double shaft models.
For single shaft models, ignore the shaft in the shaded areas.

Step Angle 1.8° Frame Size 56.4 mm (6 or 8 lead wires)

Standard Type

Specifications RoHS


Product Name Single Shaft Double Shaft	Connection Type	Maximum Holding Torque N·m	Rotor Inertia J: kg·m^2	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Basic Step Angle	Wirings and Connections (See Page A-334)	Corresponding Motor/Driver Package Product Name	Package Product Speed-Torque Characteristics Page
PK264-01A **PK264-01B**	Bipolar (Series)	0.48	120×10^{-7}	0.71	8.1	11.4	21.6	1.8°	3	–	–
	Unipolar	0.39		1	5.7	5.7	5.4		2	–	–
PK264-02A **PK264-02B**	Bipolar (Series)	0.48		1.4	3.9	2.8	5.6		3	–	–
	Unipolar	0.39		2	2.8	1.4	1.4		2	**CMK264□P**	A-227
PK264-03A **PK264-03B**	Bipolar (Series)	0.48		2.1	2.6	1.26	2.4		3	–	–
	Unipolar	0.39		3	1.9	0.63	0.6		2	–	–
PK264-E2.0A **PK264-E2.0B**	Bipolar (Parallel)	0.48		2.8	1.96	0.7	1.4		6	–	–
	Bipolar (Series)	0.48		1.4	3.9	2.8	5.6		5	–	–
	Unipolar	0.39		2	2.8	1.4	1.4		4	–	–
PK266-01A **PK266-01B**	Bipolar (Series)	1.17	300×10^{-7}	0.71	11	14.8	40		3	–	–
	Unipolar	0.9		1	7.4	7.4	10		2	–	–
PK266-02A **PK266-02B**	Bipolar (Series)	1.17		1.4	5	3.6	10		3	–	–
	Unipolar	0.9		2	3.6	1.8	2.5		2	**CMK266□P**	A-227
PK266-03A **PK266-03B**	Bipolar (Series)	1.17		2.1	3.2	1.5	4.4		3	–	–
	Unipolar	0.9		3	2.3	0.75	1.1		2	–	–
PK266-E2.0A **PK266-E2.0B**	Bipolar (Parallel)	1.17		2.8	2.52	0.9	2.5		6	–	–
	Bipolar (Series)	1.17		1.4	5	3.6	10		5	–	–
	Unipolar	0.9		2	3.6	1.8	2.5		4	–	–
PK268-01A **PK268-01B**	Bipolar (Series)	1.75	480×10^{-7}	0.71	12	17.2	56		3	–	–
	Unipolar	1.35		1	8.6	8.6	14		2	–	–
PK268-02A **PK268-02B**	Bipolar (Series)	1.75		1.4	6.3	4.5	14.4		3	–	–
	Unipolar	1.35		2	4.5	2.25	3.6		2	**CMK268□P**	A-227
PK268-03A **PK268-03B**	Bipolar (Series)	1.75		2.1	4.2	2	6.4		3	–	–
	Unipolar	1.35		3	3	1	1.6		2	–	–
PK268-E2.0A **PK268-E2.0B**	Bipolar (Parallel)	1.75		2.8	3.16	1.13	3.6		6	–	–
	Bipolar (Series)	1.75		1.4	6.3	4.5	14.4		5	–	–
	Unipolar	1.35		2	4.5	2.25	3.6		4	–	–

●**A** or **B** indicating motor shaft type is entered where the box □ is located within the product name.
●For the speed – torque characteristics of the motors in the table above, see the characteristics of the corresponding motor and driver package. If there is no corresponding package name, refer to the following characteristics.

Dimensions (Unit = mm)

Product Name	L1	L2	Mass kg
PK264DA **PK264-0□A** **PK264-E2.0A**	39	–	0.45
PK264DB **PK264-0□B** **PK264-E2.0B**		55	
PK266DA **PK266-0□A** **PK266-E2.0A**	54	–	0.7
PK266DB **PK266-0□B** **PK266-E2.0B**		70	
PK268DA **PK268-0□A** **PK268-E2.0A**	76	–	1.0
PK268DB **PK268-0□B** **PK268-E2.0B**		92	

●A number indicating the motor specification is entered where the box □ is located within the product name.

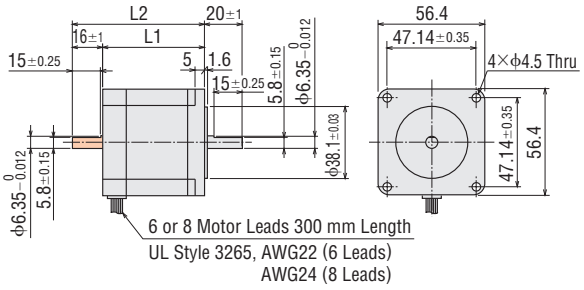

●These dimensions are for double shaft models.
For single shaft models, ignore the shaft in the shaded ▭ areas.

Step Angle 1.8° Frame Size 56.4 mm (6 or 8 lead wires)

Standard Type with Encoder

Specifications RoHS

Product Name Single Shaft	Connection Type	Maximum Holding Torque N·m	Rotor Inertia J: kg·m^2	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Basic Step Angle	Wirings and Connections (See Page A-334)
PK264-01AR21-L	Bipolar (Series)	0.48	120×10^{-7}	0.71	8.1	11.4	21.6	1.8°	3
PK264-01AR22-L	Unipolar	0.39		1	5.7	5.7	5.4		2
PK264-02AR21-L	Bipolar (Series)	0.48		1.4	3.9	2.8	5.6		3
PK264-02AR22-L	Unipolar	0.39		2	2.8	1.4	1.4		2
PK264-03AR21-L	Bipolar (Series)	0.48		2.1	2.6	1.26	2.4		3
PK264-03AR22-L	Unipolar	0.39		3	1.9	0.63	0.6		2
PK264EAR21-L	Bipolar (Parallel)	0.48		2.8	1.96	0.7	1.4		6
PK264EAR22-L	Bipolar (Series)	0.48		1.4	3.9	2.8	5.6		5
	Unipolar	0.39		2	2.8	1.4	1.4		4
PK266-01AR21-L	Bipolar (Series)	1.17	300×10^{-7}	0.71	11	14.8	40		3
PK266-01AR22-L	Unipolar	0.9		1	7.4	7.4	10		2
PK266-02AR21-L	Bipolar (Series)	1.17		1.4	5	3.6	10		3
PK266-02AR22-L	Unipolar	0.9		2	3.6	1.8	2.5		2
PK266-03AR21-L	Bipolar (Series)	1.17		2.1	3.2	1.5	4.4		3
PK266-03AR22-L	Unipolar	0.9		3	2.3	0.75	1.1		2
PK266EAR21-L	Bipolar (Parallel)	1.17		2.8	2.52	0.9	2.5		6
PK266EAR22-L	Bipolar (Series)	1.17		1.4	5	3.6	10		5
	Unipolar	0.9		2	3.6	1.8	2.5		4
PK268-01AR21-L	Bipolar (Series)	1.75	480×10^{-7}	0.71	12	17.2	56		3
PK268-01AR22-L	Unipolar	1.35		1	8.6	8.6	14		2
PK268-02AR21-L	Bipolar (Series)	1.75		1.4	6.3	4.5	14.4		3
PK268-02AR22-L	Unipolar	1.35		2	4.5	2.25	3.6		2
PK268-03AR21-L	Bipolar (Series)	1.75		2.1	4.2	2	6.4		3
PK268-03AR22-L	Unipolar	1.35		3	3	1	1.6		2
PK268EAR21-L	Bipolar (Parallel)	1.75		2.8	3.16	1.13	3.6		6
PK268EAR22-L	Bipolar (Series)	1.75		1.4	6.3	4.5	14.4		5
	Unipolar	1.35		2	4.5	2.25	3.6		4


●"**R21**" and [redacted] in the product name indicate the encoder resolution.
R21: 200 pulses/revolution [redacted] 400 pulses/revolution
●Encoder cable (0.6 m) is included.

R22もFuturaボールドにしました

Dimensions (Unit = mm)

Product Name	Motor Product Name	L1	L2	Mass kg
PK264-0□AR21-L	PK264-0□AR21	39	57.3	0.47
PK264-0□AR22-L	PK264-0□AR22			
PK264EAR21-L	PK264EAR21			
PK264EAR22-L	PK264EAR22			
PK266-0□AR21-L	PK266-0□AR21	54	72.3	0.72
PK266-0□AR22-L	PK266-0□AR22			
PK266EAR21-L	PK266EAR21			
PK266EAR22-L	PK266EAR22			
PK268-0□AR21-L	PK268-0□AR21	76	94.3	1.02
PK268-0□AR22-L	PK268-0□AR22			
PK268EAR21-L	PK268EAR21			
PK268EAR22-L	PK268EAR22			


●A number indicating the motor specification is entered where the box □ is located within the product name.

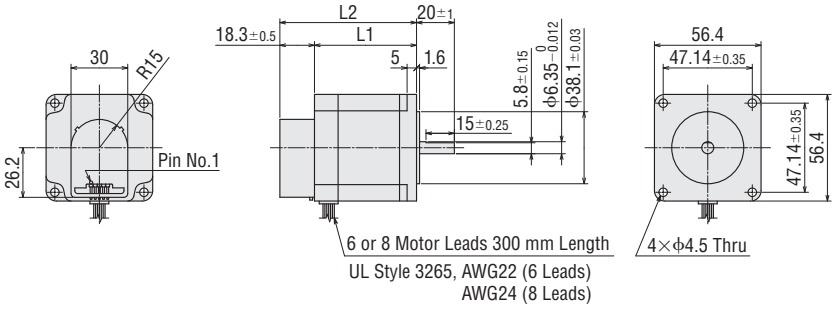

●Applicable Encoder Connector

Connector Product Name	Manufacturer
640442-5	Tyco Electronics Japan G. K.
HEDS-8903 (For 3-Channel: 5-lead wires)	Avago Technologies Limited
2695 Series (Housing)	Molex
2759 Series (Contact)	

●Included
Encoder Cable

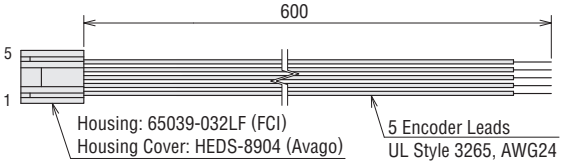


Encoder Specifications


➜ Page A-336

Speed – Torque Characteristics


PK264-01A/PK264-01B
PK264-01AR21-L/PK264-01AR22-L
Bipolar (Series)

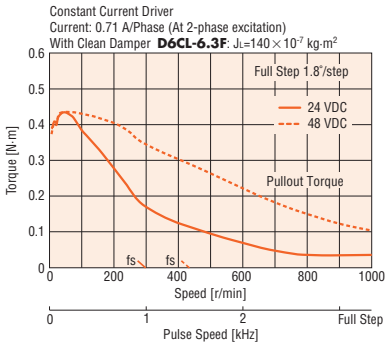


PK264-01A/PK264-01B
PK264-01AR21-L/PK264-01AR22-L
Unipolar

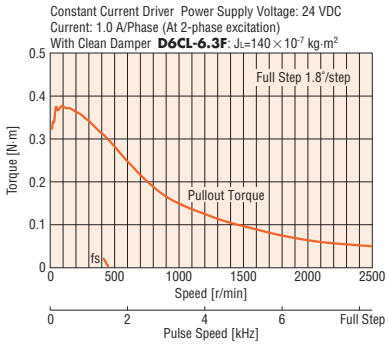


PK264-02A/PK264-02B
PK264-02AR21-L/PK264-02AR22-L
Bipolar (Series)

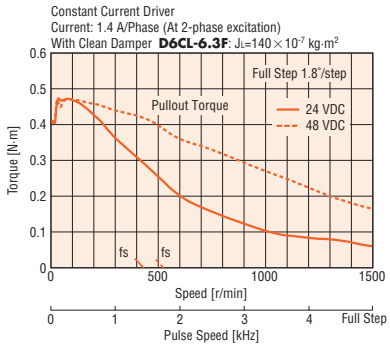


PK264-03A/PK264-03B
PK264-03AR21-L/PK264-03AR22-L
Bipolar (Series)

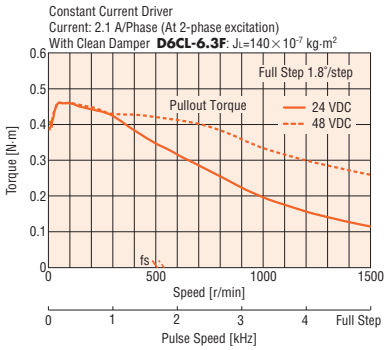


PK264-03A/PK264-03B
PK264-03AR21-L/PK264-03AR22-L
Unipolar

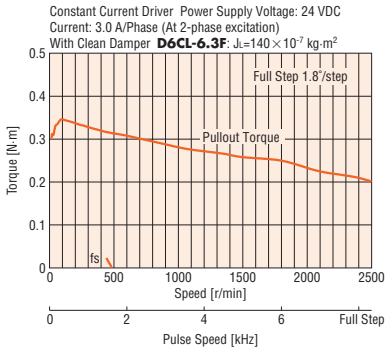


PK264-E2.0A/PK264-E2.0B
PK264EAR21-L/PK264EAR22-L
Bipolar (Parallel)

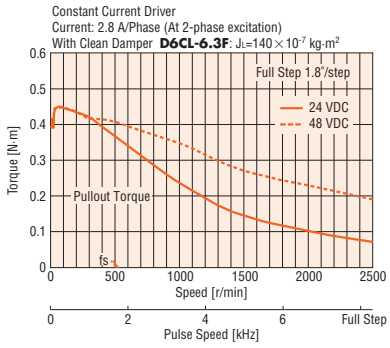


PK266-01A/PK266-01B
PK266-01AR21-L/PK266-01AR22-L
Bipolar (Series)

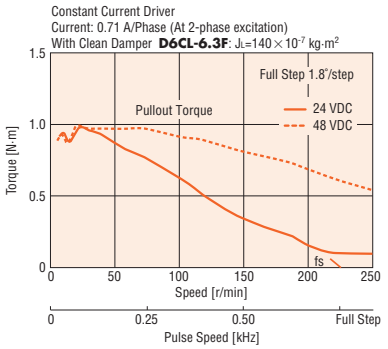


PK266-01A/PK266-01B
PK266-01AR21-L/PK266-01AR22-L
Unipolar

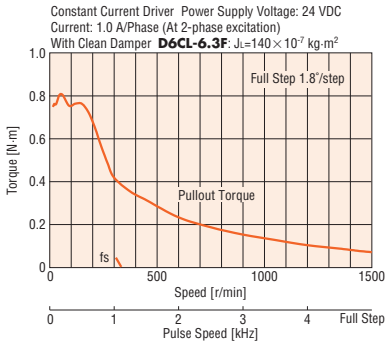


PK266-02A/PK266-02B
PK266-02AR21-L/PK266-02AR22-L
Bipolar (Series)

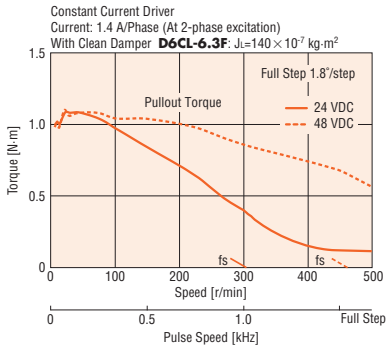


PK266-03A/PK266-03B
PK266-03AR21-L/PK266-03AR22-L
Bipolar (Series)

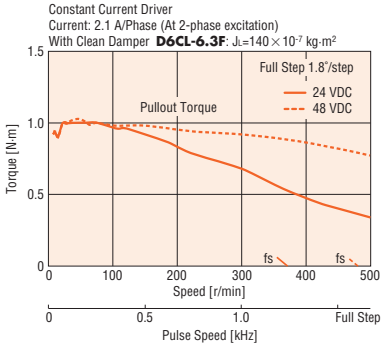

PK266-03A/PK266-03B
PK266-03AR21-L/PK266-03AR22-L
Unipolar

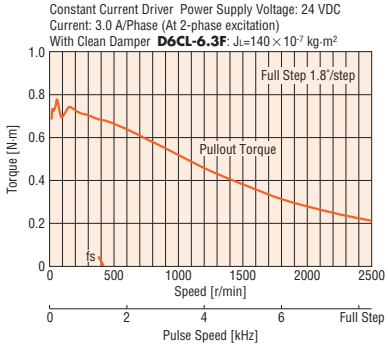

PK266-E2.0A/PK266-E2.0B
PK266EAR21-L/PK266EAR22-L
Bipolar (Parallel)

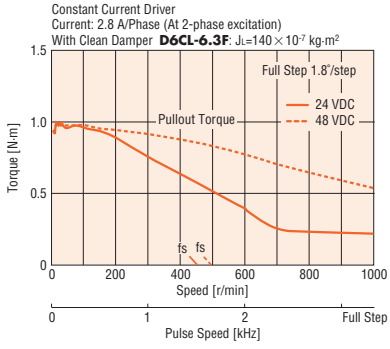


Note


●Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

Speed – Torque Characteristics


PK268-01A/PK268-01B
PK268-01AR21-L/PK268-01AR22-L
Bipolar (Series)

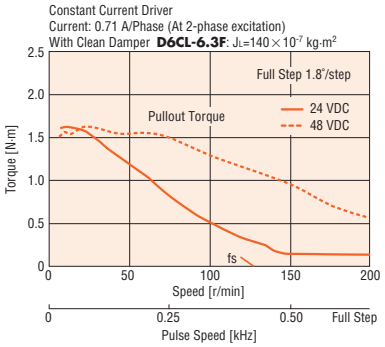


PK268-01A/PK268-01B
PK268-01AR21-L/PK268-01AR22-L
Unipolar

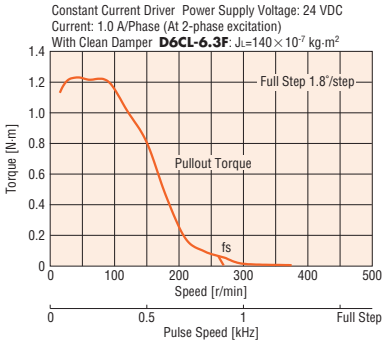


PK268-02A/PK268-02B
PK268-02AR21-L/PK268-02AR22-L
Bipolar (Series)

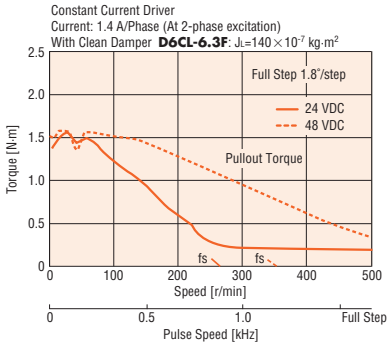


PK268-03A/PK268-03B
PK268-03AR21-L/PK268-03AR22-L
Bipolar (Series)

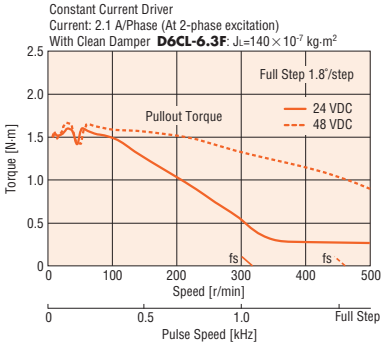

PK268-03A/PK268-03B
PK268-03AR21-L/PK268-03AR22-L
Unipolar

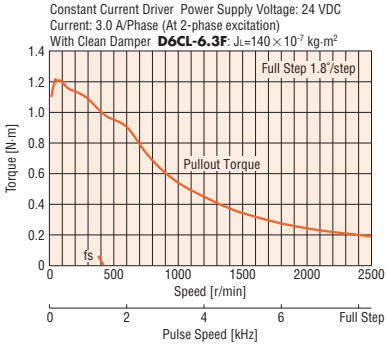

PK268-E2.0A/PK268-E2.0B
PK268EAR21-L/PK268EAR22-L
Bipolar (Parallel)

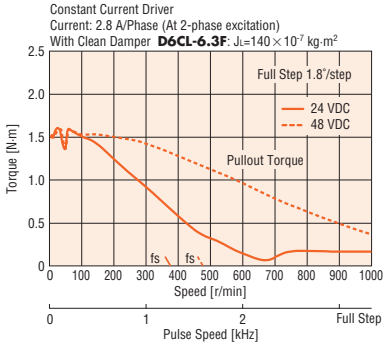

Note

●Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

Step Angle 1.8° Frame Size 85 mm (4 lead wires)

Standard Type


Specifications RoHS

Product Name Single Shaft Double Shaft	Connection Type	Maximum Holding Torque N·m	Rotor Inertia J: kg·m^2	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Basic Step Angle	Wirings and Connections (See Page A-334)	Corresponding Motor/Driver Package Product Name	Package Product Speed-Torque Characteristics Page
PK296DA **PK296DB**	Bipolar	2.2	1400×10^{-7}	4.5	1.1	0.24	1.5	1.8°	1	**RBK296**□	A-201
PK299DA **PK299DB**		4.4	2700×10^{-7}		1.5	0.33	2.5			**RBK299**□	A-201
PK2913DA **PK2913DB**		6.6	4000×10^{-7}		2.2	0.49	4.2			**RBK2913**□	A-201

- **A** or **B** indicating motor shaft type is entered where the box □ is located within the product name.
- For the speed – torque characteristics of the motors in the table above, see the characteristics of the corresponding motor and driver package. If there is no corresponding package name, refer to the following characteristics.

Dimensions (Unit = mm)

Product Name	L1	L2	Mass kg
PK296DA	66	–	1.7
PK296DB		100	
PK299DA	96	–	2.8
PK299DB		130	
PK2913DA	126	–	3.8
PK2913DB		160	

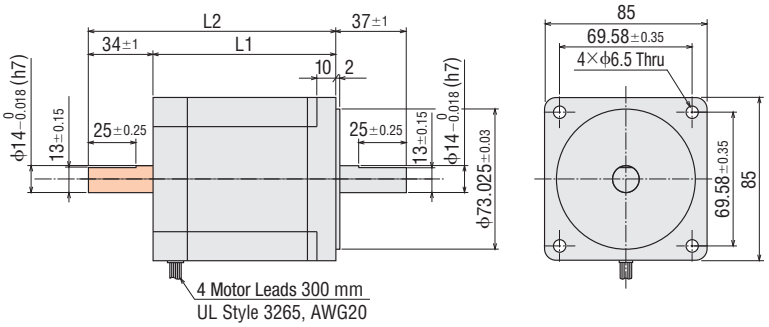

- These dimensions are for double shaft models. For single shaft models, ignore the shaft in the shaded areas.

Step Angle 1.8° Frame Size 85 mm (8 lead wires)

Standard Type


Specifications RoHS

Product Name Single Shaft Double Shaft	Connection Type	Maximum Holding Torque N·m	Rotor Inertia J: kg·m^2	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Basic Step Angle	Wirings and Connections (See Page A-334)
PK296-E4.5A **PK296-E4.5B**	Bipolar (Parallel)	3.1	1400×10^{-7}	6.3	1.4	0.24	1.5	1.8°	6
	Bipolar (Series)	3.1		3.18	2.8	0.96	6.0		5
	Unipolar	2.2		4.5	2	0.48	1.5		4
PK299-E4.5A **PK299-E4.5B**	Bipolar (Parallel)	6.2	2700×10^{-7}	6.3	1.9	0.33	2.5		6
	Bipolar (Series)	6.2		3.18	3.9	1.32	10.0		5
	Unipolar	4.4		4.5	2.8	0.66	2.5		4
PK2913-E4.0A **PK2913-E4.0B**	Bipolar (Parallel)	9.3	4000×10^{-7}	5.6	2.6	0.49	4.2		6
	Bipolar (Series)	9.3		2.8	5.3	1.94	16.8		5
	Unipolar	6.6		4	3.8	0.97	4.2		4


- **A** or **B** indicating motor shaft type is entered where the box □ is located within the product name.
- For the speed – torque characteristics of the motors in the table above, see the characteristics of the corresponding motor and driver package. If there is no corresponding package name, refer to the following characteristics.

Speed – Torque Characteristics


PK296-E4.5A/PK296-E4.5B
Bipolar (Parallel)

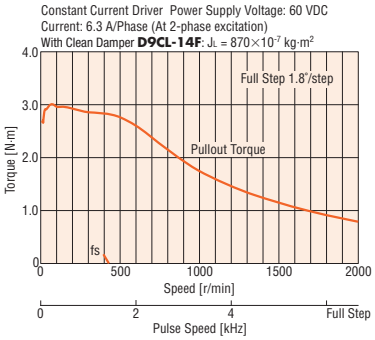


PK296-E4.5A/PK296-E4.5B
Bipolar (Series)

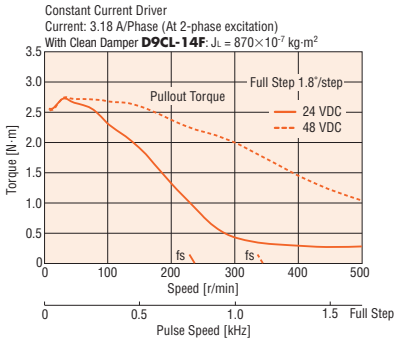


PK296-E4.5A/PK296-E4.5B
Unipolar

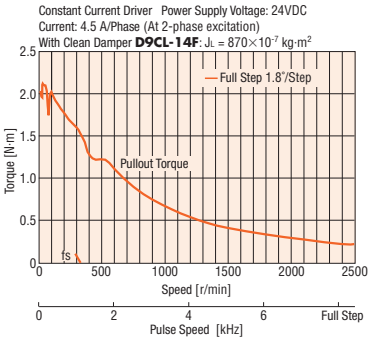


PK299-E4.5A/PK299-E4.5B
Bipolar (Parallel)

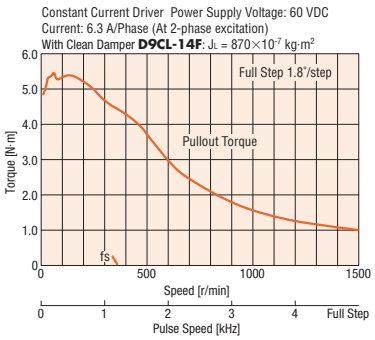


PK299-E4.5A/PK299-E4.5B
Bipolar (Series)

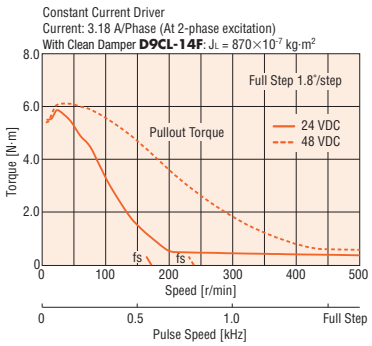


PK299-E4.5A/PK299-E4.5B
Unipolar

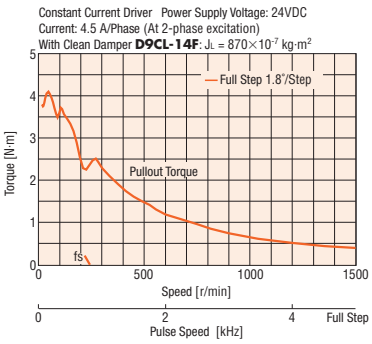


PK2913-E4.0A/PK2913-E4.0B
Bipolar (Parallel)

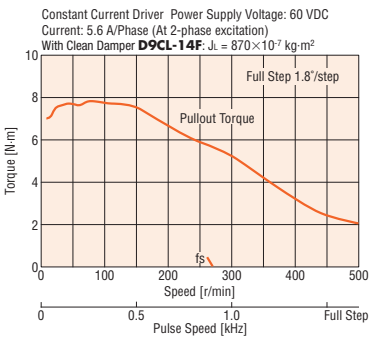

PK2913-E4.0A/PK2913-E4.0B
Bipolar (Series)

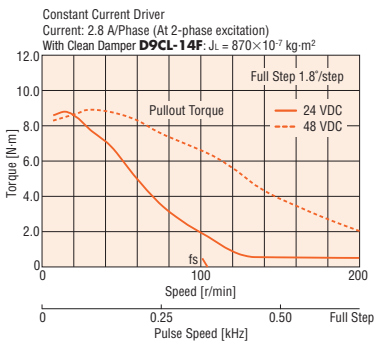

PK2913-E4.0A/PK2913-E4.0B
Unipolar

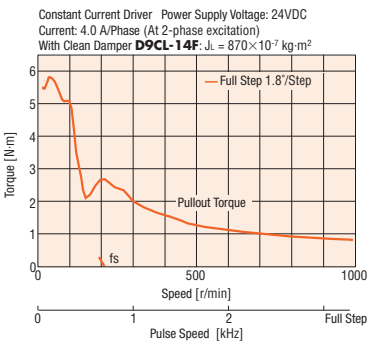


Note

- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

Dimensions (Unit = mm)

Product Name	L1	L2	Mass kg
PK296-E4.5A	66	–	1.7
PK296-E4.5B		100	
PK299-E4.5A	96	–	2.8
PK299-E4.5B		130	
PK2913-E4.0A	126	–	3.8
PK2913-E4.0B		160	

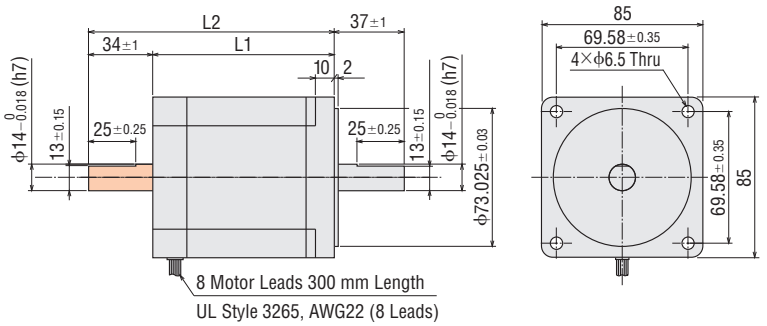

●These dimensions are for double shaft models. For single shaft models, ignore the shaft in the shaded areas.

Step Angle 1.8° Frame Size 56.4 mm (4 lead wires)

Standard Type with Cable


Specifications RoHS

Product Name Single Shaft	Connection Type	Maximum Holding Torque N·m	Rotor Inertia J: kg·m^2	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Basic Step Angle	Wirings and Connections (See Page A-334)
PK264DW	Bipolar	0.48	120×10^{-7}	4.2	1.26	0.3	0.6	1.8°	1
PK266DW		1.17	300×10^{-7}		1.68	0.4	1.1		
PK268DW		1.75	480×10^{-7}		2.1	0.5	1.6		


●Degree of Protection: IP54 (Excluding the motor mounting surface)

Speed – Torque Characteristics


PK264DW

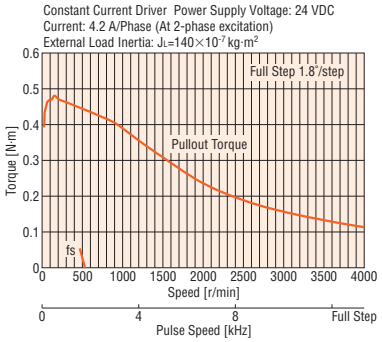

PK266DW

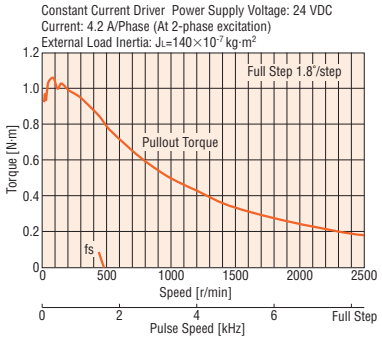

PK268DW

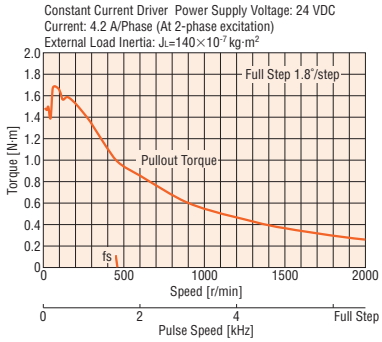


Note

●Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

Dimensions (Unit = mm)

Product Name	L	Mass kg
PK264DW	47	0.55
PK266DW	62	0.8
PK268DW	84	1.15

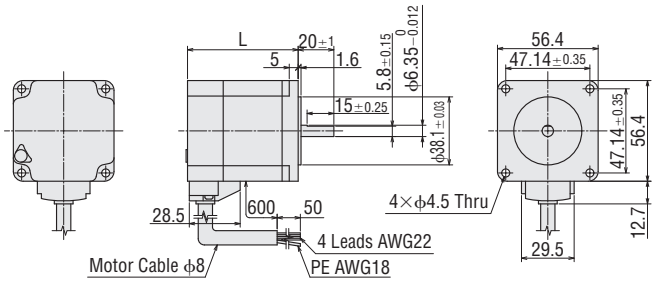

Step Angle 1.8° Frame Size 85 mm (4 lead wires)

Standard Type with Cable


Specifications RoHS

Product Name Single Shaft	Connection Type	Maximum Holding Torque N·m	Rotor Inertia J: kg·m^2	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Basic Step Angle	Wirings and Connections (See Page A-334)
PK296DW	Bipolar	3.1	1400×10^{-7}	6.3	1.4	0.24	1.5	1.8°	1
PK299DW		6.2	2700×10^{-7}	6.3	1.9	0.33	2.5		
PK2913DW		9.3	4000×10^{-7}	5.6	2.6	0.49	4.2		


●Degree of Protection: IP54 (Excluding the motor mounting surface)

Speed – Torque Characteristics


PK296DW

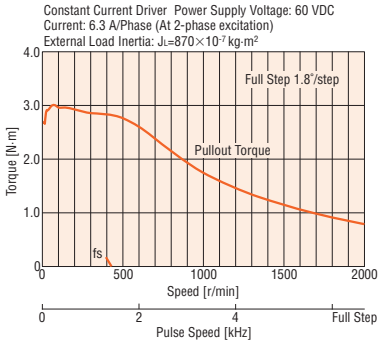

PK299DW

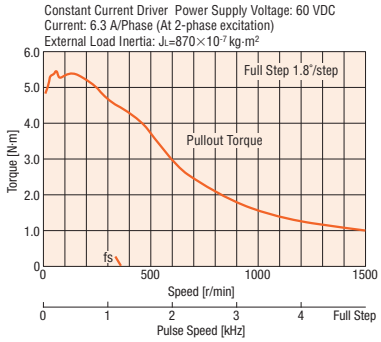

PK2913DW

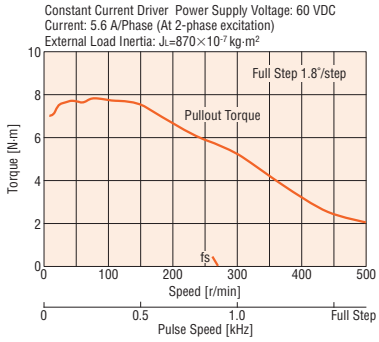


Note

●Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

Dimensions (Unit = mm)

Product Name	L	Mass kg
PK296DW	75.5	2.0
PK299DW	105.5	3.1
PK2913DW	135.5	4.2

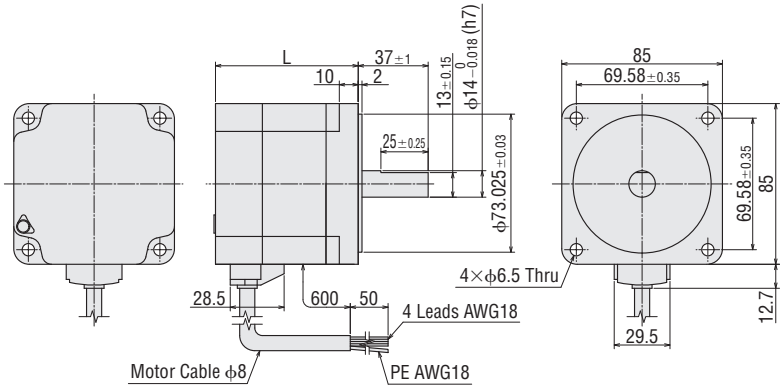

Step Angle 1.8° Frame Size 56.4 mm (4 lead wires)

Standard Type with Terminal Box


Specifications RoHS

Product Name Single Shaft	Connection Type	Maximum Holding Torque N·m	Rotor Inertia J: kg·m^2	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Basic Step Angle	Wirings and Connections (See Page A-334)	Corresponding Motor/Driver Package Product Name	Package Product Speed-Torque Characteristics Page
PK264DAT	Bipolar	0.48	120×10^{-7}	2.8	1.96	0.7	1.4	1.8°	7	–	–
PK264D1T				4.2	1.26	0.3	0.6			**RBK264T**	A-202
PK266DAT		1.17	300×10^{-7}	2.8	2.52	0.9	2.5			–	–
PK266D1T				4.2	1.68	0.4	1.1			**RBK266T**	A-202
PK268DAT		1.75	480×10^{-7}	2.8	3.16	1.13	3.6			–	–
PK268D1T				4.2	2.1	0.5	1.6			**RBK268T**	A-202


●For the speed – torque characteristics of the motors in the table above, see the characteristics of the corresponding motor and driver package. If there is no corresponding package name, refer to the following characteristics.
●Degree of Protection: IP54 (Excluding shaft penetration)

Speed – Torque Characteristics


PK264DAT

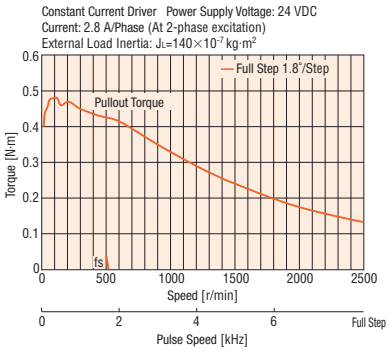

PK266DAT

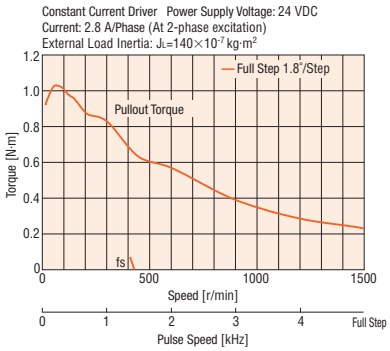

PK268DAT

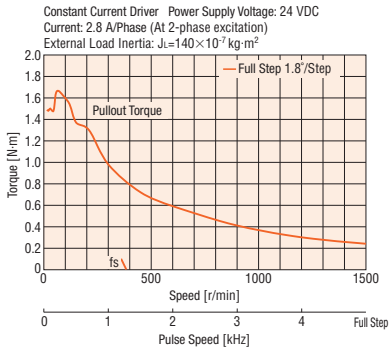


Note
●Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

Dimensions (Unit = mm)

Product Name	L	Mass kg
PK264DAT **PK264D1T**	83	0.6
PK266DAT **PK266D1T**	98	0.9
PK268DAT **PK268D1T**	120	1.2

●Use cable (VCT) with a diameter of ϕ7～ϕ13 mm. Accessory connection cable (with protective earth wire, sold separately) is available. ➜ Page A-358

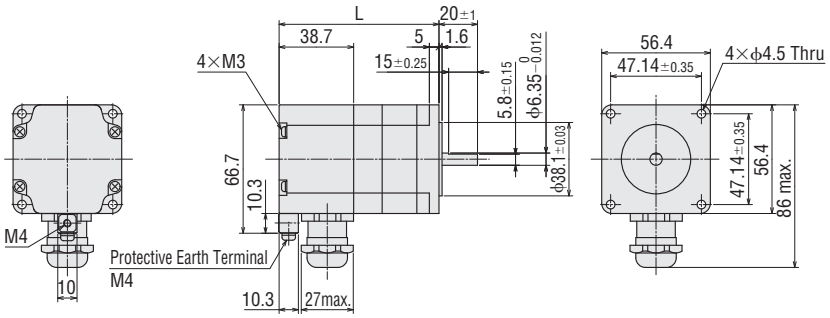

Step Angle 1.8° Frame Size 85 mm (4 or 8 lead wires)

Standard Type with Terminal Box


Specifications RoHS

Product Name	Connection Type	Maximum Holding Torque	Rotor Inertia	Rated Current	Voltage	Resistance per Phase	Inductance	Basic Step Angle	Wirings and Connections	Corresponding Motor/Driver Package	Package Product Speed-Torque Characteristics
Single Shaft		N·m	J: kg·m^2	A/Phase	VDC	Ω/Phase	mH/Phase		(See Page A-334)	Product Name	Page
PK296DT	Bipolar	2.2	1400×10^{-7}	4.5	1.1	0.24	1.5	1.8°	8	**RBK296T**	A-203
PK296EAT	Bipolar (Parallel)	3.1		6.3	1.4	0.24	1.5		10	–	–
	Bipolar (Series)	3.1		3.18	2.8	0.96	6.0		9	–	–
	Unipolar	2.2		4.5	2	0.48	1.5		11	–	–
PK299DT	Bipolar	4.4	2700×10^{-7}	4.5	1.5	0.33	2.5		8	**RBK299T**	A-203
PK299EAT	Bipolar (Parallel)	6.2		6.3	1.9	0.33	2.5		10	–	–
	Bipolar (Series)	6.2		3.18	3.9	1.32	10.0		9	–	–
	Unipolar	4.4		4.5	2.8	0.66	2.5		11	–	–
PK2913DT	Bipolar	6.6	4000×10^{-7}	4.5	2.2	0.49	4.2		8	**RBK2913T**	A-203
PK2913EAT	Bipolar (Parallel)	9.3		5.6	2.6	0.49	4.2		10	–	–
	Bipolar (Series)	9.3		2.8	5.3	1.94	16.8		9	–	–
	Unipolar	6.6		4	3.8	0.97	4.2		11	–	–


- For the speed – torque characteristics of the motors in the table above, see the characteristics of the corresponding motor and driver package. If there is no corresponding package name, refer to the following characteristics.
- Degree of Protection: IP54 (Excluding shaft penetration)

Speed – Torque Characteristics


PK296EAT
Bipolar (Parallel)

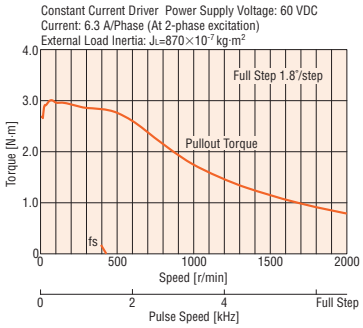


PK296EAT
Bipolar (Series)

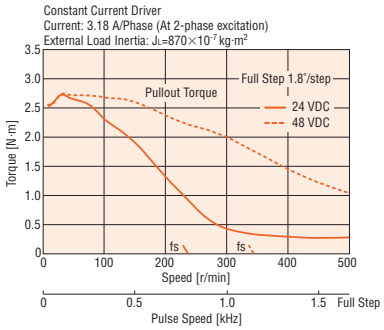


PK296EAT
Unipolar

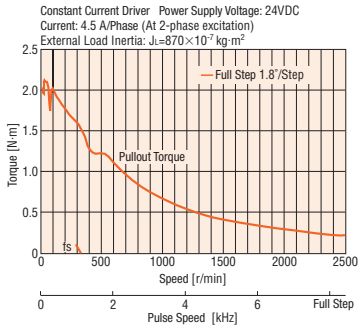


PK299EAT
Bipolar (Parallel)

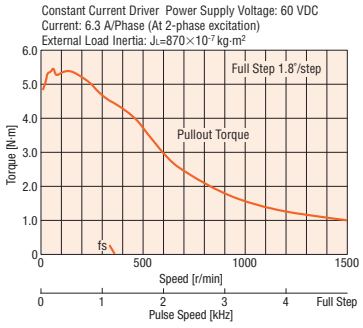


PK299EAT
Bipolar (Series)

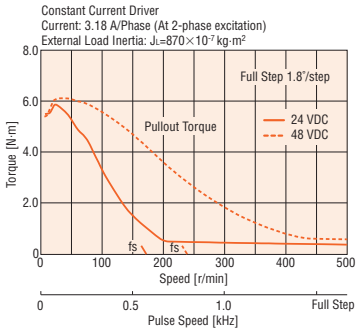


PK299EAT
Unipolar

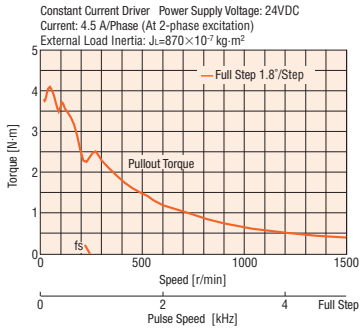


PK2913EAT
Bipolar (Parallel)

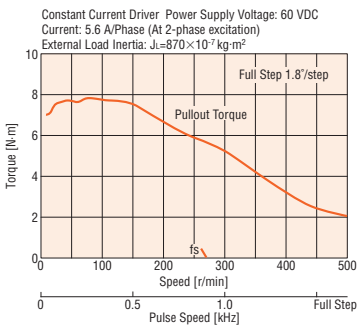

PK2913EAT
Bipolar (Series)

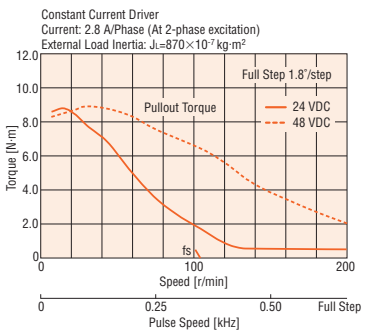

PK2913EAT
Unipolar

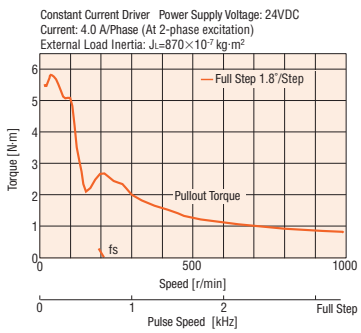


Note
- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

Dimensions (Unit = mm)

Product Name	L	Mass kg
PK296DT PK296EAT	110	2.1
PK299DT PK299EAT	140	3.2
PK2913DT PK2913EAT	170	4.3

●Use cable (VCT) with a diameter of ϕ7～ϕ13 mm. Accessory connection cable (with protective earth wire, sold separately) is available ➜ Page A-358

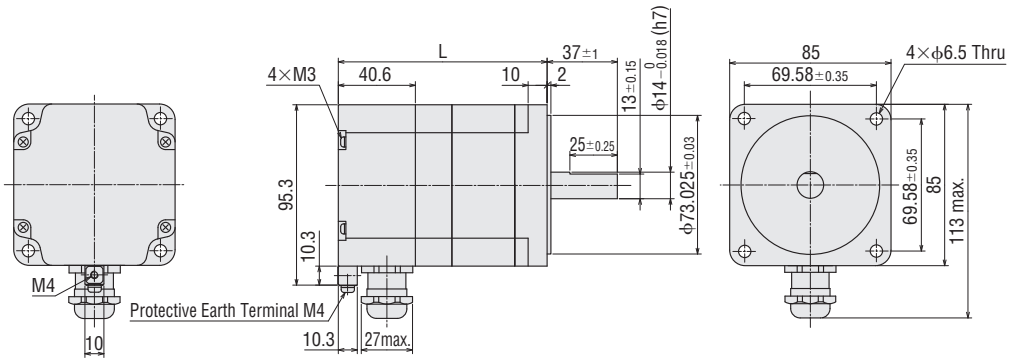

SH Geared Type Frame Size 42 mm (6 lead wires)

Specifications RoHS

Motor Specifications

Product Name Single Shaft Double Shaft	Connection Type	Rotor Inertia J: kg·m²	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Wirings and Connections (See Page A-334)	Corresponding Motor/Driver Packages	Package Product Speed-Torque Characteristics Page
PK243A1-SG□	Bipolar (Series)	35×10^{-7}	0.67	5.6	8.4	10	3	–	–
PK243B1-SG□	Unipolar		0.95	4	4.2	2.5	2	**CMK243□P-SG□**	A-229

- A number indicating the gear ratio is entered where the box □ is located within the product name.
  Either **A** or **B** indicating the motor shaft type is entered where the box □ is located within the product name.
- For the speed – torque characteristics of the motors in the table above, see the characteristics of the corresponding motor and driver package. If there is no corresponding package name, refer to the following characteristics.
- Backlash value is approximately 1 to 2°.

Note

- The rotation direction of the motor and that of the gear output shaft are the same for the gear ratios 3.6, 7.2, 9, 10, 50 and 100. It is the opposite for 18 and 36 gear ratios.

Gearmotor Specifications


Product Name Single Shaft Double Shaft	Maximum Holding Torque N·m	Basic Step Angle	Gear Ratio	Permissible Torque N·m	Permissible Speed Range r/min
PK243A1-SG3.6 **PK243B1-SG3.6**	0.2	0.5°	3.6	0.2	0~500
PK243A1-SG7.2 **PK243B1-SG7.2**	0.4	0.25°	7.2	0.4	0~250
PK243A1-SG9 **PK243B1-SG9**	0.5	0.2°	9	0.5	0~200
PK243A1-SG10 **PK243B1-SG10**	0.56	0.18°	10	0.56	0~180
PK243A1-SG18 **PK243B1-SG18**	0.8	0.1°	18	0.8	0~100
PK243A1-SG36 **PK243B1-SG36**		0.05°	36		0~50
PK243A1-SG50 **PK243B1-SG50**		0.036°	50		0~36
PK243A1-SG100 **PK243B1-SG100**		0.018°	100		0~18

- Maximum holding torque is the same regardless of the connection type due to the permissible torque limit of the gearhead.

Speed – Torque Characteristics


PK243A1-SG□/PK243B1-SG□

Bipolar (Series) 24 VDC

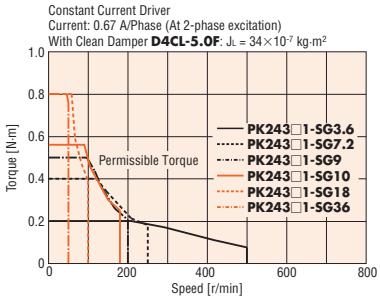

PK243A1-SG□/PK243B1-SG□

Bipolar (Series) 48 VDC

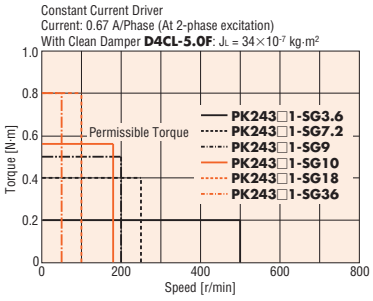

Note

- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

Dimensions

→ Page A-326

SH Geared Type Frame Size 60 mm (6 or 8 lead wires)

Specifications RoHS

Motor Specifications

Product Name Single Shaft Double Shaft	Connection Type	Rotor Inertia J: kg·m²	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Wirings and Connections (See Page A-334)	Corresponding Motor/Driver Packages	Package Product Speed-Torque Characteristics Page
PK264AE-SG□ **PK264BE-SG□**	Bipolar (Parallel)	120×10^{-7}	2.8	1.96	0.7	1.4	6	–	–
	Bipolar (Series)		1.4	3.9	2.8	5.6	5	–	–
	Unipolar		2	2.8	1.4	1.4	4	–	–
PK264A2-SG□ **PK264B2-SG□**	Bipolar (Parallel)	120×10^{-7}	1.4	3.9	2.8	5.6	3	–	–
	Unipolar		2	2.8	1.4	1.4	2	**CMK264□P-SG□**	A-231

- A number indicating the gear ratio is entered where the box □ is located within the product name.
  Either **A** or **B** indicating the motor shaft type is entered where the box □ is located within the product name.
- For the speed – torque characteristics of the motors in the table above, see the characteristics of the corresponding motor and driver package. If there is no corresponding package name, refer to the following characteristics.
- Backlash value is approximately 1 to 2°.

Note

- The rotation direction of the motor and that of the gear output shaft are the same for the gear ratios 3.6, 7.2, 9, 10, 50 and 100. It is the opposite for 18 and 36 gear ratios.


Gearmotor Specifications

Product Name Single Shaft Double Shaft	Maximum Holding Torque N·m	Basic Step Angle	Gear Ratio	Permissible Torque N·m	Permissible Speed Range r/min
PK264AE-SG3.6, **PK264A2-SG3.6** **PK264BE-SG3.6**, **PK264B2-SG3.6**	1	0.5°	3.6	1	0～500
PK264AE-SG7.2, **PK264A2-SG7.2** **PK264BE-SG7.2**, **PK264B2-SG7.2**	2	0.25°	7.2	2	0～250
PK264AE-SG9, **PK264A2-SG9** **PK264BE-SG9**, **PK264B2-SG9**	2.5	0.2°	9	2.5	0～200
PK264AE-SG10, **PK264A2-SG10** **PK264BE-SG10**, **PK264B2-SG10**	2.7	0.18°	10	2.7	0～180
PK264AE-SG18, **PK264A2-SG18** **PK264BE-SG18**, **PK264B2-SG18**	3	0.1°	18	3	0～100
PK264AE-SG36, **PK264A2-SG36** **PK264BE-SG36**, **PK264B2-SG36**	4	0.05°	36	4	0～50
PK264A2-SG50 **PK264B2-SG50**		0.036°	50		0～36
PK264A2-SG100 **PK264B2-SG100**		0.018°	100		0～18


- Maximum holding torque is the same regardless of the connection type due to the permissible torque limit of the gearhead.

Speed – Torque Characteristics


PK264AE-SG□/PK264BE-SG□
Bipolar (Series) 24 VDC

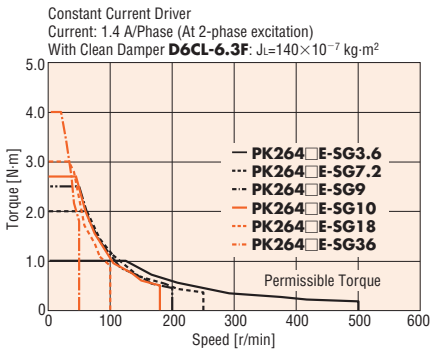

PK264AE-SG□/PK264BE-SG□
Bipolar (Series) 48 VDC

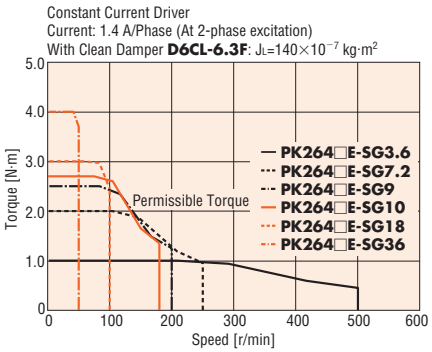

PK264AE-SG□/PK264BE-SG□
Unipolar 24 VDC

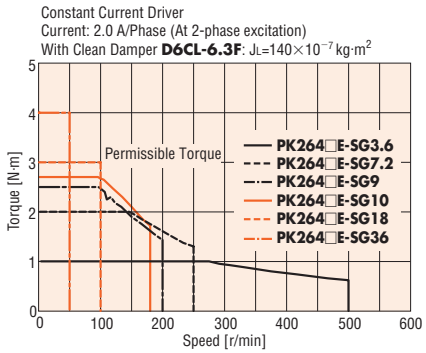

Note

- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

Dimensions

➜ Page A-326

SH Geared Type Frame Size 90 mm (8 lead wires)

Specifications RoHS

Motor Specifications

Product Name Single Shaft Double Shaft	Connection Type	Rotor Inertia J: kg·m²	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Wirings and Connections (See Page A-334)
PK296AE-SG□ **PK296BE-SG□**	Bipolar (Parallel)	1400×10^{-7}	4.2	1	0.24	1.5	6
	Bipolar (Series)		2.1	2	0.96	6	5
	Unipolar		3	1.4	0.48	1.5	4

- A number indicating the gear ratio is entered where the box □ is located within the product name.
- Backlash value is approximately 1 to 2°.

Note

- The rotation direction of the motor and that of the gear output shaft are the same for the gear ratios 3.6, 7.2, 9, 10 and 18. It is the opposite for 36 gear ratio.


Gearmotor Specifications

Product Name Single Shaft Double Shaft	Maximum Holding Torque N·m	Basic Step Angle	Gear Ratio	Permissible Torque N·m	Permissible Speed Range r/min
PK296AE-SG3.6 **PK296BE-SG3.6**	2.5	0.5°	3.6	2.5	0~500
PK296AE-SG7.2 **PK296BE-SG7.2**	5	0.25°	7.2	5	0~250
PK296AE-SG9 **PK296BE-SG9**	6.3	0.2°	9	6.3	0~200
PK296AE-SG10 **PK296BE-SG10**	7	0.18°	10	7	0~180
PK296AE-SG18 **PK296BE-SG18**	9	0.1°	18	9	0~100
PK296AE-SG36 **PK296BE-SG36**	12	0.05°	36	12	0~50


- Maximum holding torque is the same regardless of the connection type due to the permissible torque limit of the gearhead.

Speed – Torque Characteristics


PK296AE-SG□/PK296BE-SG□
Bipolar (Series) 24 VDC

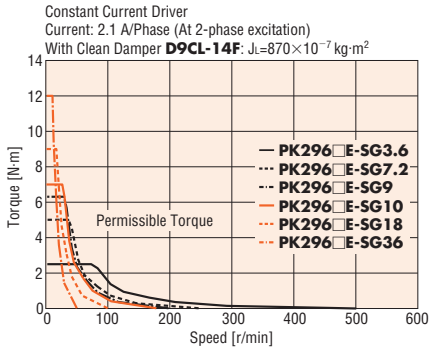

PK296AE-SG□/PK296BE-SG□
Bipolar (Series) 48 VDC

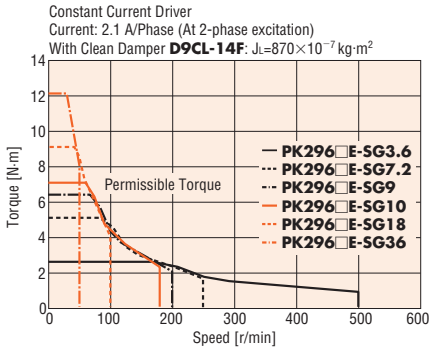

PK296AE-SG□/PK296BE-SG□
Unipolar 24 VDC

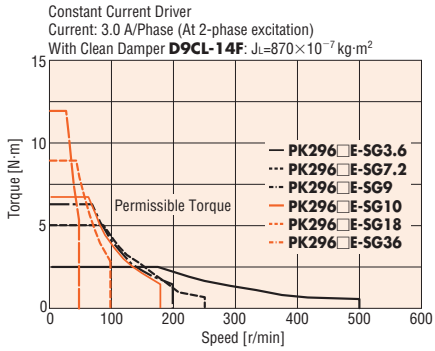

Note

- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.


Dimensions

→ Page A-326

Dimensions (Unit = mm)

Frame Size 42 mm

Product Name	Gear Ratio	Mass kg
PK243A1-SG□	**3.6, 7.2, 9, 10, 18, 36, 50, 100**	0.35
PK243B1-SG□		

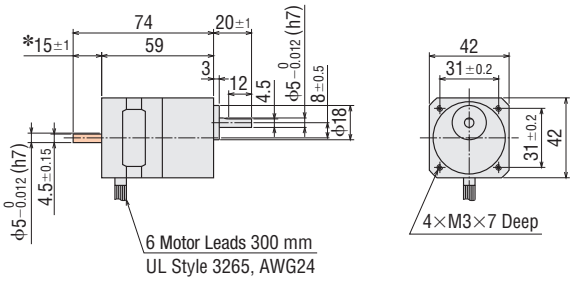


*The length of the shaft flat on the double shaft model is 15±0.25.

●Included
Mounting Screws: M3 Length 10 mm×4

Frame Size 60 mm


Product Name	Gear Ratio	Mass kg
PK264AE-SG□	**3.6, 7.2, 9, 10, 18, 36**	0.75
PK264BE-SG□		
PK264A2-SG□	**3.6, 7.2, 9, 10, 18, 36, 50, 100**	
PK264B2-SG□		

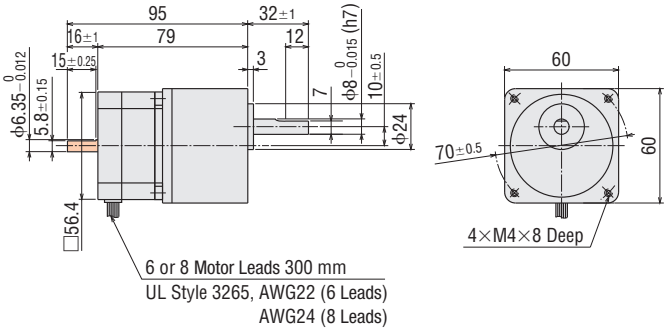

●Included
Mounting Screws: M4 Length 15 mm×4

Frame Size 90 mm

Product Name	Gear Ratio	Mass kg
PK296AE-SG□	**3.6, 7.2, 9, 10, 18, 36**	2.8
PK296BE-SG□		

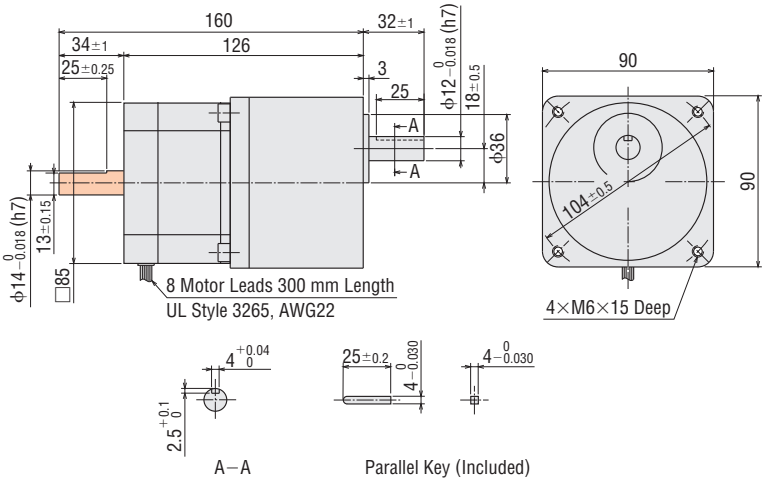

●Included
Mounting Screws: M6 Length 18 mm×4

●A number indicating the gear ratio is entered where the box □ is located within the product name.
●These dimensions are for double shaft models. For single shaft models, ignore the shaft in the shaded areas.

TH Geared Type Frame Size 42 mm (4 lead wires)

Specifications RoHS

Motor Specifications

Product Name Single Shaft Double Shaft	Connection Type	Rotor Inertia J: kg·m²	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Wirings and Connections (See Page A-334)
PK243DA-T□ **PK243DB-T□**	Bipolar	35×10^{-7}	1.5	2.4	1.6	1.75	1

●A number indicating the gear ratio is entered where the box □ is located within the product name.

Note

●The rotation direction of the motor and that of the gear output shaft are the same for the gear ratios 3.6, 7.2 and 10. It is the opposite for 20 and 30 gear ratios.


Gearmotor Specifications

Product Name Single Shaft Double Shaft	Maximum Holding Torque N·m	Basic Step Angle	Gear Ratio	Permissible Torque N·m	Backlash arc minute (degrees)	Permissible Speed Range r/min
PK243DA-T3.6 **PK243DB-T3.6**	0.35	0.5°	3.6	0.35	45 (0.75°)	0～500
PK243DA-T7.2 **PK243DB-T7.2**	0.7	0.25°	7.2	0.7	25 (0.42°)	0～250
PK243DA-T10 **PK243DB-T10**	1	0.18°	10	1		0～180
PK243DA-T20 **PK243DB-T20**	1.5	0.09°	20	1.5	15 (0.25°)	0～90
PK243DA-T30 **PK243DB-T30**		0.06°	30			0～60

Speed – Torque Characteristics


PK243DA-T□/PK243DB-T□

24 VDC

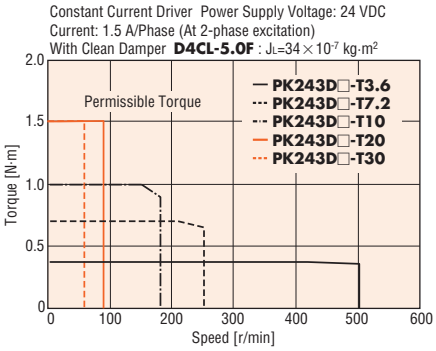

PK243DA-T□/PK243DB-T□

36 VDC

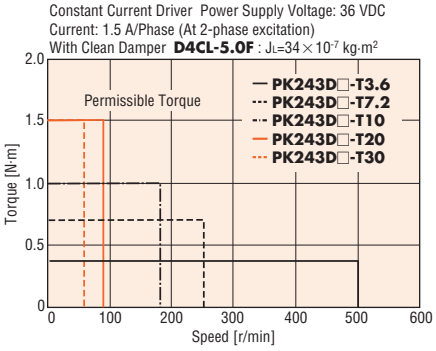


Note

●Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

Dimensions (Unit = mm)

Product Name	Mass kg
PK243DA-T□ **PK243DB-T□**	0.35

●A number indicating the gear ratio is entered where the box □ is located within the product name.

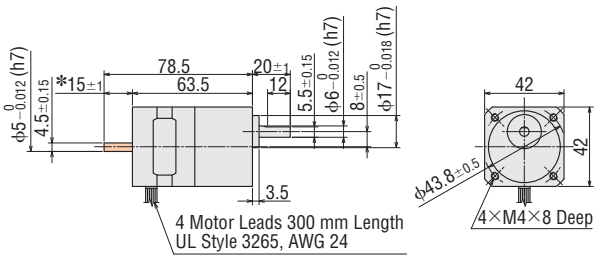

*The length of machining on double shaft model is 15±0.25.

●These dimensions are for double shaft models. For single shaft models, ignore the orange (□) areas.

TH Geared Type Frame Size 42 mm (6 lead wires)

Specifications RoHS

Motor Specifications

Product Name Single Shaft Double Shaft	Connection Type	Rotor Inertia J: kg·m²	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Wirings and Connections (See Page A-334)	Corresponding Motor/Driver Packages	Package Product Speed-Torque Characteristics Page
PK243A1-T□	Bipolar (Series)	35×10^{-7}	0.67	5.6	8.4	10	3	–	–
PK243B1-T□	Unipolar		0.95	4	4.2	2.5	2	**CMK243□P-T□**	A-233

●A number indicating the gear ratio is entered where the box □ is located within the product name.
Either **A** or **B** indicating the motor shaft type is entered where the box □ is located within the product name.
●For the speed – torque characteristics of the motors in the table above, see the characteristics of the corresponding motor and driver package. If there is no corresponding package name, refer to the following characteristics.

Note
●The rotation direction of the motor and that of the gear output shaft are the same for the gear ratios 3.6, 7.2 and 10. It is the opposite for 20 and 30 gear ratios.


Gearmotor Specifications

Product Name Single Shaft Double Shaft	Maximum Holding Torque N·m	Basic Step Angle	Gear Ratio	Permissible Torque N·m	Backlash arc minute (degrees)	Permissible Speed Range r/min
PK243A1-T3.6 **PK243B1-T3.6**	0.35	0.5°	3.6	0.35	45 (0.75°)	0~500
PK243A1-T7.2 **PK243B1-T7.2**	0.7	0.25°	7.2	0.7	25 (0.42°)	0~250
PK243A1-T10 **PK243B1-T10**	1	0.18°	10	1		0~180
PK243A1-T20 **PK243B1-T20**	1.5	0.09°	20	1.5	15 (0.25°)	0~90
PK243A1-T30 **PK243B1-T30**		0.06°	30			0~60


●Maximum holding torque is the same regardless of the connection type due to the permissible torque limit of the gearhead.

Speed – Torque Characteristics

PK243A1-T□/PK243B1-T□
Bipolar (Series) 24 VDC

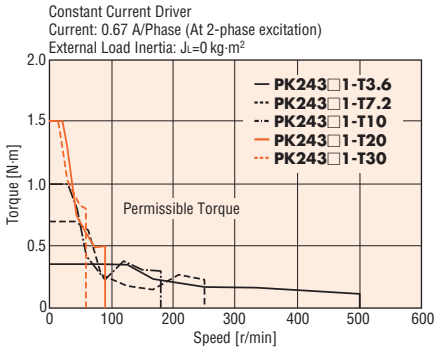

PK243A1-T□/PK243B1-T□
Bipolar (Series) 36 VDC

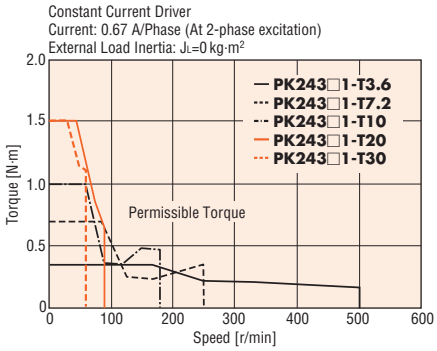


Note
●Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

Dimensions (Unit = mm)

Product Name	Mass kg
PK243A1-T□	0.35
PK243B1-T□	

●A number indicating the gear ratio is entered where the box □ is located within the product name.

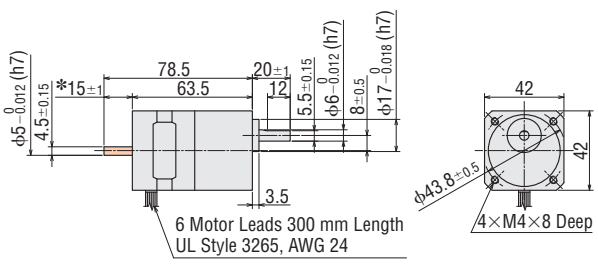

*The length of machining on double shaft model is 15±0.25.
●These dimensions are for double shaft models. For single shaft models, ignore the orange (□) areas.

TH Geared Type Frame Size 60 mm (4 lead wires)

Specifications RoHS

Motor Specifications

Product Name Single Shaft Double Shaft	Connection Type	Rotor Inertia J: kg·m²	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Wirings and Connections (See Page A-334)
PK264DA-T□ **PK264DB-T□**	Bipolar	120×10^{-7}	4.2	1.26	0.3	0.6	1

●A number indicating the gear ratio is entered where the box □ is located within the product name.

Note

●The rotation direction of the motor and that of the gear output shaft are the same for the gear ratios 3.6, 7.2 and 10. It is the opposite for 20 and 30 gear ratios.


Gearmotor Specifications

Product Name Single Shaft Double Shaft	Maximum Holding Torque N·m	Basic Step Angle	Gear Ratio	Permissible Torque N·m	Backlash arc minute (degrees)	Permissible Speed Range r/min
PK264DA-T3.6 **PK264DB-T3.6**	1.25	0.5°	3.6	1.25	35 (0.59°)	0～500
PK264DA-T7.2 **PK264DB-T7.2**	2.5	0.25°	7.2	2.5	15 (0.25°)	0～250
PK264DA-T10 **PK264DB-T10**	3	0.18°	10	3		0～180
PK264DA-T20 **PK264DB-T20**	3.5	0.09°	20	3.5	10 (0.17°)	0～90
PK264DA-T30 **PK264DB-T30**	4	0.06°	30	4		0～60

Speed – Torque Characteristics


PK264DA-T□/PK264DB-T□

24 VDC

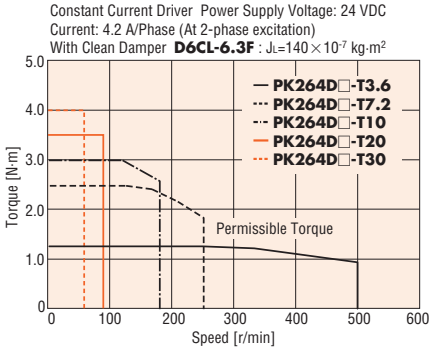

PK264DA-T□/PK264DB-T□

36 VDC

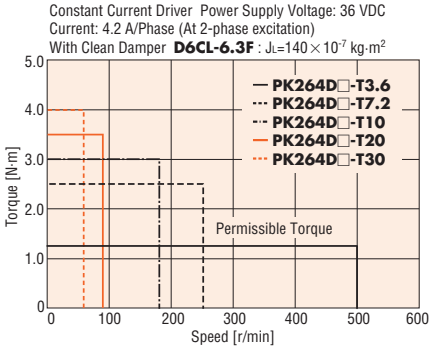


Note

●Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

Dimensions (Unit = mm)

Product Name	Mass kg
PK264DA-T□ **PK264DB-T□**	0.85

●A number indicating the gear ratio is entered where the box □ is located within the product name.

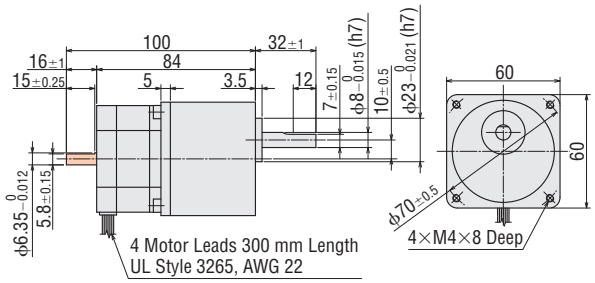

●These dimensions are for double shaft models. For single shaft models, ignore the orange (□) areas.

TH Geared Type Frame Size 60 mm (6 lead wires)

Specifications RoHS

Motor Specifications

Product Name Single Shaft Double Shaft	Connection Type	Rotor Inertia J: kg·m²	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Wirings and Connections (See Page A-334)	Corresponding Motor/Driver Packages	Package Product Speed-Torque Characteristics Page
PK264A2-T□	Bipolar (Series)	120×10^{-7}	1.4	3.9	2.8	5.6	3	–	–
PK264B2-T□	Unipolar		2	2.8	1.4	1.4	2	**CMK264□P-T□**	A-234

- A number indicating the gear ratio is entered where the box □ is located within the product name.
  Either **A** or **B** indicating the motor shaft type is entered where the box □ is located within the product name.
- For the speed – torque characteristics of the motors in the table above, see the characteristics of the corresponding motor and driver package. If there is no corresponding package name, refer to the following characteristics.

Note

- The rotation direction of the motor and that of the gear output shaft are the same for the gear ratios 3.6, 7.2 and 10. It is the opposite for 20 and 30 gear ratios.


Gearmotor Specifications

Product Name Single Shaft Double Shaft	Maximum Holding Torque N·m	Basic Step Angle	Gear Ratio	Permissible Torque N·m	Backlash arc minute (degrees)	Permissible Speed Range r/min
PK264A2-T3.6 **PK264B2-T3.6**	1.25	0.5°	3.6	1.25	35 (0.59°)	0～500
PK264A2-T7.2 **PK264B2-T7.2**	2.5	0.25°	7.2	2.5	15 (0.25°)	0～250
PK264A2-T10 **PK264B2-T10**	3	0.18°	10	3		0～180
PK264A2-T20 **PK264B2-T20**	3.5	0.09°	20	3.5	10 (0.17°)	0～90
PK264A2-T30 **PK264B2-T30**	4	0.06°	30	4		0～60


- Maximum holding torque is the same regardless of the connection type due to the permissible torque limit of the gearhead.

Speed – Torque Characteristics

PK264A2-T□/PK264B2-T□
Bipolar (Series) 24 VDC

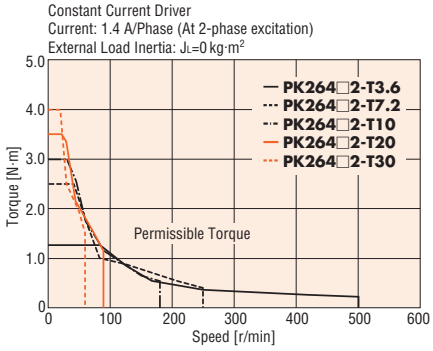

PK264A2-T□/PK264B2-T□
Bipolar (Series) 48 VDC

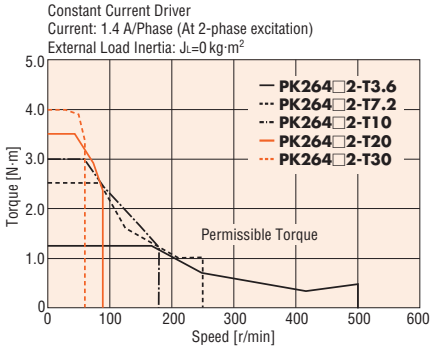


Note

- Depending on the driving conditions, a considerable amount of heat may be generated by the motor. Be sure to keep the motor case temperature at 100°C or less.

Dimensions (Unit = mm)

Product Name	Mass kg
PK264A2-T□	0.85
PK264B2-T□	

- A number indicating the gear ratio is entered where the box □ is located within the product name.

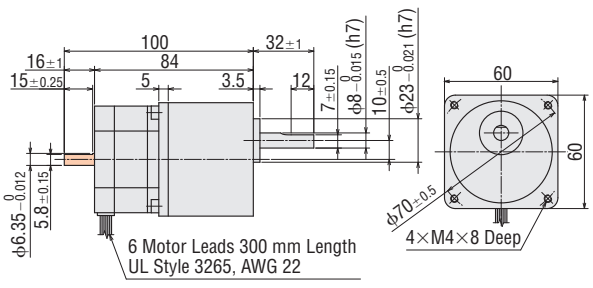

- These dimensions are for double shaft models. For single shaft models, ignore the orange (□) areas.

PS Geared Type Frame Size 28 mm (4 lead wires)

Specifications RoHS

Motor Specifications

Product Name Single Shaft Double Shaft	Connection Type	Rotor Inertia J: kg·m²	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Wirings and Connections (See Page A-334)	Corresponding Motor/Driver Packages	Package Product Speed-Torque Characteristics Page
PK223PDA-PS□-L **PK223PDB-PS□-L**	Bipolar	9×10^{-7}	1.5	1.8	1.2	0.74	1	**RBK223P□-PS□**	A-204

- A number indicating the gear ratio is entered where the box □ is located within the product name.
  Either **A** or **B** indicating the motor shaft type is entered where the box □ is located within the product name.
- For the speed – torque characteristics of the motors in the table above, see the characteristics of the corresponding motor and driver package.

Note

- The rotation direction of the motor and that of the gear output shaft are the same.

Gearmotor Specifications


Product Name Single Shaft Double Shaft	Maximum Holding Torque N·m	Basic Step Angle	Gear Ratio	Permissible Torque N·m	Maximum Torque N·m	Backlash arc minute (degrees)	Permissible Speed Range r/min
PK223PDA-PS5-L **PK223PDB-PS5-L**	0.3	0.36°	5	0.3	0.5	35 (0.59°)	0~600
PK223PDA-PS10-L **PK223PDB-PS10-L**	0.5	0.18°	10	0.5			0~300

Dimensions (Unit = mm)

Product Name	Motor Product Name	Gear Ratio	Mass kg
PK223PDA-PS□-L	PK223PDA-PS□	**5, 10**	0.11
PK223PDB-PS□-L	PK223PDB-PS□		


- A number indicating the gear ratio is entered where the box □ is located within the product name.

- Applicable Connector
  Connector Housing: 51065-0600 (Molex)
  Contact: 50212-8100 (Molex)
  Crimp Tool: 57176-5000 (Molex)

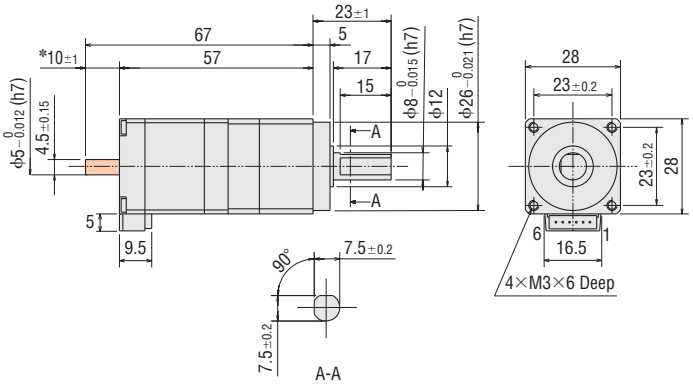

✻The length of the shaft flat on the double shaft model is 10±0.25.

- These dimensions are for double shaft models. For single shaft models, ignore the shaft in the shaded ▭ areas.
- Included
  Connection Cable: **LC2B06A**

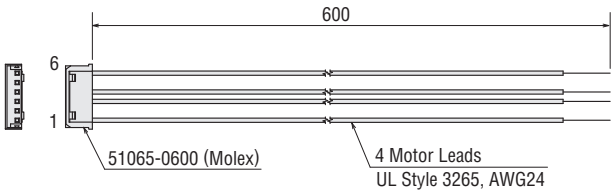

Accessories (Sold separately)

Connection cable and motor connector set are available as accessories.

- Connection cable ➜ Page A-358
- Motor connector set ➜ Page A-358

PL Geared Type Frame Size 42 mm (4 lead wires)

Specifications RoHS

Motor Specifications

Product Name Single Shaft Double Shaft	Connection Type	Rotor Inertia J: kg·m²	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Wirings and Connections (See Page A-334)	Corresponding Motor/Driver Packages	Package Product Speed-Torque Characteristics Page
PK244PDA-P□-L **PK244PDB-P□-L**	Bipolar	57×10^{-7}	1.5	2.14	1.43	1.5	1	**RBK244P□-P□**	A-205
PK244PDA-P36-L **PK244PDB-P36-L**				1.2	0.8	0.47		**RBK244P□-P36**	

●A number indicating the gear ratio is entered where the box □ is located within the product name.
Either **A** or **B** indicating the motor shaft type is entered where the box □ is located within the product name.
●For the speed – torque characteristics of the motors in the table above, see the characteristics of the corresponding motor and driver package.

Note

●The rotation direction of the motor and that of the gear output shaft are the same.

Gearmotor Specifications


Product Name Single Shaft Double Shaft	Maximum Holding Torque N·m	Basic Step Angle	Gear Ratio	Permissible Torque N·m	Backlash arc minute (degrees)	Permissible Speed Range r/min
PK244PDA-P5-L **PK244PDB-P5-L**	1	0.36°	5	1	35 (0.59°)	0～360
PK244PDA-P10-L **PK244PDB-P10-L**	1.5	0.18°	10	1.5		0～180
PK244PDA-P36-L **PK244PDB-P36-L**	3	0.05°	36	3		0～50

Dimensions (Unit = mm)


Product Name	Motor Product Name	Gear Ratio	L1	L2	Mass kg
PK244PDA-P□-L	PK244PDA-P□	**5, 10**	66.5	81.5	0.48
PK244PDB-P□-L	PK244PDB-P□				
PK244PDA-P36-L	PK244PDA-P36	**36**	90	105	0.6
PK244PDB-P36-L	PK244PDB-P36				

●A number indicating the gear ratio is entered where the box □ is located within the product name.

●Applicable Connector
Connector Housing: 51103-0600 (Molex)
Contact: 50351-8100 (Molex)
Crimp Tool: 57295-5000 (Molex)

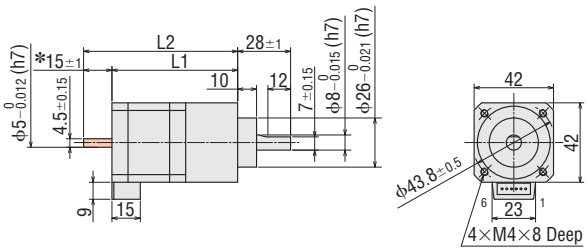

*The length of the shaft flat on the double shaft model is 15±0.25.
●These dimensions are for double shaft models. For single shaft models, ignore the shaft in the shaded areas.
●Included
Connection Cable: **LC2B06B**

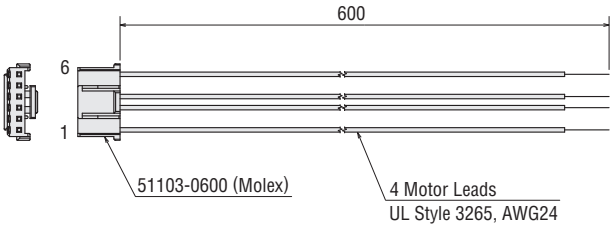

Accessories (Sold separately)

Connection cable and motor connector set are available as accessories.
●Connection cable ➜ Page A-358
●Motor connector set ➜ Page A-358

PL Geared Type Frame Size 60 mm (4 lead wires)

Specifications RoHS

Motor Specifications

Product Name Single Shaft Double Shaft	Connection Type	Rotor Inertia J: kg·m²	Rated Current A/Phase	Voltage VDC	Resistance per Phase Ω/Phase	Inductance mH/Phase	Wirings and Connections (See Page A-334)	Corresponding Motor/Driver Packages	Package Product Speed-Torque Characteristics Page
PK266PDA-P□-L **PK266PDB-P□-L**	Bipolar	290×10^{-7}	2.8	1.62	0.58	0.97	1	**RBK266P□-P□**	A-206
PK264PDA-P36-L **PK264PDB-P36-L**		120×10^{-7}		1.29	0.46	0.73		**RBK264P□-P36**	

●A number indicating the gear ratio is entered where the box □ is located within the product name.
Either **A** or **B** indicating the motor shaft type is entered where the box □ is located within the product name.
●For the speed – torque characteristics of the motors in the table above, see the characteristics of the corresponding motor and driver package.

Note
●The rotation direction of the motor and that of the gear output shaft are the same.

Gearmotor Specifications


Product Name Single Shaft Double Shaft	Maximum Holding Torque N·m	Basic Step Angle	Gear Ratio	Permissible Torque N·m	Backlash arc minute (degrees)	Permissible Speed Range r/min
PK266PDA-P5-L **PK266PDB-P5-L**	3.5	0.36°	5	3.5	20 (0.33°)	0～360
PK266PDA-P10-L **PK266PDB-P10-L**	5	0.18°	10	5		0～180
PK264PDA-P36-L **PK264PDB-P36-L**	8	0.05°	36	8		0～50

Dimensions (Unit = mm)


Product Name	Motor Product Name	Gear Ratio	L1	L2	Mass kg
PK266PDA-P□-L	PK266PDA-P□	**5, 10**	89	112	1.23
PK266PDB-P□-L	PK266PDB-P□				
PK264PDA-P36-L	PK264PDA-P36	**36**	99	122	1.26
PK264PDB-P36-L	PK264PDB-P36				

●A number indicating the gear ratio is entered where the box □ is located within the product name.

●Applicable Connector
Connector Housing: 51067-0600 (Molex)
Contact: 50217-9101 (Molex)
Crimp Tool: 57189-5000 (Molex)
57190-5000 (Molex)

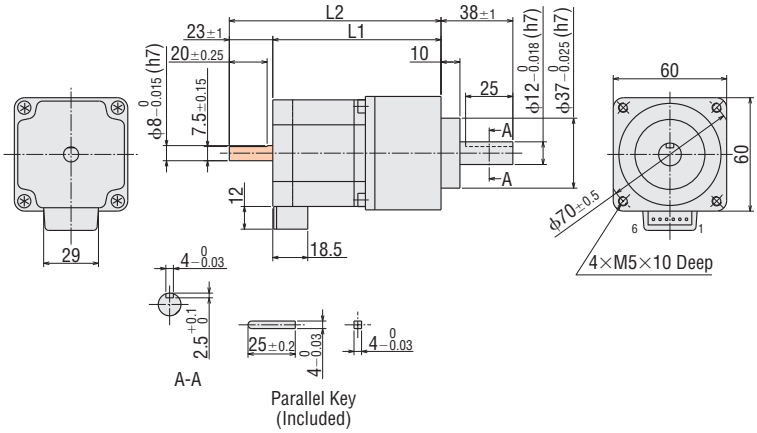

●These dimensions are for double shaft models. For single shaft models, ignore the shaft in the shaded areas.
●Included
Connection Cable: **LC2B06C**

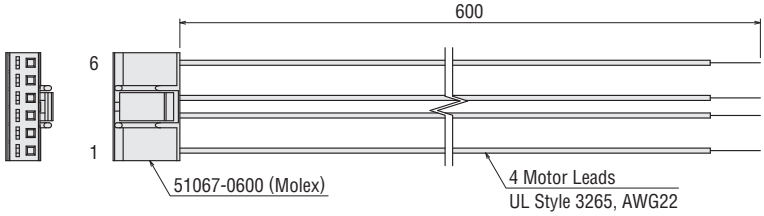

Accessories (Sold separately)


Connection cable and motor connector set are available as accessories.
●Connection cable ➜ Page A-358
●Motor connector set ➜ Page A-358

General Specifications

Specifications		Motor
Thermal Class		130 (B) [Standard Type with Cable and Terminal Box: These Motors are recognized as 105 (A) under UL and CSA Standards.]
Insulation Resistance		The measured value is 100 MΩ min. when a 500 VDC megger is applied between the windings and the case under normal ambient temperature and humidity.
Dielectric Strength		No abnormality is judged even with application of 1.0 kVAC at 50 Hz or 60 Hz between the windings and the case for 1 minute under normal ambient temperature and humidity. (0.5 kV: For models with a frame size of 42 mm or smaller. 1.5 kV: For models with a standard type with cable and terminal box and **PK29□D**)
Operating Environment (In operation)	Ambient Temperature	−10～+50°C (non-freezing)
	Ambient Humidity	85% max. (non-condensing)
	Atmosphere	Use in an area without corrosive gases or dust. The product should not be directly exposed to water, oil or other liquids. (Standard Type with Terminal Box: No corrosive gases and no direct exposure to oil)
Temperature Rise		・Unipolar Temperature rise of windings is 80°C max. measured by the resistance change method (at rated voltage, at standstill, 2-phase excitation). ・Bipolar Temperature rise of windings is 80°C max. measured by the resistance change method (at rated current, at standstill, 2-phase excitation). [The following motors are with aluminum heat radiation plates. **PK22□PD, PK24□D** : 115×115×5 mm **PK24□PD** : 175×175×5 mm **PK26□PD, PK26□D** : 250×250×10 mm] ✻**PK26□JD** is the same as the unipolar specification.
Stop Position Accuracy✻1		±3 arc minutes (±0.05°) [**PK26□J, PK26□JD**: ±2 arc minutes (±0.034°)]
Shaft Runout		0.05 T. I. R. (mm)✻4
Radial Play✻2		0.025 mm max. (Load 5 N)
Axial Play✻3		0.075 mm max. (Load 10 N)
Concentricity		0.075 T. I. R. (mm)✻4
Perpendicularity		0.075 T. I. R. (mm)✻4

✻1 This value is for full step under no load. (The value changes with the size of the load).
✻2 Radial Play: Displacement in shaft position in the radial direction when 5 N load is applied in the vertical direction to the tip of the motor's shaft.
✻3 Axial Play: Displacement in shaft position in the axial direction when a 10 N load is applied to the motor's shaft in the axial direction.
✻4 T. I. R. (Total Indicator Reading): The total dial gauge reading when the measurement section is rotated one revolution centered on the reference axis center.

Note
●Do not measure insulation resistance or perform the dielectric strength test while the motor and driver are connected.




Wirings and Connections


●High-Resolution Type, High-Torque, High-Efficiency Type, High-Torque Type, Standard Type and Geared Type

◇Motor Wirings


• 4 Leads Motor



• 6 Leads Motor




• 8 Leads Motor




◇Wirings Connection Diagrams


1 4 Leads Bipolar Connection




2 6 Leads Unipolar Connection




3 6 Leads Bipolar (Series) Connection




4 8 Leads Unipolar Connection



5 8 Leads Bipolar (Series) Connection



6 8 Leads Bipolar (Parallel) Connection




Note
●The numbers inside the parentheses indicate the connector pin No. of the high-efficiency type and high-torque type.
●N.C.: No Connection


●Standard Type with Terminal Box


◇Motor Wirings

• PK26□DAT, PK26□D1T

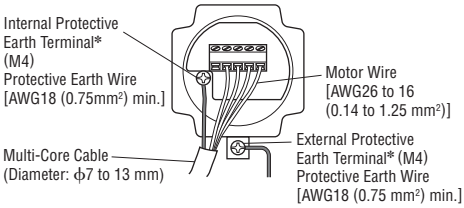


Connect motor lead wires to the terminals 2 to 5.







*Use either the internal or external protective earth terminal for grounding.

• PK29□DT, PK29□EAT

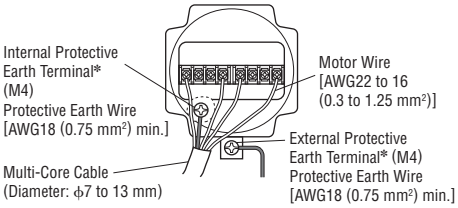




• PK29□DT



• PK29□EAT




*Use either the internal or external protective earth terminal for grounding.


◇Wirings Connection Diagrams

• PK26□DAT, PK26□D1T

7 Bipolar




Connect motor lead wires to the terminals 2 to 5.



• PK29□DT


8 Bipolar

Connect motor lead wires to the terminal 1, 4, 5 and 8.




• PK29□EAT


9 Bipolar (Series)



10 Bipolar (Parallel)



11 Unipolar

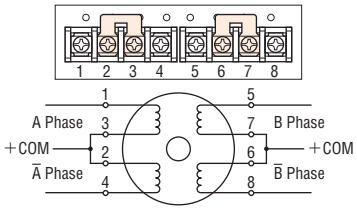

Encoder Specifications

Encoder Code		R21	R22
Type		Incremental	
Resolution		200 P/R	400 P/R
Output		3-Channel A, B, Index	
Input Current		57 mA (Typ.)	
Input Voltage		5 VDC ±10%	
Output Type		TTL	
Output Voltage	Low	0.4 VDC	
	High	2.4 VDC	
Response Frequency		100 kHz (Max.)	

Encoder Pin-Outs

Pin No.	Lead Wire Color of Encoder Cable	Encoder Code	
		R21	R22
1	Black	GND	
2	Blue	Index Channel	
3	White	A Channel	
4	Red	+5 VDC Power	
5	Brown	B Channel	

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP