

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

PALL Microelectronics

Mini Gaskleen® Gas Purifier



Description

Pall's Mini Gaskleen gas purifier is a true point-of use purifier. A unique combination of Pall's cutting-edge AresKleen™ purification material and Ultramet-L® stainless steel filter media, it is designed to remove contamination from many process gases. The purifier is capable of sub ppb level purification at designed flow rates of up to 1 splm, while providing 3 nm filtration.

- Controls and reduces impurities such as O_2, H_2O, CO_2, CO, NMHC, $Ni(CO)_4$ and $Fe(CO)_5$
- One-for-one dimensional replacement of conventional in-line particle filter assemblies
- Assembly hardware is made of 316 L stainless steel
- High efficiency diffusion barrier ensures integrity of reactive material during installation
- Superior pressure drop characteristics
- Purifies a wide variety of gases
- 100% helium leak and pressure tested
- Compact size
- Not orientation sensitive
- Does not generate hazardous waste when used in non-hazardous gas service
- Will not release hydrocarbons
- No detectable metal contribution above background in HCl gas with HCLP material
- No detectable metal contribution above background in HBr gas with HBRP material

Specifications

Materials

- Electropolished 316 L VAR PLUS stainless steel components
- ≤ 0.25 µm / 10 µin R_a internal surface finish

Particle Removal Efficiency Rating

- $1x10^9$ retention of particles ≥ 3 nm up to 2 slpm

Connections

- ¼ in Gasket seal, male / male (VCR[1] compatible)

Operating Conditions

- Maximum operating pressure: 20.7 MPa / 3,000 psig
- Maximum operating temperature: 100°C / 212°F (INP, SIP, FCP, SF6P), 40°C / 104°F (GEH4P, OXP, CLXP, HCLP, HBRP, CDAP)
- EU pressure equipment directive: Assemblies have been evaluated and designed using SEP per the European Union's Pressure Equipment Directive 2014/68/EU and are not CE marked

Design Flow Rate

- 0-1 slpm @ 0.1 MPa / 15 psig
- Higher intermittent flow rates of up to 2 slpm can be accommodated, with reduced lifetime[2]

Packaging

- Double bagged
- Outer bag: aluminized Mylar[3]
- Inner bag: polyethylene
- End fittings capped with metal seals
- Product packaged in an argon environment

Nominal Dimensions


- Length: 84 mm / 3.31 in
- Diameter: 21.3 mm / 0.84 in

[1] VCR is a trademark of Swagelok Company


[2] Contact the Pall Microelectronics Group for further information.

[3] Mylar is a registered trademark of Dupont Teijin Films.

Pressure Drop vs. Gas Flow Rate

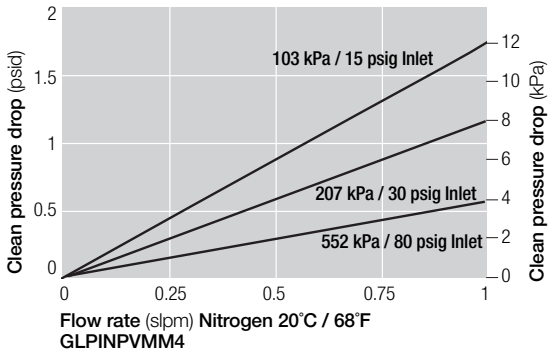


Lifetime Calculations

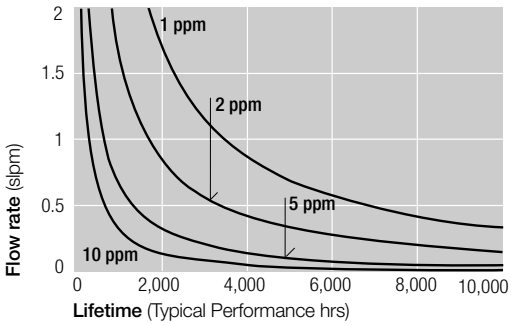


Pall AresKleen purification material: Inert gas service
Mini Gaskleen purifier assembly, part # GLPINPVMM4

Inlet pressure: 207 kPa (30 psig) contaminant challenge as H_2O

Nominal Dimensions

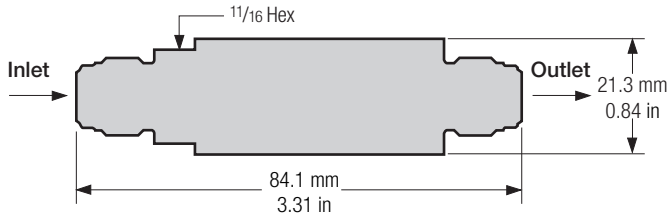

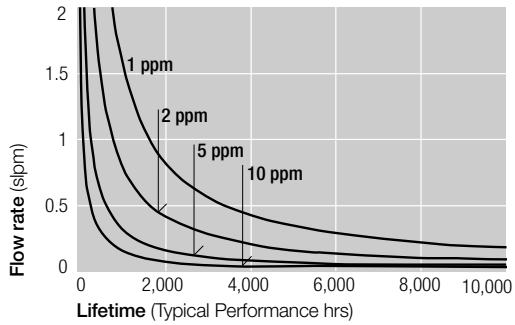

Pall AresKleen purification material: Inert gas service
Mini-Gaskleen purifier assembly, part # GLPINPVMM4

Inlet pressure: 207 kPa (30 psig) contaminant challenge as O_2

Part Numbers / Ordering Information

Part Number	Specific Gas	Effluent Purity Specifications
GLPINPVMM4	Inert gases: Nitrogen, argon, helium, xenon, krypton, neon	< 1 ppb H_2O, O_2, CO_2, CO
GLPSIPVMM4	Flammable gases: Silane, hydrogen, methane, ethane, cyclopropane, propane, dimethyl ether	< 1 ppb H_2O, CO_2, O_2, CO
	Carbon monoxide	< 1 ppb H_2O, O_2, CO_2, $Ni(CO)_4$, $Fe(CO)_5$
GLPFCPVMM4	Fluoromethane, difluoromethane, trifluoromethane, tetrafluoroethane, pentafluoroethane, heptafluoropropane, carbon tetrafluoride, perfluoropropane, perfluorocyclobutane, hexafluoroethane	< 1 ppb H_2O, CO_2, O_2
GLPGEH4PVMM4	Germane	< 1 ppb H_2O, CO_2, O_2, CO
GLPSF6PVMM4	Sulfur hexafluoride	< 1 ppb H_2O, CO_2, O_2, CO
GLPOXPVMM4	Oxygenated gases: Carbon dioxide, oxygen, nitrous oxide	< 10 ppb H_2O
GLPCLXPVMM4	Chlorinated gases: Boron trichloride, chlorine, trichlorosilane, dichlorosilane	< 100 ppb H_2O
GLPHCLPVMM4	Hydrogen chloride	< 15 ppb H_2O
GLPHBRPVMM4	Hydrogen bromide	< 50 ppb H_2O
GLPCDAPVMM4	Photolithography clean dry air	< 1 ppb H_2O, < 300 ppt organics (as C_4), < 10 ppt acid gases (as SO_2), < 15 ppt basic gases (as NH_3), < 1 ppt refractory compounds (as HMDSO)

Unit conversion: 1 bar = 100 kilopascals

Technical Information

Impurity Removal as Tested in Specific Gases

Specific Gas	Impurity Removal Efficiency
Inert gases: Nitrogen, argon, helium, xenon, krypton, neon	< 1 ppb H_2O, CO_2, O_2 and CO, as tested in argon and nitrogen using APIMS analyzer
Flammable gases: Silane, hydrogen, methane, ethane, cyclopropane, propane, dimethyl ether	< 1 ppb H_2O, CO_2, O_2 and CO, as tested in argon, nitrogen and hydrogen using APIMS analyzer < 1 ppb H_2O, as tested in carbon monoxide using trace moisture analyzer H_2O and siloxanes removed to trace levels, as tested in silane using APIMS
Carbon monoxide	< 1 ppb $Ni(CO)_4$, and < 1 ppb $Fe(CO)_5$, as tested in carbon monoxide using GC-ECD analyzer
Fluoromethane, difluoromethane, trifluoromethane, tetrafluoroethane, pentafluoroethane, heptafluoropropane, carbon tetrafluoride, perfluoropropane, perfluorocyclobutane, hexafluoroethane	< 1 ppb H_2O, CO_2, O_2, and CO, as tested in argon and nitrogen using APIMS analyzer < 1 ppb O_2, as tested in trifluoromethane using trace oxygen analyzer < 10 ppb H_2O, as tested in trifluoromethane using trace moisture analyzer and FTIR
Germane	< 1 ppb H_2O, CO_2, O_2, and CO, as tested in argon and nitrogen using APIMS analyzer
Sulfur hexafluoride	< 1 ppb H_2O, CO_2, and O_2, as tested in argon using APIMS
Oxygenated gases: Carbon dioxide, oxygen, nitrous oxide, clean dry air	< 10 ppb H_2O < 1 ppb H_2O, and CO_2, as tested in argon using APIMS analyzer
Chlorinated gases: Boron trichloride, chlorine, trichlorosilane, dichlorosilane	< 100 ppb H_2O < 1 ppb H_2O, and CO_2, as tested in argon using APIMS analyzer
Hydrogen chloride	< 15 ppb H_2O as tested in hydrogen chloride using CRDS < 1 ppb H_2O as tested in argon using APIMS analyzer
Hydrogen bromide	< 50 ppb H_2O as tested in hydrogen bromide using CRDS < 1 ppb H_2O as tested in argon using APIMS analyzer
Photolithography clean dry air	< 1 ppb H_2O as tested in argon using APIMS analyzer < 300 ppt C_4H_8 as tested in argon using APIMS Analyzer < 10 ppt SO_2 as tested in nitrogen using ion chromatograph < 15 ppt NH_3 as tested in nitrogen using ion chromatograph < 1 ppt HMDSO as tested in argon using APIMS analyzer and baseline subtraction

PALL Microelectronics

25 Harbor Park Drive
Port Washington, New York 11050

1.800.360.7255 toll free (only in US)
1.516.484.3600 phone
1.516.625.3610 fax
microelectronics@pall.com

Visit us on the Web at www.pall.com/micro

Pall Corporation has offices and plants throughout the world. For Pall representatives in your area, please go to www.pall.com/contact.asp

Because of technological developments related to the products, systems, and/or services described herein, the data and procedures are subject to change without notice. Please consult your Pall representative or visit www.pall.com to verify that this information remains valid. Products in this document may be covered by the following patent number: US 7,465,692

© Copyright 2009, 2018, Pall Corporation. Pall, PALL, Gaskleen, Ultramet-L and Areskleen are trademarks of Pall Corporation. ® Indicates a Pall trademark registered in the USA. *Filtration. Separation. Solution.*SM is a service mark of Pall Corporation.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP