

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Parker P2M* at our website: ***Click HERE***





aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding





Moduflex Valve System

Instant control
for all pneumatic actuators


Catalogue PDE2536TCUK September 2015



Parker

ENGINEERING YOUR SUCCESS.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com



The machine designer Moduflex workshop



Valves are the centre of electro-pneumatic automation. They are now designed into compact islands that are easily configured to each application.
For full efficiency in this enhanced automation practice, machine designers are helped by 3 complementary design tools:

1 - the Moduflex valve island configurator, an easy to use **CD-ROM** (see p.30);

2 - the Moduflex functional **poster**, a "one glance synopsis" of the Moduflex System;

3 - this **catalogue**, that includes "The manual of modular pneumatic valves islands".

4 - The Moduflex valve island **e-configurator** and **3D models** are available on website:
http://www.parker.com/pneu/moduflex

Make sure your Moduflex workshop is complete.

WARNING

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.
This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyse all aspects of your application and review the information concerning the product or system in the current product catalogue. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met. The products described herein, including without limitation, products features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

SALE CONDITIONS
The itms described in this document are available for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. Any sale contract entered into by Parker will be governed by the provisions stated in Parker's standard terms and conditions of sale (copy available upon request).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Summary

	Page Nº.
Product Overview	4 - 7
Cylinder working speed chart	8 - 9
Technical characteristics	10 - 13
Ordering guide	14 - 29
Basic modules order code	16 - 25
V Series	16 - 19
T Series, Lockable connector IP67 and Clip connector IP40	20 - 21
S Series, Lockable connector IP67 and Clip connector IP40	22 - 23
P Series	24 - 25
Complete modules order code	26 - 29
T Series, Lockable connector IP67 and Clip connector IP40 & V Series	26 - 27
S Series, Lockable connector IP67 and Clip connector IP40	28
P Series	29
Moduflex Valve Island Configurator Software	30
Valve Island Head Module Port Sizing	31
Maintenance	32 - 33
Dimensions	34 - 40
Recommendations - Machines to U. S. Standard	41
V Series electrical and fieldbus modules - Connection and Configuration	42 - 47
Manual	M1 - M38

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Moduflex Valve System

The Moduflex Valve System redefines flexibility for pneumatic users. Whether configured from basic components or ordered as a pre-assembled and tested valve island, Moduflex flexibility is unmatched in the market place.



V Series



T Series



Lockable Connector IP67



Clip Connector IP40

S Series



Lockable Connector IP67



Clip Connector IP40

P Series



Innovative

The 6 patents awarded to the Moduflex Valve System reflect that innovation is core to the Parker design process. Maintaining a clear understanding of our customer's expectations has defined the individuality of the Moduflex, and clearly differentiated it as a leading automation solution.

Adaptive

No other system can be adapted so simply once specified. Unique, captive fitting release system, quick release electrical connectors and single mechanical screw connection between manifolds offer the ultimate capability for late system design changes.

Multi-Functional

From stand-alone valves to fieldbus ready valve islands, from cylinder flow controls to vacuum generators with integrated blow-off, the Moduflex Valve System meets the requirements of the whole automation spectrum.

Light-weight

An As-i compatible valve manifold with 8 electrical inputs and 8 pneumatic outputs weighs a mere 800grams, making the Moduflex Valve System the perfect choice for end of arm tooling application.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Moduflex Valve technology

Two technology platforms enable the compact design and high performance of the Moduflex Valve System.
The compact dual 4/2 and 3/2 valves utilise well proven Parker seal technology. The standard 4/2 valves adopt the long life super durable ceramic switching technology.

Dual 4/2 valve




4/2 Valve



Moduflex Complete Control

With the introduction of the dual 4/2 size 1 valves, Moduflex now offers unrivalled ability of matching valves to exact flow requirements, ensuring cost and space are minimised.
In addition, Moduflex Valve System offers all the necessary control peripherals to provide a complete automation solution. Moduflex is the complete control package.

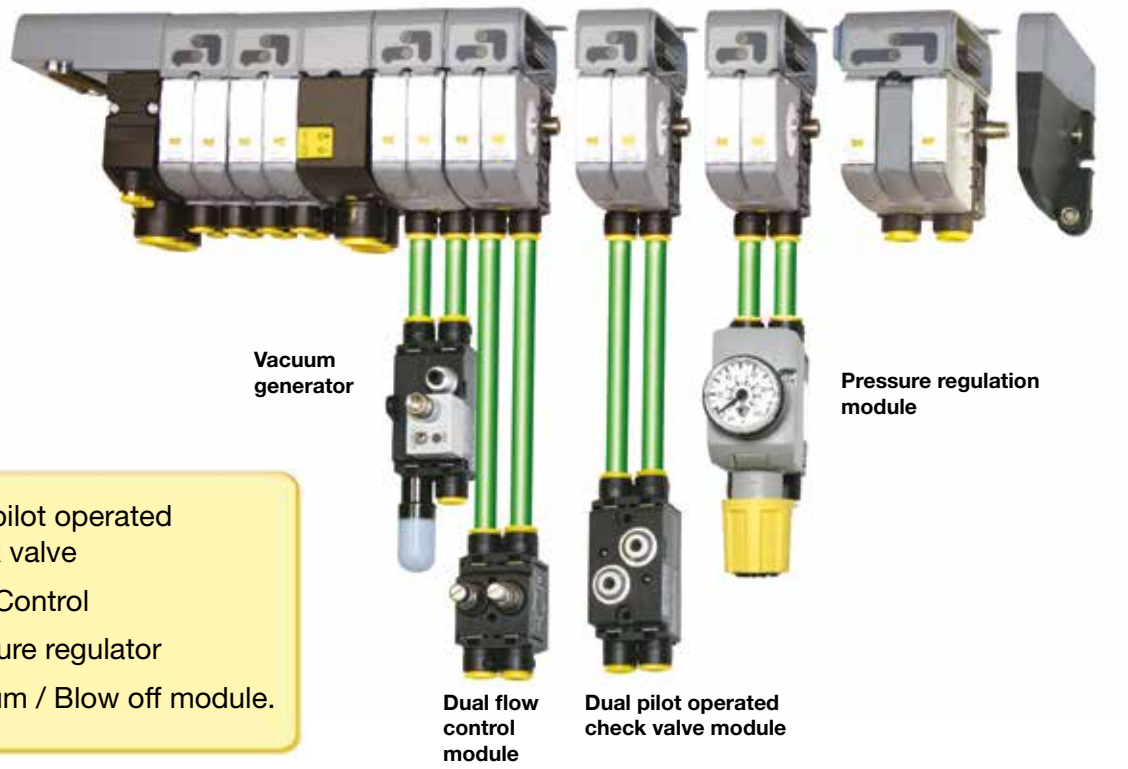

- Dual pilot operated check valve
- Flow Control
- Pressure regulator
- Vacuum / Blow off module.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

With high performance technology, Moduflex opens a new era in the field of electro-pneumatic automation. Valves are easily assembled into compact islands that conform to any application requirement.

Adaptive pneumatic

With the Moduflex Valve design, pneumatic automation is now totally flexible.

- Valves may be stand-alone or assembled into short or long islands, depending on application.
- IP 65-67 water and dust protection allows the valve to be installed near the cylinders for shorter response time and lower air consumption.
- The IP40 water and dust protection allows an optimised electrical connection for applications into cabinet or soft and none aggressive environments.
- Valve island electrical connections may be integrated.
- Push-in pneumatic connectors may be straight or elbow, for 4, 6, 8 or 10 mm OD tubes.
- A given island may incorporate different valve sizes in order to fulfill each cylinder flow requirement.
  A single island will accommodate all cylinders, up to 100 mm bore size.
- Island modifications are easy: add or remove a valve, change a valve function, change tubing size or change piloting in minutes.
- Manual overrides are also adaptive: locking for set up, non-locking for production.



stand-alone valve



short valve island



or long valve island

straight or elbow pneumatics connectors


Easy man-machine dialog


- Moduflex incorporates LED indicators, manual overrides (MAN), in conjunction with valve symbols and identification.
- As compared to traditional 5/2 valve islands, Moduflex offers a more user friendly dialogue: each marking, LED and MAN are all lined up with the corresponding cylinder output.



Island with traditional 5/2 spool valves:
Before any action, LED and MAN have to be carefully related to the corresponding output.

Man-machine dialogue is difficult.

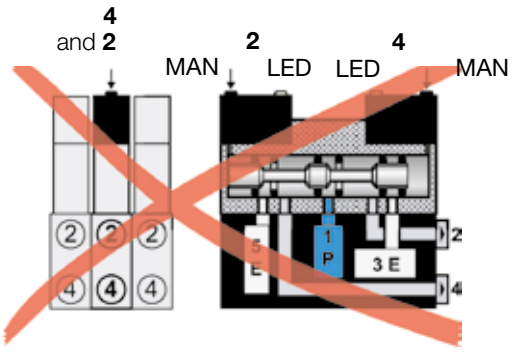

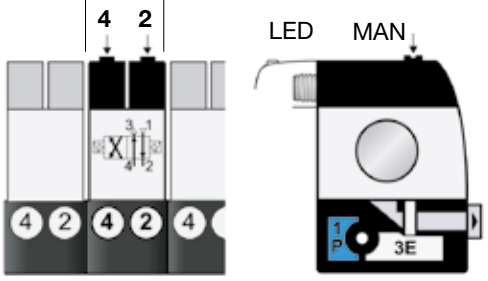

Island with Moduflex 4/2 slides valves:
Each marking, LED and MAN line up with the corresponding output.

Man-machine dialogue is easy.


Parker Hannifin Corporation
Pneumatic Division - Europe

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Adaptive design


individual electrical connector
Lockable M8 Connector - IP67 **or** **Clip Connector - IP40**





or Valve Bank with integrated IP65 electrical connections

3 valves sizes in the same valve bank

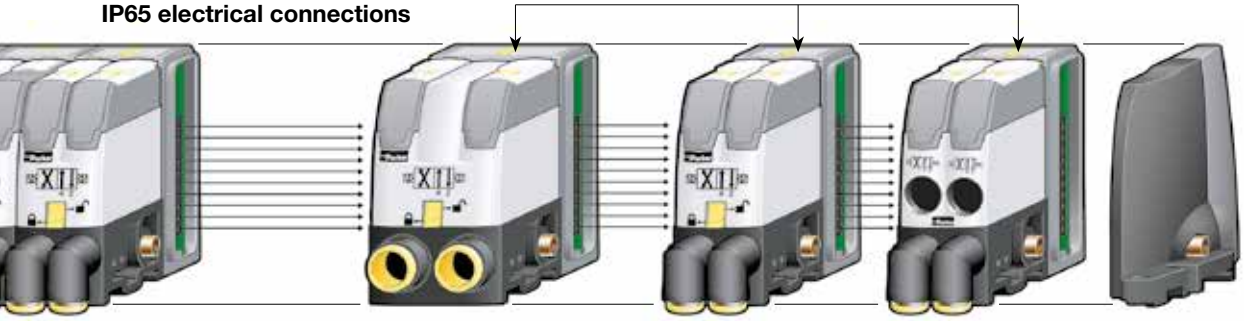


Size 2
All functions

Size 1
All functions

Size 01
Dual 4/2 Sgl Sol


Flows and tube connections



Optimal nominal section for a full flow with appropriate fitting


3 valve sizes lead to a global choice of tube sizes, thus covering all usual applications

	Size 2 Nominal section 40 mm²	**Size 1** Nominal section 12 mm²	**Size 01** Nominal section 4 mm²
	Qn 800 Nl/mn* Qmax 1340 Nl/mn* * For 3/2 functions Qn 450 Nl/mn Qmax 805 Nl/mn	Qn 310 Nl/mn* Qmax 510 Nl/mn* * For 3/2 functions Qn 235 Nl/mn Qmax 415 Nl/mn	Qn 165 Nl/mn* Qmax 275 Nl/mn*
Tube size to cylinder	**Ø Ext. 10 mm** / Ø Ext. 8 mm	**Ø Ext. 6 mm** / Ø Ext. 4 mm	**Ø Ext. 4 mm**
Cylinder bore size	Ø 63 to Ø 100 mm / Ø 40 to Ø 63 mm	Ø 25 to Ø 40 mm / Ø 6 to Ø 25 mm	Ø 6 to Ø 25 mm

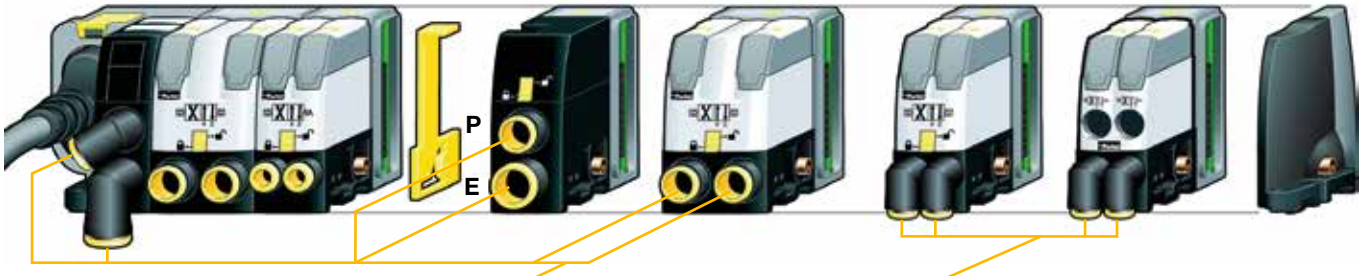

Adaptive pneumatic connection

Valve outputs are equipped with clip-on push-in tube connectors with a choice of straight or elbow in different sizes

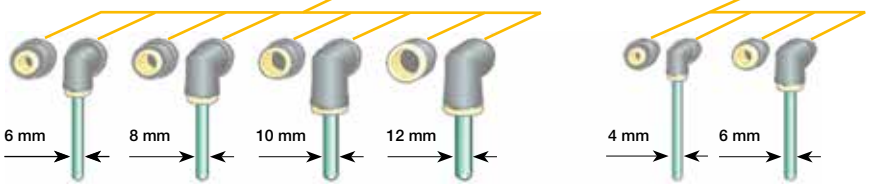

Typical cylinder speeds are shown on next pages. Module size, tube diameter and length, cylinder size, load and exhaust collection are taken into account.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Cylinder working speed charts

The charts below give the cylinder working speeds at 6 bar, under different conditions:
- non loaded or 50 % loaded double acting cylinder;
- exhaust piped through 2 m. long tubing, or exhaust muffled.


cylinder working speeds, in cm/s

standard conditions:

- double acting cylinder
- working pressure: P = 6 bar

specific conditions:

- exhaust piped through tube 2 m long, with next ID above ID tube from valve to cylinder.
- non loaded cylinder



valve module	tube ID	tube OD	tube length	cylinder bore size 25 mm	32 mm	40 mm	50 mm	63 mm	80 mm	100 mm
Size 1	2 x 4 mm		1 m.	43 cm/s	28 cm/s					
			3 m.	27	17					
	2 .7 x 4 mm		1 m.	85	52	33 cm/s				
			3 m.	55	34	21				
	4 x 6 mm		1 m.	167	100	62	41 cm/s	27 cm/s		
			2 m.	157	86	54	37	23		
			4 m.	125	73	46	31	19		
			8 m.	94	57	36	24	14		
Size 2	5.5 x 8 mm		1 m.			146	102	67	40 cm/s	25 cm/s
			3 m.			122	84	54	32	20
	6 x 8 mm		1 m.				125	78	46	30
			3 m.				105	65	39	25
	7 x 10 mm		1 m.				135	88	53	33
			3 m.				120	77	47	30
	8 x 10 mm		1 m.					94	57	40
			3 m.					85	53	37


cylinder working speeds, in cm/s

standard conditions:

- double acting cylinder
- working pressure: P = 6 bar

specific conditions:

- exhaust piped through tube 2 m long, with next ID above ID tube from valve to cylinder.
- 50% loaded cylinder



valve module	tube ID	tube OD	tube length	cylinder bore size 25 mm	32 mm	40 mm	50 mm	63 mm	80 mm	100 mm
Size 1	2 x 4 mm		1 m.	32 cm/s	20 cm/s					
			3 m.	21	13					
	2 .7 x 4 mm		1 m.	65	43	25 cm/s				
			3 m.	43	27	16				
	4 x 6 mm		1 m.	100	85	53	36 cm/s	22 cm/s		
			2 m.	93	75	44	30	19		
			4 m.	83	62	36	24	15		
			8 m.	68	46	27	18	11		
Size 2	5.5 x 8 mm		1 m.			83	67	44	27 cm/s	18 cm/s
			3 m.			79	54	35	21	15
	6 x 8 mm		1 m.				77	51	32	21
			3 m.				69	43	26	17
	7 x 10 mm		1 m.				88	59	37	24
			3 m.				81	51	30	21
	8 x 10 mm		1 m.					63	39	27
			3 m.					58	35	25

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Field of application :

- stand-alone valve modules **S** series
- valve island modules, **T** series and **V** series

Note : a complete machine cycle includes:
- the cylinder displacement times that can be deducted from the cylinder speeds given below
- the cylinders starting times that depend on the cylinder strokes and thus could not be included in the charts below.


cylinder working speeds, in cm/s

standard conditions:

- double acting cylinder
- working pressure: P = 6 bar

specific conditions:

- muffled exhaust (non collected)
- non loaded cylinder



valve module	tube ID	tube OD	tube length	cylinder bore size 25 mm	32 mm	40 mm	50 mm	63 mm	80 mm	100 mm
Size 1	2 x 4 mm		1 m.	43 cm/s	27cm/s					
			3 m.	27	17					
	2 .7 x 4 mm		1 m.	88	54	34 cm/s				
			3 m.	55	34	22				
	4 x 6 mm		1 m.	170	98	62	42 cm/s	26 cm/s		
			2 m.	150	85	55	37	23		
			4 m.	125	70	45	31	19		
			8 m.	95	56	35	24	15		
Size 2	5.5 x 8 mm		1 m.			181	126	80	48 cm/s	30 cm/s
			3 m.			134	91	58	35	22
	6 x 8 mm		1 m.				139	89	54	34
			3 m.				112	70	43	27
	7 x 10 mm		1 m.				148	94	57	37
			3 m.				125	81	49	31
	8 x 10 mm		1 m.					102	60	42
			3 m.					90	55	38


cylinder working speeds, in cm/s

standard conditions:

- double acting cylinder
- working pressure: P = 6 bar

specific conditions:

- muffled exhaust (non collected)
- 50% loaded cylinder



valve module	tube ID	tube OD	tube length	cylinder bore size 25 mm	32 mm	40 mm	50 mm	63 mm	80 mm	100 mm
Size 1	2 x 4 mm		1 m.	35 cm/s	22 cm/s					
			3 m.	23	14					
	2 .7 x 4 mm		1 m.	67	44	27cm/s				
			3 m.	44	28	17				
	4 x 6 mm		1 m.	100	87	56	38 cm/s	23 cm/s		
			2 m.	93	77	46	31	19		
			4 m.	83	63	37	25	16		
			8 m.	69	46	28	18	12		
Size 2	5.5 x 8 mm		1 m.			102	85	54	33 cm/s	22 cm/s
			3 m.			87	61	40	24	16
	6 x 8 mm		1 m.				91	59	37	25
			3 m.				77	46	29	19
	7 x 10 mm		1 m.				98	63	40	26
			3 m.				87	54	33	22
	8 x 10 mm		1 m.					68	43	30
			3 m.					61	38	27


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Two technology platforms

The well proven Parker seal technology

WCS Wear Compensating System

For 3/2 and dual 4/2 functions



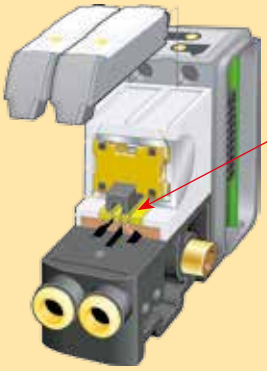

Ceramic switching technology
For single 4/2 functions

Pneumatic valve body


Visualisation LED's
For easy man-machine dialog


Configurable manual override
For locking, non-locking or condamned manual override

24 V DC solenoid valve

Pneumatic symbol

Locking system for clip-on fittings

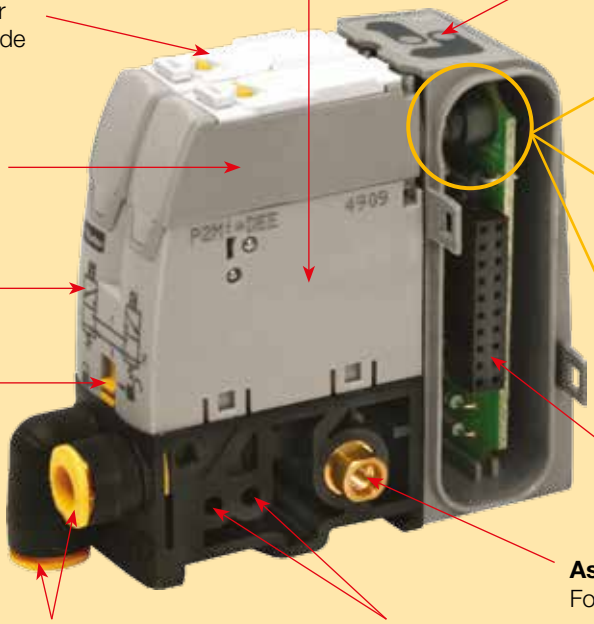



Clip connector - IP40
Economic connection for traditional wiring



M8 - 3 pins for lockable connector - IP67
For traditional wiring



4 mm orientable push-in fitting
For pneumatic remote pilot

Internal connection
Up to 19 solenoids

Associating tie-rod
For easy module assembly

Straight or elbow clip-on push-in fittings
For size 1: 4 or 6 mm OD tubing
For size 2: from 6 to 12 mm OD tubing

Auxiliary channels
Independent pilot pressure and exhaust

Material Specification

Plastics:	Polyamide reinforced fibreglass
Screws:	Zinc plated steel
Seals:	Nitrile rubber
Valve mechanism:	Aluminium alloy
Plate:	Ceramic

Certification

EMC / CE mark:	According to EN 61 000-6-2
Dust & water protection:	According to EN 60529 - NEMA 4
- S & T series:	M8 connector: IP67 Clip connector: IP40
- V series:	IP65*

* For Sub-D 25 connection: IP40 or IP65 depending on the cable

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Moduflex Valve System - P2M

Moduflex specifications answer most industries automation requirements.
Applications run from clean room electronic manufacturing to process industries in aggressive environments.

Pneumatic specifications

General Specification		
Fluid		Air or Inert gas, Filtered 40µ (class 5 according to ISO 8573-1) Dry (class 4 according to ISO 8573-1) or Lubricated (with lubricated air, we recommend external pilot supply with non lubricated air)
Operating Pressure		-0,9 to 8,0 bar
Piloting Pressure for operating pressures below, use external pilot by configuring the head module accordingly (function available on standard head module)	3/2 N.C. or N.O.	3,5 to 8,0 bar
	4/2 single solenoid	3,0 to 8,0 bar
	4/2 double solenoid	3,0 to 8,0 bar
Pilot supply	S Series	Internal
	T & V Series	Mixed internal/external (configurable on the standard head module)
Exhaust collection		All collectable (including pilot solenoid valve exhaust)
Life cycle (all sizes)	3/2 N.C. or N.O.	60 million operations (with dry air, 2 Hz, 20°C, 6 bar)
	Single and Dual 4/2	100 million operations (with dry air, 2 Hz, 20°C, 6 bar)
Operating temperatures	Clip connector	-15°C to 60°C
	Lockable connector	
	Multiwiring connector	
	Fieldbus	0°C to 55°C
Stocking temperatures		-40°C to 70°C
Vibration resistance		2G - From 2 to 150 Hz (According to IEC 68 - 2 - 6)
Impact resistance		15G - 11 ms (According to IEC 68 - 2 - 27)

Flow specifications		Dual 4/2	Dual 3/2	Single 3/2	Single 4/2
Size 1	Q max. (Nl/mn)	275	415	415	510
	Qn (Nl/mn)	165	235	235	310
Size 2	Q max. (Nl/mn)	-	805	805	1340
	Qn (Nl/mn)	-	450	440	800

Electrical specifications

Pilot solenoid Specifications			
	**Electric Connector**	M8	Clip connector
	Rated Voltage	24 Vdc	
	Electric Connection	Not polarized	Polarized
	Allowable voltage fluctuation	-15% to +10% (at 20°C)	+/- 10% (at 20°C)
	Coil insulation type	Class B	Class F
	Power consumption	Without lockable connector: 1W	1W
		With lockable connector: 1,2W	
	Visualisation and surge protection	Included into lockable connector	Included on pilot solenoid
	Manual override	Configurable: Locking or non-locking, isolated if required	
	Response Time of the complete valve (with connector) 3/2 N.C. or N.O.	Actuating: 10 ms Return: 15 ms	
	4/2 single solenoid		
	4/2 double solenoid	10 ms	
	Duty factor	ED 100%	
	Dust and Water protection S & T Series	IP67 (with lockable connector)	IP40 (with clip connector)
	V Series	Guillotine connector of fieldbus: IP65 Sub-D 25: IP40 or IP65 (depending on the cable)	

Communication module specifications					
All protocols	EMC / CE mark	According to EN 61 000-6-2 & EN 50081-2			
	AS-i line	According to EN 50295			
AS-interface	Module consumption	70 mA max. (2 slaves)			
	Max supply for all inputs	240 mA (including internal input consumption)			
	Internal input consumption	9 mA for each active input			
	Inputs	According to IEC 1131-2 classe 2			
Device protocols		**Profibus DP**	**DeviceNet**	**CANopen**	**interBus-S**
Bus line		According to each bus specification			
Module Voltage		20 to 30 V DC			
	Module consumption	1,5 W max.			2 W max.
	Outputs	Overload protection			

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Technical characteristics

Vacuum module

Fluid
Compressed air or inert gas, filtered 40µ mini., not lubricated

Working pressure
1 to 8 bar

Working temperature
-15°C to +60°C

Materials

Body:	Polyamide 6,6 reinforced fibreglass
Poppet:	Nitrile
Nozzle:	Brass
Clip connector:	Treated steel

Pressure sensor

Fluid
Air or inert gas, filtered 40µ mini., not lubricated

Working temperature
0°C to +50°C


Supply
10,8 to 30 V DC

Digital output
PNP 125 mA

Materials

Body:	Polycarbonate

Connection drawing

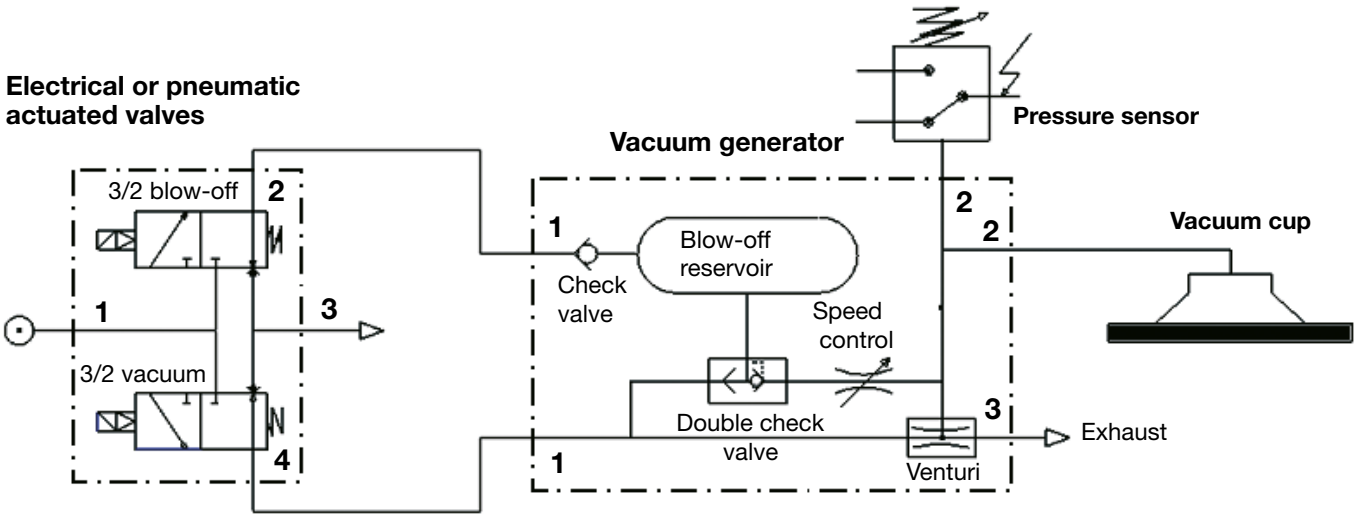

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Specific characteristics

Maximum vacuum
Vacuum level: 90% at 6,5 bar

Air consumption
Consumption: 46 Nl/min at 5 bar

Vacuum flow
Flow: 25Nl/min at 0 % vacuum and 6,5 bar


Evacuation time in s/l to reach different vacuum levels % (at P = 6,5 bar)

Vacuum %	0	10	20	30	40	50	60	70	80	90
Time in s	0,0 / 0,0	0,3 / 0,3	0,4 / 0,5	0,8 / 0,9	1,4 / 1,5	2,0 / 2,2	2,7 / 3,2	3,7 / 4,9	5,9 / 9,8	10,7 / -
Flow in Nl/min	24,9 / 23,2	22,1 / 20,3	19,3 / 17,3	16,6 / 14,4	13,8 / 11,5	11,0 / 8,5	8,2 / 5,6	5,5 / 2,7	2,7 / 0,0	0,0 / -


With silencer / With captured exhaust *

Performances


Vacuum level

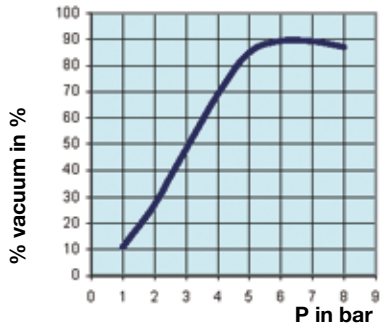

Vacuum flow

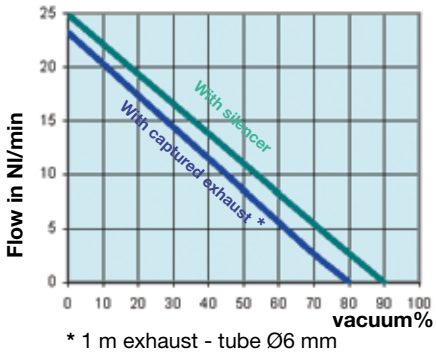

Air consumption

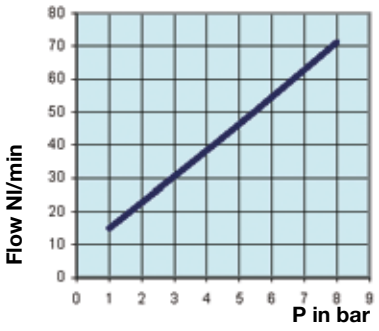

* 1 m exhaust - tube Ø6 mm
3 m exhaust - tube Ø8 mm

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Operating information

Working pressure	-0,9 to 8 bar
Pilot pressure	3 to 8 bar *
Working temperature	-15 °C to 60 °C
Protection individual M8 connectors	IP 67 NEMA4
Protection individual clip connector	IP40
Protection integrated connectors	IP 65
Voltage	24 V DC
* Single and double 3/2	3,5 to 8 bar


		Dual 4/2	Dual 3/2	3/2	4/2
Size 1	**Qmax.**	275 l/min	415 l/min	415 l/min	510 l/min
	Qn	165 l/min	235 l/min	235 l/min	310 l/min
Size 2	**Qmax.**	-	805 l/min	805 l/min	1340 l/min
	Qn	-	450 l/min	440 l/min	800 l/min

Total ordering flexibillity

In addition to the complete product adaptability, the Moduflex valve range offers ordering flexibility for V, T, S and P series with 3 different designs; from all components separately ordered (basic module) to pre-assembled and tested valve island.

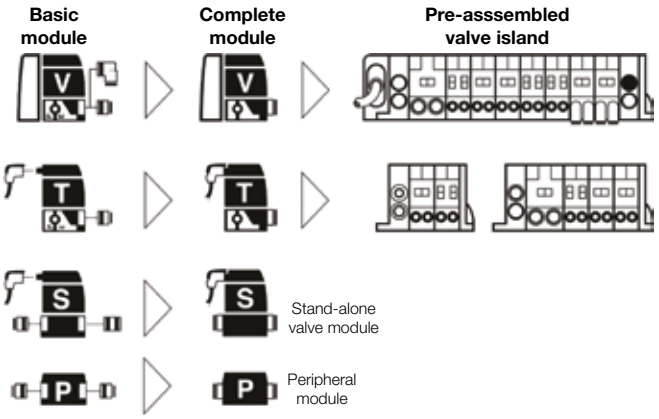

The Moduflex Valve Island in-line e-Configurator software is the easy way to, step by step, configure and order the required valve island for the application.

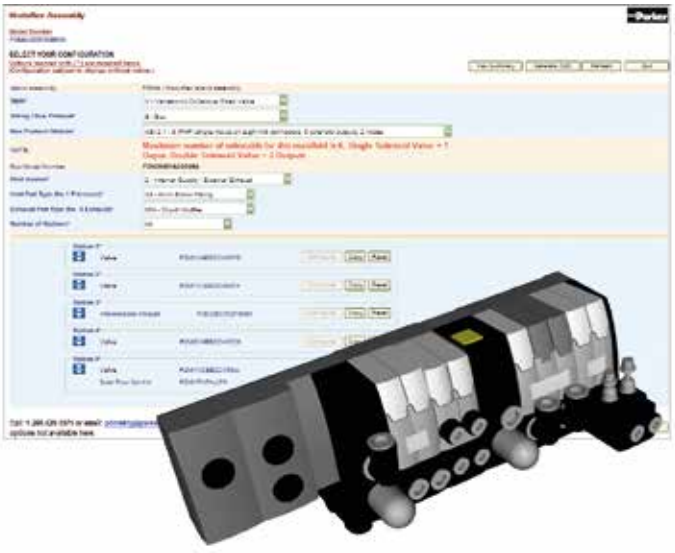

Ordering options

1 - Basic modules ordering

Using this option, all basic components are separately ordered :

- Head and Tail set
- Valve modules
- Intermediate module kit
- Peripheral modules
- Pneumatic connectors, mufflers and plugs
- Electrical connection or fieldbus module

The complete bill of material needed for the valve island assembly can be easily details using page 1 of the Moduflex Valve Configurator software report.

2 - Complete modules ordering

Using this option, modules are defined, ordered and supplied, pneumatic connectors and electrical connection equiped. One part number defines:

- Function module
- Pneumatic connectors, muffler and plugs
- Electrical connection and cable

For an entire valve island configuration, the list of complete modules can be easily details using page 3 of the Moduflex Valve Configurator software report.

3 - Pre-assembled valve islands ordering

Using this option, the complete valves island configuration has to be defined, and may be ordered, delivered fully assembly and tested under one part number.

The Moduflex Valve in-line e-Configurator software is an easy way for a clear definition of the requested valve island configuration.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Moduflex Valve System - P2M

V series

Integrated connection field bus or multi-connector valve island





Pages 16-19

T series

Individual connector valve islands
Solenoid clip or lockable connector or remote air pilot





Pages 20-21

S series

Stand alone valves
Solenoid clip or lockable connector or remote air pilot





Pages 22-23

P series

Peripheral modules
Flow control, check valves, pressure regulator, vacuum





Pages 24-25





Pages 26-27



Page 28




Page 29

Moduflex Valve in-line e-Configurator



Page 30

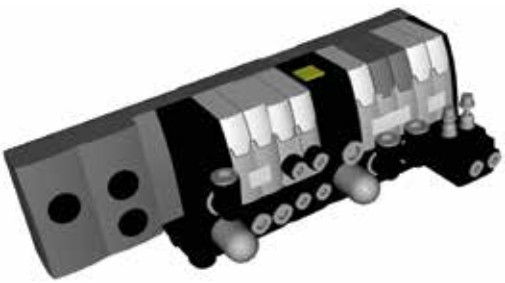

Parker Hannifin Corporation
Pneumatic Division - Europe

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Integrated connections valve islands: V series


In a V series Moduflex valve island, electrical controls are all received by the head module and transmitted to the concerned valve modules through the modular integrated circuit.

The head module may either be a cable multi-connector or a Fieldbus communication module: the next pages show multi-connector cable and a complete choice of bus protocols.



Valve island configuration

The following page shows all valve sizes and functions that may enter into a V series valve island and, for each valve size, a choice of clip-on pneumatic connectors: tubing size, straight, elbow etc.
To receive its pressure supply and collect its exhaust, the island also requires a pneumatic head and tail module set and sometimes an intermediate module set with 4 configuration plates for different functions.
To receive its electrical controls, the island is completed by an electrical head module, either a multi-connector or by a bus module to be chosen from the next pages.

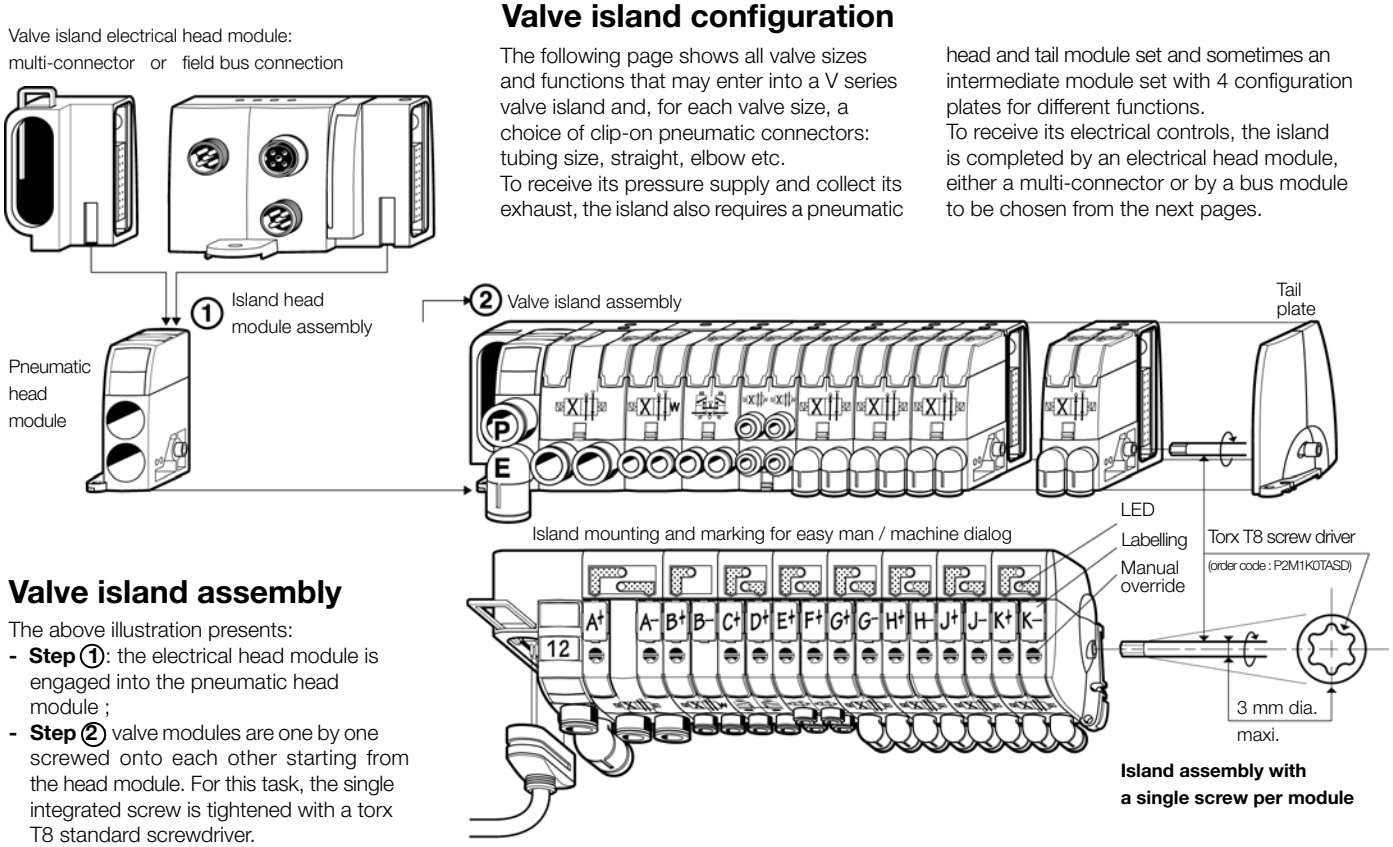

Valve island assembly

The above illustration presents:
- **Step** ①: the electrical head module is engaged into the pneumatic head module ;
- **Step** ② valve modules are one by one screwed onto each other starting from the head module. For this task, the single integrated screw is tightened with a torx T8 standard screwdriver.

The pneumatic connectors may be clipped or unclipped at any stage.


With a LED, a manual override and a labelling for each valve pilot (see illustration), the island front face eases the "man / machine" dialogue.

The resulting valve island length is expressed by the drawing below, while further size details and mountings are presented on the dimensions pages.

Modules and island ordering

Choice between 3 approaches:
1 - Basic modules ordering:
The following page shows these modules supplied without connector, together with the choice of clip-on connectors separately supplied (10 units packs). This approach gives the maximum flexibility.

2 - Complete modules ordering:
Page 27 shows the ordering chart for modules supplied with their connectors.
3 - Assembled island ordering:
Page 30 shows the valve island configurator CD-Rom to specify a valve island that may be delivered assembled.

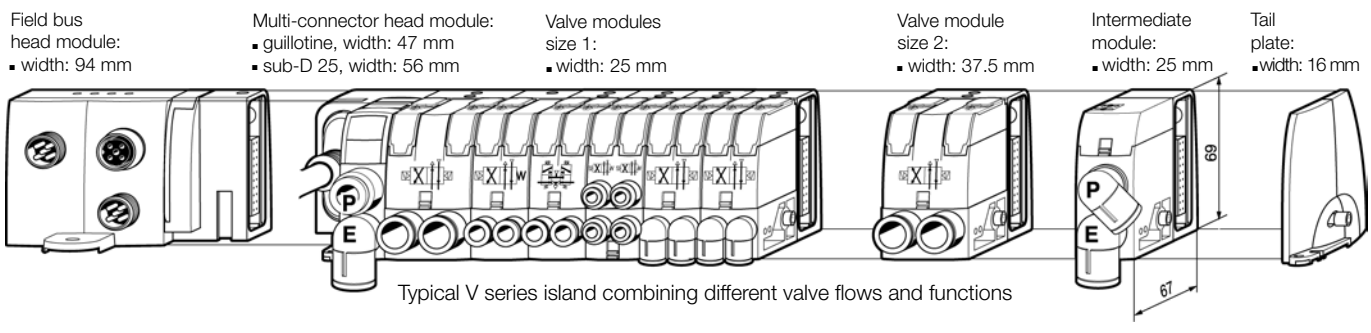

Typical V series island combining different valve flows and functions

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Basic modules (without connector)

Valve Modules

Size 1



Size 2



Symbol	Description	Size 1 Weight (g)	Size 1 Order code	Size 2 Weight (g)	Size 2 Order code
	4/2 Solenoid spring	94	**P2M1V4ES2CV**	100	**P2M2V4ES2CV**
	4/2 Double solenoid	103	**P2M1V4EE2CV**	110	**P2M2V4EE2CV**
	2 x 3/2 NC + NC with exhaust check valves	106	**P2M1VDEE2CV**	115	**P2M2VDEE2CV**
	2 x 3/2 NO + NO with exhaust check valves	106	**P2M1VCEE2CV**	115	**P2M2VCEE2CV**
	2 x 3/2 NC + NO with exhaust check valves	106	**P2M1VEEE2CV**	115	**P2M2VEEE2CV**
	2 x 4/2 Solenoid spring with exhaust check valves	114	**P2M1VJEE2CV**		
	3/2 NC with exhaust check valves	102	**P2M1V3ES2CV**	110	**P2M2V3ES2CV**
	4/3 Centre exhaust 2 x 3/2 NC + NC without exhaust check valves	106	**P2M1VGEE2CV**	115	**P2M2VGEE2CV**

Island head and intermediate module sets

Valve Modules



P2M2HXT01



P2M2BXV0A

Description	Size 2 Weight (g)	Size 2 Order code
Valve island pneumatic head and tail module set	64	**P2M2HXT01**
Valve island intermediate supply module with a set of 4 configuration plates	68	**P2M2BXV0A**

Clip-On pneumatic connectors *

Valve Modules







Description	Tube OD	Size 1 Weight (g)	Size 1 Order code	Size 2 Weight (g)	Size 2 Order code
Straight connector	G1/8"	2	**FMDG1-1**		
	4 mm	2	**FMD04-1**		
	6 mm	3	**FMD06-1**	3	**FMD06-2**
	8 mm			4	**FMD08-2**
	10 mm			5	**FMD10-2**
	12 mm			6	**FMD12-2**
Elbow connector	G1/8"	3	**CMDG1-1**		
	4 mm	3	**CMD04-1**		
	6 mm	5	**CMD06-1**	5	**CMD06-2**
	8 mm			6	**CMD08-2**
	10 mm			7	**CMD10-2**
	12 mm			8	**CMD12-2**
Silencer				5	**MMDVA2**
Plug		3	**PMDXX1**	5	**PMDXX2**

* Fittings and plugs pack quantity: 10

Electrical multi-connection and field bus head modules

Multiconnector or field bus head module to be chosen from next pages.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

V series valve island: Electrical multi-connector head module





Description		Protection	Cable length	Weight (g)	Order code
Guillotine type	Multi-connection head module			38	**P2M2HEV0A**
	Guillotine connector with flying leads multi-cable	IP65	2 m	335	**P8LMH20M2A**
			5 m	802	**P8LMH20M5A**
			9 m	1425	**P8LMH20M9A**
Standard Sub-D 25 type	Multi-connection head module			60	**P2M2HEV0D**
	Sub-D 25 connector with flying leads multi-cable	IP40	3 m	435	**P8LMH25M3A**
			9 m	1425	**P8LMH25M9A**
		IP65	9 m	1425	**P8LMH25B9A**

V series valve island: Electrical field bus head modules for AS-i protocol

Standard AS-i protocol (up to 31 nodes) electrical head modules



Electrical module for **8 outputs** max.

- V series islands may have up to 8 solenoid pilots
- 2 nodes per module, 4 I / 4 O per node

Input connections	Weight(g)	Order code
no input	150	**P2M2HBVA10800**
8 M8 inputs	200	**P2M2HBVA10808A**
8 inputs on 4 M12	200	**P2M2HBVA10808B**



Electrical module for **4 outputs** max.

- V series islands may have up to 4 solenoid pilots
- 1 node per module, 4 I / 4 O

No inputs	150	**P2M2HBVA10400**
4 inputs on 4 M12	200	**P2M2HBVA10404B**

AS-i version 2-1 protocol (up to 62 nodes) electrical head modules



Electrical module for **6 outputs** max.

- V series islands may have up to 6 solenoid pilots
- 2 nodes per module, 4 I / 3 O per node

none	150	**P2M2HBVA20600**
8 M8 Inputs	200	**P2M2HBVA20608A**
8 inputs on 4 M12	200	**P2M2HBVA20608B**

AS-i head module accessories




P8CS0803J



P8CSY1212A

Description	Connector type	Weight (g)	Order code
Cable quick connect connector	M8 Male	25	**P8CS0803J**
	M12 Male - A coding	25	**P8CS1204J**
« Y » shape	M12 Male - 2 x M12 Female	25	**P8CSY1212A**



Addressing cable 1 meter	M12 Male - Jack	100	**P8LS12JACK**

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

V series valve island: Electrical field bus head modules for device bus

Electrical modules for 16 outputs
(The V series modules may have up to 16 solenoid pilot valves)





Description	Bus Protocol	Bus In / Bus Out	Power supply	Weight (g)	Order code
Moduflex Bus Communication module	**Profibus DP**	M12 - B coding	M12 - A coding	250	**P2M2HBVP21600**
	For GSD file, go to http://www.parker.com/pneu/moduflex				
	DeviceNet	M12 - A coding	M12 - A coding	250	**P2M2HBVD21600**
			M12 - B coding	250	**P2M2HBVD11600**
	For EDS file, go to http://www.parker.com/pneu/moduflex				
	CANopen	M12 - A coding	M12 - A coding	250	**P2M2HBVC21600**
			M12 - B coding	250	**P2M2HBVC11600**
	For EDS file, go to http://www.parker.com/pneu/moduflex				
	InterBus-S	M23 - 9 Pins	M12 - A coding	300	**P2M2HBVS11600**

Device Bus connection accessories

P2M2HBVP21600



P8CS1205AA

Description	Bus Protocol	Connector type	Weight (g)	Order code
Power supply female straight connector	All	M12 - A coding	25	**P8CS1205AA**
	DeviceNet CANopen	M12 - B coding	25	**P8CS1205AB**
Bus IN female connector	DeviceNet CANopen	M12 - A coding	25	**P8CS1205AA**
	Profibus DP	M12 - B coding	25	**P8CS1205AB**
Bus OUT male connector	DeviceNet CANopen	M12 - A coding	25	**P8CS1205BA**
	Profibus DP	M12 - B coding	25	**P8CS1205BB**
Line termination	DeviceNet CANopen	M12 - A coding	25	**P8BPA00MA**
	Profibus DP	M12 - B coding	25	**P8BPA00MB**

M12 - A coding connector

M12 - B coding connector

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Individual connection valve islands: T series

In a T series valve island, electrical controls are individually connected to each valve module, onto its solenoid pilot.

As an alternative, air pilot valve modules are also available, to be controlled by individual pneumatic signals.




Valve island assembly

As shown by the above illustration, the valve modules are one by one screwed onto each other, starting from the head module. For this task, the single integrated screw is tightened with a torx T8 standard screwdriver.
The pneumatic connectors may be clipped or unclipped at any stage.
With a LED, a manual override and a labelling for each valve pilot (see above illustration), the island front face eases the "man / machine" dialogue.
The resulting valve island length is expressed by the drawing below, while further size details and mountings are presented on dimensions pages.


Valve pilot connections

1 - Solenoid valve modules

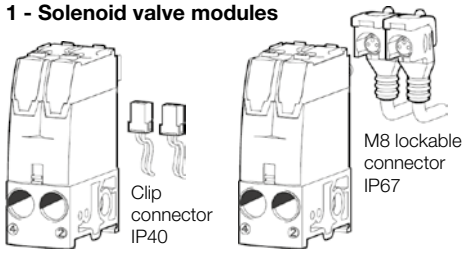


In its IP40 version, each solenoid shows Clip connection integrating LED and voltage surge protection. The clip connector with flying leads may be ordered separately with independent or interconnected common.
In its IP67 version, each solenoid shows a M8 connection. Lockable connectors, IP67 protected, with LED voltage surge protection and flying lead cable may be ordered for the required length.

2 - Air pilot valve modules



No connector has to be ordered: each pneumatic pilot port includes its integrated movable elbow 4 mm OD tube push-in connector.


Typical T series short island for single or double acting small cylinders.



Valve island configuration

The following page presents all valve sizes and functions that may enter into a T series valve island and, for each valve size, a choice of clip-on pneumatic connectors: tubing size, straight, elbow etc."
To receive its pressure supply and collect its exhaust, the island also requires a pneumatic head and tail module set and sometimes an intermediate module set including 4 configuration plates for different functions. Valve modules may either be solenoid versions or air pilot versions. Mixing both versions into the same valve island is possible.

Valve island assembly

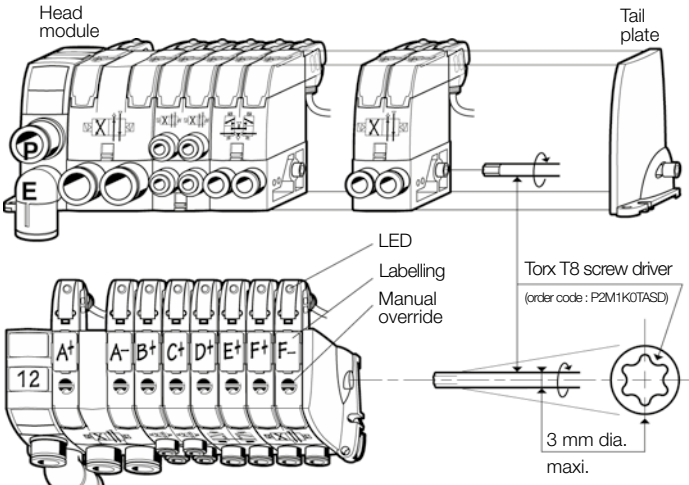

Island mounting and marking for easy man / machine dialog

Island assembly with a single screw per module

Modules and island ordering

Choice between 3 approaches:
1 - Basic modules ordering:
The following page shows these modules supplied without connector, together with the choice of clip-on connectors separately supplied (10 units packs). This approach gives the maximum flexibility.
2 - Complete modules ordering:
Page 27 shows the ordering chart for modules supplied with their connectors.
3 - Assembled island ordering:
Page 30 shows the valve island configurator CD-Rom to specify a valve island that may be delivered assembled.

Pneumatic head module:
▪ width: 32 mm


Valve module size 1:
▪ width: 25 mm

Valve module size 2:
▪ width: 37.5 mm

Intermediate module:
▪ width: 25 mm

Tail plate:
▪ width: 16 mm

Typical T series hight flow island for both small and large cylinders.

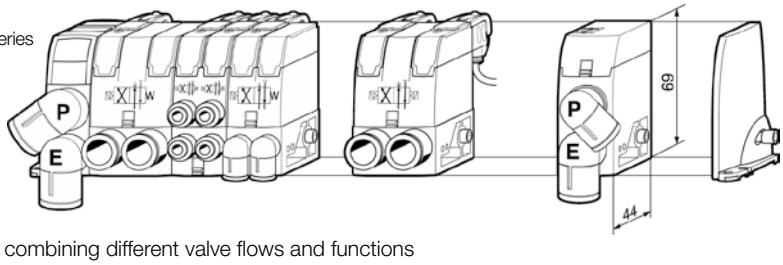

Typical T series islands combining different valve flows and functions

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Basic modules (without connector)

Valve Modules


Size 1
Dual 4/2


Size 1


Size 2

Symbol	Description	Actuator	Pilot connector	W (g)	Size 1 Order code	W (g)	Size 2 Order code
	4/2 Spring return	Solenoid	M8 Lockable	68	**P2M1T4ES2C**	74	**P2M2T4ES2C**
			Clip	68	**P2M1T4ES2CW**	74	**P2M2T4ES2CW**
		Air pilot		63	**P2M1T4PS**	69	**P2M2T4PS**
	4/2 Double pilot	Solenoid	M8 Lockable	77	**P2M1T4EE2C**	83	**P2M2T4EE2C**
			Clip	77	**P2M1T4EE2CW**	83	**P2M2T4EE2CW**
		Air pilot		67	**P2M1T4PP**	73	**P2M2T4PP**
	2 x 3/2 NC + NC with exhaust check valves	Solenoid	M8 Lockable	80	**P2M1TDEE2C**	94	**P2M2TDEE2C**
			Clip	80	**P2M1TDEE2CW**	94	**P2M2TDEE2CW**
		Air pilot		70	**P2M1TDPP**	84	**P2M2TDPP**
	2 x 3/2 NO + NO with exhaust check valves	Solenoid	M8 Lockable	80	**P2M1TCEE2C**	94	**P2M2TCEE2C**
			Clip	80	**P2M1TCEE2CW**	94	**P2M2TCEE2CW**
		Air pilot		70	**P2M1TCPP**	84	**P2M2TCPP**
	2 x 3/2 NC + NO with exhaust check valves	Solenoid	M8 Lockable	80	**P2M1TEEE2C**	94	**P2M2TEEE2C**
			Clip	80	**P2M1TEEE2CW**	94	**P2M2TEEE2CW**
		Air pilot		70	**P2M1TEPP**	84	**P2M2TEPP**
	2 x 4/2 Spring return with exhaust check valves	Solenoid	M8 Lockable	88	**P2M1TJEE2C**		
			Clip	88	**P2M1TJEE2CW**		
		Air pilot		78	**P2M1TJPP**		
	3/2 NC with exhaust check valves	Solenoid	M8 Lockable	76	**P2M1T3ES2C**	90	**P2M2T3ES2C**
			Clip	76	**P2M1T3ES2CW**	90	**P2M2T3ES2CW**
		Air pilot		71	**P2M1T3PS**	70	**P2M2T3PS**
	4/3 Centre exhaust 2 x 3/2 NC + NC without exhaust check valves	Solenoid	M8 Lockable	80	**P2M1TGEE2C**	94	**P2M2TGEE2C**
			Clip	80	**P2M1TGEE2CW**	94	**P2M2TGEE2CW**
		Air pilot		70	**P2M1TGPP**	84	**P2M2TGPP**

Island head and intermediate module sets

Valve Modules


P2M2HXT01


P2M2BXT0A

Description	W (g)	Size 2 Order code
Valve island pneumatic head and tail module set	64	**P2M2HXT01**
Valve island intermediate supply module with a set of 4 configuration plates	64	**P2M2BXT0A**

Clip-On pneumatic connectors *

Valve Modules






* Fittings and plugs pack quantity: 10

Description	Tube OD	W (g)	Size 1 Order code	W (g)	Size 2 Order code
Straight connector	G1/8"	2	**FMDG1-1**		
	4 mm	2	**FMD04-1**		
	6 mm	3	**FMD06-1**	3	**FMD06-2**
	8 mm			4	**FMD08-2**
	10 mm			5	**FMD10-2**
	12 mm			6	**FMD12-2**
Elbow connector	G1/8"	3	**CMDG1-1**		
	4 mm	3	**CMD04-1**		
	6 mm	5	**CMD06-1**	5	**CMD06-2**
	8 mm			6	**CMD08-2**
	10 mm			7	**CMD10-2**
	12 mm			8	**CMD12-2**
Silencer				5	**MMDVA2**
Plug		3	**PMDXX1**	5	**PMDXX2**

Electrical connectors


M8 lockable connector

Clip connector

Description	Connector type	Cable length	W (g)	Order code
Individual lockable connector – IP67	M8 / 2 x Flying leads	2 meters	62	**P8LS08L226C**
Including LED and surge protection		5 meters	155	**P8LS08L526C**
2 Flying leads		9 meters	180	**P8LS08L926C**
Clip connector – IP40	1 x Clip connector	1 meter	8	**P8LW021C**
Individual: Including 2 flying leads	2 x Clip connectors	1 meter	12	**P8LW021C02**
Multiple: Including 1 common (0 Vdc)	4 x Clip connectors	1 meter	20	**P8LW021C04**
and 1 flying lead per connector	8 x Clip connectors	1 meter	36	**P8LW021C08**
Straight cable quick connect to thread	M8		12	**P8CS0803J**
connector, IP67 protected	M12		15	**P8CS1204J**

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Stand-Alone Valve Modules: S series

Very useful to control isolated cylinders, these stand-alone valves module are compact and easy to mount on the machines with neat electrical and pneumatic connections.

As an alternative to electrical controls, valves with air pilots are also available, to be controlled by individual pneumatic signals.




Valve functions

The following page shows all valve sizes and functions and, for each valve size, a choice of clip-on pneumatic connectors: tubing size, straight, elbow etc."

Valve main connections


- Outlets to cylinders (ports 2 and 4) on one side.
- Supply P (port 1) and exhaust E (port 3) on the other side. At port 3, exhaust may be collected or receive a clip-on muffler.



Valve mounting


All valves may be mounted either with side screws or with their integrated retractable brackets.

Side screw mounting



The brackets are then retracted.


Optional foot mounting



The brackets are then extended.

Valve pilot connections


1- Solenoid valve modules

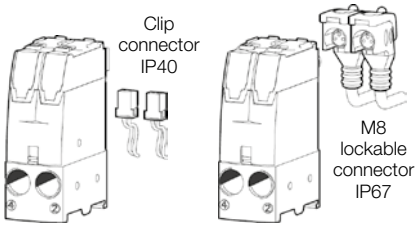

In its IP40 version, each solenoid shows Clip connection integrating LED and voltage surge protection. The clip connector with flying leads may be ordered separately with independent or interconnected common. In its IP67 version, each solenoid shows a M8 connection. Lockable connectors, IP67 protected, with LED voltage surge protection and flying lead cable may be ordered for the required length.

2- Air pilot valve modules

No connector has to be ordered : each pneumatic pilot port includes its integrated movable elbow 4 mm OD tube push-in connector.




Modules and island ordering

Choice between 2 approaches:


1 - Basic modules ordering:
The following page shows these modules supplied without connector, together with the choice of clip-on connectors separately supplied (10 units packs). This approach gives the maximum flexibility.

2 - Complete modules ordering:
Page 28 shows the ordering chart for modules supplied with their pneumatic and electrical connectors and muffler.

Valve module size 1



Valve module size 2



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Basic modules (without connector)

Valve Modules







Symbol	Description	Actuator	Pilot connector	W (g)	Size 1 Order code	W (g)	Size 2 Order code
	4/2 Spring return	Solenoid	M8 Lockable	72	**P2M1S4ES2C**	78	**P2M2S4ES2C**
			Clip	72	**P2M1S4ES2CW**	78	**P2M2S4ES2CW**
		Air pilot		67	**P2M1S4PS**	73	**P2M2S4PS**
	4/2 Double pilot	Solenoid	M8 Lockable	87	**P2M1S4EE2C**	93	**P2M2S4EE2C**
			Clip	87	**P2M1S4EE2CW**	93	**P2M2S4EE2CW**
		Air pilot		77	**P2M1S4PP**	73	**P2M2S4PP**
	2 x 3/2 NC + NC with exhaust check valves	Solenoid	M8 Lockable	85	**P2M1SDEE2C**	91	**P2M2SDEE2C**
			Clip	85	**P2M1SDEE2CW**	91	**P2M2SDEE2CW**
		Air pilot		75	**P2M1SDPP**	81	**P2M2SDPP**
	2 x 3/2 NO + NO with exhaust check valves	Solenoid	M8 Lockable	85	**P2M1SCEE2C**	91	**P2M2SCEE2C**
			Clip	85	**P2M1SCEE2CW**	91	**P2M2SCEE2CW**
		Air pilot		75	**P2M1SCPP**	81	**P2M2SCPP**
	2 x 3/2 NC + NO with exhaust check valves	Solenoid	M8 Lockable	85	**P2M1SEEE2C**	91	**P2M2SEEE2C**
			Clip	85	**P2M1SEEE2CW**	91	**P2M2SEEE2CW**
		Air pilot		75	**P2M1SEPP**	81	**P2M2SEPP**
	3/2 NC with exhaust check valves	Solenoid	M8 Lockable	80	**P2M1S3ES2C**	86	**P2M2S3ES2C**
			Clip	80	**P2M1S3ES2CW**	86	**P2M2S3ES2CW**
		Air pilot		70	**P2M1S3PS**	76	**P2M2S3PS**
	4/3 Centre exhaust 2 x 3/2 NC + NC without exhaust check valves	Solenoid	M8 Lockable	85	**P2M1SGEE2C**	91	**P2M2SGEE2C**
			Clip	85	**P2M1SGEE2CW**	91	**P2M2SGEE2CW**
		Air pilot		75	**P2M1SGPP**	81	**P2M2SGPP**

Clip-On pneumatic connectors *

Valve Modules








Description	Tube OD	W (g)	Size 1 Order code	W (g)	Size 2 Order code
Straight connector	G1/8"	2	**FMDG1-1**		
	4 mm	2	**FMD04-1**		
	6 mm	3	**FMD06-1**	3	**FMD06-2**
	8 mm			4	**FMD08-2**
	10 mm			5	**FMD10-2**
	12 mm			6	**FMD12-2**
Elbow connector	G1/8"	3	**CMDG1-1**		
	4 mm	3	**CMD04-1**		
	6 mm	5	**CMD06-1**	5	**CMD06-2**
	8 mm			6	**CMD08-2**
	10 mm			7	**CMD10-2**
	12 mm			8	**CMD12-2**
Silencer		3	**MMDVA1**	5	**MMDVA2**
Plug		3	**PMDXX1**	5	**PMDXX2**

* Fittings and plugs pack quantity: 10

Electrical connectors



Description	Connector type	Cable length	W (g)	Order code
Individual lockable connector – IP67	M8 / 2 x Flying leads	2 meters	62	**P8LS08L226C**
Including LED and surge protection		5 meters	155	**P8LS08L526C**
2 Flying leads		9 meters	180	**P8LS08L926C**
Clip connector – IP40	1 x Clip connector	1 meter	8	**P8LW021C**
Individual: Including 2 flying leads	2 x Clip connectors	1 meter	12	**P8LW021C02**
Multiple: Including 1 common (0 Vdc)	4 x Clip connectors	1 meter	20	**P8LW021C04**
and 1 flying lead per connector	8 x Clip connectors	1 meter	36	**P8LW021C08**
Straight cable quick connect to thread	M8		12	**P8CS0803J**
connector, IP67 protected	M12		15	**P8CS1204J**

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Peripheral Valve Modules: P series


Four additional peripheral modules complete the valve system in order to facilitate the installation of specific cylinder controls:
- Dual flow control, for cylinder speed adjusting;
- Dual pilot operated check valve, for cylinder positioning;
- Pressure regulator, for cylinder thrust adjusting;
- Vacuum generator, for vacuum pad controls.



Module function selection


Dual flow control

By controlling the exhaust flows of a double acting cylinder, this module can adjust both speeds: forwards and backwards.




Dual pilot operated check valve

Combined with a double 3/2 NC + NC valve, this module will block flows and stop cylinder movement as soon as the valve outputs are both exhausted. Better than a 3 position closed centre valve, it provides accurate positioning when mounted close to the cylinder.

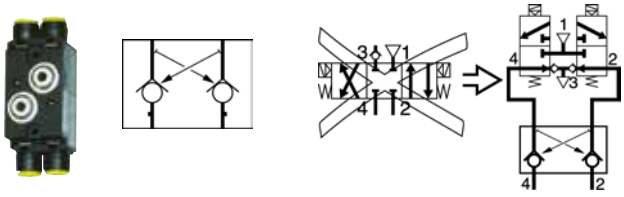

Pressure regulator


The thrust developed by a cylinder often requires adjustment by controlling the pressure to the front or back of the piston. This pressure regulator module enables manual adjustment of pressure on one side of the piston, with visual indication provided by the pressure gauge.

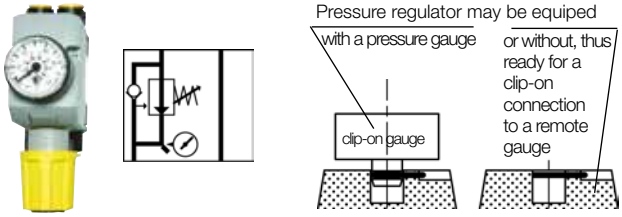


Vacuum generator


This multi-purpose module controls vacuum pads with a choice between two basics schematics:
- Controlled with only one 3/2 NC valve, the vacuum generator provides vacuum to the pads during valve actuation and then blow-off supplied from an integrated chamber.
- Controlled with a double 3/2 NC + NC, the vacuum generator provides vacuum during the first valve actuation, and then strong blow-off from the second valve.

Integrated blow-off flow controller. Optional plug-in vacuum sensor.

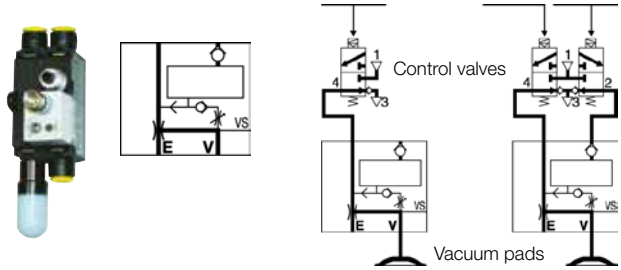


Module installation selection





Peripheral modules may either be mounted:
- Plugged into the valve module through double male unions;
- Or in line, close to the cylinder to control it better.







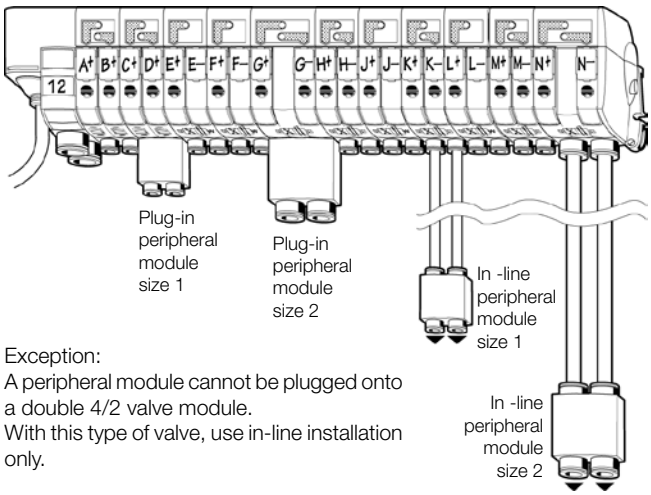

Exception:
A peripheral module cannot be plugged onto a double 4/2 valve module.
With this type of valve, use in-line installation only.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Basic peripheral modules (without connector)

Peripheral Modules					Size 1		Size 2
	Symbol	Description		Weight (g)	**Order code**	Weight (g)	**Order code**
		Dual flow control		50	**P2M1PXFA**	50	**P2M2PXFA**
		Dual P.O. check valve		50	**P2M1PXCA**	50	**P2M2PXCA**
		Pressure regulator	Pressure range / Gauge				
			0 - 2 bar / 0 - 4 bar	135	**P2M1PXSR**	135	**P2M2PXSR**
			0 - 2 bar / Without	105	**P2M1PXST**	165	**P2M2PXST**
			0 - 4 bar / 0 - 7 bar	135	**P2M1PXSM**	135	**P2M2PXSM**
			0 - 4 bar / Without	105	**P2M1PXSL**	165	**P2M2PXSL**
			0 - 8 bar / 0 - 11 bar	135	**P2M1PXSG**	135	**P2M2PXSG**
			0 - 8 bar / Without	105	**P2M1PXSN**	165	**P2M2PXSN**
		90% Vacuum generator		30	**P2M1PXVA**		

Clip-On pneumatic connectors *

Valve Modules				Size 1		Size 2
	Description	Tube OD	Weight (g)	**Order code**	Weight (g)	**Order code**
	Straight connector	G1/8"	2	**FMDG1-1**		
		4 mm	2	**FMD04-1**		
		6 mm	3	**FMD06-1**	3	**FMD06-2**
		8 mm			4	**FMD08-2**
		10 mm			5	**FMD10-2**
		12 mm			6	**FMD12-2**
	Elbow connector	G1/8"	3	**CMDG1-1**		
		4 mm	3	**CMD04-1**		
		6 mm	5	**CMD06-1**	5	**CMD06-2**
		8 mm			6	**CMD08-2**
		10 mm			7	**CMD10-2**
		12 mm			8	**CMD12-2**
	Double male union		5	**HMDXX1**	8	**HMDXX2**
	Silencer		3	**MMDVA1**		
	Plug		3	**PMDXX1**	5	**PMDXX2**

* Fittings and plugs pack quantity: 10

Clip-on accessories

	Description	Connection	Pressure range	Weight (g)	Order code
	Clip-on pressure gauge for pressure regulator modules, size 1 or size 2	Clip-on	0 to 4 bar	30	**P2M1K0GT**
			0 to 7 bar	30	**P2M1K0GL**
			0 to 11 bar	30	**P2M1K0GN**
	Analog (1 - 5 Vdc) Vacuum Sensor Flying lead 2 meter cable	Diam. 4 mm tube	0 to -1 bar	25	**MPS-V8T4-AG**
		Diam. 6 mm tube	0 to -1 bar	25	**MPS-V8T-AG**
	Dig. PNP / Ana (4 - 20 mA) Vacuum Sensor 15 cm cable - M8 4 pin's connector	G 1/8" male	0 to -1 bar	45	**MPS-V34G-PCI**

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Complete module ordering, as compared to basic module ordering

Complete modules

Ordered from the following pages, the complete modules are supplied all equipped with their electrical and pneumatic connectors. Only one order line is necessary, and each module comes complete, with just the necessary chosen connectors.




Basic modules

Ordered from the previous pages, the basic modules are to be equipped with their connectors. The clip-on assembly to the module is easy. The main advantage is flexibility : connector type and size may be chosen at the last moment, to better fit the machine needs.




V series


See opposite page for complete module order code chart

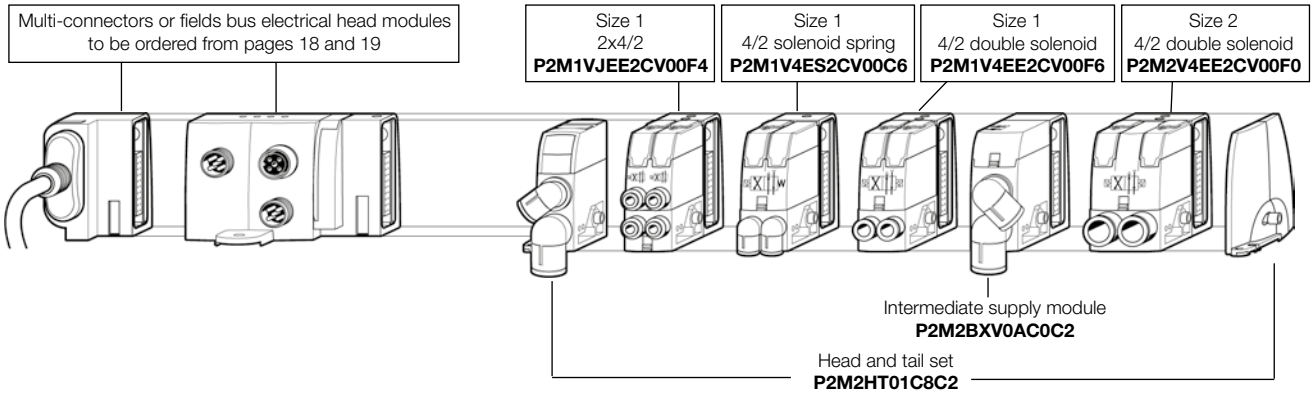

T series


See opposite page for complete module order code chart

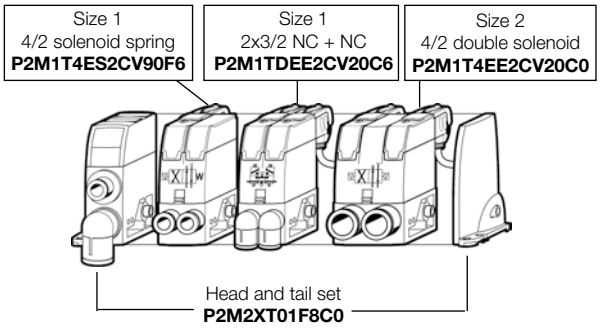


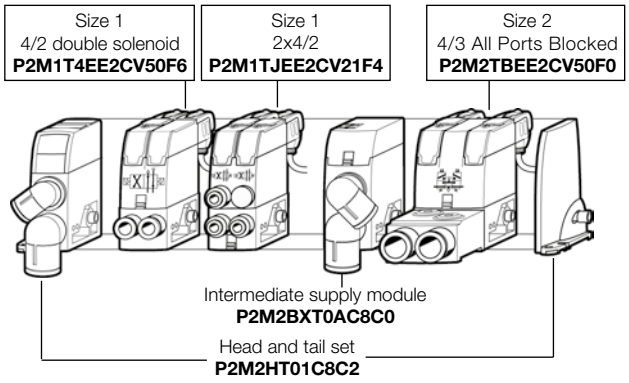

Special case : the 2 x 4/2 mini-module plug configuration

For micro-cylinders, this very compact 2 x 4/2 module (order code. JEE) may also be used to obtain 3/2 valves, either Normally Closed or Normally Open.
To do so, the complete module may be supplied with plugs that may replace some of the plug-in connectors.
To order, use the top chart from opposite page.





S and P series

See page 28 and 29 for complete module order code charts.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Complete Moduflex modules, equipped with their electrical and pneumatic connectors, may be ordered. To do so, use the below chart to define the complete module order codes.

Valve modules



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
P	2	M	1	V	4	E	E	2	C	V	0	0	F	6

Minimum ordering quantity: 10 pieces

Size	
1	Size 1
2	Size 2

Series	
V	Integrated connections
T	Individual connectors

Voltage	
00	Pneumatic pilot
2C	24VDC

Pilot Connection & Cable Length		
Valvetronic V Series IP65		
V	0	V Series - Integrated Valvetronic Gallery
T Series - M8 Connector		
0	0	No cable (also for pneumatic remote pilot)
V	2	2 meter cable - M8 connector
V	5	5 meter cable - M8 connector
V	9	10 meter cable - M8 connector
T Series - Clip Connector		
W	0	No cable
W	1	1 meter cable - Clip connector
T Series - Pneumatic Remote Pilot		
0	0	4 mm OD tubing

Pneumatic connectors Ports 2 & 4	
Size 1 modules	
F4	Straight 4 mm OD
C4	Elbow 4 mm OD
F6	Straight 6 mm OD
C6	Elbow 6 mm OD
Size 2 modules	
F6	Straight 6 mm OD
C6	Elbow 6 mm OD
F8	Straight 8 mm OD
C8	Elbow 8 mm OD
F0	Straight 10 mm OD
C0	Elbow 10 mm OD

Valve Function - Solenoid Versions *	
4 E S	4/2 Solenoid spring
4 E E	4/2 Double solenoid
D E E	2 x 3/2NC + NC (with exhaust check valve)
C E E	2 x 3/2 NO + NO (with exhaust check valve)
E E E	2 x 3/2 NC + NO (with exhaust check valve)
3 E S	3/2 NC (with exhaust check valve)
G E E	4/3 centre exhaust (= 2x3/2 without exhaust check valve)
B E E	2x3/2 + clipped dual PO check (= 4/3 APB)
J E E (Size 1 only)	2x4/2 with exhaust check valve with plug configuration

Plug configurations	
0	No plug

Only for JEE 2x4/2 modules (1)	
0	0 plug (2x 4/2)
1	1 plug (4/2 + 3/2)
2	2 plugs (2x3/2 or 1x4/2)
3	3 plugs (1x3/2)

(1) more informations on p26.

* For T Series - Pneumatic Pilot: Replace "ES" or "EE" by "PS" or "PP"

Head/Tail & Intermediate Modules

Minimum ordering quantity: 10 pieces

1	2	3	4	5	6	7	8	9	10	11	12	13
P	2	M	2	H	X	T	0	1	F	0	C	2

	Head and intermediate module	
	HXT01	**V** and **T** series Pneumatic head and tail set
	BXV0A	**V** series intermediate supply module with a set of 4 configuration plates
	BXT0A	**T** series intermediate supply module with a set of 4 configuration plates

Pressure port connector	
F6	Straight 6 mm OD
C6	Elbow 6 mm OD
F8	Straight 8 mm OD
C8	Elbow 8 mm OD
F0	Straight 10 mm OD
C0	Elbow 10 mm OD
F2	Straight 12 mm OD
C2	Elbow 12 mm OD
PP	Plug
MM	Muffler

Exhaust port connector	
F6	Straight 6 mm OD
C6	Elbow 6 mm OD
F8	Straight 8 mm OD
C8	Elbow 8 mm OD
F0	Straight 10 mm OD
C0	Elbow 10 mm OD
F2	Straight 12 mm OD
C2	Elbow 12 mm OD
PP	Plug
MM	Muffler

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Complete Moduflex stand alone valves, equipped with their electrical and pneumatic connectors, may be ordered. To do so, use the below chart to define the complete module order codes.

Stand alone valve modules



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
P	2	M	1	S	4	E	E	2	C	V	5	A	F	6

Minimum ordering quantity: 10 pieces

Size	
1	Size 1
2	Size 2

Series	
S	Stand alone valve modules

Voltage	
00	Pneumatic pilot
2C	24VDC

Pilot Connection & Cable Length		
M8 Connector		
0	0	No cable
V	2	2 meter cable - M8 connector
V	5	5 meter cable - M8 connector
V	9	10 meter cable - M8 connector
Clip Connector		
W	0	No cable
W	1	1 meter cable - Clip connector
Pneumatic Remote Pilot		
0	0	4 mm OD tubing

Valve Function - Solenoid Versions *	
4 E S	4/2 Solenoid spring
4 E E	4/2 Double solenoid
D E E	2 x 3/2NC + NC (with exhaust check valve)
C E E	2 x 3/2 NO + NO (with exhaust check valve)
E E E	2 x 3/2 NC + NO (with exhaust check valve)
3 E S	3/2 NC (with exhaust check valve)
G E E	4/3 centre exhaust (= 2x3/2 without exhaust check valve)
B E E	2x3/2 + clipped dual PO check (= 4/3 APB)

* Pneumatic Pilot: Replace "ES" or "EE" by "PS" or "PP"

Pneumatic connectors					
Ports 1 & 3		**Outlet ports 2 & 4**		**Tube OD**	
A	Straight & straight	F	Straight & straight	**Size 1 modules**	
B	Elbow & elbow	C	Elbow & elbow	4	4 mm OD
C	Straight & muffler	0	No connector for plug-in P module	6	6 mm OD
D	Elbow & muffler			**Size 2 modules**	
				6	6 mm OD
				8	8 mm OD
				0	10 mm OD

Size 1
4/2 solenoid spring
P2M1S4ES2CV5CC6





Size 2
4/2 double solenoid
P2M2S4EE2CV9CC8





Size 2
2x3/2 NC + NC
P2M2SDEE2CV2CC0

Size 1
2x3/2 NC + NC
P2M1SDEE2CV2BC6





Size 2
4/3 All Ports Blocked
P2M2SBEE2CV2AF0

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Complete Moduflex peripheral module, equipped with their pneumatic connectors, may be ordered. To do so, use the below chart to define the complete module order codes.

Dual flow control, dual pilot operated check valve, and pressure regulator peripheral modules







Minimum ordering quantity: 10 pieces

1	2	3	4	5	6	7	8	9	10	11	12
P	2	M	1	P	X	F	A	J	J	F	6

Size	
1	Size 1
2	Size 2

Peripheral module function	
F A	Dual flow control
C A	Dual P.O. check valve
Pressure regulators	
S R	0-2 bar, with pressure gauge
S M	0-4 bar, with pressure gauge
S G	0-8 bar, with pressure gauge

Inlet port pneumatic connectors	
Size 1 modules	
F4	Straight 4 mm OD
C4	Elbow 4 mm OD
F6	Straight 6 mm OD
C6	Elbow 6 mm OD
Size 2 modules	
F6	Straight 6 mm OD
C6	Elbow 6 mm OD
F8	Straight 8 mm OD
C8	Elbow 8 mm OD
F0	Straight 10 mm OD
C0	Elbow 10 mm OD

Outlet port pneumatic connectors	
Size 1 modules	
F4	Straight 4 mm OD
C4	Elbow 4 mm OD
F6	Straight 6 mm OD
C6	Elbow 6 mm OD
Size 2 modules	
F6	Straight 6 mm OD
C6	Elbow 6 mm OD
F8	Straight 8 mm OD
C8	Elbow 8 mm OD
F0	Straight 10 mm OD
C0	Elbow 10 mm OD

Vacuum generator peripheral module



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
P	2	M	1	P	X	V	A	F	6	A	F	6	C	M	A

Minimum ordering quantity: 10 pieces

Size	
1	Size 1

Peripheral module function	
V A	Vacuum generator

Exhaust port (3) *	
F4	Straight 4 mm OD
C4	Elbow 4 mm OD
F6	Straight 6 mm OD
C6	Elbow 6 mm OD
MA	Clip-on muffler

Pressure & Blow-off port connectors	
JJ	Clip-on double male union
F4	Straight 4 mm OD
C4	Elbow 4 mm OD
F6	Straight 6 mm OD
C6	Elbow 6 mm OD
F1	Straight threaded 1/8"
C1	Elbow threaded 1/8"

A	2 clip-on male union
A	2 push-in connectors
B	1 push-in connector 1 plug on blow-off port

Vacuum and Vacuum Sensor port connectors	
F4	Straight 4 mm OD
C4	Elbow 4 mm OD
F6	Straight 6 mm OD
C6	Elbow 6 mm OD
F1	Straight threaded 1/8"
C1	Elbow threaded 1/8"


A	2 similar connectors
B	1 connector on vacuum port 1 plug on vacuum sensor port
D	1 Connector on Vacuum Port 1 Dig/Ana Vacuum Sensor MPS-V34G-PCI
E	1 Connector on Vacuum Port 1 Analog Vacuum Sensor MPS-V8T-AG

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Moduflex Valve Island e-Configurator

The comprehensive **Moduflex Valve CAD e-Configurator** enables online Moduflex Valve Island configuration giving bill of material and 3D or 2D CAD downloads.
Go to http://www.parker.com/pde/cad to start

Stacking Air Valve
Moduflex P2M Series

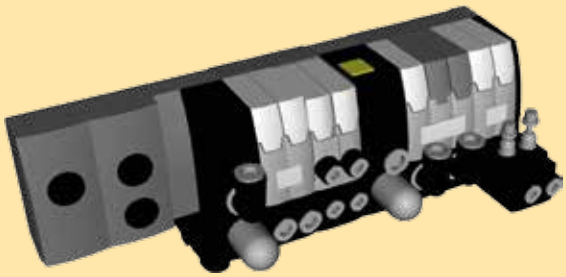


Valve island configuration practice:

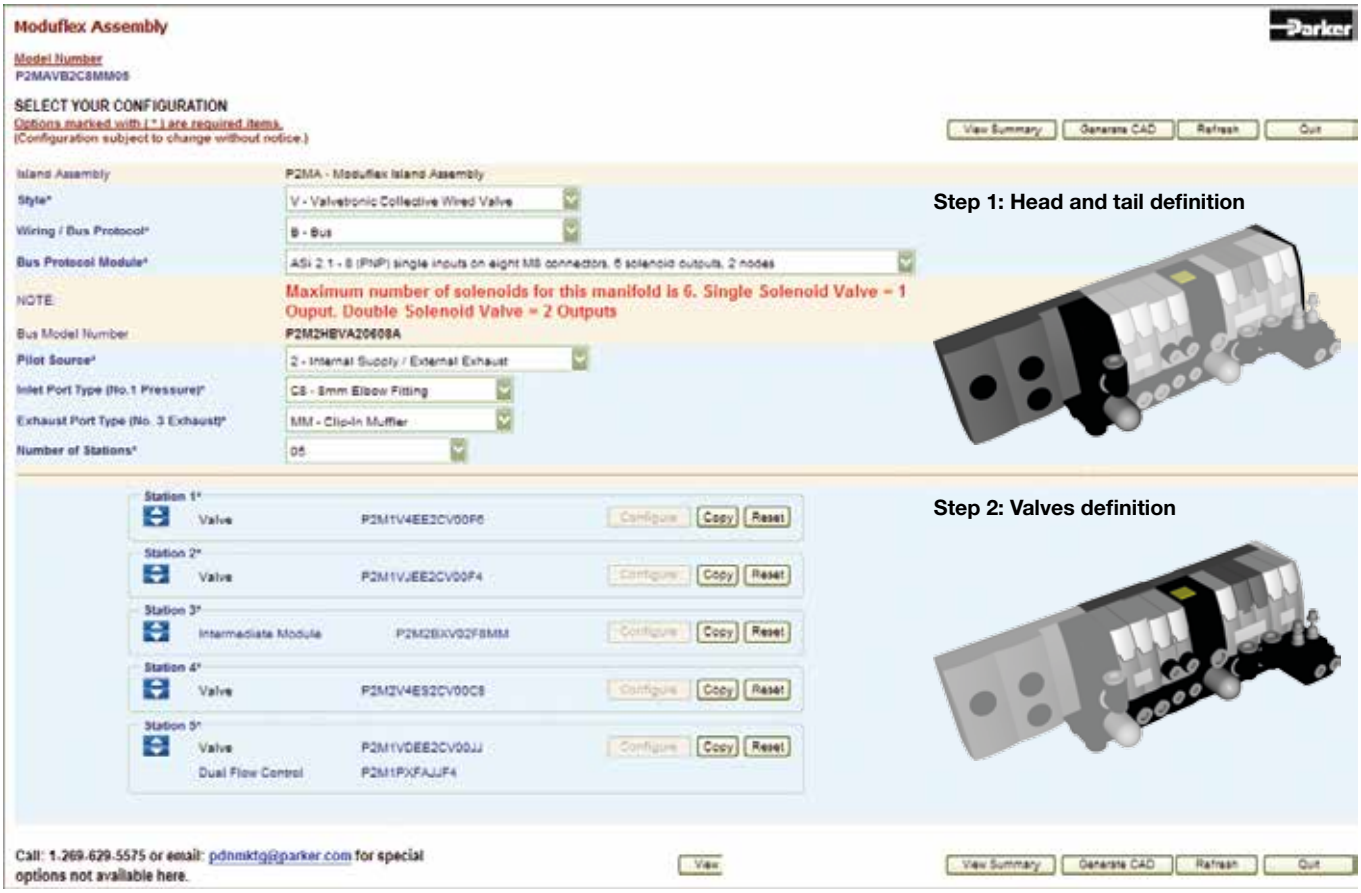

Get the bill of material

By clicking on View Summary button:

1. View the bill of material:
   - Head and Tail Set
   - Valves detail
2. Click to Print

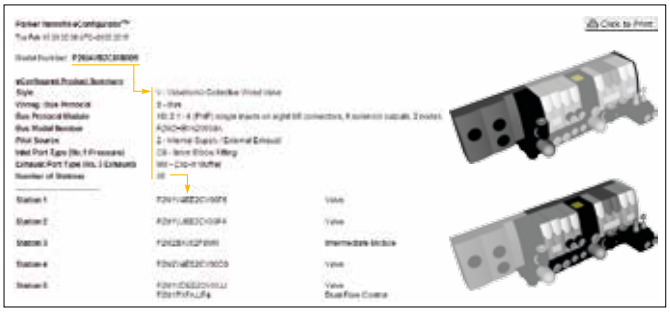

Download 2D or 3D CAD

By clicking on Generate CAD button:

1. Select to view, download or e-mail your CAD file
2. Select your best file format
3. Submit Request




Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Island head module port sizing

Moduflex is totally flexible: islands may have up to 19 valves for the V Series and is not limited for the T series with a choice of 3 valve sizes, depending on the required flow. Thus, each island has specific needs for the size of it pressure supply and its exhaust collection.


Choice of connections to an island P and E ports

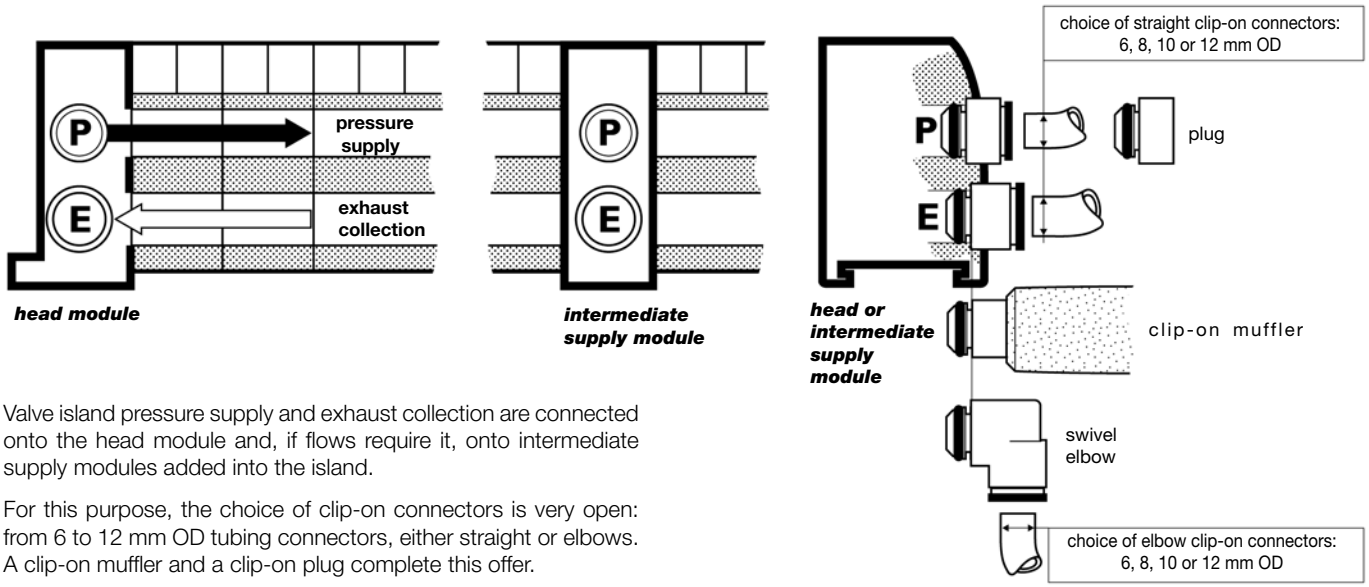

Valve island pressure supply and exhaust collection are connected onto the head module and, if flows require it, onto intermediate supply modules added into the island.

For this purpose, the choice of clip-on connectors is very open: from 6 to 12 mm OD tubing connectors, either straight or elbows. A clip-on muffler and a clip-on plug complete this offer.

Sizing recommendations

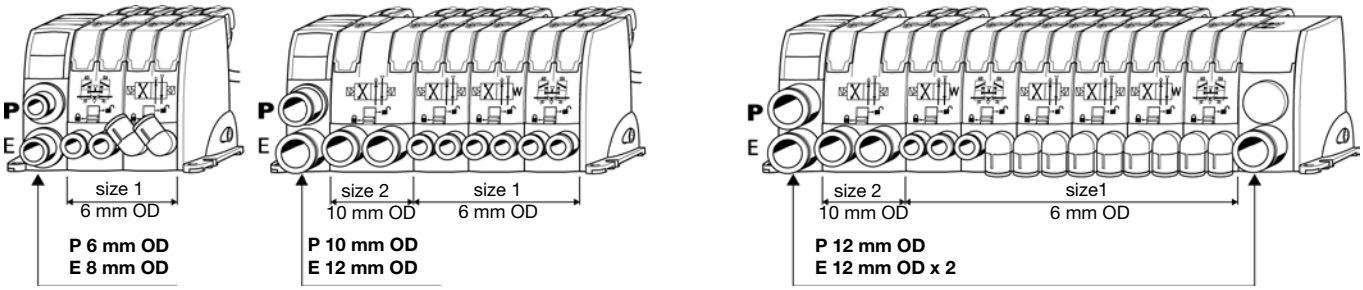

The 3 valve islands above present typical situations for sizing islands pressure supply and exhaust collection.

In a given island, valves do not deliver their flow at the same moment. Thus, the number of valves in an island is not the major factor to consider. More important is the size of the largest valve and of the largest output tubes to the cylinders.

ID section areas of standard tubings

2 x 4 mm:	3 mm²	5.5 x 8 mm:	24 mm²	10 x12 mm:	80 mm²
2.7 x 4 mm:	6 mm²	6 x 8 mm:	28 mm²		
4 x 6 mm:	12 mm²	7 x 10 mm:	40 mm²	muffler:	100 mm² equivalent
		8 x 10 mm:	50 mm²		

We would recommend the following:

- air supply connection at least equivalent to largest output tube to cylinders;
- exhaust collection at least twice the section area of the largest output tube to cylinders.

For islands with high flows, the following options are possible:

- use tubes up to 12 mm OD or mufflers providing exhaust collection is not necessary;
- provide additional P and/or E connection ports by inclusion of intermediate supply modules, thus keeping tube size small.


At the machine commissioning stage, the supply and exhaust connections can be easily modified until the required performance is achieved.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Maintenance procedure

The latest generations of compact pneumatic valves have a life expectancy which generally exceeds the equipment they control. Therefore, although maintenance is seldom required, when necessary the solenoid pilot, valve or connector can be easily replaced without removing the island base, as shown below.

S and **T** series

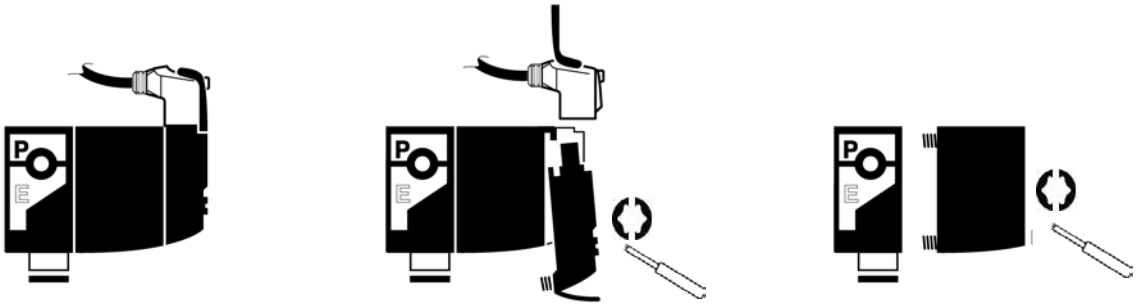

V series

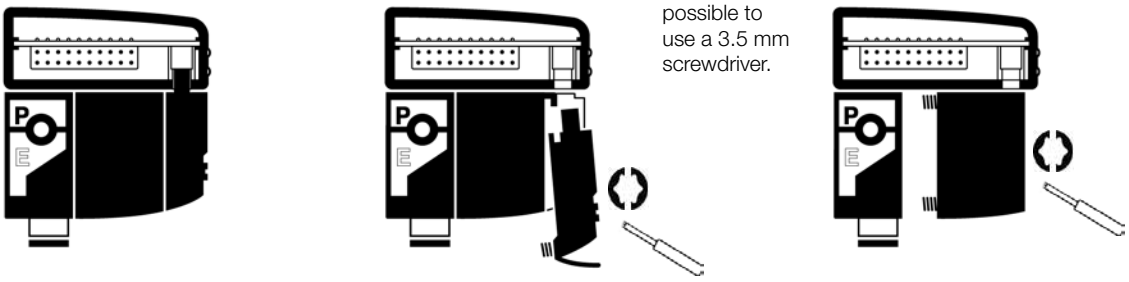

Please, use a Torx T8 screw driver. Also possible to use a 3.5 mm screwdriver.

With only one universal solenoid pilot for all configurations, maintenance is simple


24V DC is now a global standard for all machines.

The Moduflex 24V DC unique solenoid pilot is supplied with the multi-function manual override that can be adapted to all requirements, as explained by the drawings.

Because all Moduflex valve and island configurations are supplied with this unique solenoid pilot, maintenance operations remain very simple.

For more information, see chap. 9, manual section.

Multi-function adaptable manual override

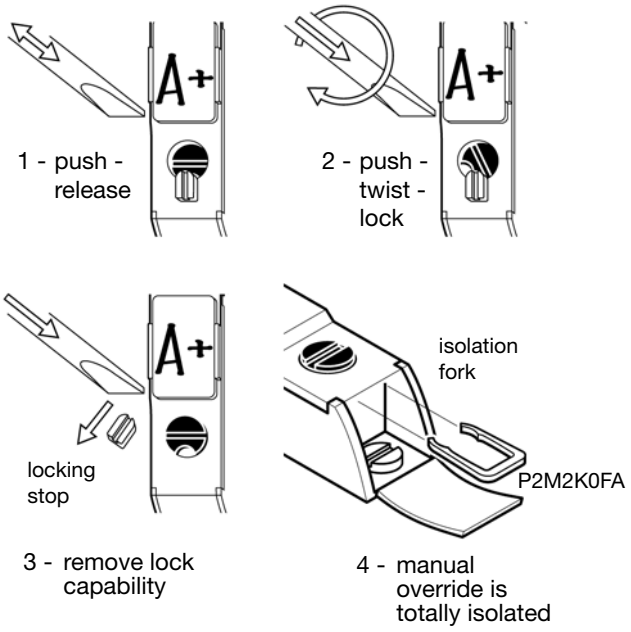

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Maintenance components



Valve pilot	Connection	Weight (g)	Order code
Solenoid pilot	M8 - 3 Pins - IP67	15	**P2D8V32C5**
	Clip connector - 2 pins - IP40 With LED and voltage surge supression	15	**P2D2W3226C5**
Pneumatic pilot	4 mm OD tubing push-in elbow fitting	10	**P2M2K0PA**


P2M1X4EE

size 1 valve modules without solenoid pilot and without sub-base		Weight (g)	Order code
4/2	monostable	26	**P2M1X4ES**
	bistable	25	**P2M1X4EE**
3/2	double NC + NC	28	**P2M1XDEE**
	double NO + NO	28	**P2M1XCEE**
	double NC + NO	28	**P2M1XEEE**
	single NC	25	**P2M1X3ES**
4/3 CE	double 3/2 NC + NC without exhaust check valve	28	**P2M1XGEE**


P2M2X4EE


size 2 valve modules without solenoid pilot and without sub-base		Weight (g)	Order code
4/2	monostable	28	**P2M2X4ES**
	bistable	30	**P2M2X4EE**
3/2	double NC + NC	32	**P2M2XDEE**
	double NO + NO	32	**P2M2XCEE**
	double NC + NO	32	**P2M2XEEE**
	single NC	28	**P2M2X3ES**
4/3 CE	double 3/2 NC + NC without exhaust check valve	32	**P2M2XGEE**



Device bus electrical head module

Description	Bus In / Bus Out connector type	Power supply connector type	Weight (g)	Order code
Profibus DP head module	M12 - B coding	M12 - A coding	210	**P2M2HBVP01600**
DeviceNet head module	M12 - A coding	M12 - B coding	210	**P2M2HBVD01600**
CANopen head module	M12 - A coding	M12 - B coding	210	**P2M2HBVC01600**
Bus communication module adaptor			30	**P2M2HEV0B**

For .EDS & .GSD files, go to http://www.parker.com/pneu/moduflex







Set of maintenance parts		Weight (g)	Order code
Seals	Set of various seals: 3 under solenoid pilot seals 3 inter island base seals 2 for dual 4/2 valves (2 parts) 2 for single and dual 3/2 – Size 1 – valves 2 for single 4/2 – Size 1 – valves 2 for size 2 valves (all functions)	8	**PM2K0JA**
Fitting locking clips	Set of 14 clips: 4 for dual 4/2 valves 6 for size 1 valves 2 for size 2 valves 2 for intermediate supply modules	10	**P2M2K0CA**
Manual override forks	Set of 10 isolating forks for pilot solenoid manual override	8	**P2M2K0FA**

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

1 - Multi-connector or sub-D 25 valve island

Multi-connector or sub-D 25 electrical head module width: 15 mm


Head and tail pneumatic module set width: 48 mm

Modules size 1 width: 25 mm


Modules size 2 width: 37.5 mm

Intermediate module width: 25 mm

Island total width depending on valve composition

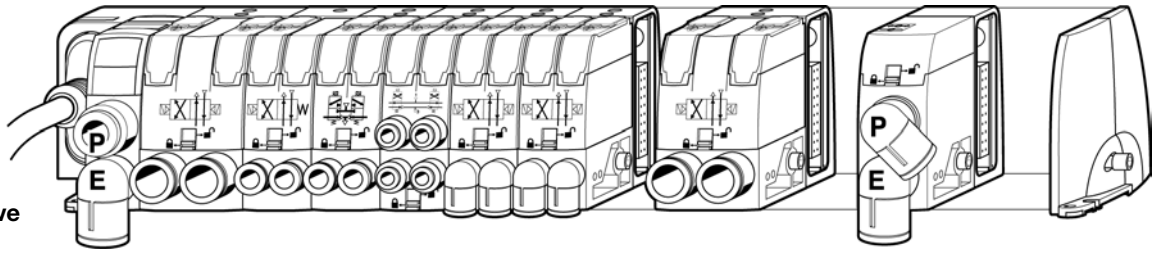

- - - - : sub-D 25

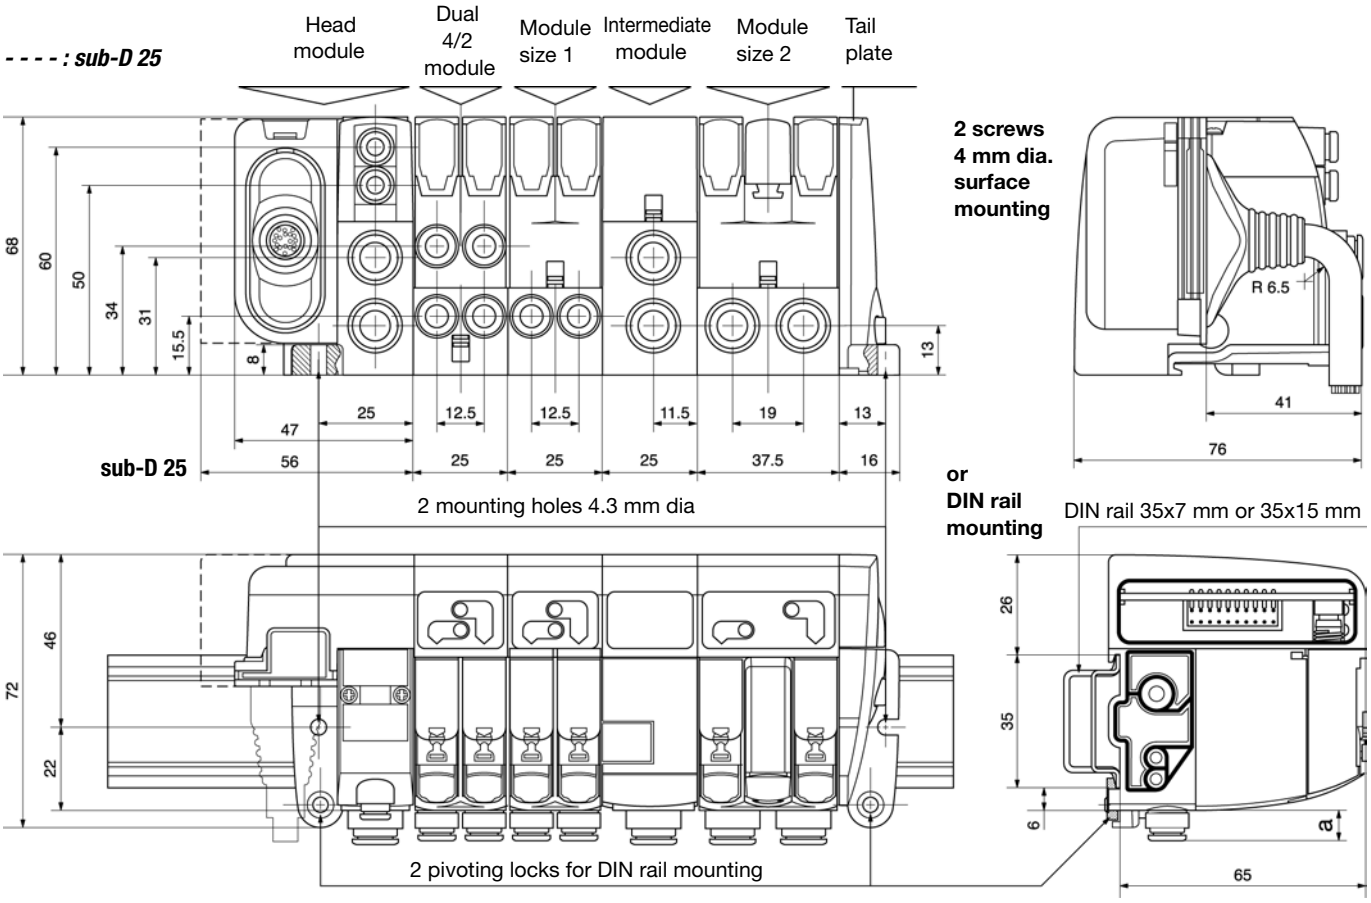

2 screws 4 mm dia. surface mounting


or DIN rail mounting

DIN rail 35x7 mm or 35x15 mm

Special case: 4/3 closed centre function within island version:
Add the dimensions of the dual P.O. check valve module plugged into the island. See pages 39 and 40 for dimensions.


Island head and intermediate modules

	a	b	c
6 mm tube OD	8	13	16
8 mm tube OD	9	16	19
10 mm tube OD	13	18	22
12 mm tube OD	13	19	25
muffler		40	




Island valves modules

	OD tube	a	b	c
Size 1 modules	4 mm	8	10	12
	6 mm	8	13	16
Size 2 modules	8 mm	9	16	19
	10 mm	13	18	22




Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2 - Field bus connected islands

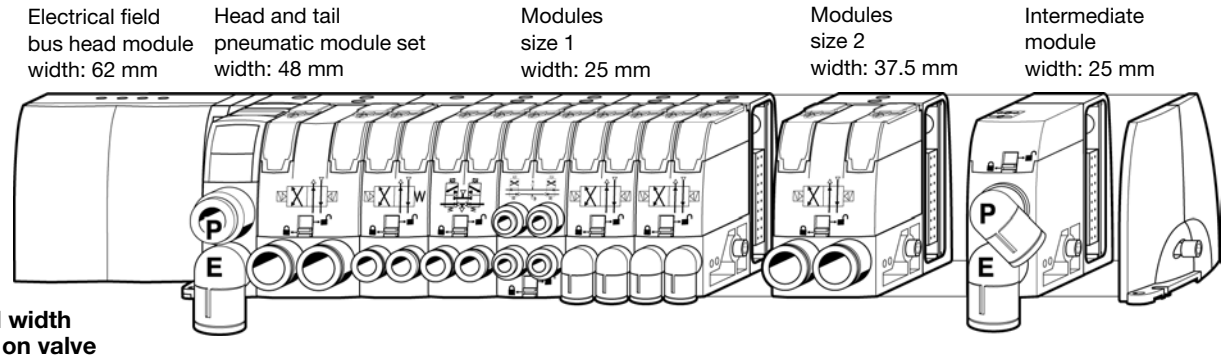


Island total width depending on valve composition

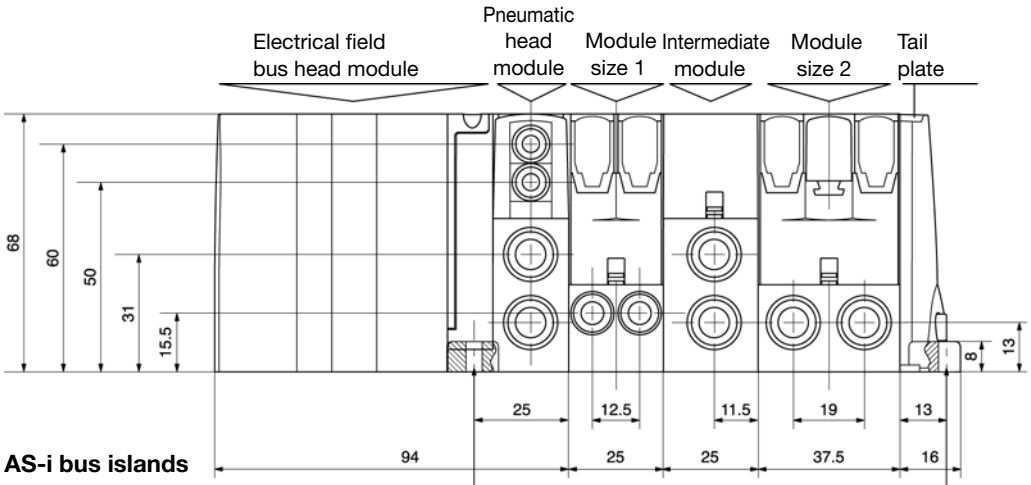


2 screws 4 mm dia. surface mounting

or DIN rail mounting

AS-i bus islands

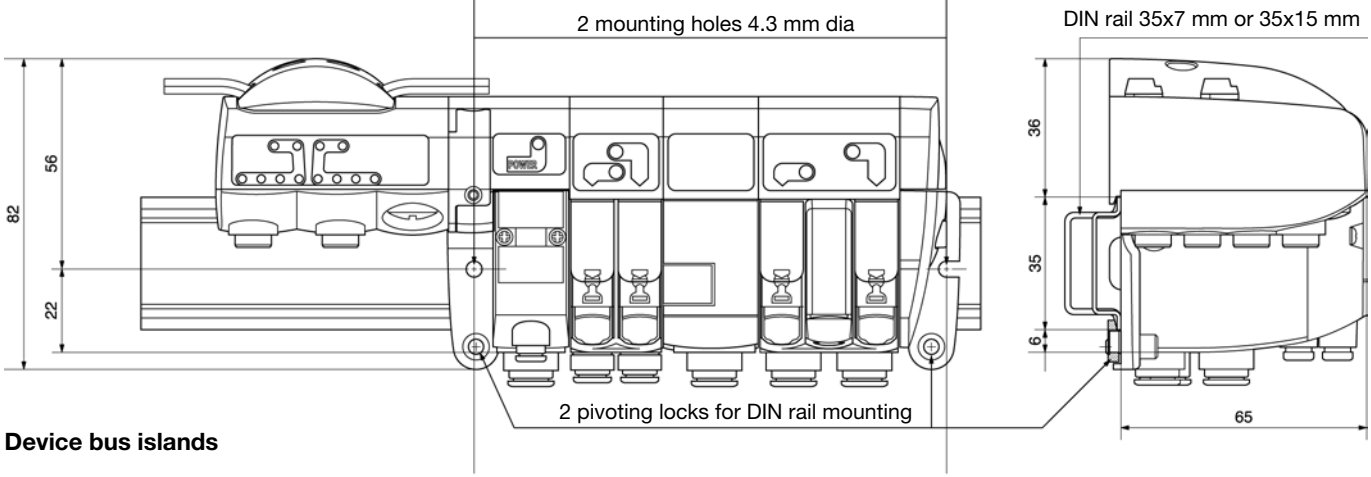



Device bus islands

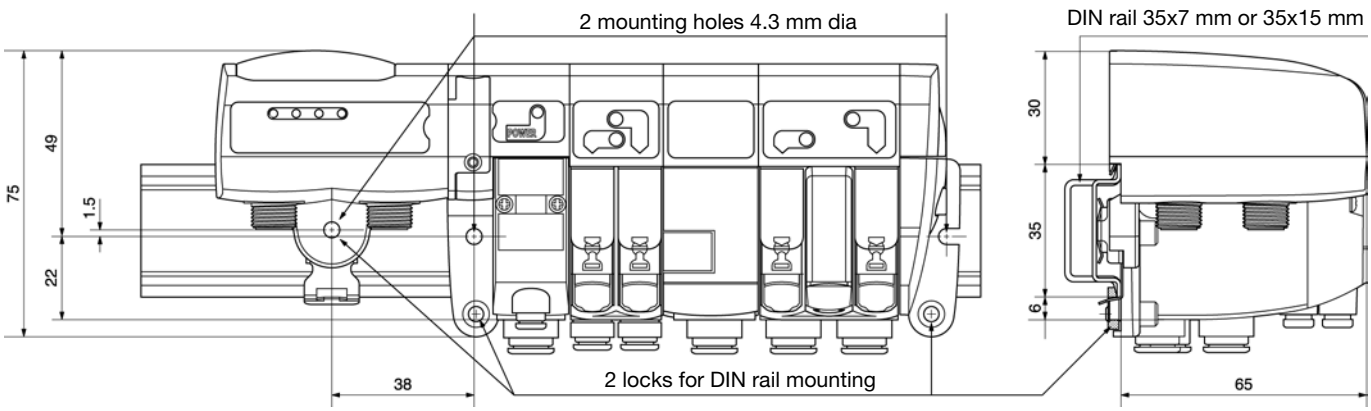

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Island total width depending on valve composition

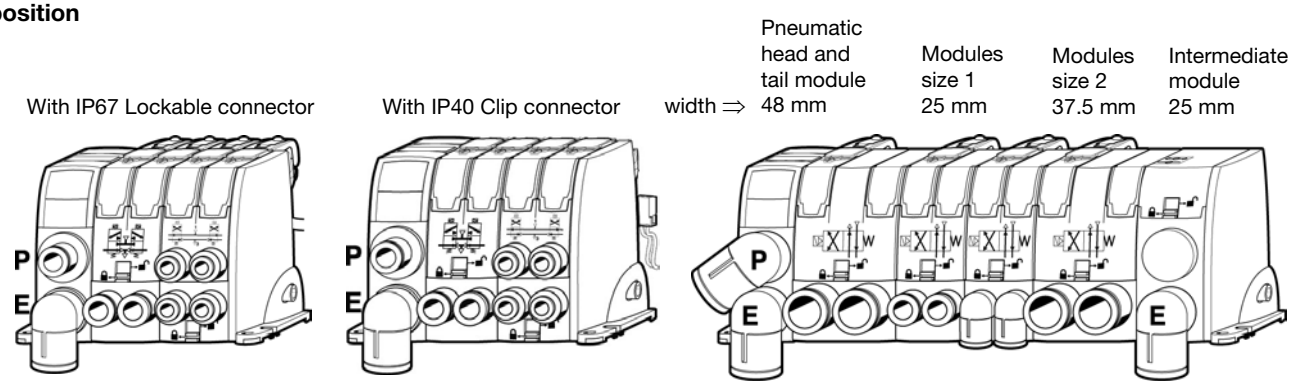


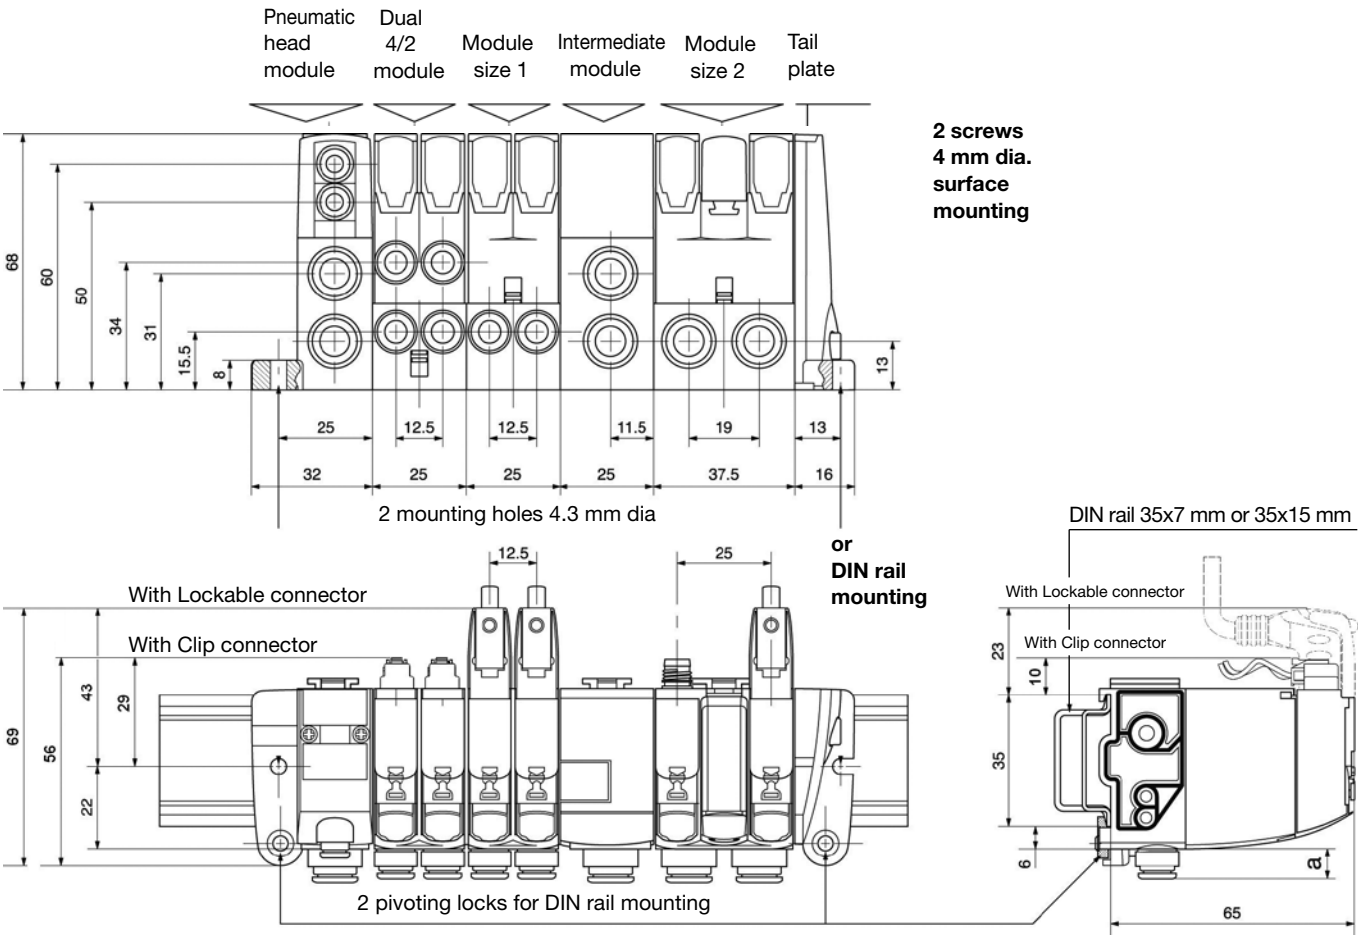

Special case : 4/3 closed centre function within island version:
Add the dimensions of the dual P.O. check valve module plugged into the island. See pages 39 and 40 for dimensions.


Island head and intermediate modules

	a	b	c
6 mm tube OD	8	13	16
8 mm tube OD	9	16	19
10 mm tube OD	13	18	22
12 mm tube OD	13	19	25
muffler		40	



Island valves modules

	OD tube	a	b	c
Size 1 modules	4 mm	8	10	12
	6 mm	8	13	16
Size 2 modules	8 mm	9	16	19
	10 mm	13	18	22




Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Stand-alone valve size 1



surface mounting with screws
4 mm dia. into retractable brackets 3 mm thick

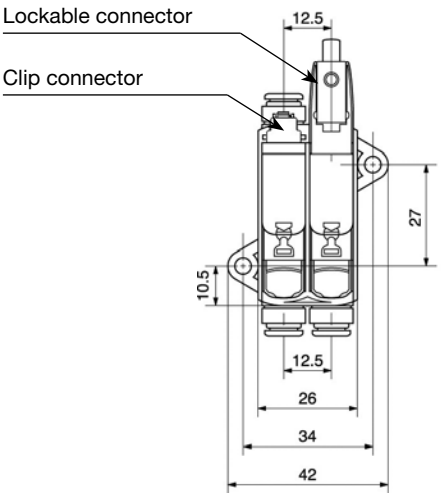


or side mounting with
2 screws 4 mm dia.

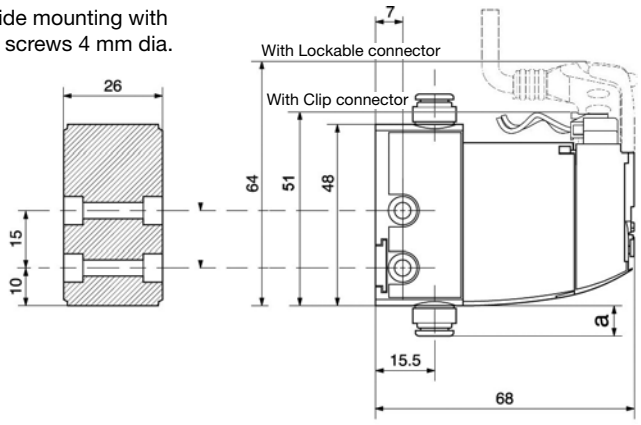


Stand-alone valve size 2



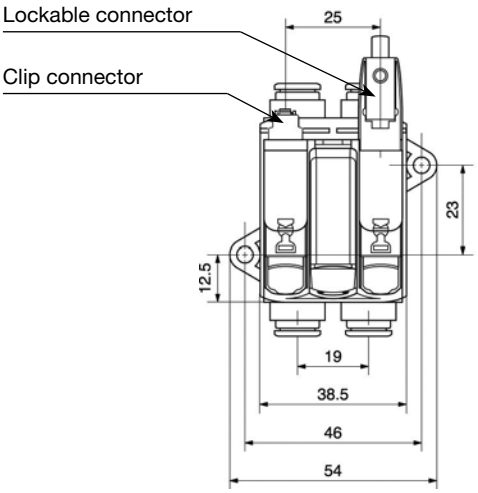


or side mounting with
2 screws 4 mm dia.

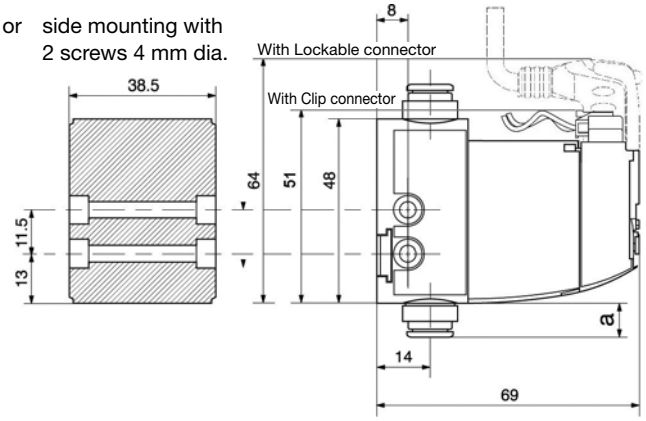

Dimensions and mountings of the stand-alone valves 4/2, double and single 3/2, 4/3 vented centre and 4/3 pressure centre.


Special case : 4/3 closed centre. Add the dual P.O. check valve module that has been plugged in the basic valve. Dimensions are given pages 39 and 40.

		a	b	c
Size 1 modules	4 mm tube OD	8	10	12
	6 mm tube OD	8	13	16
	muffler		31	
Size 2 modules	8 mm tube OD	9	16	19
	10 mm tube OD	13	18	22
	muffler		40	

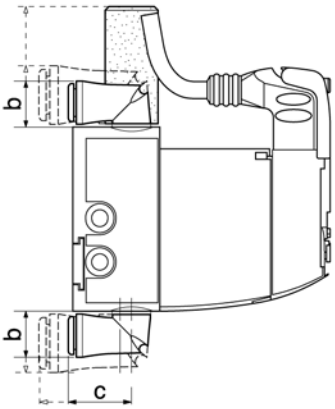


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Reminder: peripheral modules may either be plugged in the valve output ports or mounted in line separate from the valve




peripheral module plugged in a valve or an island

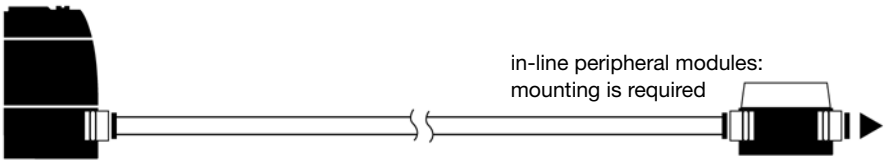


in-line peripheral modules: mounting is required


Dual flow control module size 1








possible mounting with 2 screws 3 mm dia.




Pressure regulation module size 1


mounting with 2 screws 4 mm dia. on retractable brackets

- with gauge






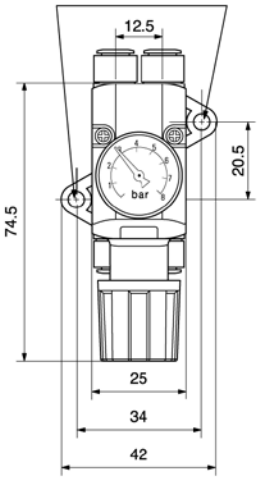


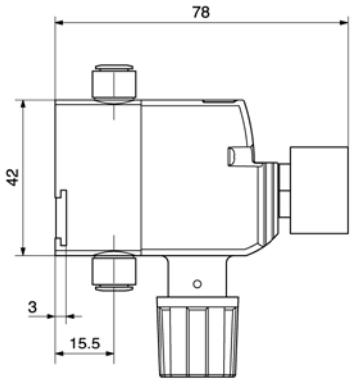

- without gauge









swivel elbow push-in connector 4 mm OD tube


Dual P.O. check valve module size 1





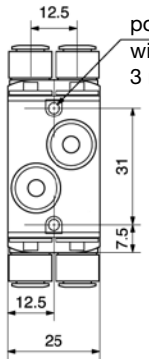


possible mounting with 2 screws 3 mm dia.




Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Dual flow control module size 2






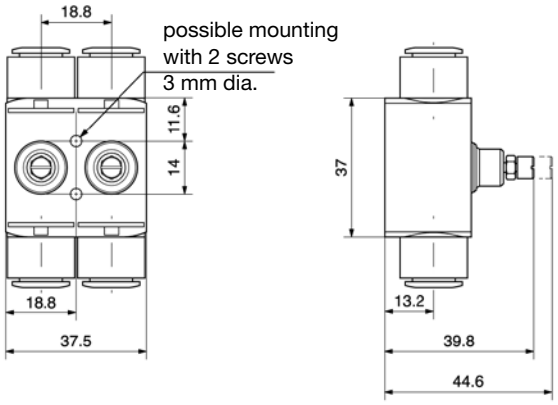


Pressure regulation module size 2


- with gauge






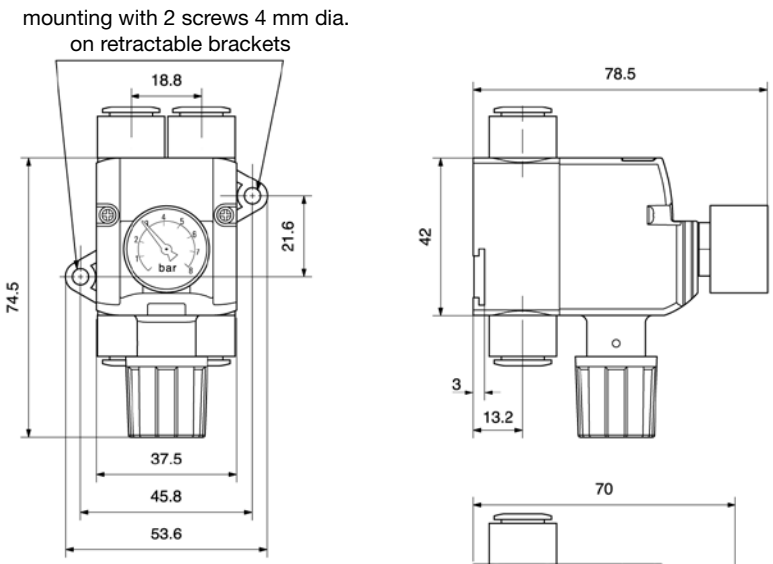

- without gauge









swivel elbow push-in
connector 4 mm OD tube

Dual P.O. check valve module size 2





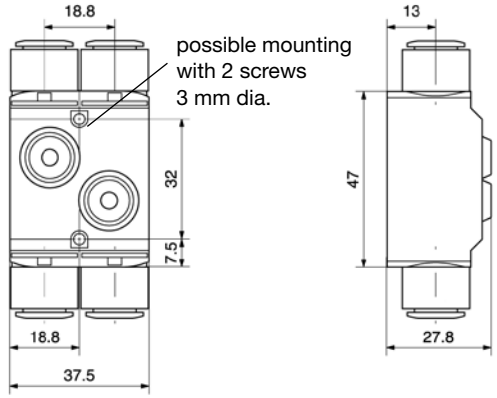


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Vacuum generator module


In-line



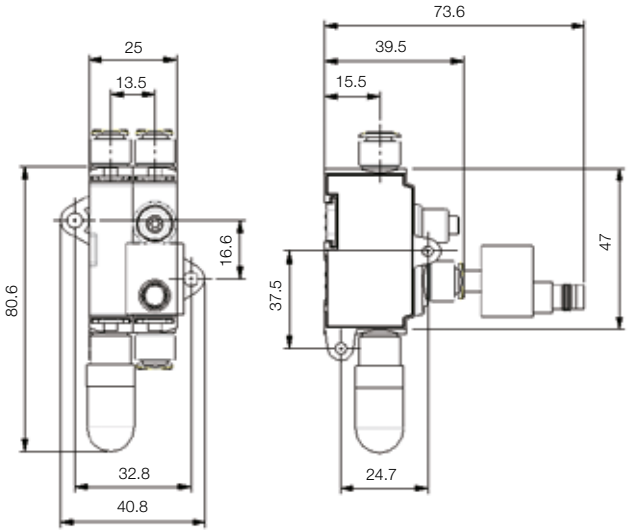

With Moduflex valve




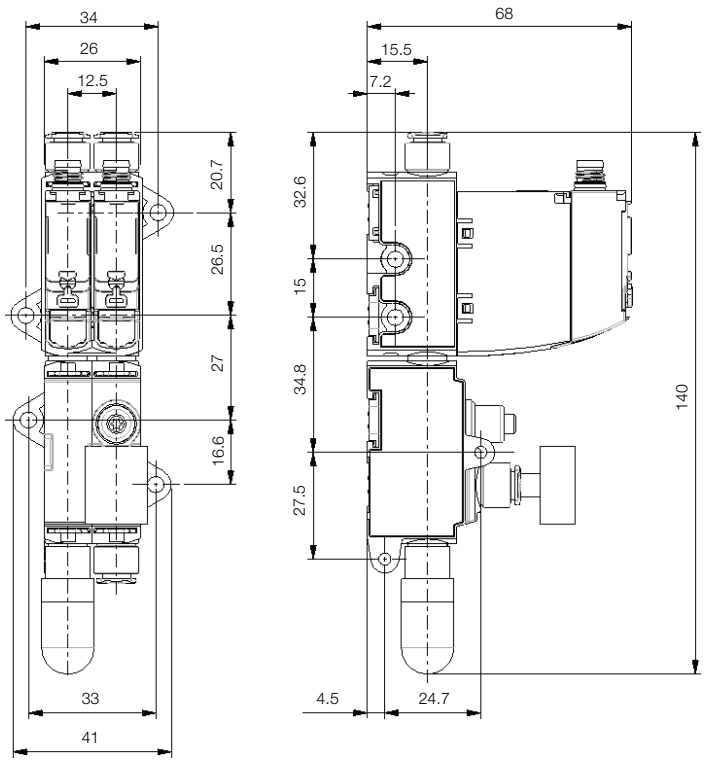

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Recommendations for building machines with imperial OD tubes (US usual standard)

size 1 modules




Moduflex is a global product available in the US with the two standards that are commonly used in this country:
- metric OD tubes with the metric connectors shown in this catalogue,
- imperial OD tubes with specific connectors for the US.

Machine builders exporting to the US may propose to their clients one of the following solutions.

- Machines equipped with Moduflex components connected with metric tubes found in this catalogue. Parker will provide products locally for maintenance.

- Or machines equipped with Moduflex components connected with imperial size OD tubes. In this case, use the following procedure to order Moduflex and to build the machine.


size 2 modules



Imperial OD tube and metric OD tube comparison

metric standard tube OD	imperial US standard tube OD	metric equivalent	Moduflex clip-on connectors
4 mm	5/32"	4 mm	imperial and metric connectors identical
6 mm	1/4"	6,35 mm	specific imperial connector
8 mm	5/16"	8 mm	imperial and metric connectors identical
10 mm	3/8"	9,53 mm	specific imperial connector
12 mm	1/2"	12,7 mm	specific imperial connector

head and intermediate island modules



Moduflex selection for imperial size OD tubes

Such components will easily be obtained with the following procedure:

1 - select the required basic modules (with no connector).

2 - Select from the list below the clip-on connectors for the required imperial OD tubes.

3 - Push-in the connectors into the basic modules ports in order to obtain complete modules.









pneumatic connectors for size 1 modules		Pack Quant.	elbow version Weight (g) per unit	elbow version Order code	straight version Weight (g) per unit	straight version Order code
clip-on tube push-in connector	5/32"= 4 mm OD	10	5	**CMD04-1**	2	**FMD04-1**
	1/4"OD	10	5	**CMD07-1**	3	**FMD07-1**








pneumatic connectors for size 2 modules head and intermediate island modules		Pack Quant.	elbow version Weight (g) per unit	elbow version Order code	straight version Weight (g) per unit	straight version Order code
clip-on tube push-in connector	1/4"OD	10	5	**CMD07-2**	3	**FMD07-2**
	5/16"= 8 mm OD	10	6	**CMD08-2**	4	**FMD08-2**
	3/8"OD	10	7	**CMD09-2**	5	**FMD09-2**
	1/2"OD	10	8	**CMD13-2**	6	**FMD13-2**

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

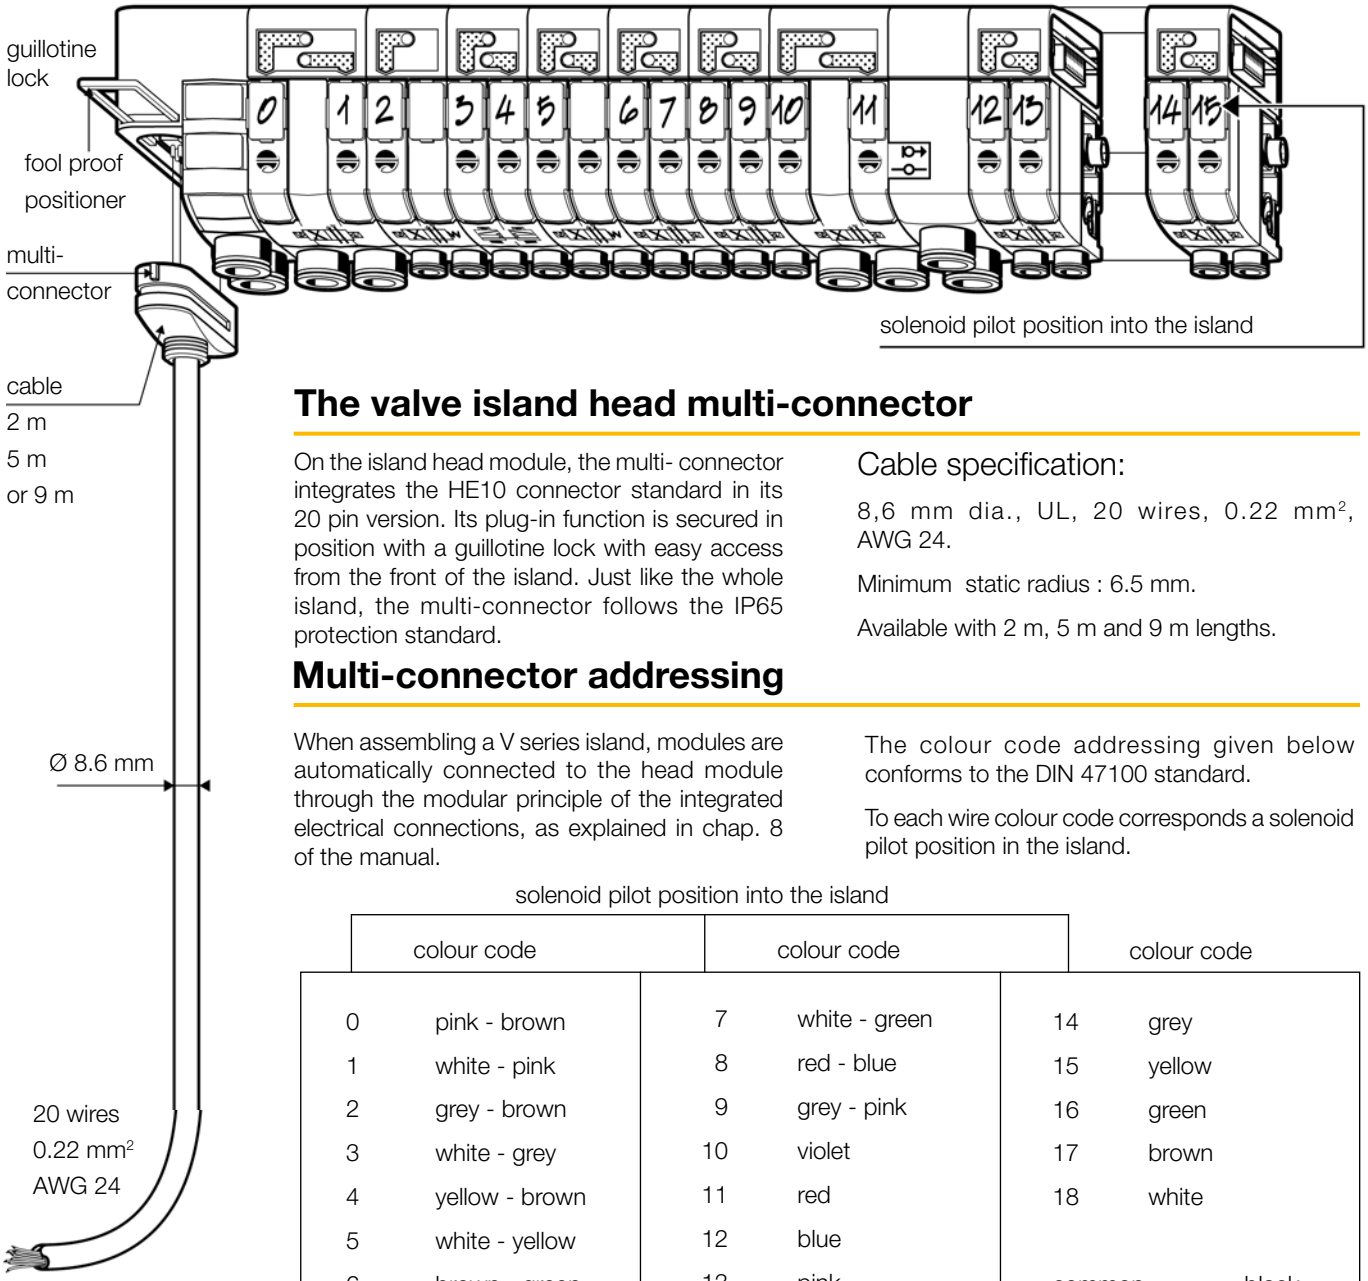

The valve island head multi-connector

On the island head module, the multi- connector integrates the HE10 connector standard in its 20 pin version. Its plug-in function is secured in position with a guillotine lock with easy access from the front of the island. Just like the whole island, the multi-connector follows the IP65 protection standard.

Cable specification:

8,6 mm dia., UL, 20 wires, 0.22 mm², AWG 24.

Minimum static radius : 6.5 mm.

Available with 2 m, 5 m and 9 m lengths.

Multi-connector addressing

When assembling a V series island, modules are automatically connected to the head module through the modular principle of the integrated electrical connections, as explained in chap. 8 of the manual.


The colour code addressing given below conforms to the DIN 47100 standard.


To each wire colour code corresponds a solenoid pilot position in the island.

solenoid pilot position into the island

	colour code		colour code		colour code	
0	pink - brown	7	white - green	14	grey	
1	white - pink	8	red - blue	15	yellow	
2	grey - brown	9	grey - pink	16	green	
3	white - grey	10	violet	17	brown	
4	yellow - brown	11	red	18	white	
5	white - yellow	12	blue			
6	brown - green	13	pink	common:		black

Sub-D 25 addressing



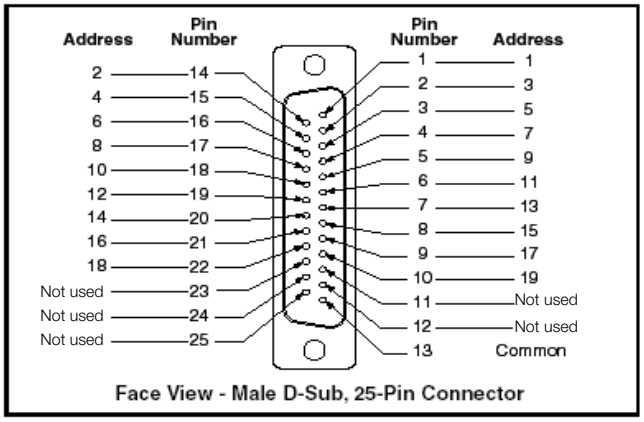


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Bus addressing, first and second node

In this catalogue:

- V series AS-i bus electrical cal head modules: p.18.
- V series AS-i bus dimensions and mounting: p.36.
- Remote short valve islands with AS-i bus: manual chap. 17.

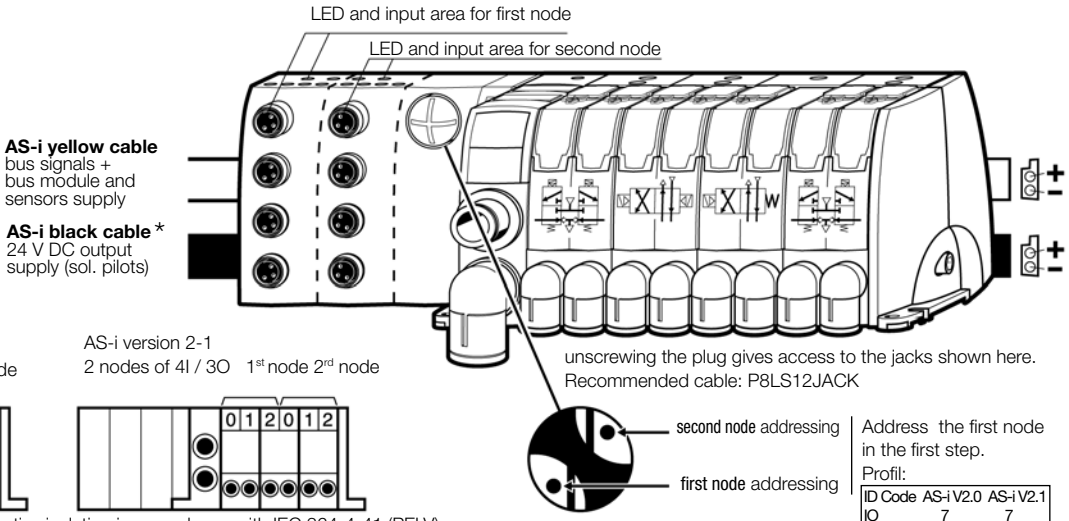

AS-i standard
2 nodes of 4I / 4O 1st node 2rd node




AS-i version 2-1
2 nodes of 4I / 3O 1st node 2rd node

Address the first node in the first step.
Profil:

ID Code	AS-i V2.0	AS-i V2.1
IO	7	7
ID	F	A
ID1	F	7
ID2	F	E

* The extern supply shall have protective isolation in accordance with IEC 364-4-41 (PELV).

Bus diagnostic

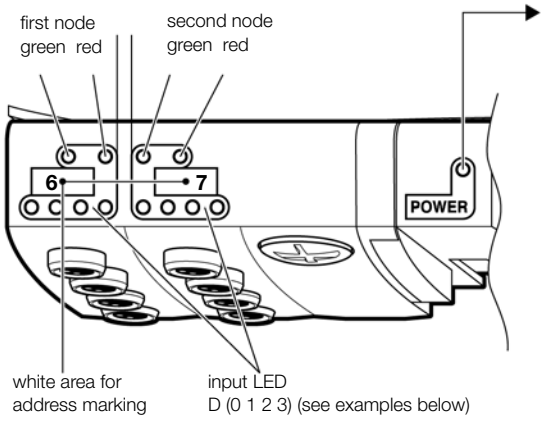

«power» LED state	off	green	red
Power supply	sol. pilot supply	normal operation	solenoid overload

first node LEDs state		second node LEDs state		System condition
green LED	red LED	green LED	red LED	
☀	○	☀	○	Normal operation
○	○	○	○	No module + sensor supply
○	☼	○	☼	Input overload
○	☀	○	☼	No AS-i communication
☼	☀	○	☼	Address first node = 0
☀	○	☼	☀	Address second node = 0


☀ ON ○ OFF ☼ BLINK

Input wiring

Physical input (Ⅰ, Ⅱ, Ⅲ, Ⅳ) = D (0 1 2 3) first node, physical input (Ⅴ, Ⅵ, Ⅶ, Ⅷ) = D (0 1 2 3) second node
Examples : physical input Ⅲ = logical input 6.2, physical input Ⅴ = logical input 7.0


M8 female connectors

pin out
1 - 24 V DC / AS-i
3 - 0 V DC / AS-i
4 - input

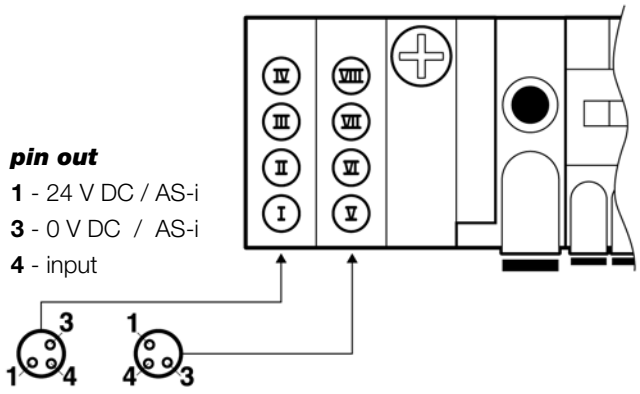

M12 female connectors

pin out
1 - 24 V DC / AS-i
2 - second input
3 - 0 V DC / AS-i
4 - first input
5 - *not connected*

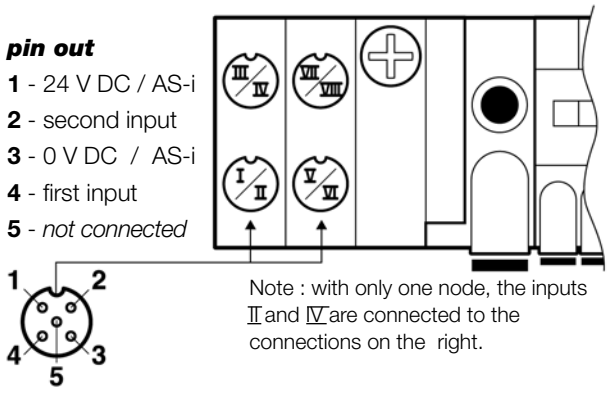

Note : with only one node, the inputs Ⅱ and Ⅳ are connected to the connections on the right.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Power supply common to all types of device bus modules

In this catalogue:


- V series device bus electrical head modules: p.19.
- V series device bus dimensions and mounting: p.36.
- Remote short valve islands with device bus: manual chap. 18.

1 - Connection

All bus modules have a M12 male connector for power supply.

M12 supply connector (as seen on module)

M12
type A




1 - 24 V DC module (not connected for DeviceNet and CANopen)
2 - *not connected*
3 - 0 V DC module and solenoid
4 - 24 V DC solenoid
5 - protected earth (PE)

2 - Diagnostic

The two «power» indicators shown on the illustrations provide visual indication of the module and solenoid supply status.


Note: output power to the solenoids can be wired to allow the user to turn the outputs off while allowing the communications to remain on.

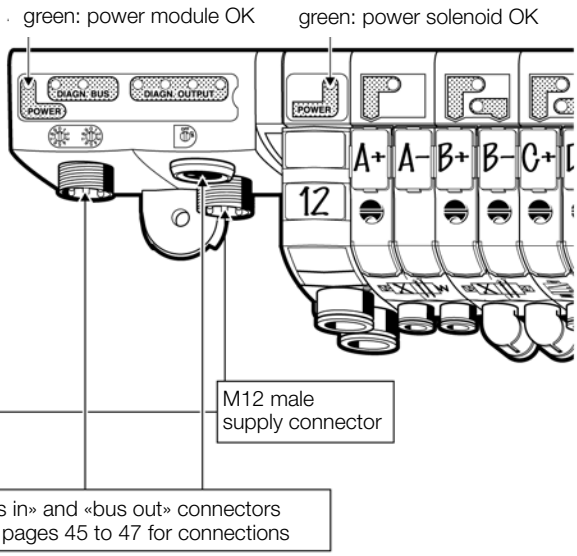

Bus cable protection shield connections for Profibus DP, DeviceNet and CANopen

To provide protection against electro-magnetic interferences, the bus cables are shielded. The module «bus in» and «bus out» connectors each includes a pin for connecting the cable shield (see next pages). It is safer to connect the shield to the protected earth (PE) at both ends of the bus.
Within the bus module, provision is made to enable shield continuity by connection between the two shield pins.

The protected earth have to be connected localy on each module for CE accordance.

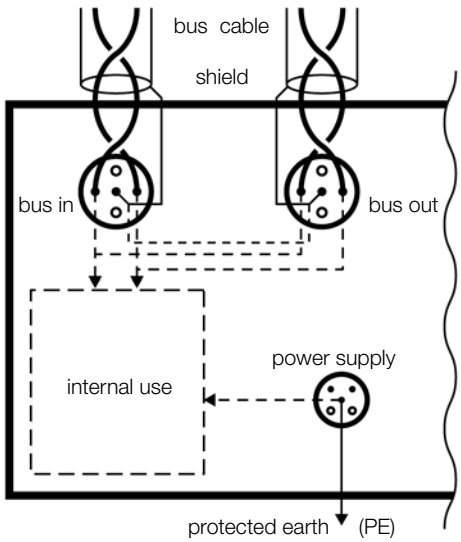

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

PROFI BUS

Bus cable connections


Profibus DP standard male and female type B M12 connectors.
Use of prefabricated cables available from your usual electrical supplier is recommended.
Line termination, P8BPA00MB, is necessary on the «bus out» connector of the last station.

Addressing

Use the .GSD file on Moduflex web site:
www.parker.com/pneu/moduflex
The coding wheels enable configuration of the decimal address.

Diagnostic

Diagnostic according to the module dialogue shown on the illustration.

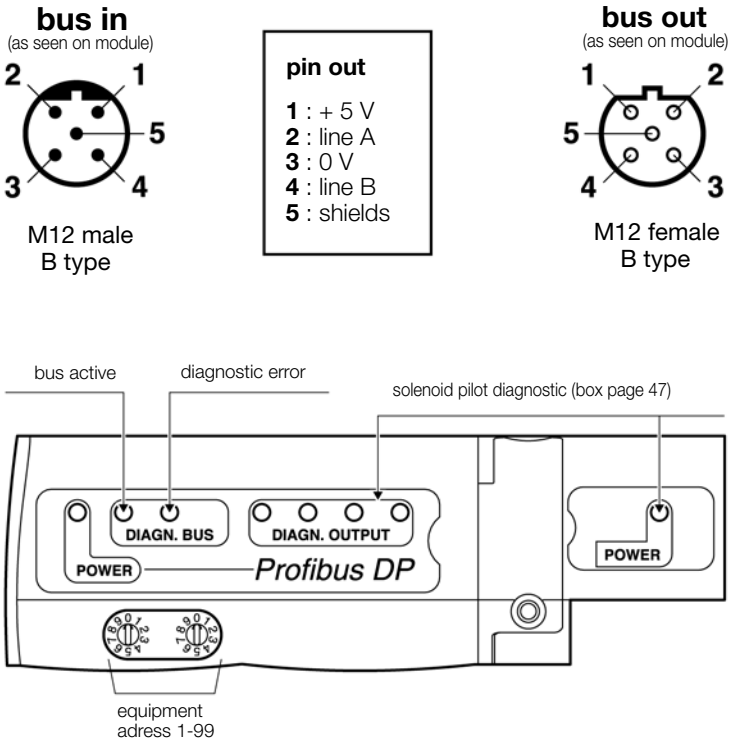

DeviceNet™

Bus cable connections


DeviceNet standard male and female type A M12 connectors.
The supply for the module is supplied from the V+ and V- (24 V DC) of «bus in» connector.
Use of prefabricated cables available from your usual electrical supplier is recommended.
Line termination, P8BPA00MA, is necessary on the «bus out» connector of the last station.

Addressing

Use the .EDS file on Moduflex web site:
www.parker.com/pneu/moduflex
The coding wheels enable configuration of the decimal address.

Diagnostic

Diagnostic according to the module dialogue shown on the illustration.

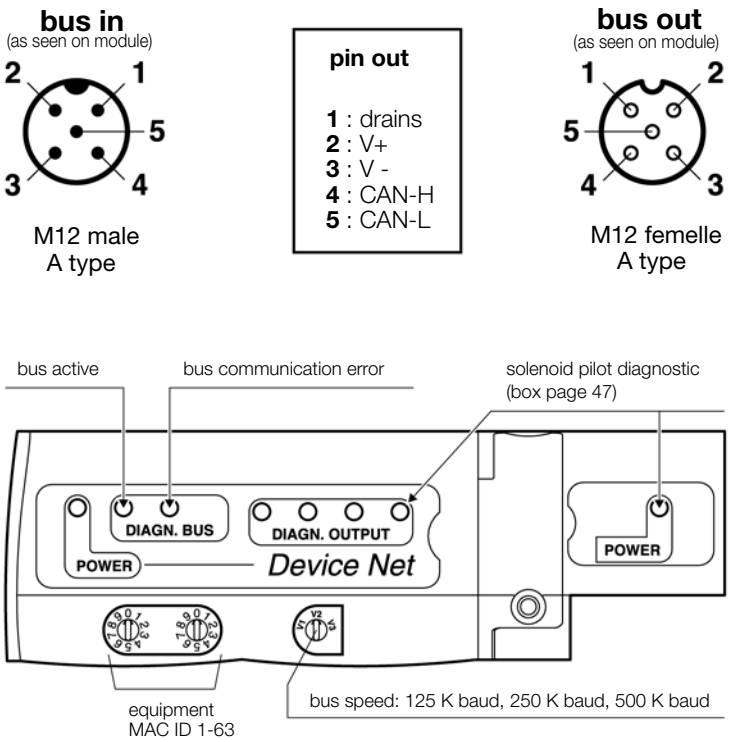


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

CANopen


Bus cable connections

CANopen standard male and female type A M12 connectors.
The supply for the module is supplied from the V+ and V- (24 V DC) of «bus in» connector.
Use of prefabricated cables available from your usual electrical supplier is recommended.
Line termination, P8BPA00MA, is necessary on the «bus out» connector of the last station.

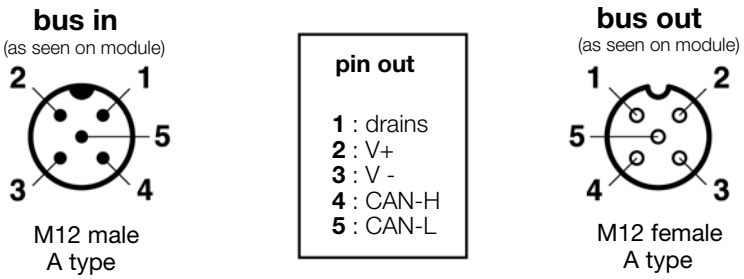

Addressing

Use the .EDS file on Moduflex web site:
www.parker.com/pneu/moduflex
The coding wheels enable configuration of the decimal address.

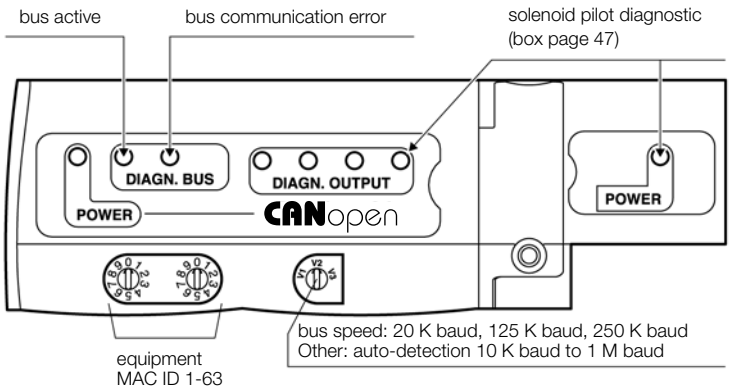

Diagnostic

Diagnostic according to the module dialogue shown on the illustration.

Compatibility

Telemecanique

Integration of P2M2 head modules in SRB Advantys

The P2M2HBVC11600 CANopen head modules are integrated in the inputs/outputs Telemecanique Advantys STB whatever bus choosen for the installation.


7 types of communication bus Advantys STB are available (Ethernet, CAN Open, FIP I/O, Profibus DP, DeviceNet, InterbusS, Modbus+).

These head modules P2M2 are integrated in the Advantys STB SPU 1xxxx catalogue software. Just use "drag and drop" to use the application.

It is possible to connect up to 12 head modules P2M2 on the same island Advantys STB.

Addressing head modules P2M2 is automatically managed by the Advantys STB island.

The P2M2 head module diagnostic will be included into the Advantys STB island diagnostic.

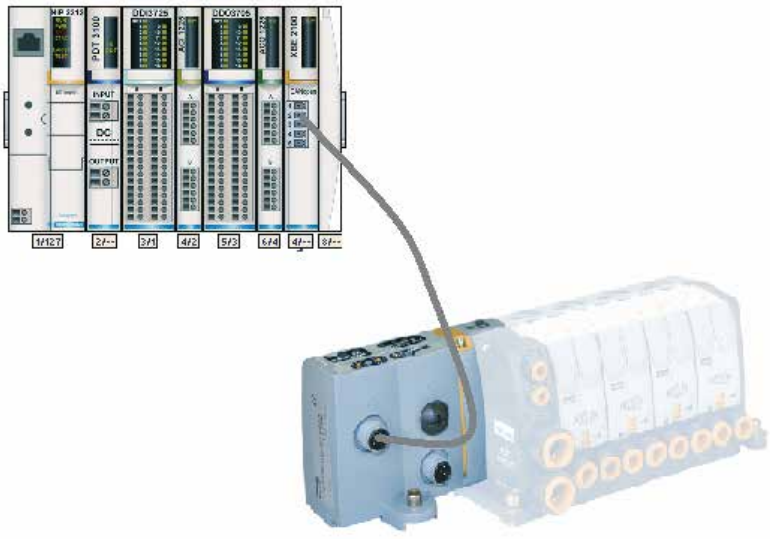

Parker Moduflex valve system p2M2HBCVC11600: 16 outputs


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

INTERBUS-S

Bus cable connections

The M23 connectors conform to «Interbus remote bus».

Use of prefabricated cables available from your electrical usual supplier is recommended.

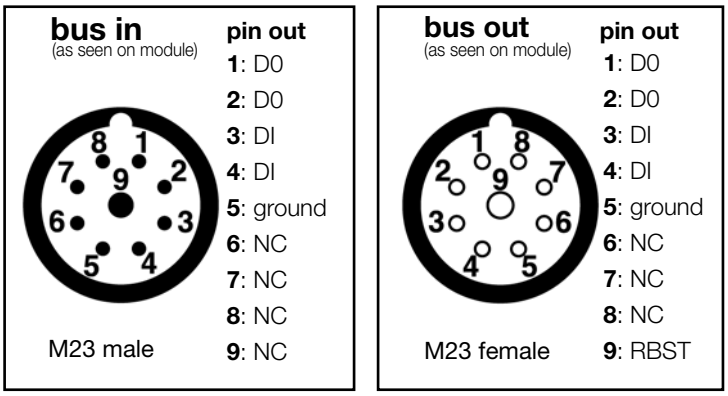

Note: for more details please consult «Interbus remote bus» documentation

Automatic Addressing


InterBus-S is self addressing. Thus it does not need any software or hardware configuration.

Manual Addressing

InterBus-S network can also be manually configured using:
- ID code: 03 (hexadecimal)
- Data length: 2 bytes


Diagnostic

Diagnostic according to the module dialogue shown on the illustration.
This diagnostic conforms to the InterBus-S standard.

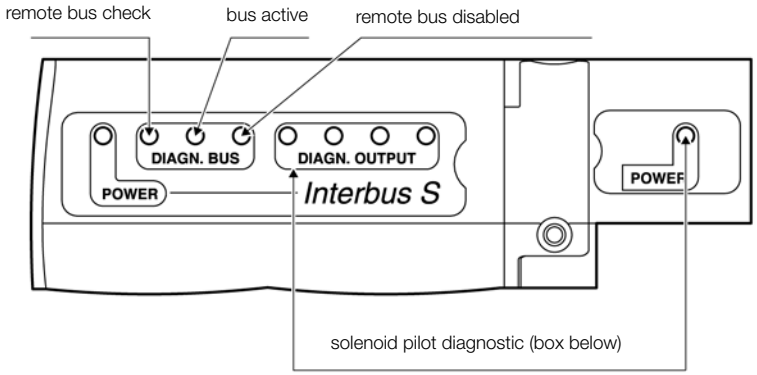

Solenoid pilot diagnostic common to all device bus modules

Red LEDs detecting solenoid valve short-circuits

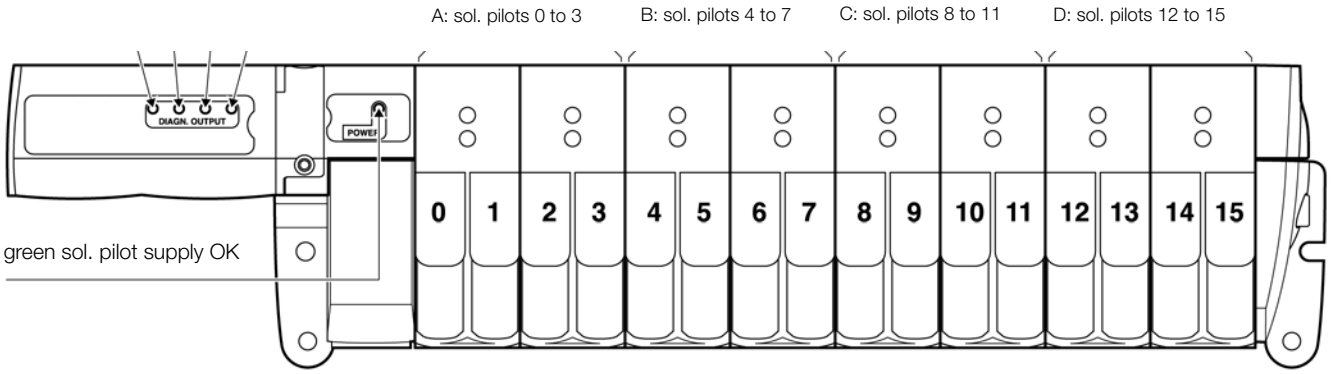

Inside the bus module, solenoid valve control is protected against short-circuits, with the following visual indication provided:

- The solenoid pilot power supply indicator, green when supply is OK.
- The red LEDs detecting solenoid valve short-circuits with code shown above.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Manual

The previous sections explain in detail the features and functions of a specific valve line: Moduflex.

More generally, modern pneumatic valve generations open up new possibilities for electro-pneumatic automation.

Valves are at the centre of automation. The progress in valve design facilitates each step: design, installation, machine commissioning, machine maintenance. This results in a more efficient solution for each application.

The following manual explains the evolution of valve design and defines the principles of more simple and more efficient automation practice.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

the manual of modular pneumatic valve islands

Electro-pneumatic automation techniques have progressed through use of PLC's, field buses, cylinder integrated sensors and modular pneumatic valve islands. Pneumatic valves are now designed into compact islands that are easily configured for specific installation requirements. They are at the centre of both the automation network and the man-machine dialogue.

Defining the best valve island assembly for each application is now the key answer to performance. This manual presents the numerous possibilities that are offered by the latest modular pneumatic valve islands.

chapter		page
1	Valve islands change automation practice	M3
2	History: from stand-alone to pneumatic valve islands	M5
3	Basic valve choice for a given island	M7
4	A valve island for each application	M9
5	The internal flexibility of valve islands	M11
6	The peripheral flexibility of valve islands	M13
7	Modules with individual electrical connectors	M15
8	Islands with integrated electrical connections	M17
9	Man-machine dialogue through valve islands	M19
10	Islands with flow and pressure controls	M21
11	Islands with 3 position valve applications	M23
12	Valve islands exhaust back pressure control	M25
13	Valve islands internal/external pilot supply and exhaust	M27
14	Valve islands for vacuum applications	M29
15	Valve islands and emergency machine positioning	M31
16	Valve islands connected to IP 20 input/output modules	M33
17	Remote short valve islands with AS-i bus	M35
18	Valve islands with device bus connections	M37

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

1 Valve islands change automation practice


Automation practice is in continual evolution. The latest pneumatic valve island generation offers advantages at several stages: design, installation, machine commissioning and machine maintenance.

A Design

New compact modular pneumatic valve islands offer numerous possibilities for automation design.

Depending on the machine complexity and the environment, the designer will choose either to centralise or to decentralise the pneumatic valves.


Central valve island in a cabinet

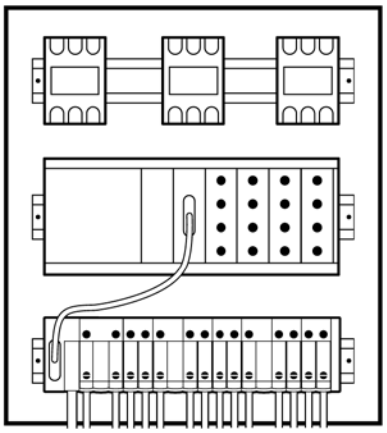


control cabinet with both, electric and pneumatic components

to cylinders

Remote short islands located close to the cylinder

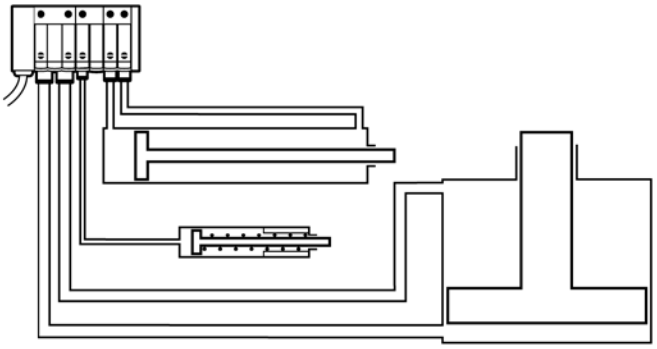

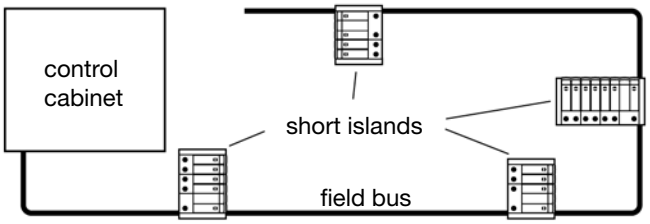


B Installation

The configuration and the installation of a valve island for a given machine has been simplified with the latest generation of products.

This manual explains each step, from assembling the valve island to plug-in.

Valve island plug-in connection to PLC

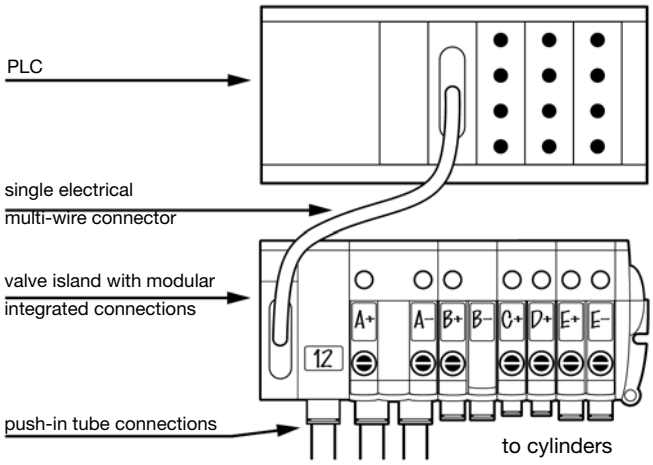


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

C Machine commissioning

Automation is a step by step procedure. Electro-pneumatic machines generally have a final commissioning procedure stage to ensure they fully achieve their task.


This manual explains how valve islands of the latest generation can easily be configured and re-configured until all cylinders on the machine achieve the required performance.

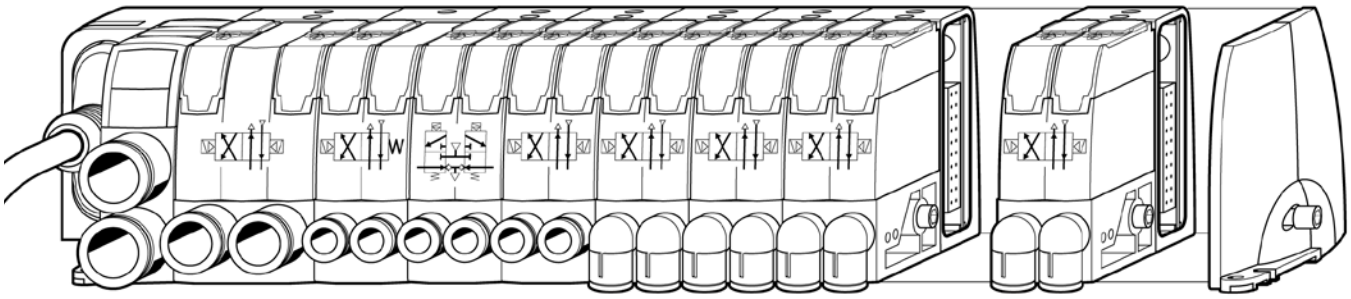

D Machine maintenance


Man-machine dialogue has been much improved with the latest pneumatic valve islands. They now provide a key function for machine troubleshooting.

This manual shows how each island module, with its identification marking, LED indicators and manual overrides, improves and simplifies the troubleshooting of a machine.

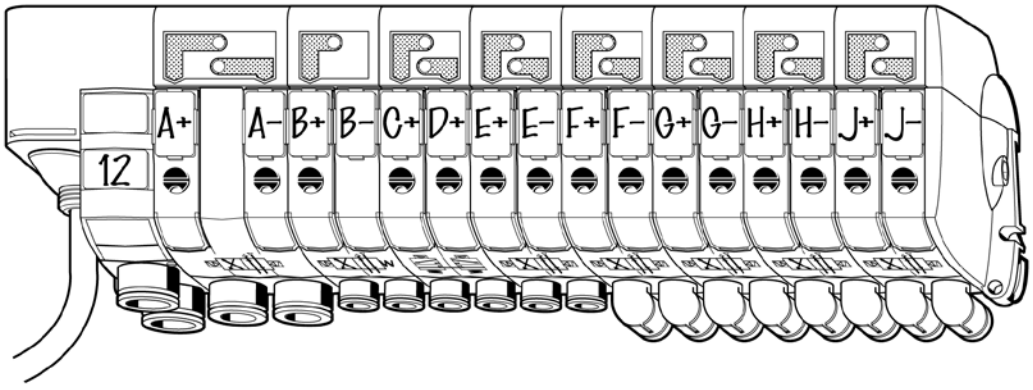


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2 History: from stand-alone to pneumatic valve islands

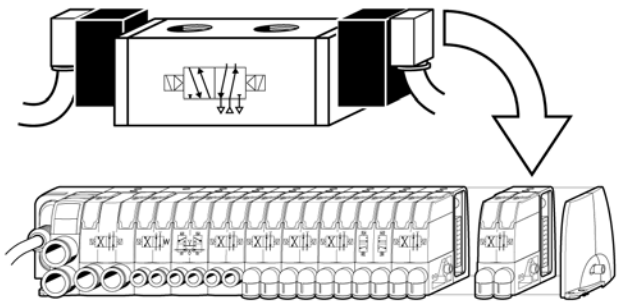


To answer the needs of more and more complex and compact machines, pneumatic automation has continuously progressed:
- in order to be compatible with PLC's, it became low power electrically controlled;
- what were originally stand-alone valves are now manifolded together into compact, flexible valve islands that include a complete range of functions.

A The stand-alone valves

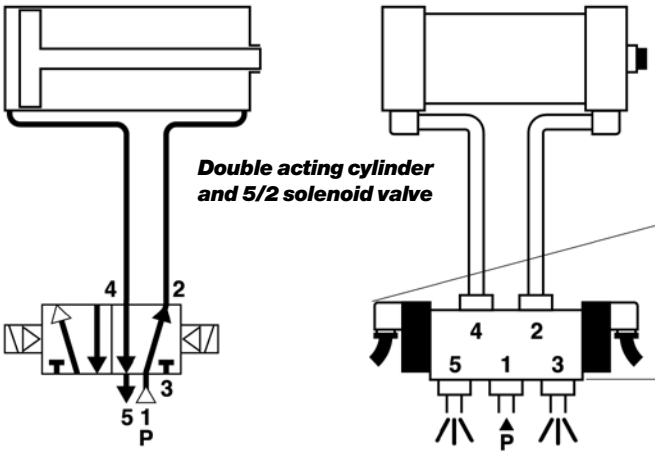

The sketches represent the basic sub-assembly of a double acting cylinder that is controlled by a 4 way valve.
The «5/2» specification indicates the number of ports (5) and the number of spool positions (2).
The spool valve design requires an exhaust port at each end (5 ports for a 4 way valve).

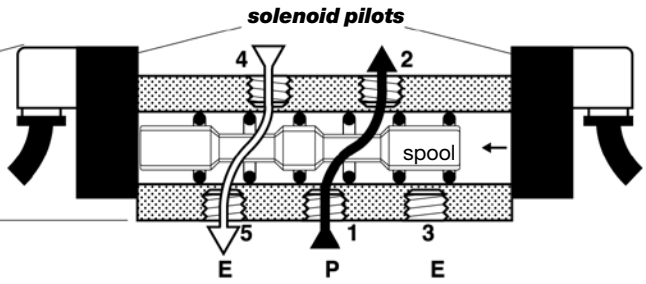



B The valve manifolds


As early as the 1980's, large numbers of stand-alone valves on each machine made the installation and piping work long and costly. As with hydraulic valves, designers developed manifolded pneumatic valves, thus reducing the number of tube connections to be made.

The sketches show a typical 5/2 valve manifold incorporating 3 common channels: common pressure supply 1 and exhaust collection channels 3 and 5.
Depending on the valve and manifold design, output ports to cylinders can either be on top of the valve or in the bottom or on the side of the manifold.

Installation and piping time was tremendously reduced. This manifold design led the way for more than 10 years.

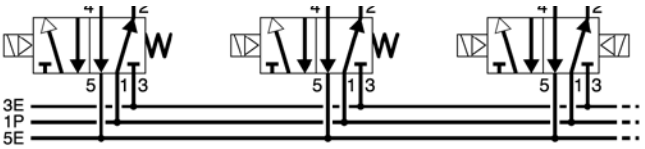

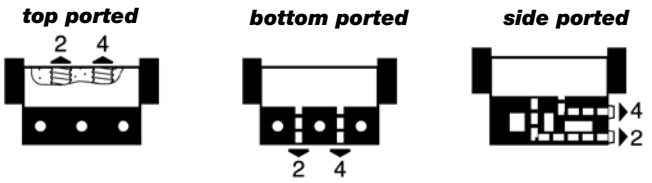

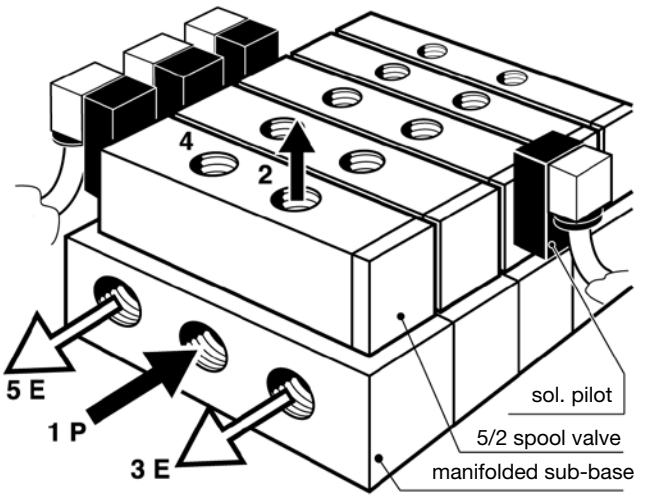


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


C The 3 channel compact islands

As early as the 1990's, with the number of pneumatic valves still increasing on the machines, valve manifolds appeared big and bulky. On the same 3 channel principle, compact islands were developed and took over, with also a wider choice of options.

It included:
– pilot exhaust collection for cleaner environment,
– 5/2 valves (4 ways) as well as 3/2 valves (3 ways) as shown on sketches below.


5/2 module (4 way) for double acting cylinder






spool valve design

double 3/2 module (3 way) for single acting cylinder







spool valve design

D The 2 channel compact islands

Today, additional needs must be satisfied : more flexible islands, different valve sizes in the same island etc. With appropriate valve designs (see sketches below), islands with only 2 common channels represent a new generation still more compact, with a complete solution for all needs. This allows for new and efficient automation pratice.


4/2 module (4 way) for double acting cylinder

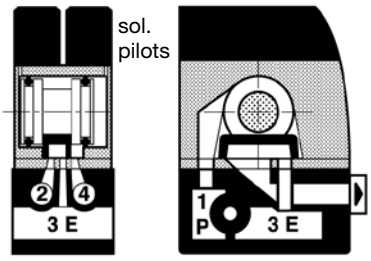





slide valve design

double 3/2 module (3 way) for single acting cylinder






piston + spool design

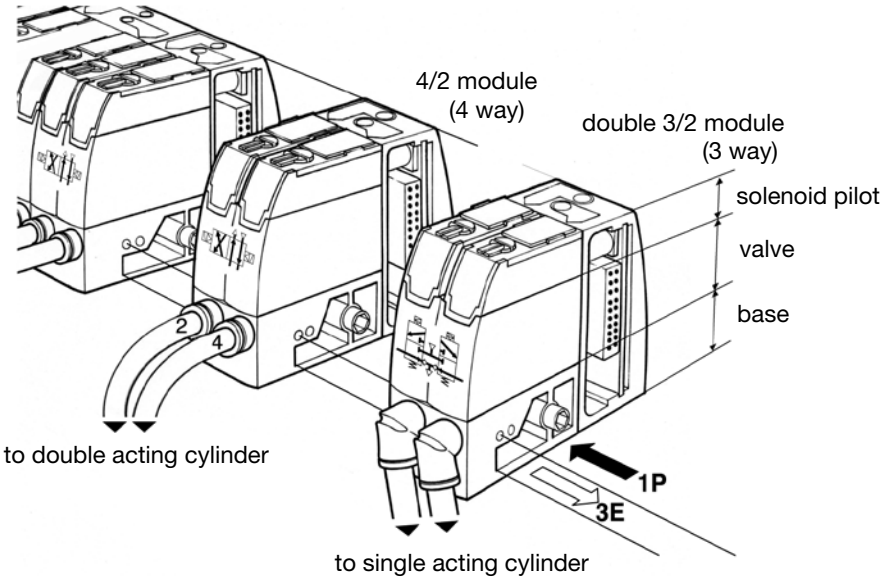

This 2 channel compact island generation allows considerable progress in automation practice. This manual's target is to describe the progress made.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3 Basic valve choice for a given island

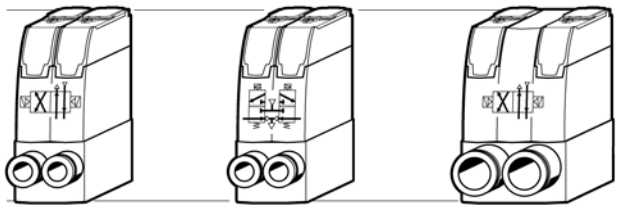


Compact pneumatic valve ranges have been developed and proven. They can now be adapted to all practical situations:

- *different island sizes: long islands, short remote islands near the cylinders, stand-alone valves etc.*
- *in a given island, different flows and different valve functions.*

The right valve module for each cylinder

A- Valve flow passage

One island may control both large and small cylinders. This is why valve modules of different flow capabilities can be combined into the same island.

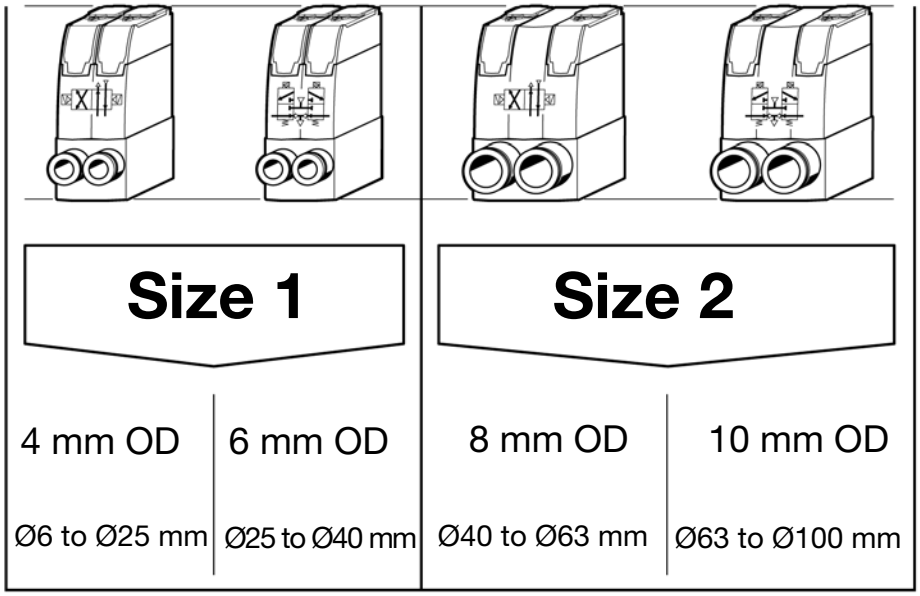


B- Valve function

One island may control single or double acting cylinders, requiring 3/2 or 4/2 valves.

Control may require single or double solenoid pilot valves, or both.

All these valve functions can be combined into the same island together with 3 position valve functions (chapter 11) and peripheral flow control and pressure regulation modules (chapter 10).

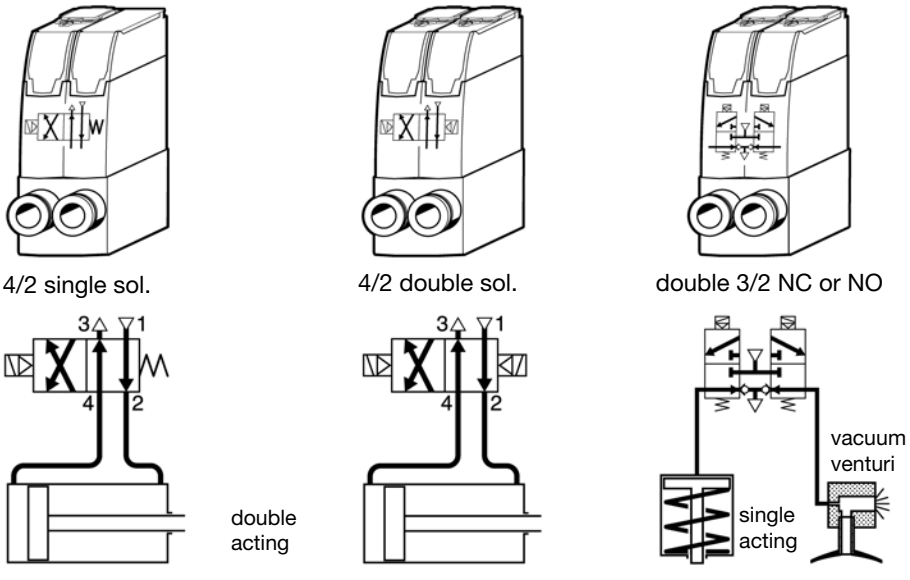


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Pneumatic valves and islands for all applications


The flow and function variations that have been explained on the previous page are completed with the following additional ones.

A- Stand-alone modules


For isolated cylinders on a machine, it is preferable to locate the valve close by. Thus a stand-alone module is required. Response time and air consumption are then reduced to a minimum.




4/2 size 1




4/2 size 2



double 3/2 size 1





double 3/2 size 2



B - Modules for islands with individual electrical connectors


For small groups of cylinders, short valve islands can be used.
In this case, it is practical to use individual electrically connected valves.

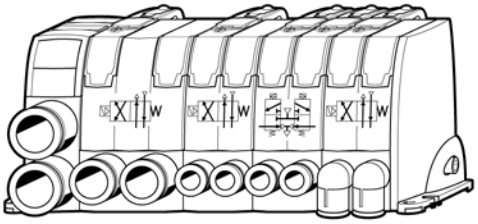




C - Modules for islands with integrated connections


When the number of valves is larger, modular islands are easily assembled with their integrated electrical connection series.
Such islands are then connected to the control PLC with an electric multi-connector that plugs into the island head module or with a field bus connection.

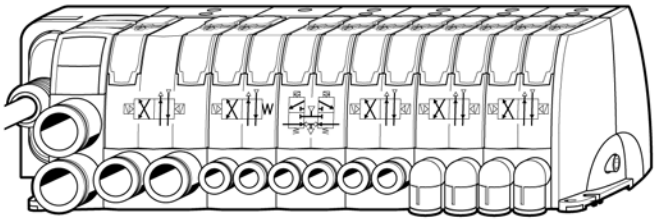



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


4 A valve island for each application

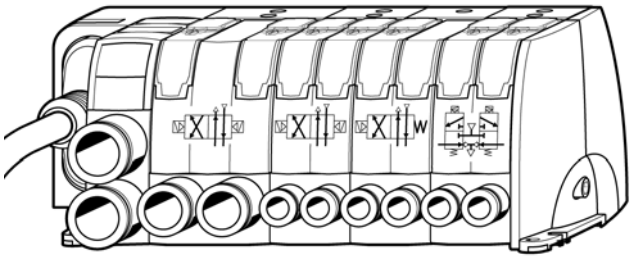


Valve modules selected from the previous pages are assembled into a specific island for each application.

The valve island features push-in connections that clip into the valve modules. For each application, the most effective configuration may be obtained.


Tube connections to cylinders

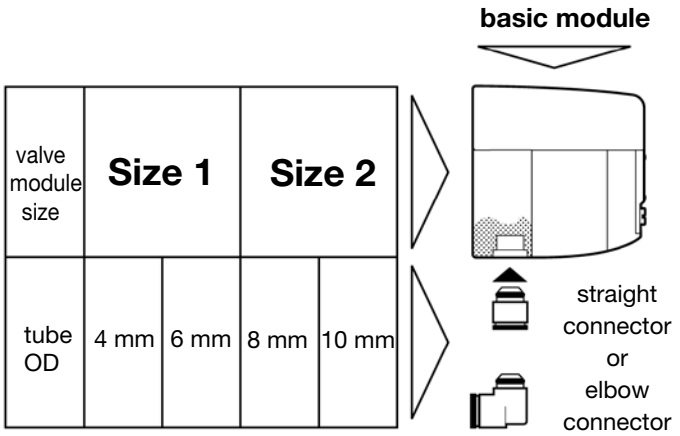

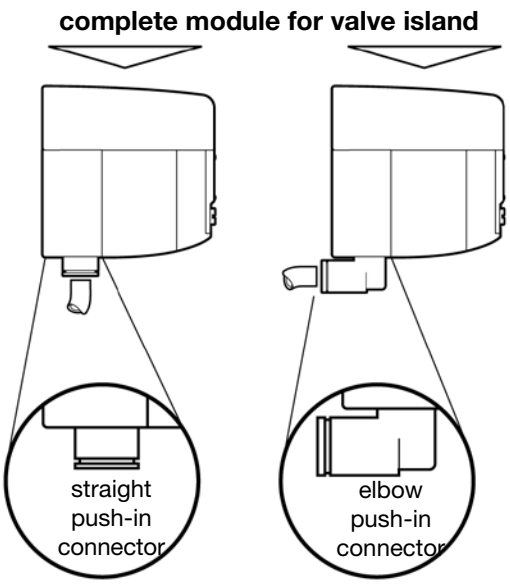


Each valve module is equiped with push-in tube connectors of the required size and configuration. All connectors simply clip into the *basic modules* to obtain the required *complete modules* for valve islands.

Valve island assembly and installation

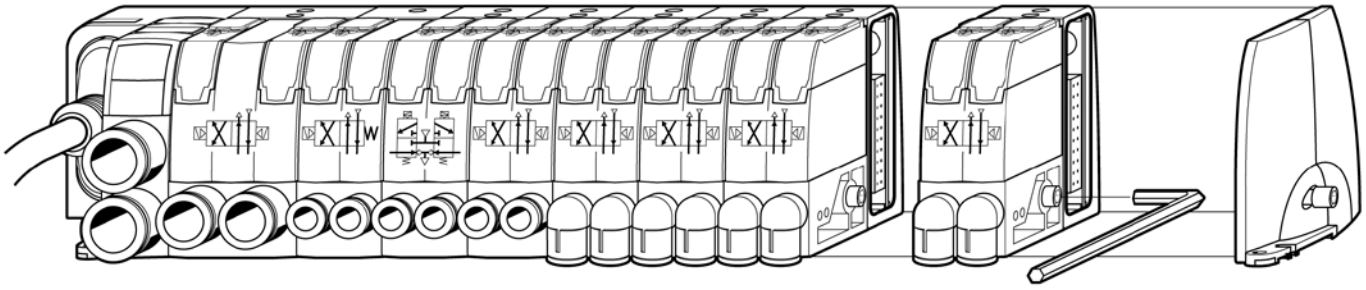


To assemble the valve island, modules are fastened side by side at their base. The resulting island is compact and rigid, and can be mounted directly onto the machine or inside an enclosure.

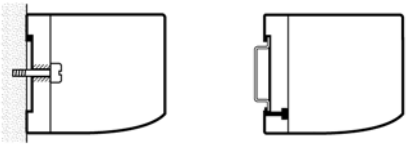


screw mounting and DIN rail mounting

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Valve island pressure supply and exhaust collection

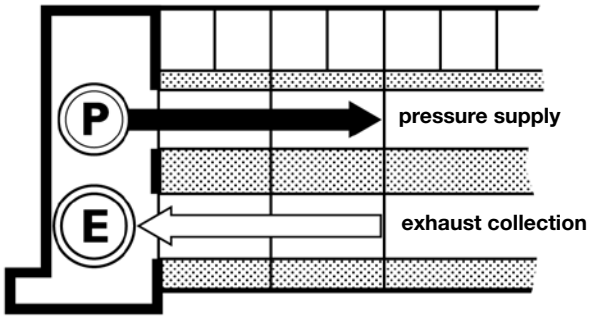

head module

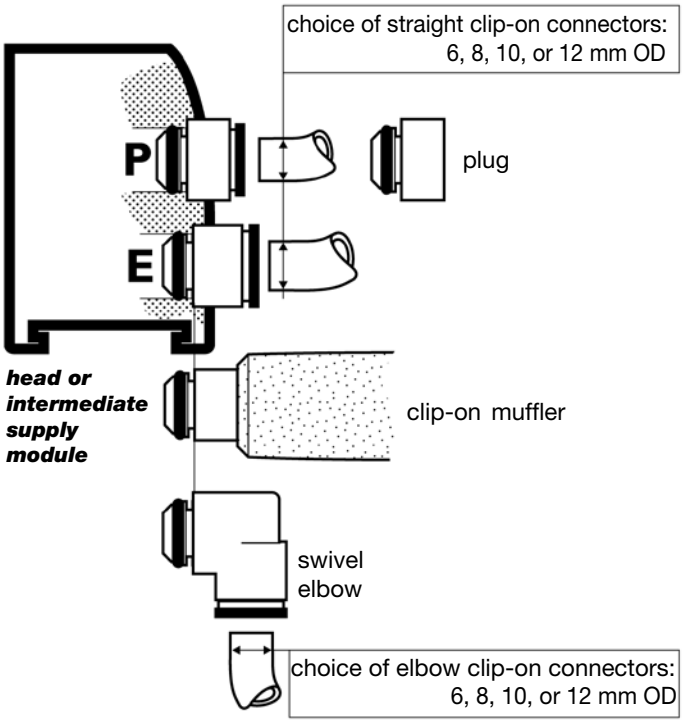

Pressure supply and exhaust connections are provided on the head module, at the left end of the island.

Push-in tube connectors are simply clipped into the head module and are available in various sizes as either straight or elbow connections to suit a particular application.

On some large and/or noisy machines, the exhaust may not need to be piped away. Therefore, in such cases, a clip-on muffler will provide the best options for flow and noise reduction.


Valve island configurations to meet flow requirements


Depending on the island size (short or long) and on the size of its valves, the flow requirements can be very different. Each island is easily configured to conform to the flow requirements, and can be easily modified if the cylinder speeds are insufficient.

● Short islands

With only size 1 valves, a short island requires limited flow supply: the tail module is a simple plate. When a size 2 valve is integrated into the island, its flow needs drive the island supply and exhaust choices.


In all cases, the exhaust section area must be bigger than the supply section area.

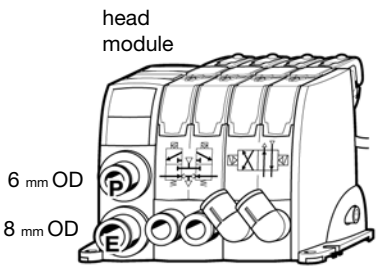

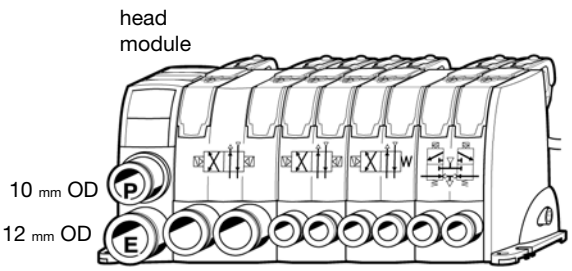


● Long islands

The double exhaust connector E (Ø 12 mm) with maximum flow is generally required, while only one pressure supply connector P is necessary.

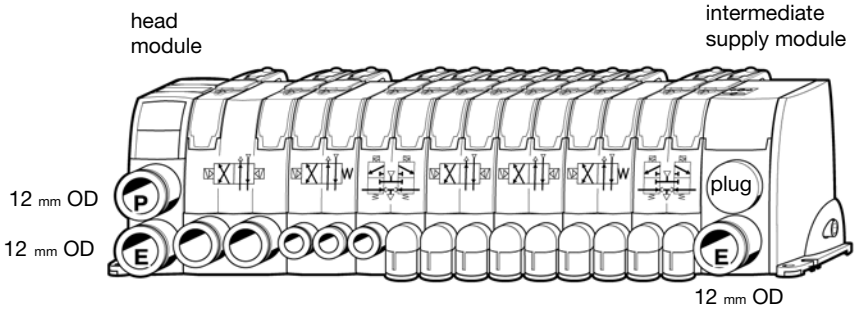

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


5 The internal f exibility of valve islands

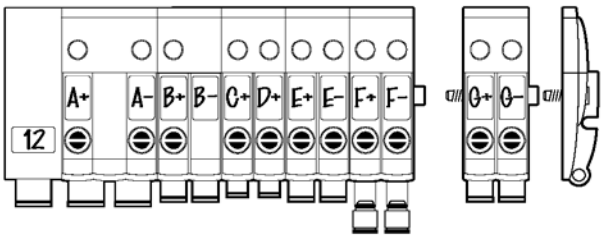

In order to simplify machine commissioning procedures, valve islands must be flexible.

Totally modular, they can easily be expanded or reconfigured until they precisely answer the application needs: different cylinders, different flows to achieve the required cylinder speeds, different sections in a given island etc.


Island composition adaptations

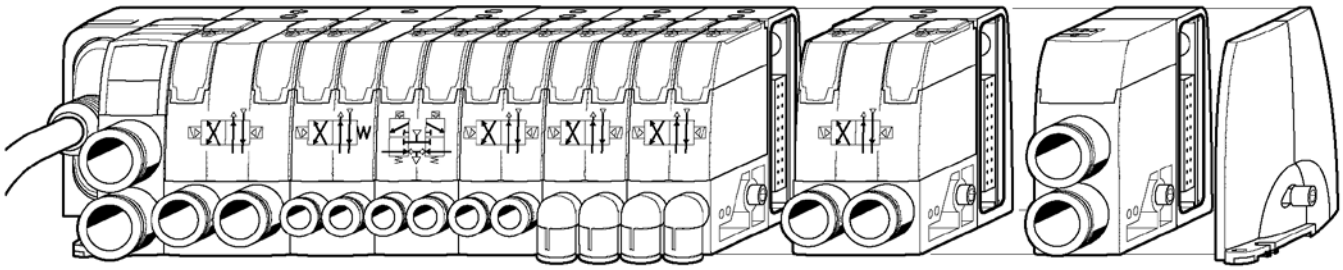

The initial island may be modified until it achieves all requirements. As an example, on the island shown above, the last valve module is being changed for a higher flow and in consequence, the pressure supply and exhaust collection are being doubled.

1 - This size 2 valve module will provide the required speed for the cylinder.


2 - This additional intermediate module will increase the island flow supply and exhaust connection to the required levels.

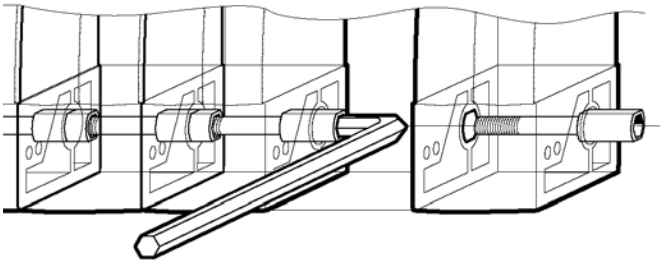

Easy island assembly and disassembly

When assembling a valve island, the screw head must be orientated (see drawing) so that the following module will prevent the screw from turning.
This facilitates the disassembly of the island in the correct order.

Tube connection variations

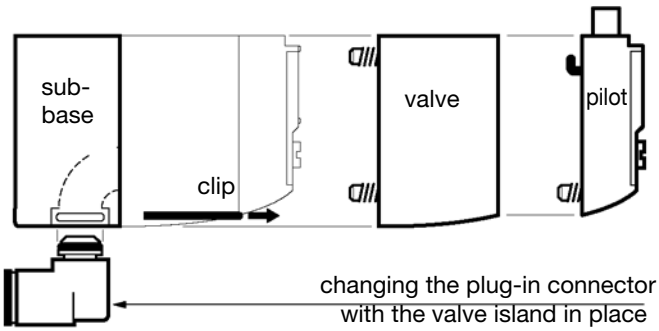


For each application, the valve flow passage and the tube size are independently selected.
If however a cylinder does not reach the required speed, the flexible valve island design allows a change in tube size with the valve island in place. Simply remove the solenoid pilot and the valve, pull out the clip, and replace the tube connector with a larger one.


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Island division into different pressure sections


Valve islands may require two or more different pressure sections. The universal intermediate supply module is available to provide any required combination, as shown by the following examples.

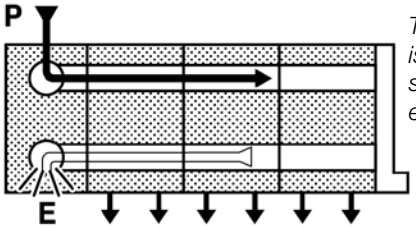


Typical short island with single supply and exhaust collection.

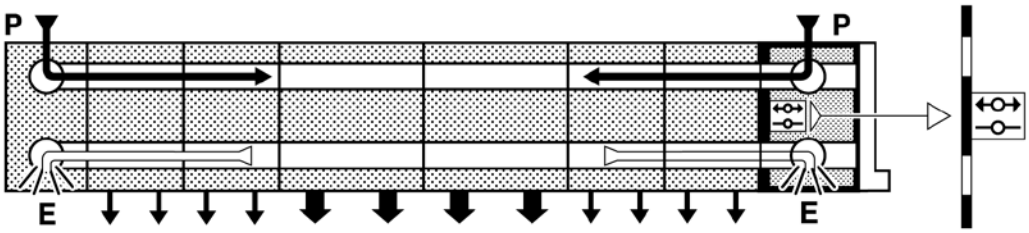


Typical long island with double supply and exhaust collection.
P and E channels are both open.

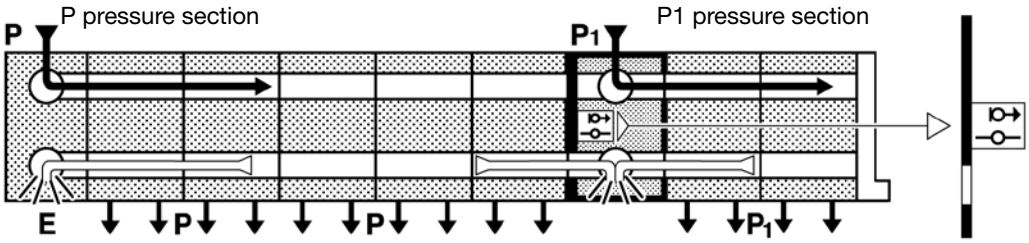

Two section island for different pressures P and P1.
P channel is blocked.
E channel is open.

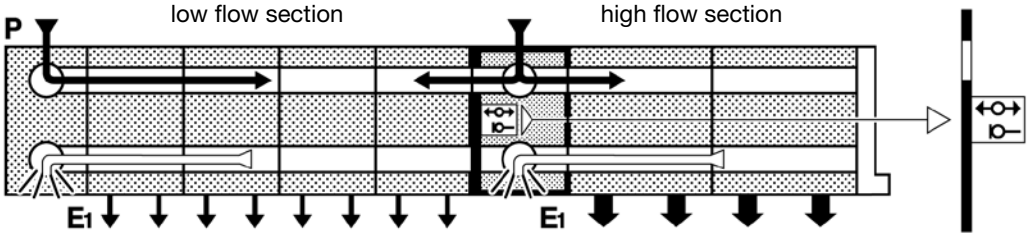


Two section island for exhaust separation of hight flow valves.
P channel is open.
E channel is blocked.

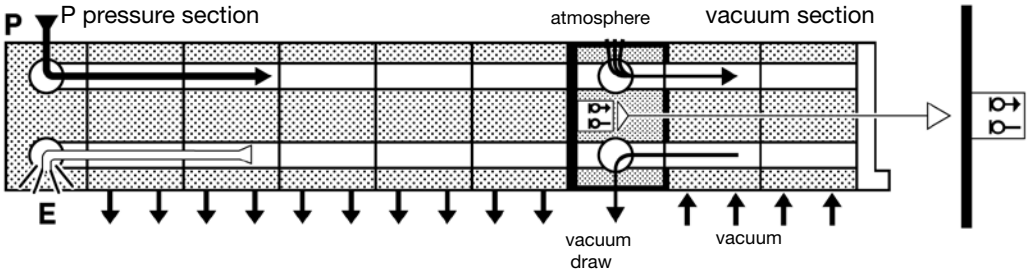


Two section island :
- one section with P pressure .
- one section with vacuum.
P and E channels are both blocked.

The universal intermediate supply module is supplied with four configuration plates that achieve two functions:
- block P or E channel, or none, or both;
- present a simple diagram on the island front to indicate the internal configuration.

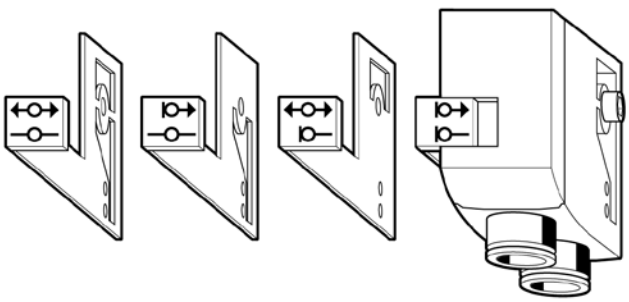

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

6 The peripheral f exibility of valve islands

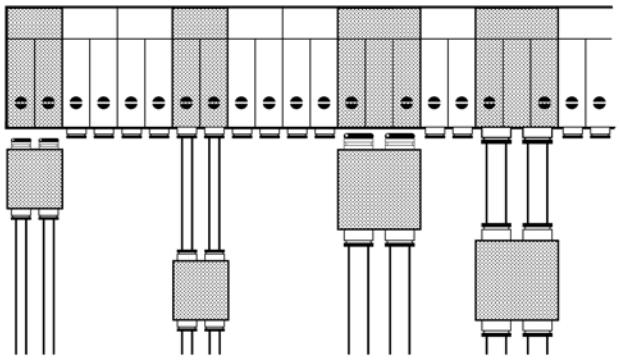


Peripheral control modules add to the valve island flexibility.
These modules answer the complementary needs of the cylinders: flow controls, pressure regulation or positioning.
They may be plugged-in directly to the valve island or installed in-line closer to the cylinder.

Valve islands output functions

A- Dual flow control module

This dual flow control module is suitable for adjusting cylinder speeds by:
- controlling exhaust flows from a double acting cylinder;
- controlling supply flow to a single acting cylinder.


Chap. 10 gives full details.

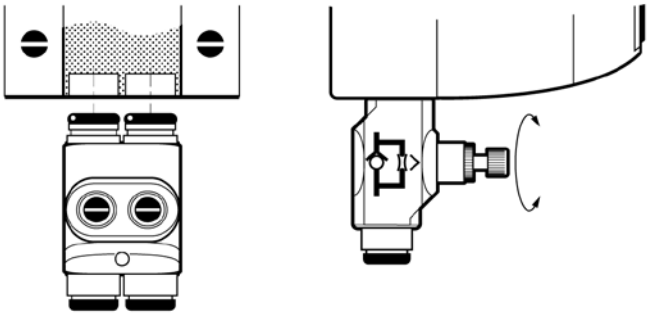

B- Pressure regulation module

Adjusting the thrust developed by a cylinder is often necessary. This pressure regulation module enables adjustment of the P_1 pressure required for a given cylinder, and to read it on the attached pressure gauge.


Chap. 10 gives full details.

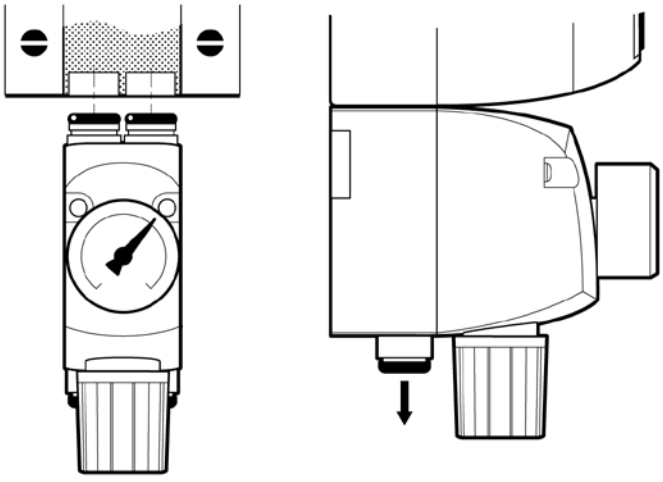

C- Dual pilot operated check module

With two internally piloted check valves, this module will block both flows and stop cylinder movement as soon as the valve's outputs are both exhausted.

Chap. 11 gives full details.

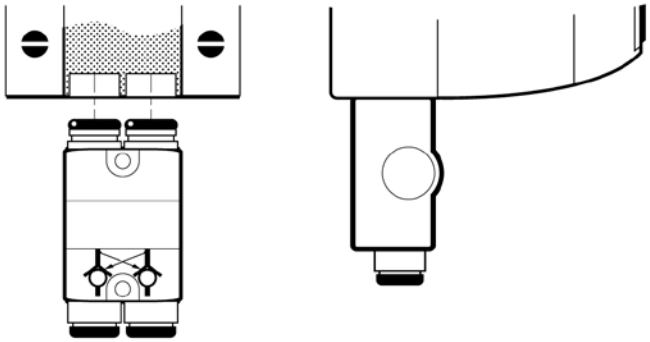


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Peripheral flexibility with control modules

Sizes and flows


Corresponding to the two valve sizes, peripheral control modules are available in 2 sizes:
- size 1,
- size 2.

All cylinders can thus be accomodated, from 6 mm to 100 mm in bore size.

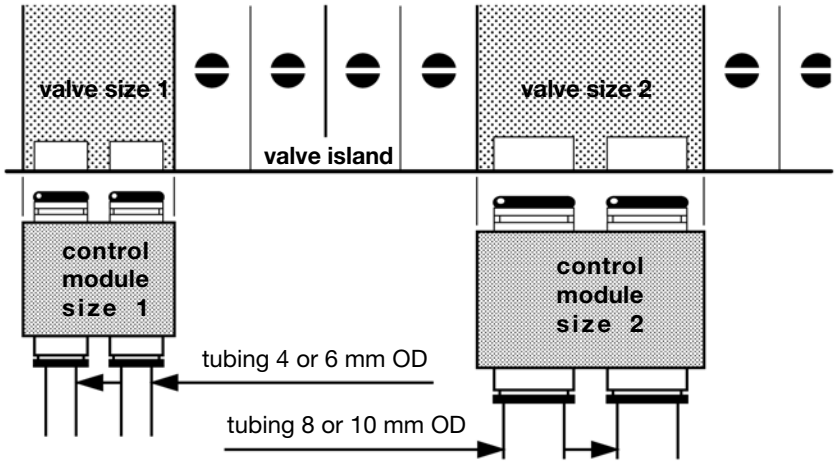


Different installations

In order to accommodate machine design, and depending on cylinder requirements, the peripheral modules may be plugged into the island or installed in-line, between the valve island and the cylinder.

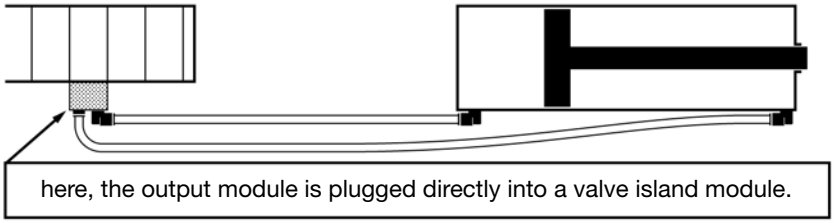


Flow controls and dual P.O. check valve modules are more efficient when close to the cylinder, while the location of a pressure regulation module makes no difference.

The control modules enable flexibility in designing machines as well as improving their performance during machine commissioning.

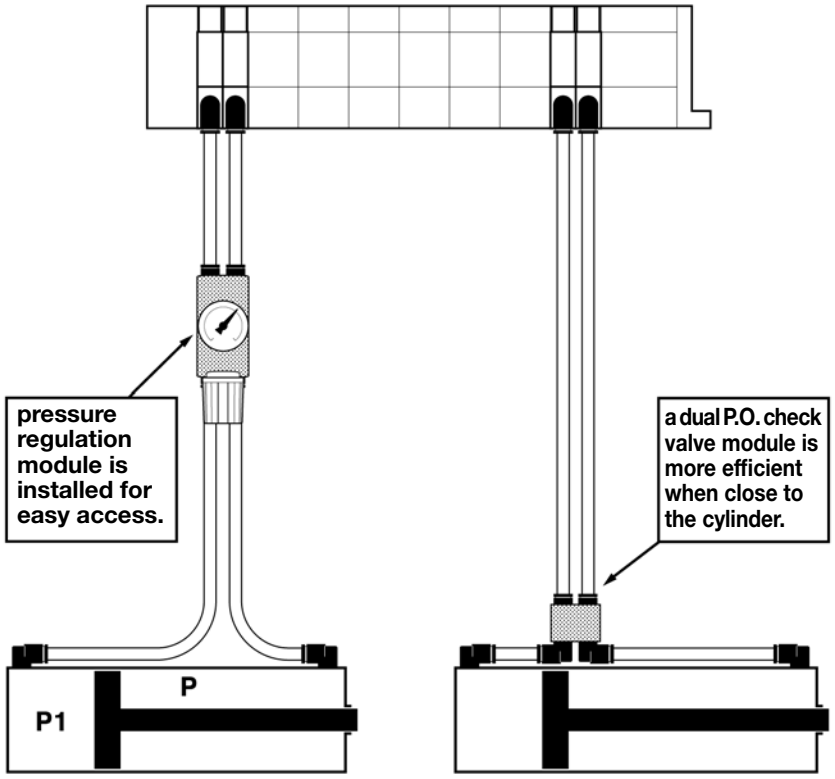

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

7 Modules with individual electrical connectors

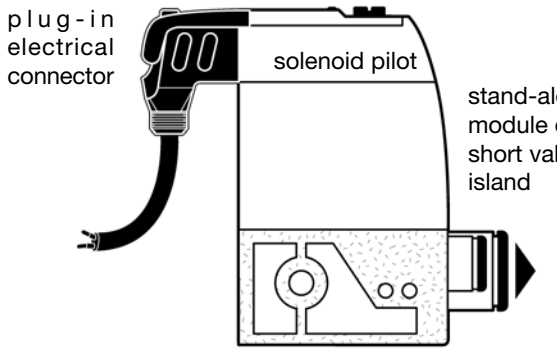


For stand-alone modules, or for short valve islands, individual electrical connectors are generally appropriate.

These plug-in connectors are dust and waterproof (IP 67), and include the LED indicator and the voltage surge suppressor.


The plug-in dust and waterproof connector


This electric connector plugs onto the solenoid pilot standard M8 male thread. It features a LED indicator and a voltage surge supressor with a cable for a polarity insensitive connection.

All stand alone modules incorporate solenoid pilots with individual «plug-in» connectors. With short valve islands, the individual connector is still preferred. However, for longer island, integrated electrical connections become more viable (see next chapter).

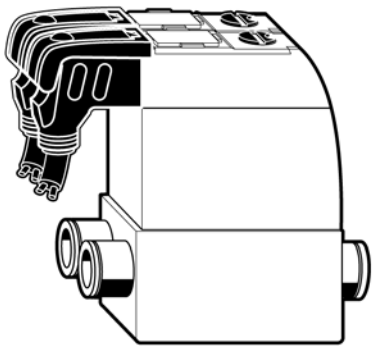


plug-in connector arrangement onto stand-alone modules or short valve island

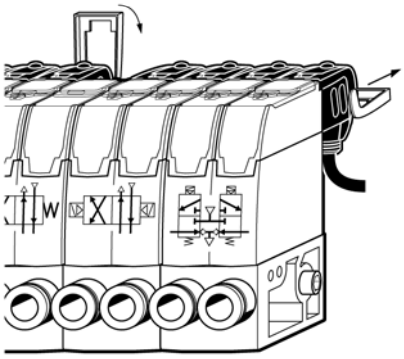

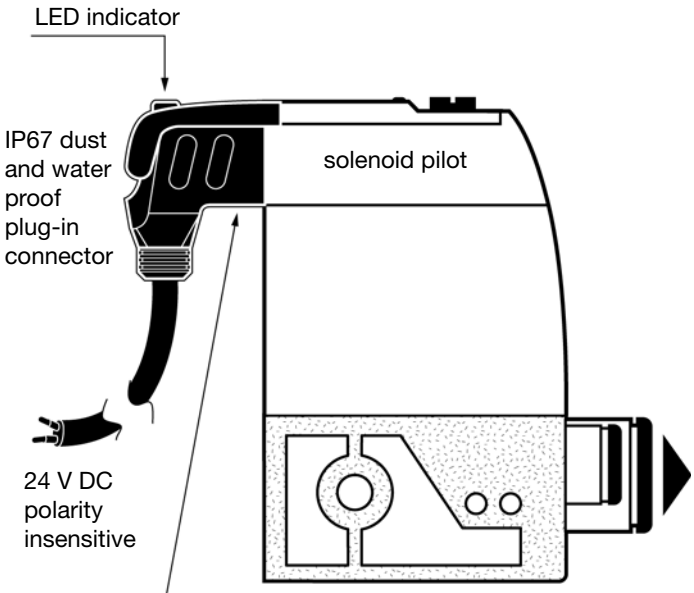

individual electrical connector with -
connections to solenoid pilot
- LED indicator
- voltage surge surpressor

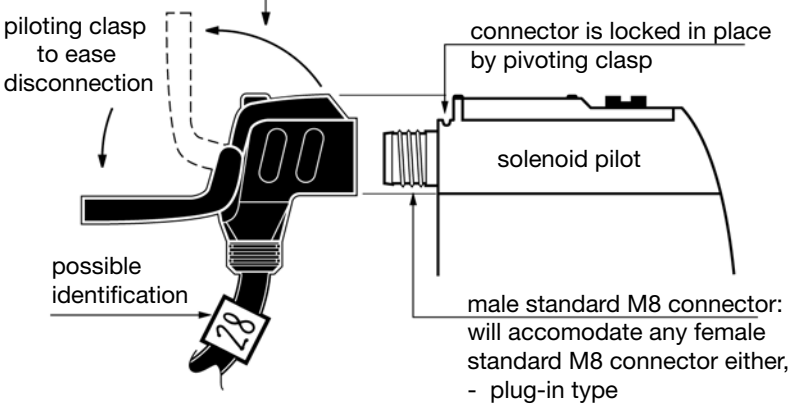


male standard M8 connector:
will accomodate any female
standard M8 connector either,
- plug-in type
- screw-in type.


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Connections to PLC's and other controls

The 2 wires of each connector cable can be taken directly to the output terminals of a PLC or field bus module.
If all outputs have a single common terminal, it will be necessary to use an intermediate terminal block with the commons linked as shown in the drawing below.

Connections outside enclosures may be IP 67 protected, using the standard M8 or M 12 connectors of a terminal box, as shown in the drawing below.

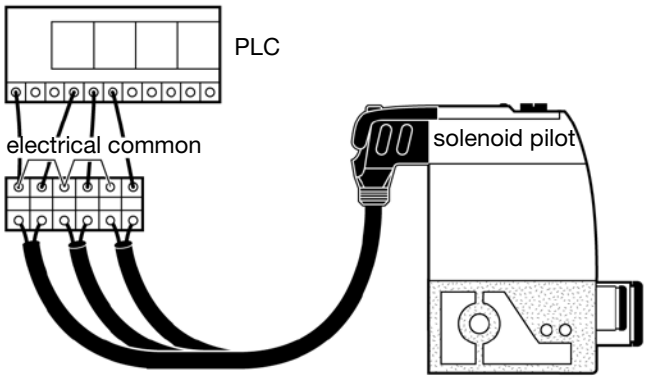

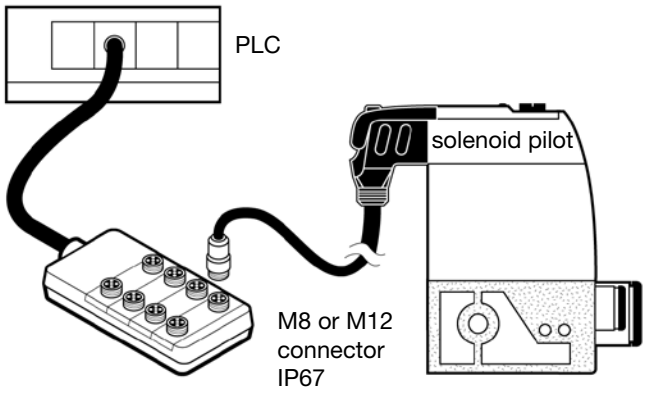

Pneumatic valve islands conform to the latest electrical requirements

Pneumatic valve islands now have to withstand many different conditions in their various applications:

- installed inside or outside enclosures;
- combined with electrical components sensitive to solenoid «spikes» and inside machines subjected to voltage drop;
- integrated with either positive logic or negative logic controls.

Therefore, the latest generation of valve islands has been developed to satisfy the following requirements in both their individual or integrated connection forms.

1- IP 65-67 dust and water protection.

Valve islands may be installed close to the cylinders they control; this can prove to be a difficult environment. Therefore the electrical parts are dust and water protected. They conform to the the following standard: IP 67 for individual connector valves and islands, IP 65 for integrated electric connections islands.

2- Collection of exhausts, including pilot exhausts.

Increasingly, valve islands are incorporated into the electrical enclosure of a machine.
Therefore, in this case and applications involving clean rooms or food industry, the latest valve islands enable collection of all air exhaust including these of the solenoid pilots.

3- Protection of controls from voltage surges.

The voltage surge generated when a coil is de-energised is a common problem and can disrupt control circuits upstream of the valve island. To overcome this problem, the latest generations of valve islands incorporate a voltage surge suppressor with each solenoid pilot.

4- Positive logic (PNP) and negative (NPN) compatibility.


The increasing use of global automation components and machines can raise problems of compatibility between «PNP» and «NPN» circuit design. The latest generation valves and islands overcome this problem as the solenoid pilots are polarity insensitive and can accept 24 VDC in any orientation.

5- Dependability even with voltage drop.

Electro-pneumatic automation is often integrated to machines that are submitted to voltage drop for example when an electrical motor is started. In order to overcome such working conditions, standard requirements state that the solenoid pilot should still operate 15 % under the voltage rating, i.e. 20.4 V for a 24 V rating. To fulfill such a specification, the solenoid pilot power has to be sufficiently high: for example, 1 W is better than 0.5 W.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

8 Islands with integrated electrical connections

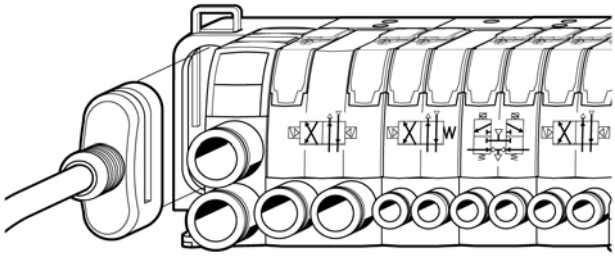


This valve island configuration considerably simplifies installation: with the multi-connector, the time taken in connecting the valve island to controls is reduced to a minimum.

Inside the island, modular integrated circuitry conveys the signals from the multi-connector to each solenoid pilot.


Integrated electrical connections

The island's pneumatic modularity is complemented by the electrical connection modularity. When modules are assembled into an island they are automatically inter-connected. They follow the electrical connection modularity principle that is described in the box below.

The island connections to controls are then made from the electrical head module by one of the methods shown on the next page.

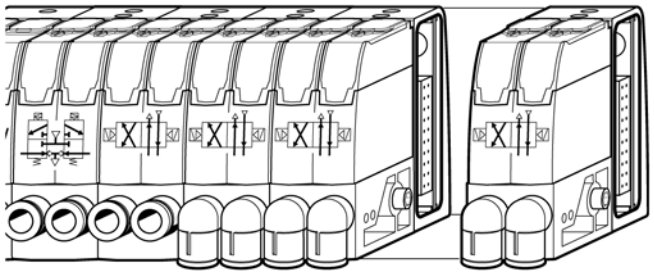


modular valve island with integrated electrical connections

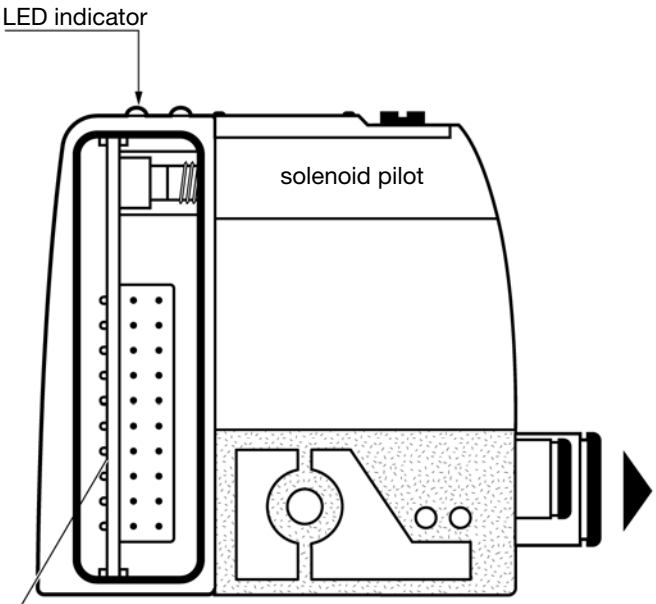

modular electrical circuit including:
- multiple connections between island modules
- connections to solenoid pilots
- LED indicators and voltage surge protection
- self-adressing (see below)

Valve self-addressing modularity principle

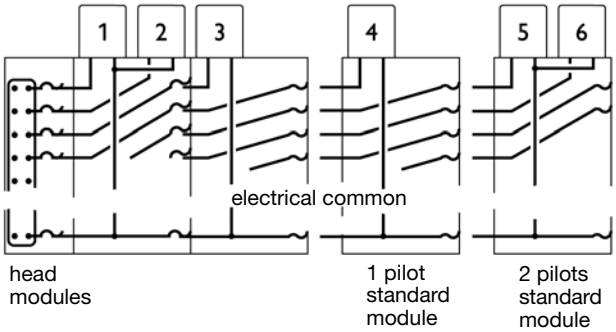


The schematic on the left illustrates the connection principle between each island module:
– an electrical common crosses the whole island connecting one pole of each of the solenoid pilots;
– connections from the head module are self-addressing; one step adjusted at each pilot, they step by step progress upwards until they reach the solenoid that they will control.

All modules are standard and easily assembled to build the valve island.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Valve island connection to PLCs and other controls

An electrical multi-connector is simply added to the basic pneumatic head module, to form the complete island with each pin of the connector self addressed to the corresponding solenoid pilot.

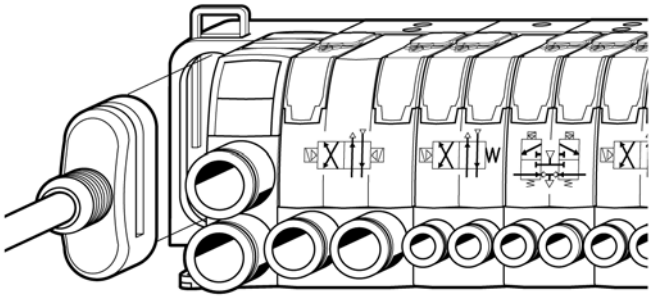


plug-in multi-connector

Wired connection to PLC

A multiple cable is plugged into the island head module and each individual wire is connected to the PLC's terminals.


The multi-coloured cable is a guide to addressing, with each colour unique to a solenoid pilot row within the island.

When compared with the individual electrical connector (see chapter 7) the integrated electrical connection island with multi-connector reduces the connections to be made by almost one half.

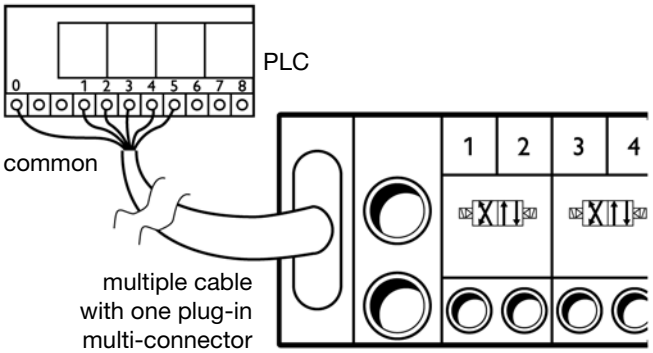

Plug-in connection to PLC


It is possible with some well known PLC models to have a dedicated double multi-connector cable enabling the PLC plug-in card to connect directly to the standard valve island.

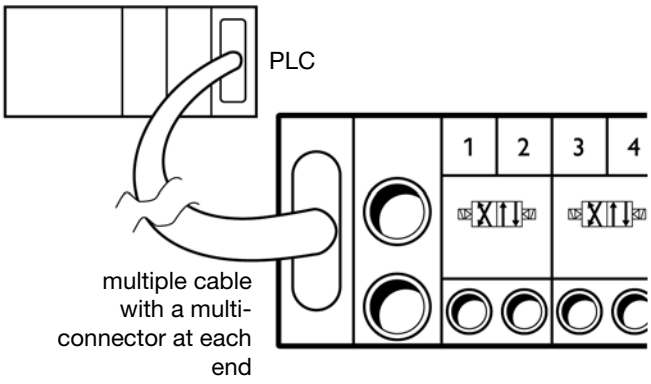

Field-bus communication with PLC


The multi-connector at the head of the island can be replaced by a field-bus connection and decoding module.

Valve islands with this option can be connected at any point along the field bus that the PLC controls (see chapter 15, 16 and 17).

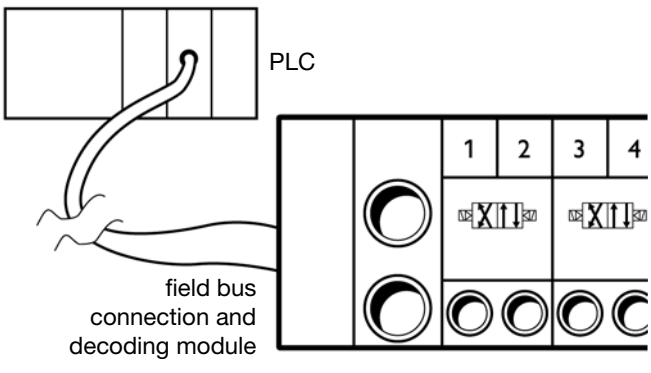

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


9 Man-machine dialog through valve islands

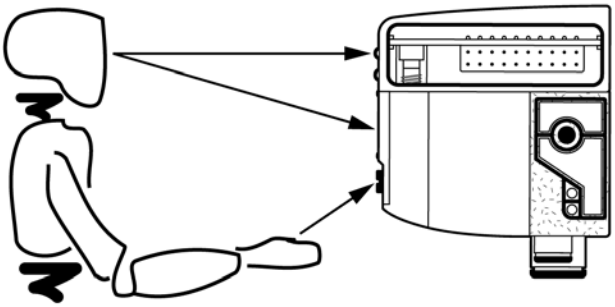


Pneumatic valves are at the center of electro-pneumatic automation systems. This is why pneumatic valve islands with built-in features enable efficient man-machine dialog.

This achieved with their method of identification, the LED indicator and the manual overrides, all of which simplify troubleshooting on the machine.

Identification marking on valve islands

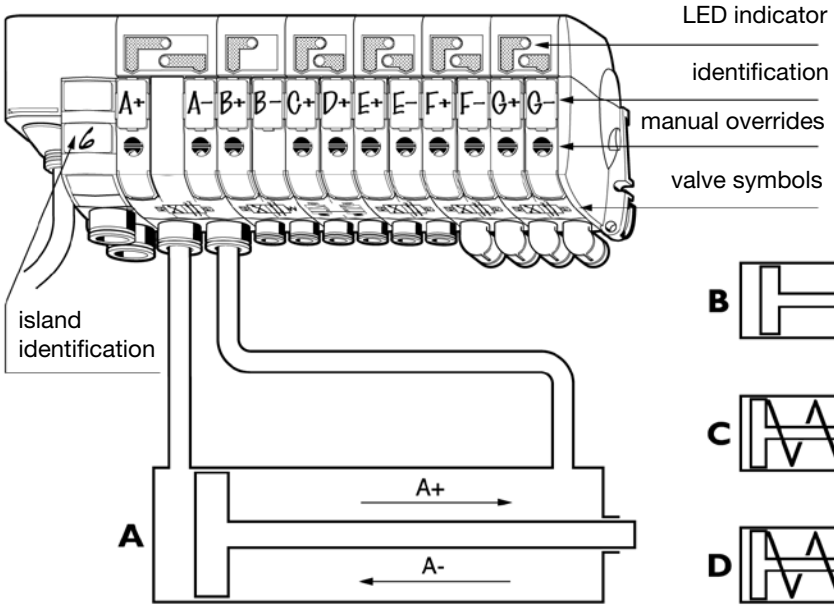

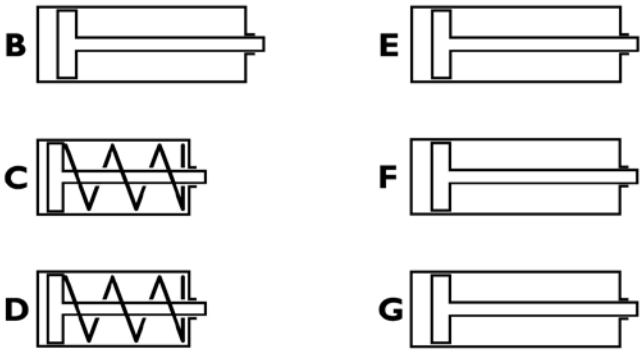


It is often useful to relate a module to a movement within the machine. This is made possible with the ability for each module to have an identification marking corresponding to each movement. The LED reading and manual override action can now be easily identified for a particular movement within the machine.


Valve island marking process

Valve islands have standard 9 x 17 mm identification areas.


Depending on the application, one can choose between the different marking procedures shown here, from a simple hand marking to a more permanent label or tag marking using computerised equipment.



Hand made marking with an indeleble pencil




Sticking label marked with a laser printer standard label 9 x 17 mm



Sticking tag marked with a tracing table standard tag 9 x 17 mm

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Identification of valve island sections

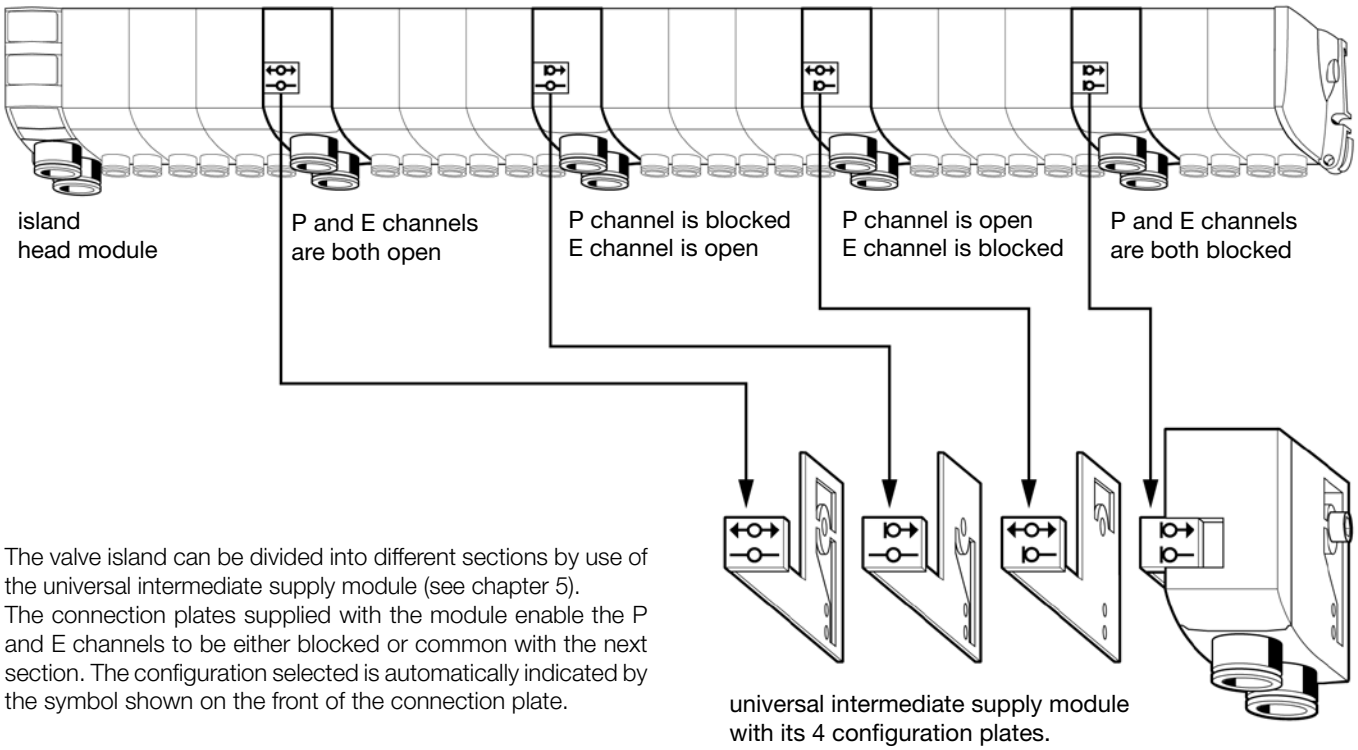

The valve island can be divided into different sections by use of the universal intermediate supply module (see chapter 5).
The connection plates supplied with the module enable the P and E channels to be either blocked or common with the next section. The configuration selected is automatically indicated by the symbol shown on the front of the connection plate.

universal intermediate supply module with its 4 configuration plates.

Unique solenoid pilot with multi-function and adaptable manual override


For safety and standardisation reasons, most machine builders now use 24 VDC. This convergence towards only one voltage leads to a more simple system with a unique solenoid pilot. In order to cater for the man-machine dialogue requirements this solenoid pilot manual override is both multi-function and adaptable to each stage, from the machine installation to its maintenance.

The standard modules have solenoid pilots with multifunction manual overrides:
- push-release function ;
- push-twist-lock function.


Man-machine dialogue is then complete facilitating the commissioning of each machine sub-assembly. Later, when electrical controls are connected, the manual override may be adapted.

Depending on the machine and its conditions of use, one may either:
- keep complete multi-function manual overrides;
- or delete the lock capability by removing the locking stop: this will prevent the manual override being left in the locked position;
- or make the manual override completely inoperative when automatic controls take care of access for maintenance: an isolation fork is available for this operation.

A - Multi-function manual override

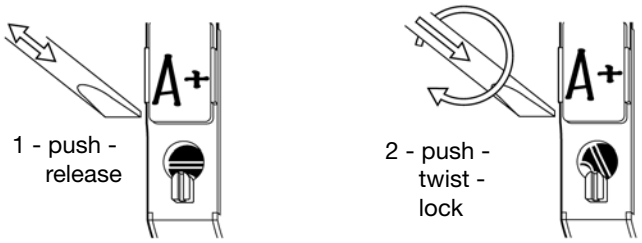

B - Manual override adaptations

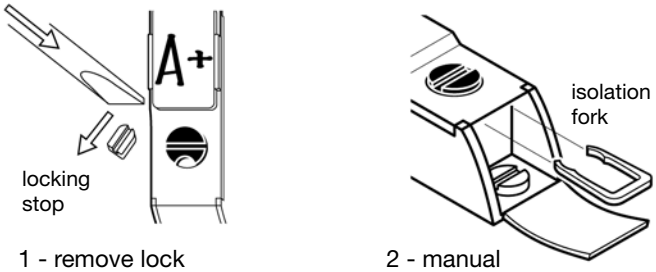


1 - remove lock capability

2 - manual override is totally isolated

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


10 Islands with f ɓw and pressure controls

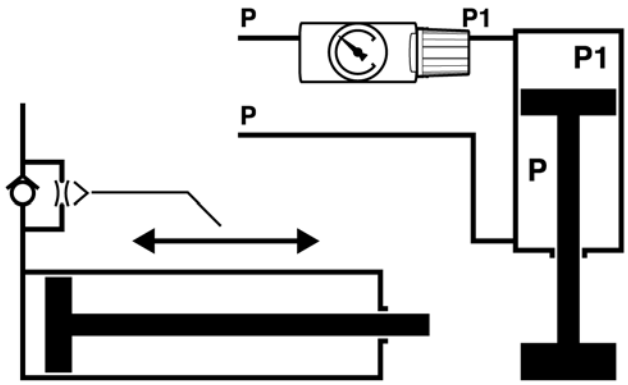

As automation develops, pneumatic cylinders require better controls.
- Speed controls : for this purpose, adjustment means are continuously improved for better effciency and easier access.
- Thrust controls : for this purpose, pressure regulation to the cylinder is now easily added to a circuit that requires it.

Flow adjustment = speed control


On a double acting cylinder, forward and retract speeds are adjusted separatly by control of air flow exhaust. The control becomes more precise when the flow adjustment is close to the cylinder. The examples show different solutions which are dependant upon the valve to cylinder distance and accessibility to the cylinder.

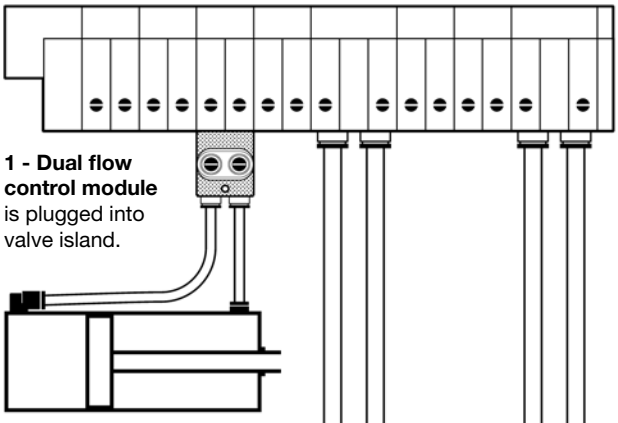


1 - Dual flow control module is plugged into valve island.

Dual flow control module

This valve island control module (see chapter 6) may also be used close to the cylinder.




to double acting cylinder



2 - Dual flow control module is installed close to the cylinder.


Note: flow control to single acting cylinders.




to single acting cylinders

For controlling supply flow instead of exhaust flow, the module may be reversed.

This may be used in conjunction with single acting cylinders.

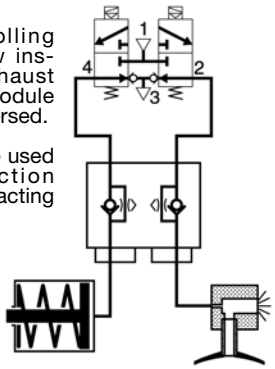

3 - Flow control fittings are fitted directly onto the cylinder ports if access is good.

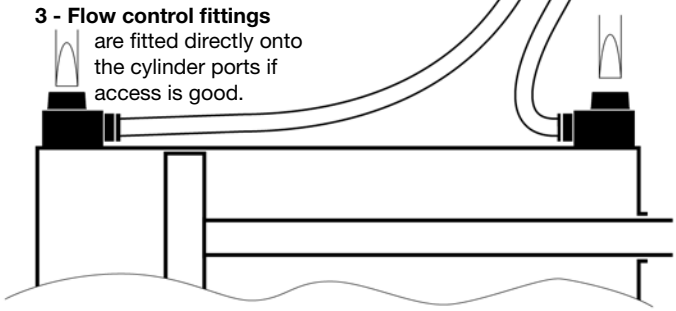


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Pressure regulation = thrust control


Pressure regulation to individual cylinders is increasingly used in automation (see box below).
Most of the time single port regulation is sufficient: only one chamber of the cylinder is concerned.
Such a regulation may be specified initially but, most often, it has to be added at the machine commissioning stage. The valve island pressure regulation module is available for this.

Pressure regulation module

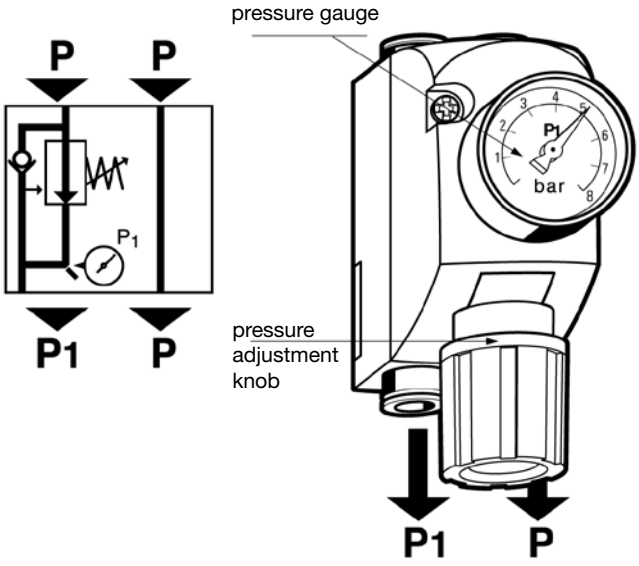



An integrated pressure regulator reduces the P pressure to the P_1 pressure required. The regulator is of the vented type.
Therefore, when lowering the pressure level, it exhausts the excess pressure to the new level.


It also includes a non-return valve allowing full exhaust flow.
This module is normally installed downstream of the valve.
Depending on the application, the pressure gauge may be remotely mounted, or integrated into the machine control panel.

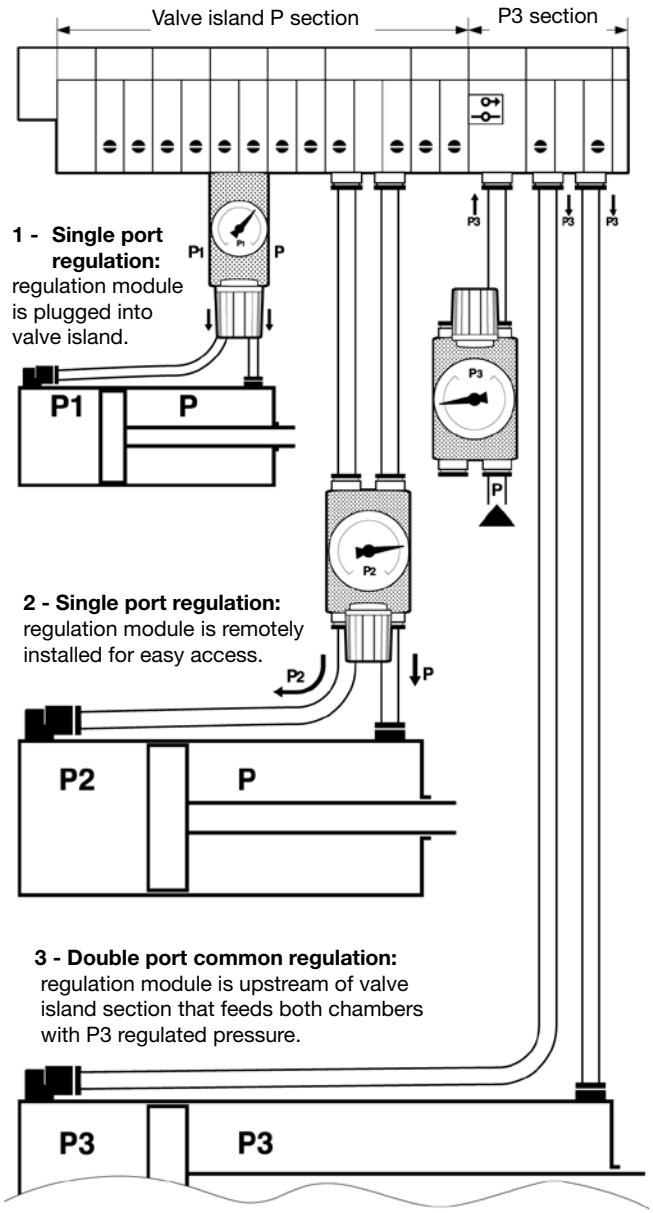

Typical applications of pressure regulation to cylinders

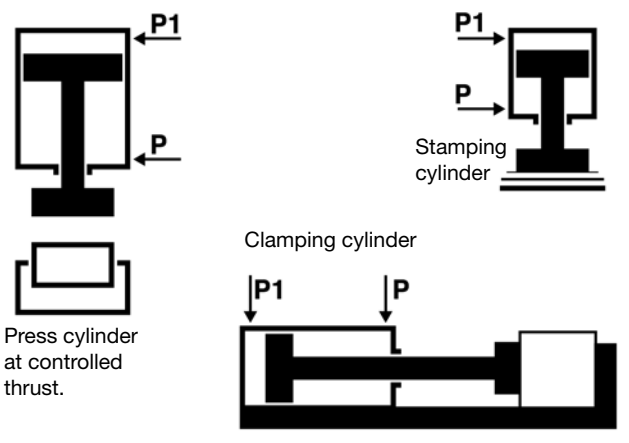


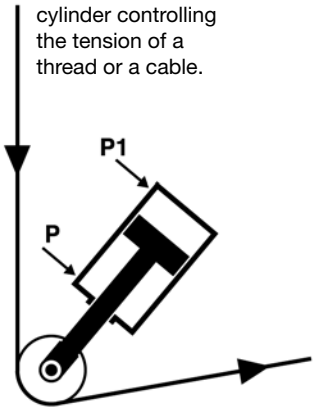

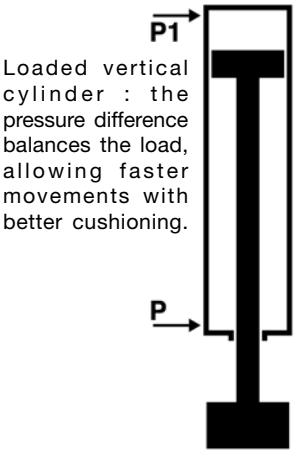

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

11 Islands for 3 position valve applications

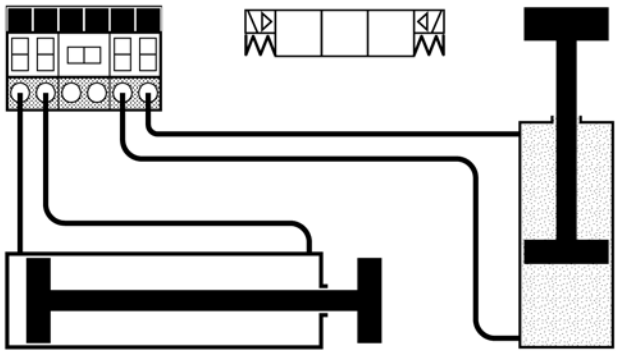


3 position valves are traditional for positioning, blocking or venting pneumatic cylinders.


Because pneumatic valves are now commonly assembled into islands, 3 position valve functions have to be adapted in order to meet all applications allowing for exhaust back pressures and long distances between valves and cylinders.

3 position vented centre: pressure free cylinder

Traditional configuration:

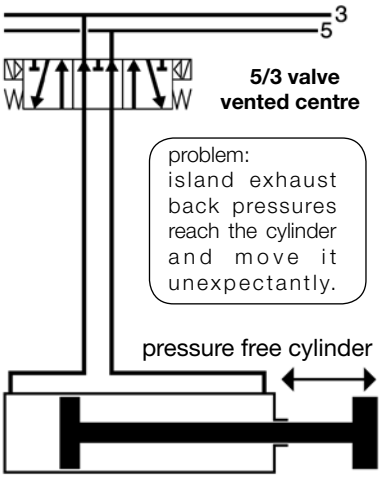


New generation: double 3/2 NC + NC

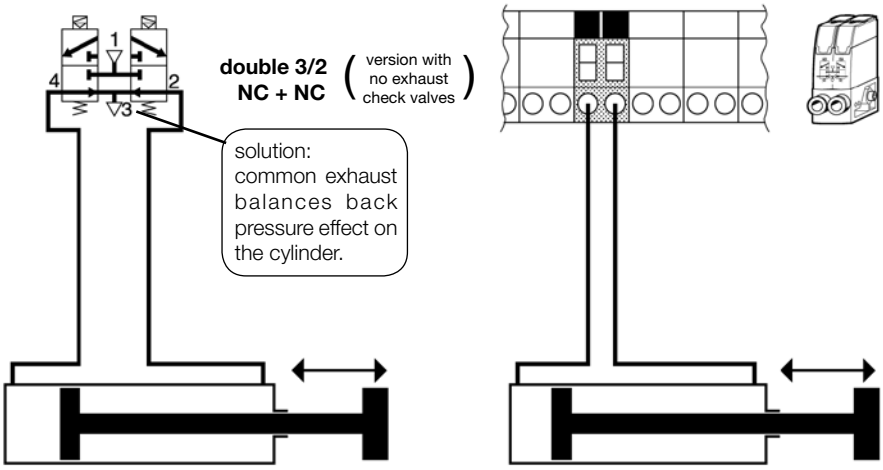


3 position pressure centre: cylinder fitted with locking device

Traditional configuration:

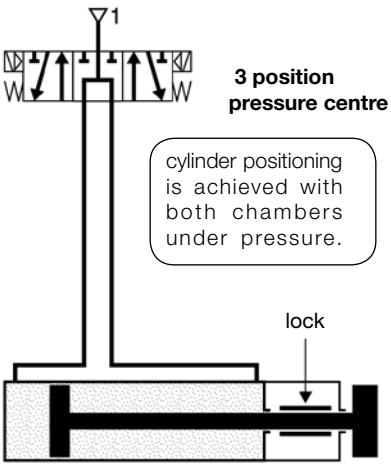


New generation: double 3/2 NO + NO

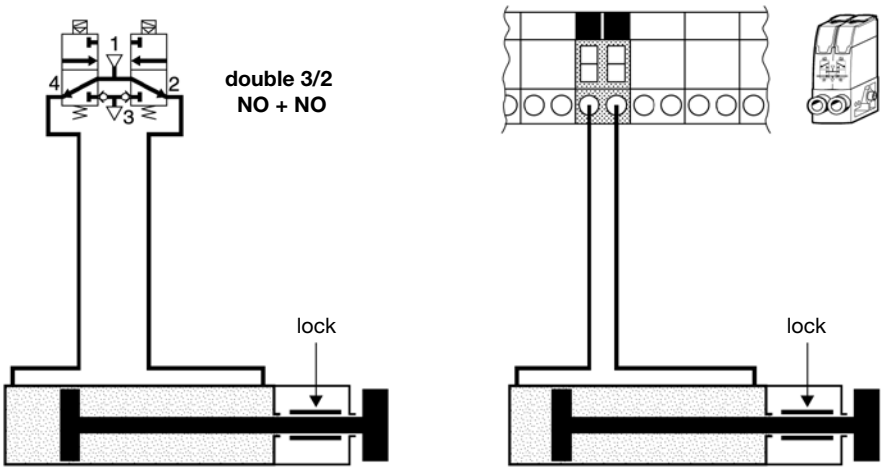


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3 position, closed centre: cylinder positioning

Traditional configuration:

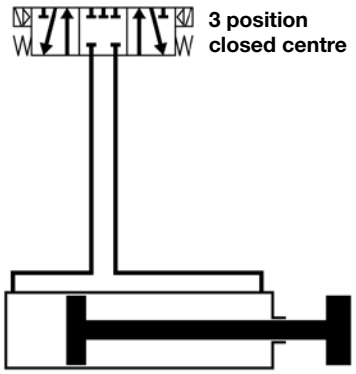


problem: in centre position, compact valves are not perfectly sealed: cylinder position cannot be held indefinitely

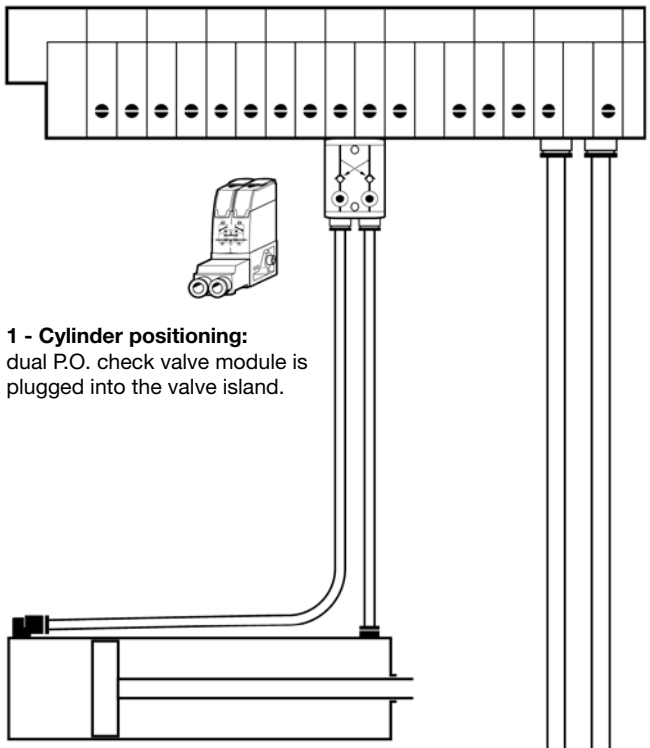


1 - Cylinder positioning:
dual P.O. check valve module is plugged into the valve island.

Double 3/2 NC + NC and dual P.O. check valve

solution: a dual P.O. check module is totally sealed

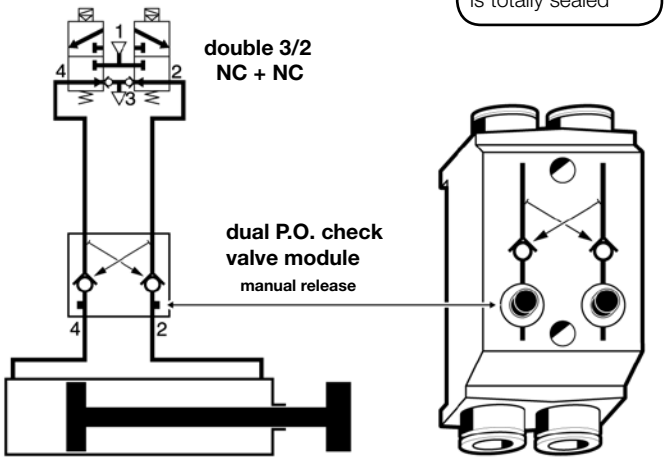

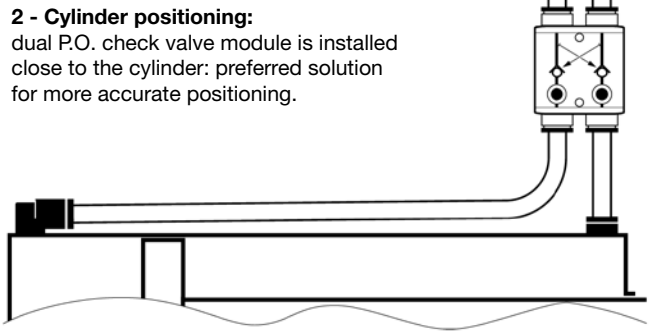


2 - Cylinder positioning:
dual P.O. check valve module is installed close to the cylinder: preferred solution for more accurate positioning.

At the outputs of a double 3/2 NC + NC valve, the dual P.O. check valve module achieves efficient and stable cylinder positioning. As soon as both lines are exhausted by the main control valve, the two internally piloted check valves close tight. The cylinder is then stabilised.
The manual pressure releases may then eventually be used for an adequate machine positionning.


Typical application using cylinder positioning

Depending on each parts requirements, cylinder A will position them either in front of cylinder B or C or D. A double 3 way NC + NC valve and a double check module will easily control cylinder A for such positioning.

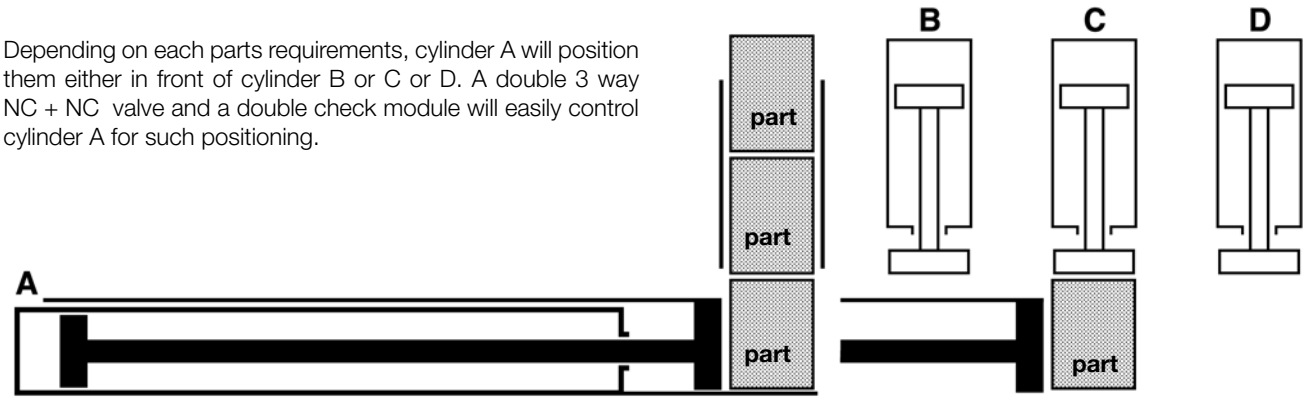

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

12 Valve islands exhaust back pressure control

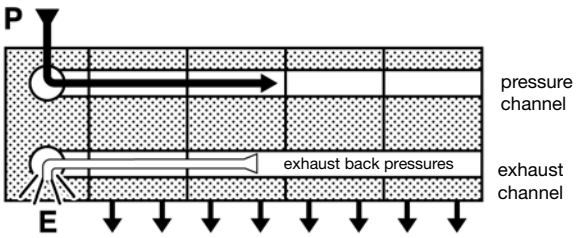

The problems associated with exhaust back pressures are well known already with traditional valve manifolds.


The latest generation of valve islands provides new solutions to this problem: either to block exhaust back pressures or to limit them to a level that would not affect the application

Blocking exhaust back pressures with 3/2 modules

From the example shown below, one can see the followings:

- C cylinder, large and fast moving, may feed the island exhaust channel with an exhaust back pressure PE.
- Such a back pressure is normaly under 1 bar. Thus, it will not affect double acting cylinders such as B since the opposite pressure P is high.
- However such a back pressure may affect a single acting cylinder A if its pressure theshold is low.

Such single acting cylinders may pop out unexpectantly whenever an exhaust back pressure rises into the island. To avoid such malfunctions 3/2 valves modules feature integrated exhaust non-return valves that will block any exhaust back pressure from reaching acting cylinders that they control.

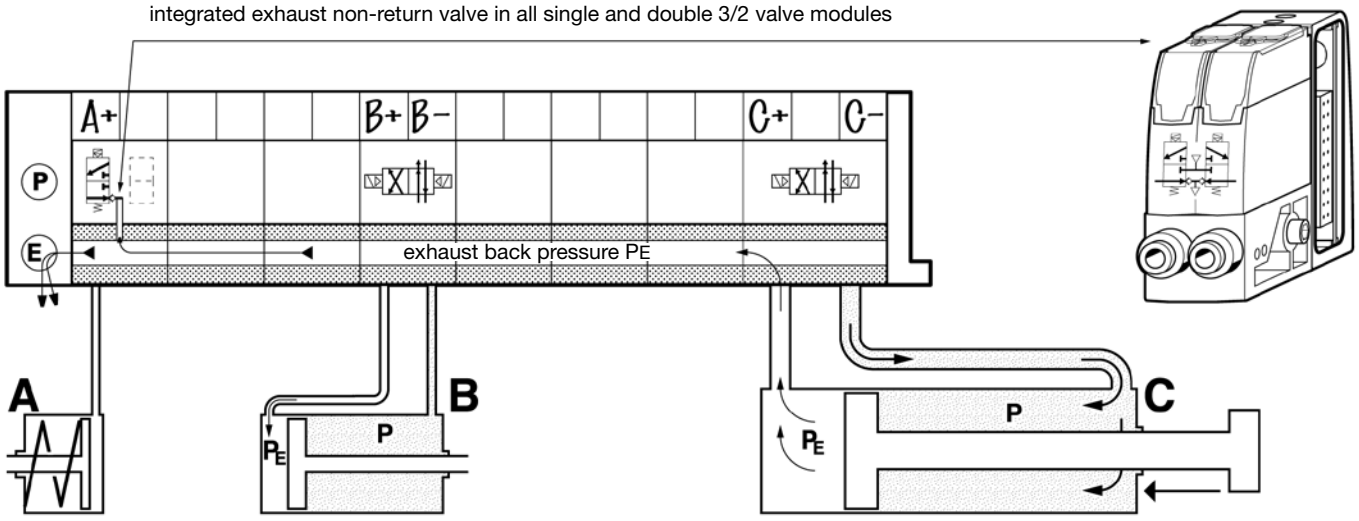


single acting cylinder controlled by a 3/2 valve

double acting cylinders controlled by 4/2 valve modules

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Blocking exhaust back pressures inside the island

Another method to block exhaust back pressures when they may affect the application is to isolate in the island the valves that control the largest and fastest cylinders. The illustration below shows how this may be easily achieved with an intermediate module (see chap. 5).

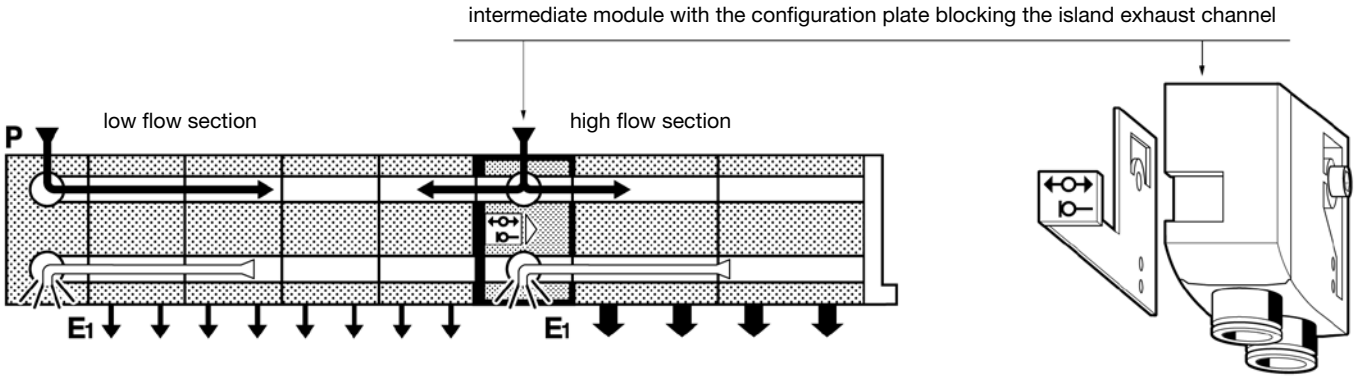

Limiting exhaust back pressures in a valve island


In a valve island, it is important to limit exhaust back pressures to about 1 bar maximum so that all double acting cylinders efficiently achieve their function at 6 bar.

By reducing the exhaust flows of the largest cylinders, one kills back pressures at their birth, particularly for their return stroke that does not affect the cycle time.

a - collected exhaust


Depending on the sizes of the cylinders and the speed required by the application, exhaust back pressures may still remain too high in the island after cylinder exhaust flow adjustment.

Such back pressures in the island may be efficiently evacuated through multiple exhaust collections using the intermediate module (see chap. 5).

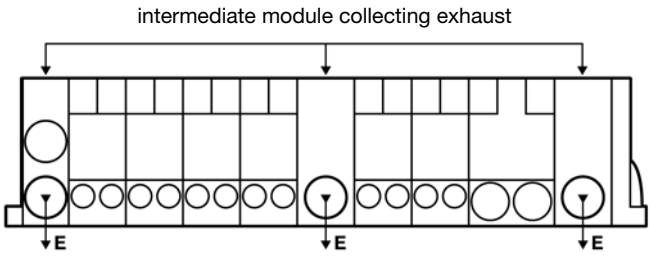


b - exhaust through mufflers

For applications that do not require the exhausts to be collected, a plug-in muffler into each exhaust port of the island will evacuate exhaust back pressures.

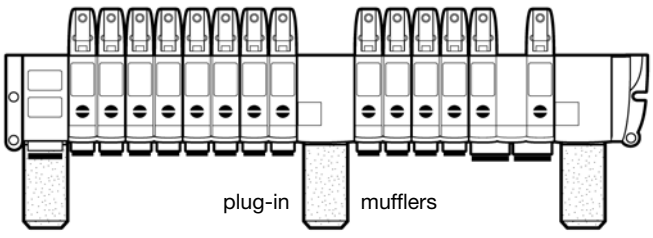

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

13 Valve islands internal / external pilot supply and exhaust

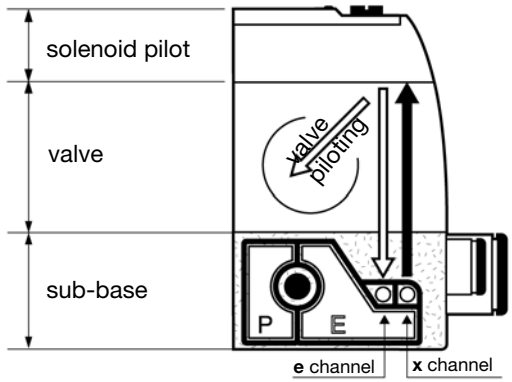


Valve islands of the last generation integrate:
- an x channel to supply pressure to the pilots,
- an e channel to collect exhaust from the pilots.

The island universal pneumatic head module provides selectors for different types of pilot supply and exhaust:

- internal or external pressure supply through x,
- internal or external exhaust collection through e.

External / internal pilot supply

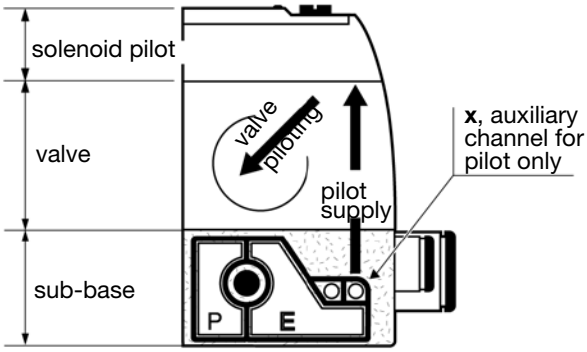

In all valve islands, sub-bases incorporate an auxiliary channel x to supply pressure to the solenoid pilots. Depending on the application, this channel:

- may be fed by the main pressure P if it is between 3 to 8 bar; this is the «internal pilot supply» of the valve island,
- may be fed separately, when pressure P is lower than 3 bar (3 bar being the minimum pressure to pilot the valves); this is the «external pilot supply» of the valve island.

The new valve island generations have a universal pneumatic head module that allows these two types of pilot supplies. This head module incorporates a 2 position x selector:


The internal pilot supply position is the normal position;

- no connection port is visible since no external supply is necessary. If required, the external pilot supply position can be obtained manually by rotating the selector;
- it then presents a push-in connection port for a 4 mm OD tubing that will feed the pilot pressure (3 to 8 bar) to the x channel.


Special case: multi-section valve island.


The intermediate module that separates two island sections is crossed by the auxiliary channel x. Thus, when an island includes several sections working at different pressures, an internal pilot supply pressure is satisfactory, if the first section operates at 3 to 8 bar pressure.

P = 3 to 8 bar

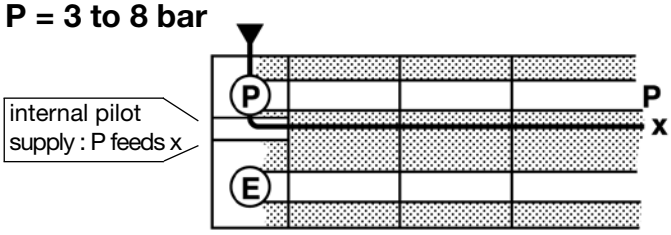

P = 0 to 3 bar

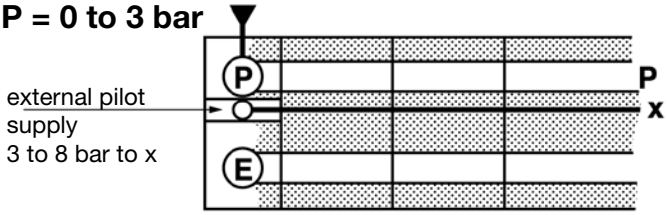


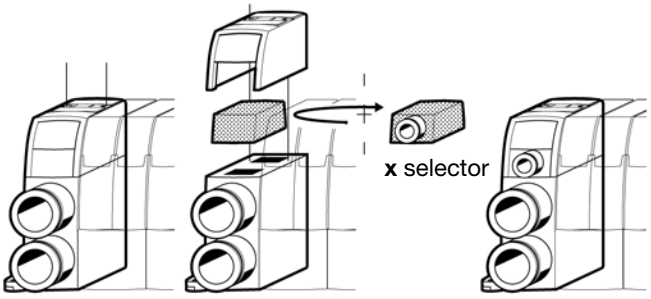

x selector is positioned for internal pilot supply

x selector is positioned for external pilot supply


P = 3 to 8 bar **P_1 = 0 to 3 bar**

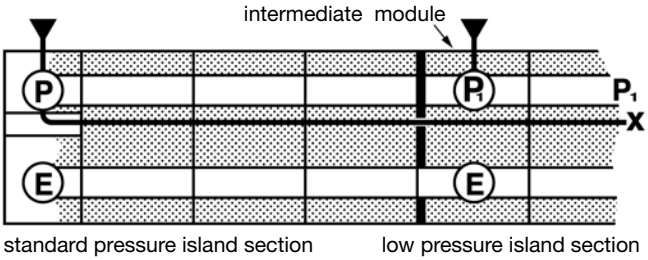



standard pressure island section — low pressure island section

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

External / internal pilot exhaust collection

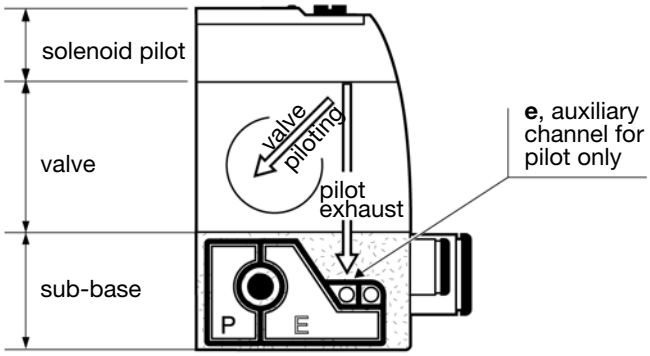

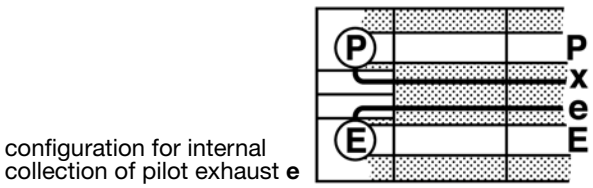


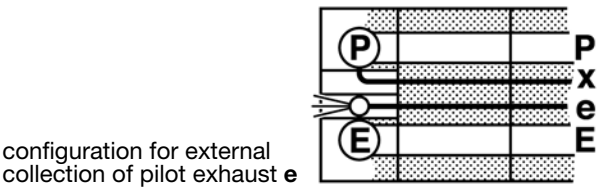

In all valve islands, sub-bases also incorporate an auxiliary channel e to collect the solenoid pilot exhausts. Depending on the application, this channel:

- may exhaust directly into the main exhaust channel E if no important exhaust back pressure is to be feared (see chapter. 12).
- may be collected separatly when a persistant back pressure will possibly delay the depiloting of some of the valves into the island, or for vacuum applications (see chap.14).

In order to chose between the internal or the external collection of the island pilot exhaust a second two position selector is integrated into the pneumatic island head module, as shown here.

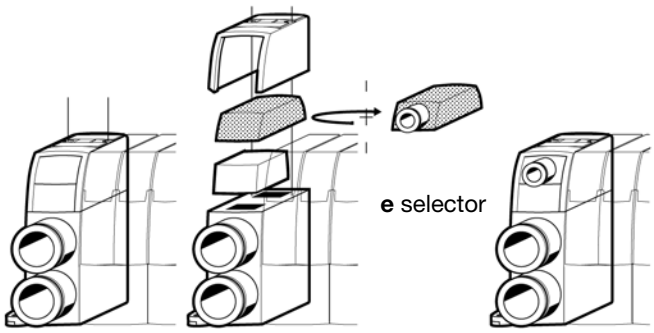


e selector is positionned for internal collection of pilot exhaust

e selector is positionned for external collection of pilot exhaust


Special case: multi-section valve island.

The intermediate module that separates two island sections is crossed by both auxiliary channel x and e. Thus, when an island includes several sections including a section working with vacuum where no exhaust should pollute the vacuum drawn (see chapter 14), an internal collection of pilot exhaust is satisfactory, if the first section is the one that works at a usual pressure.

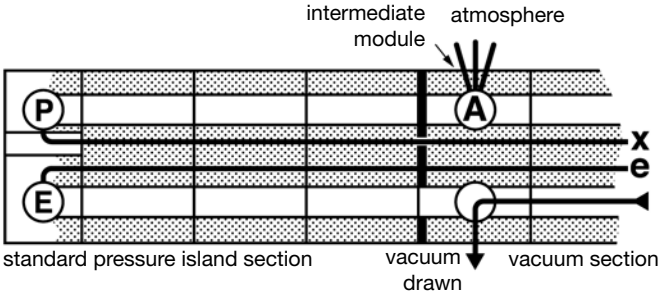

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


14 Valve islands for vacuum applications

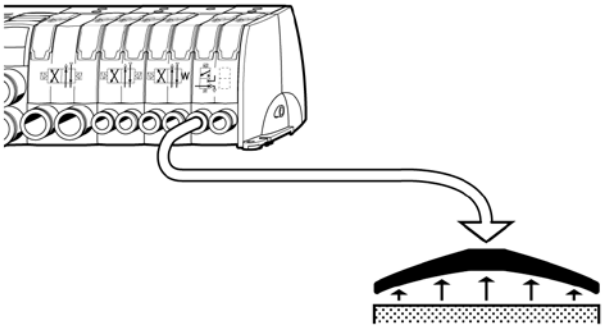

Pneumatic automation is often combined with vacuum applications:
- to pick-up parts and to move them;
- to vacuum pack or to process under vacuum.

Within electro-pneumatic circuits and machines, new generation pneumatic valve islands can simplify circuit design and installation of combined pneumatic and vacuum systems.

Providing controls for vacuum venturi devices

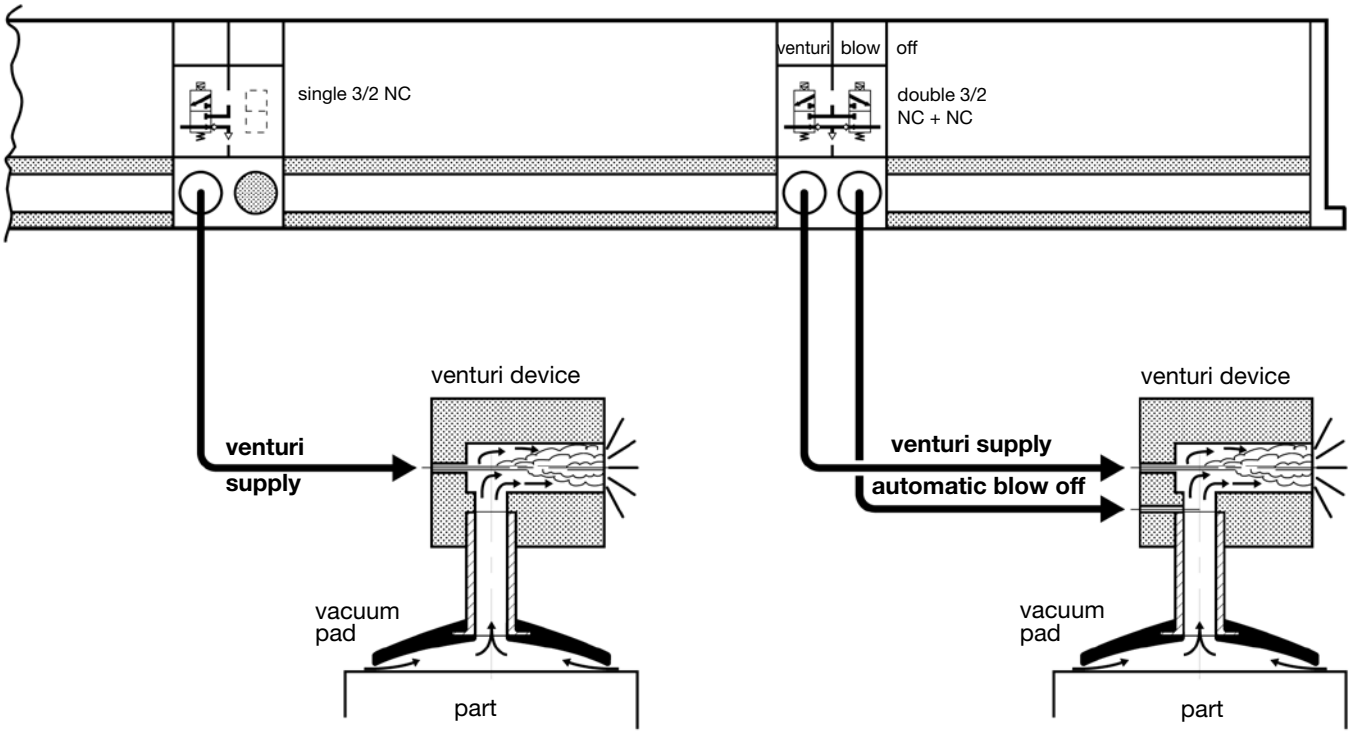

The venturi device is also called an «ejector» or a vacuum generator and is well known to pneumatic engineers. It produces vacuum from an air pressure supply: the air jet generates a fast moving flow stream that draws the surrounding atmospheric air; the resulting air movement creates a vacuum when the entry of atmospheric air is blocked by a part.

This simple and compact system replaces costly and cumbersome vacuum pumps and their piping. It is mostly used to pick-up and move parts.
The vacuum pad that picks-up the part is ideally combined with the venturi device.

In order to supply the venturi, a single 3/2 NC valve is integrated into the closest valve island. To limit air consumption, it is advantageous to adjust the pressure that reaches the venturi. This is easily done by adding a pressure regulation module to the valve island.

If besides the venturi supply an automatic blow off is required, a double 3/2 NC + NC will control the complete system:
- one 3/2 for the venturi supply;
- one 3/2 for the automatic blow off: the integrated exhaust non return valve in all 3/2 modules size 1 (chap.12) will prevent external air from polluting the venturi vacuum.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Valve island in a vacuum distribution network

When the vacuum level or the flow requirement is high, an electric vacuum pump is installed on the machine with a vacuum distribution network.

In this case, 3/2 pneumatic valves are used to control the different vacuum circuits or 4/2 pneumatic valves when a bistable function is necessary. 3/2 pneumatic valves should be Normally Open, in order to obtain vacuum outputs when electrical signals will be on.
Vacuum controls generally require large flows: most of the time, size 2 valves are necessary.


In the valve island, vacuum is drawn through the channel normally used for the common exhaust while the other channel may be used differently, depending of the application:

1 - no blow off or permanent blow off
The top illustration presents a typical vacuum valve island whose channel normally used for the main pressure supply is either connected to atmosphere (no blow off) or to a low pressure supply that will act as permanent blow off towards the vacuum pads when they are not connected to vacuum.


2 - intermittent blow off
The second illustration presents a vacuum valve island equipped with a head blow off valve that will send a pressure for blow off only when required. A size 1 single 3/2 is sufficient for this purpose.

In both cases, the auxiliary channel x will be supplied with a 3 or 8 bar pressure for solenoid pilots (chap.13). In the first case, the auxiliary channel e is collected externally in order to avoid pressurizing the vacuum channel with the pilot exhausts.


Vacuum valve island with no blow off or with permanent blow off

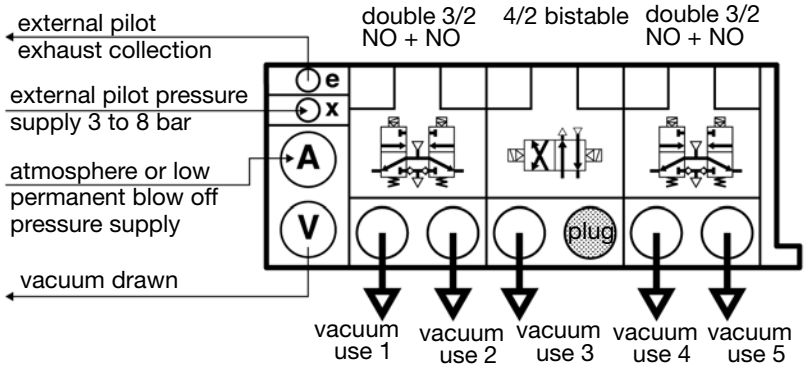

Vacuum valve island equiped for intermittent blow off

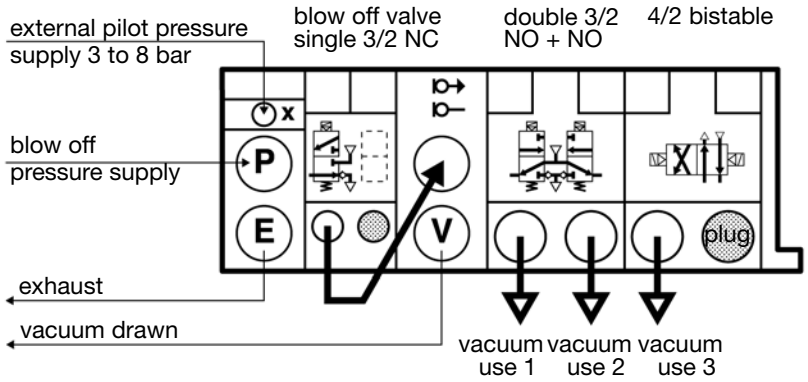

Pressure and vacuum combined in the same island

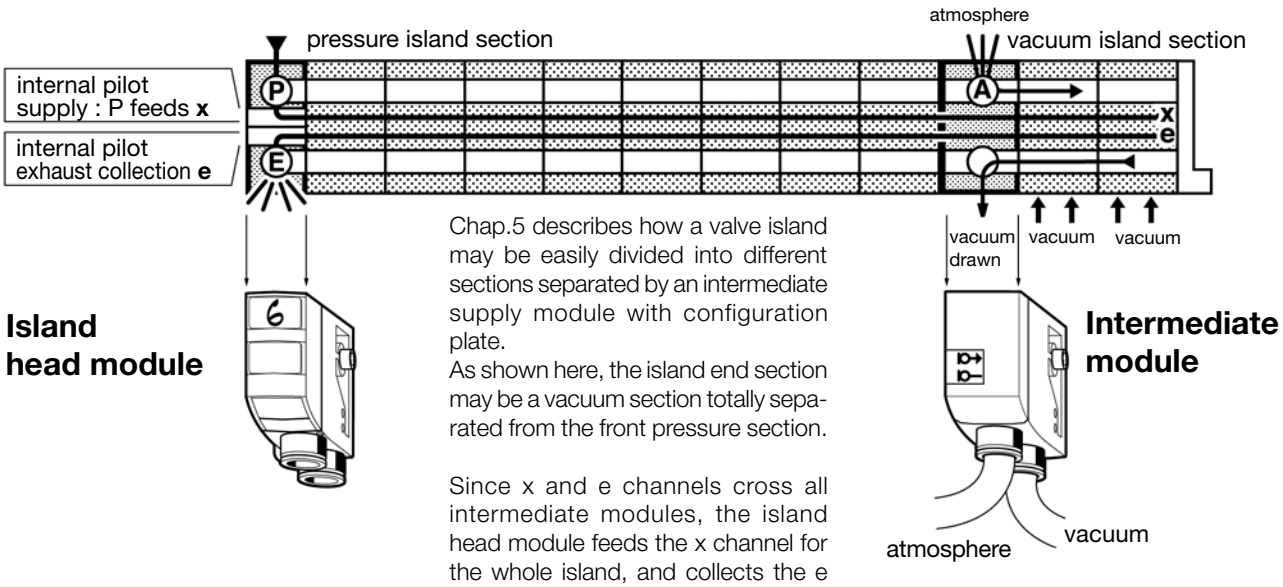


Chap.5 describes how a valve island may be easily divided into different sections separated by an intermediate supply module with configuration plate.
As shown here, the island end section may be a vacuum section totally separated from the front pressure section.

Since x and e channels cross all intermediate modules, the island head module feeds the x channel for the whole island, and collects the e channel for the whole island, including the vacuum section.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


15 Valve islands and emergency machine positioning

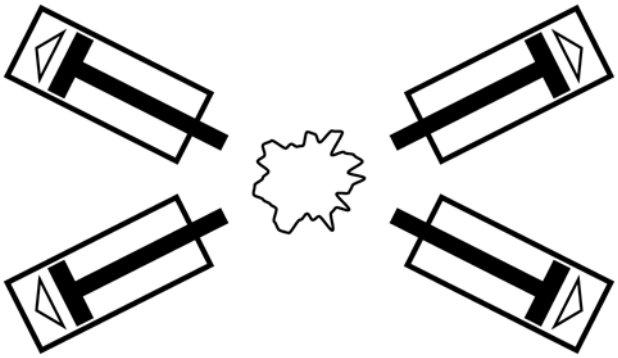

Pneumatic cylinder/valve circuit design must take into account the machine positioning in case of electrical supply cut-off or other emergency events.

Valve islands now offer many means to do so, with bistable and monostable valves, peripheral modules, integrated dump valves,etc.

Bistable/monostable valve choice for adequate emergency positioning

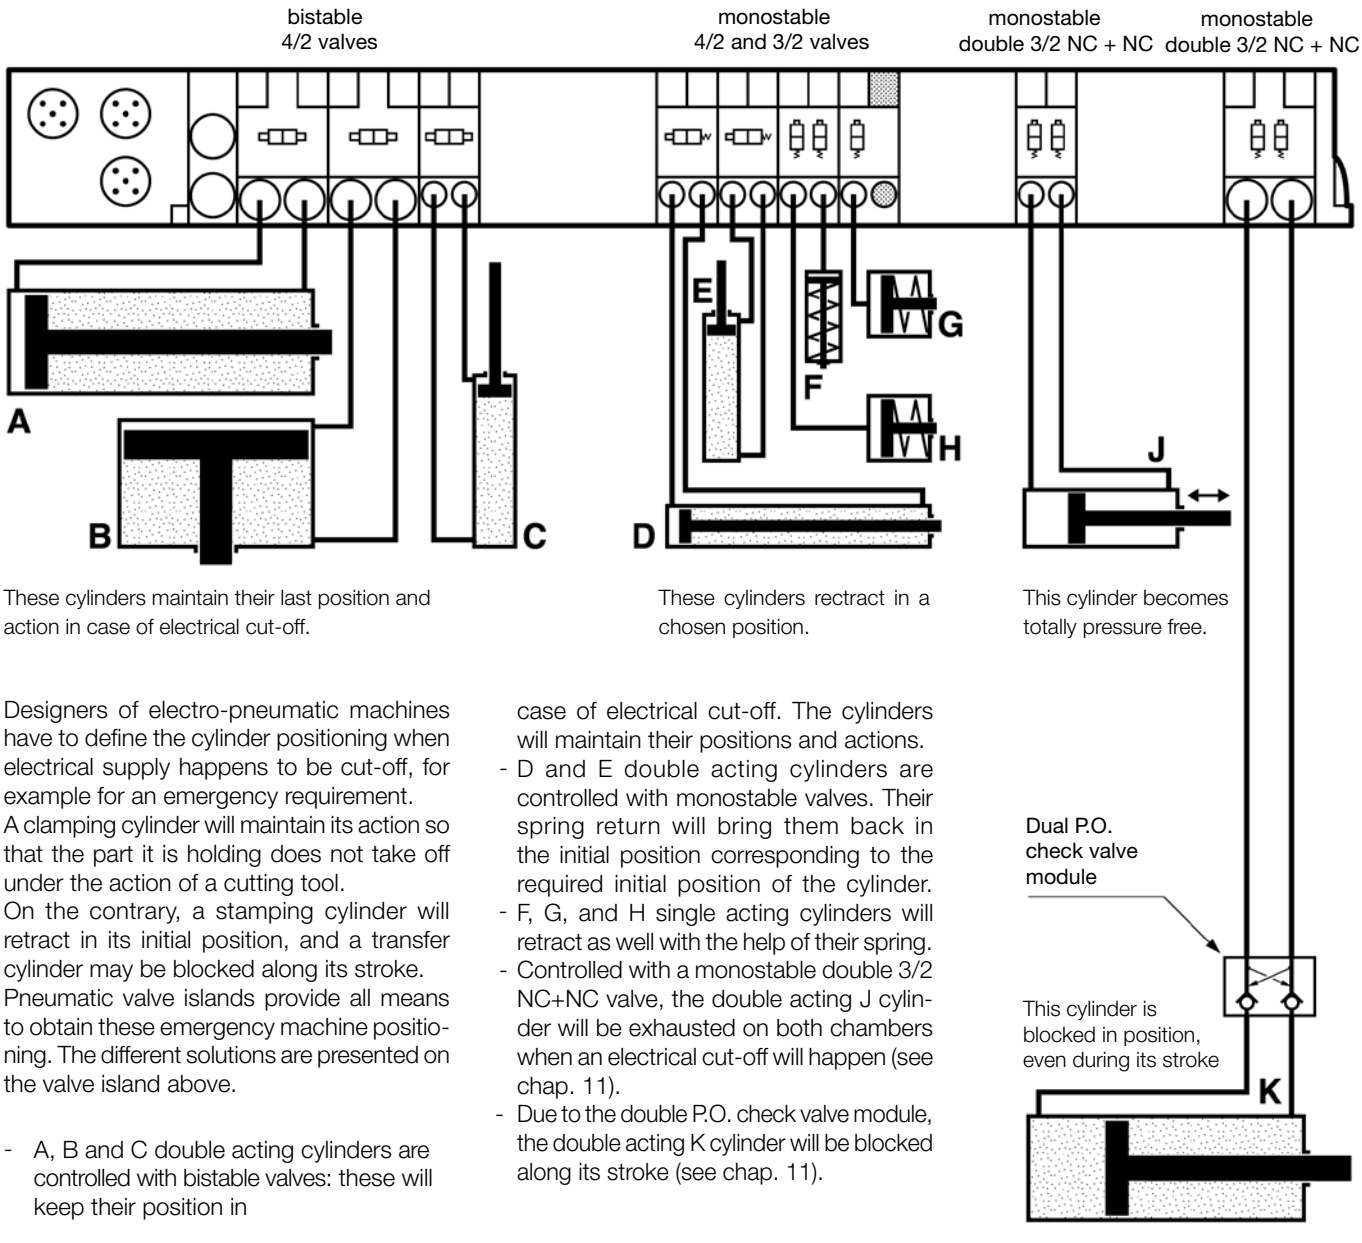

These cylinders maintain their last position and action in case of electrical cut-off.

These cylinders rectract in a chosen position.

This cylinder becomes totally pressure free.

Designers of electro-pneumatic machines have to define the cylinder positioning when electrical supply happens to be cut-off, for example for an emergency requirement.
A clamping cylinder will maintain its action so that the part it is holding does not take off under the action of a cutting tool.
On the contrary, a stamping cylinder will retract in its initial position, and a transfer cylinder may be blocked along its stroke.
Pneumatic valve islands provide all means to obtain these emergency machine positioning. The different solutions are presented on the valve island above.

- A, B and C double acting cylinders are controlled with bistable valves: these will keep their position in case of electrical cut-off. The cylinders will maintain their positions and actions.
- D and E double acting cylinders are controlled with monostable valves. Their spring return will bring them back in the initial position corresponding to the required initial position of the cylinder.
- F, G, and H single acting cylinders will retract as well with the help of their spring.
- Controlled with a monostable double 3/2 NC+NC valve, the double acting J cylinder will be exhausted on both chambers when an electrical cut-off will happen (see chap. 11).
- Due to the double P.O. check valve module, the double acting K cylinder will be blocked along its stroke (see chap. 11).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Valve island with integrated dump functions

In case of emergency electrical supply cut-off, a general dump action on many cylinders may often be required. This is easily done with a valve island by mounting a dump valve controlling the island pressure supply channel. The dump valve will be monostable in order to automatically dump the pressure when electrical is cut-off. A 4/2 size 2 valve will have enough flow to dump a whole size 1 valve island.

The dump action will either concern:


- all the cylinders controlled by the valve island: the dump valve will then be at the island's head (top drawing).
- or just a few cylinders among the ones controlled by the valve island: the dump valve will concern only the valves on its right (second drawing).
- or several valve islands all controlled by only one dump valve (third drawing).

Dump valve
4/2 monostable
size 2

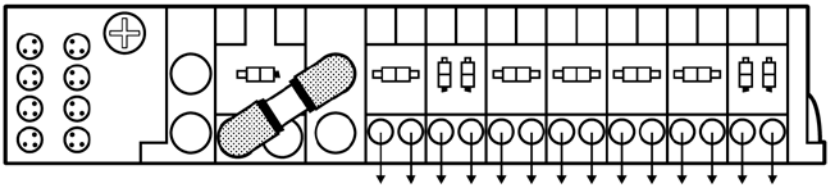

in case of electrical cut-off, pressure is dumped on all cylinders.

Dump valve
4/2 monostable
size 2

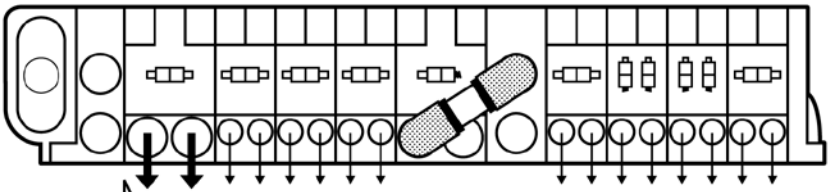


in case of electrical cut-off,

pressure remains on these cylinders,

pressure in dumped on these cylinders.

Dump valve
4/2 monostable
size 2

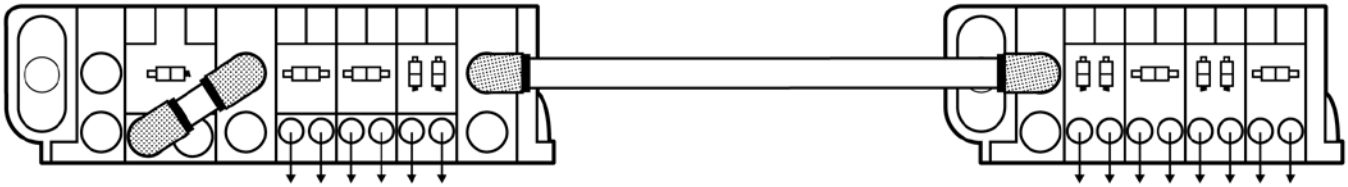


A dump valve may control several valves islands.

Dump and soft start functions


Double acting cylinders have adjustable cushions at the end of their stroke. Such cushioning is necessary for loaded cylinders. They are efficient when the movement is controlled by the working pressure but also by the exhausting back-pressure that limits the speed through external flow control. When such an exhausting back-pressure has been previously totally exhausted by a dump action, when restarting, the cylinder movement may be brutal and the cushioning less efficient.

Thus, for average and big loaded double acting cylinders, a dump action will have to be followed by a soft start. For this purpose, a dump and soft start FRL unit will replace the dump valve into the valve island.

The circuit of such an FRL unit describes the two following functions:
- the dump 2/2 valve, solenoid pilot controlled;
- the slow start pneumatic circuit: the downstream valve and cylinders receive a small flow supply until the pressure reaches a sufficient level to pilot the main flow 2/2 valve whose pilot pressure may be adjusted.

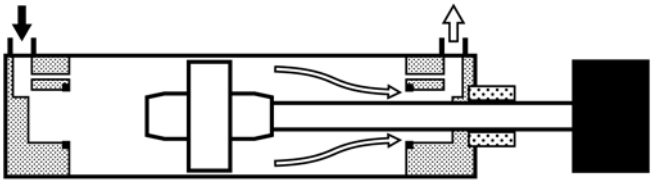


FRL integrated dump and soft start function

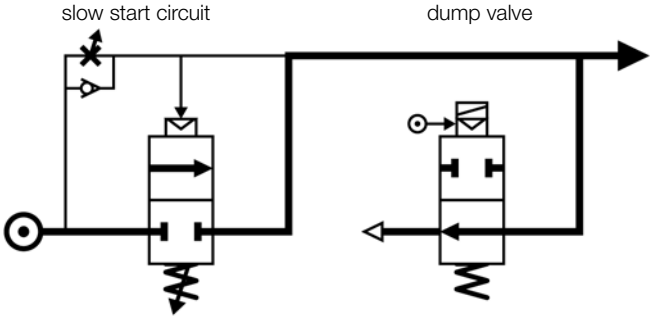

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


16 Valve islands connected to IP 20 input/output modules

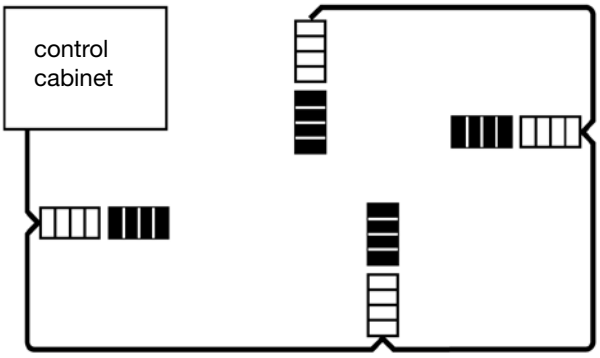

Industrial automation has progressed with the introduction of remote input / output modules which can be adapted to most electro-pneumatic applications and communicate via a field bus system.

Offered as IP 20 only (non protected), these field bus connected I/O are very modular and lead to efficient and competitive electro-pneumatic applications.

The evolution of bus connected IP 20 input/output modules

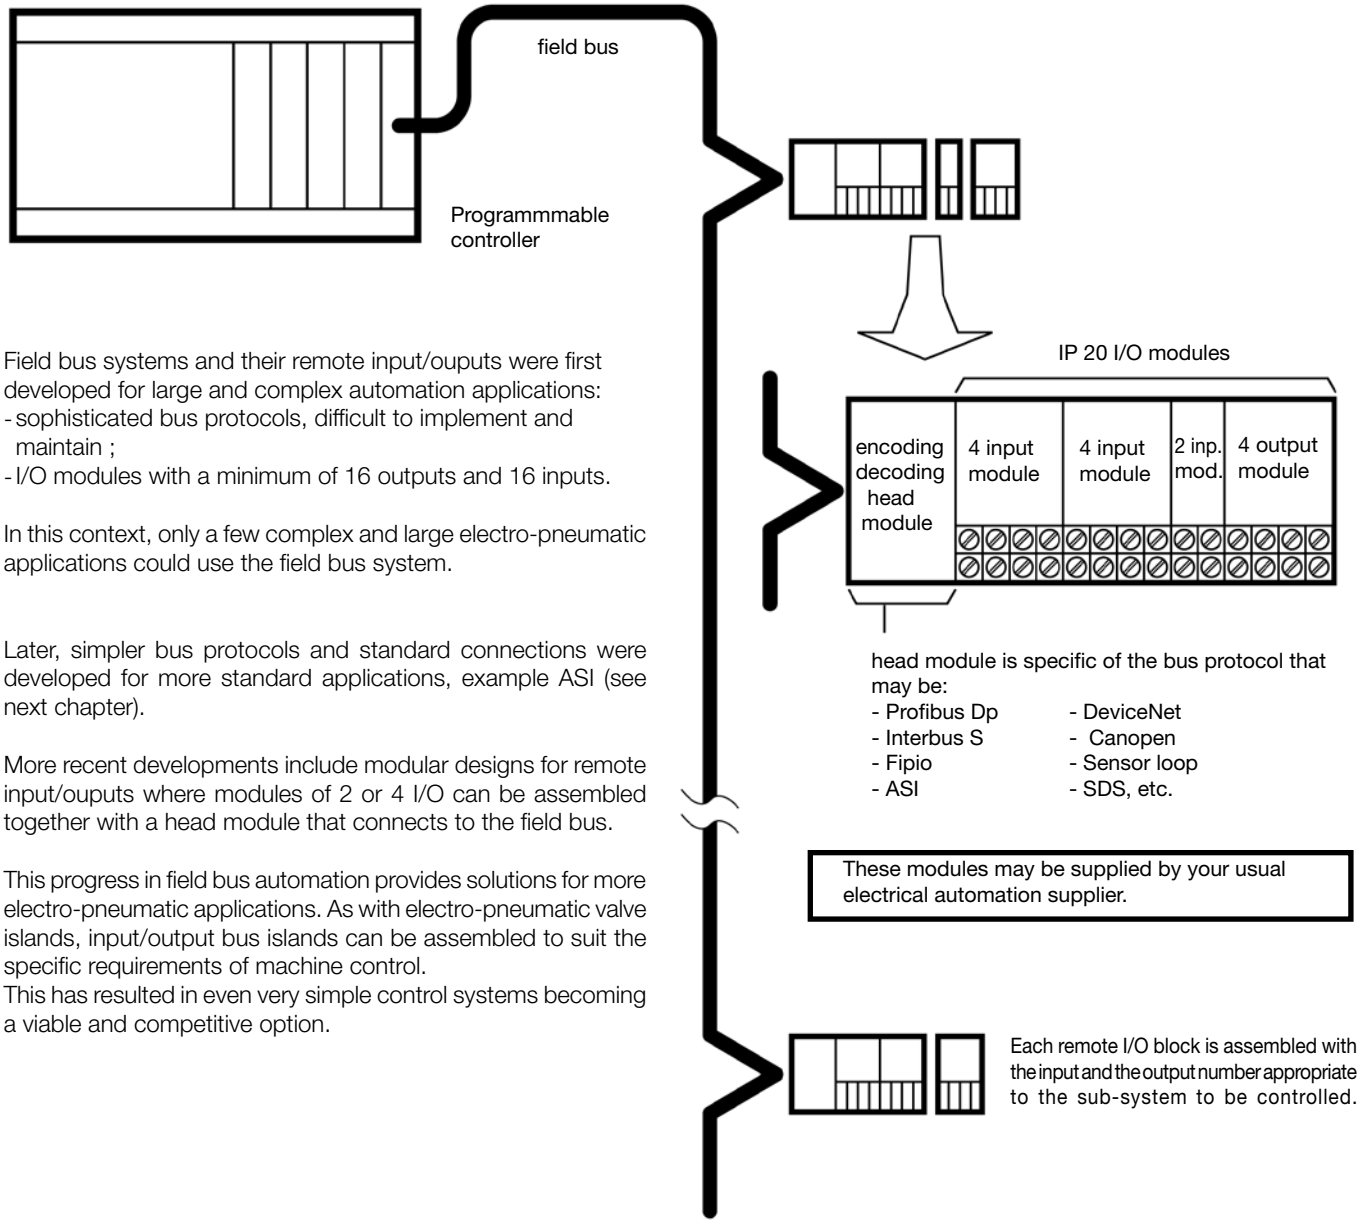

Field bus systems and their remote input/ouputs were first developed for large and complex automation applications:
- sophisticated bus protocols, difficult to implement and maintain ;
- I/O modules with a minimum of 16 outputs and 16 inputs.

In this context, only a few complex and large electro-pneumatic applications could use the field bus system.

Later, simpler bus protocols and standard connections were developed for more standard applications, example ASI (see next chapter).

More recent developments include modular designs for remote input/ouputs where modules of 2 or 4 I/O can be assembled together with a head module that connects to the field bus.

This progress in field bus automation provides solutions for more electro-pneumatic applications. As with electro-pneumatic valve islands, input/output bus islands can be assembled to suit the specific requirements of machine control.
This has resulted in even very simple control systems becoming a viable and competitive option.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Electro-pneumatic applications with IP 20 inputs/outputs


In most electro-pneumatic applications, IP 20 would need additional protection within an enclosure.

Depending upon the applications, the valve island can be mounted in the same enclosure.

Alternatively, the IP 65 valve island could be mounted outside the enclosure and closer to the cylinders as shown on the diagram.

Field bus connected IP 20 I/O modules in control cabinet.

Integrated connection IP 65 valve island close to cylinders.

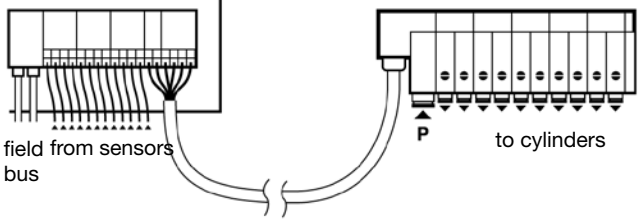

A typical example


The application shown is a fairly typical simple electro-pneumatic sub-assembly which may form only a small part of a larger application covered by the field bus.


This application demonstrates:

- the ease of mounting and interconnecting the I/O island and a valve island.
- typical I/O ratio, average 2 to 3 inputs to 1 output.

Integrated connection IP 65 valve island close to cylinder.


Field bus connected IP 20 I/O modules in control cabinet.

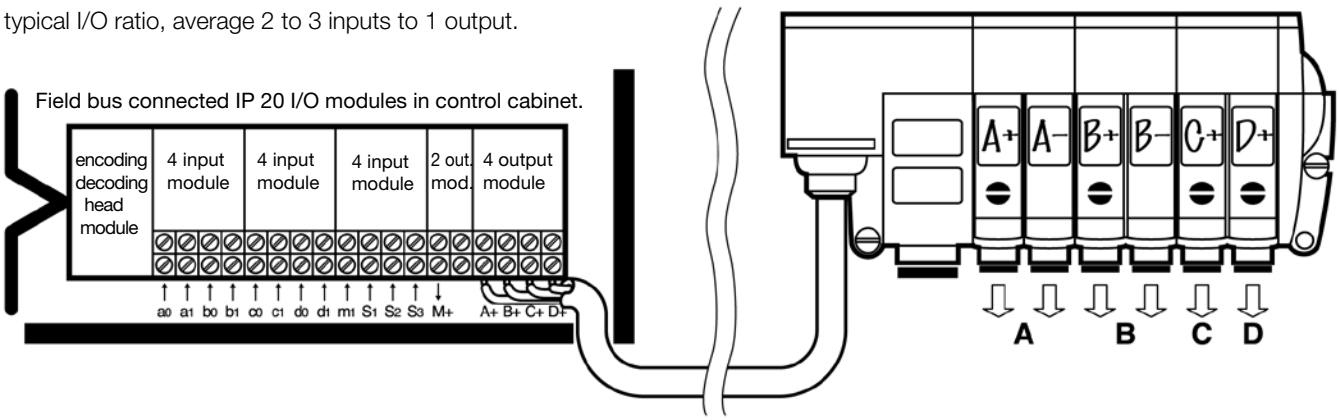

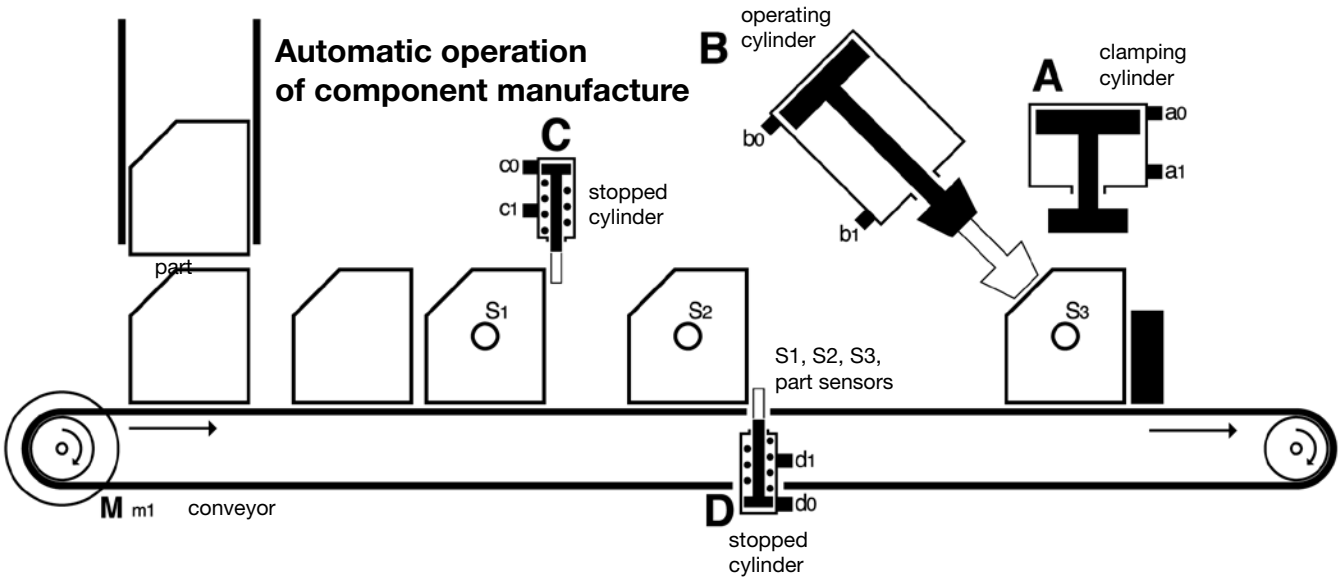

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


17 Remote short valve islands with AS-i bus

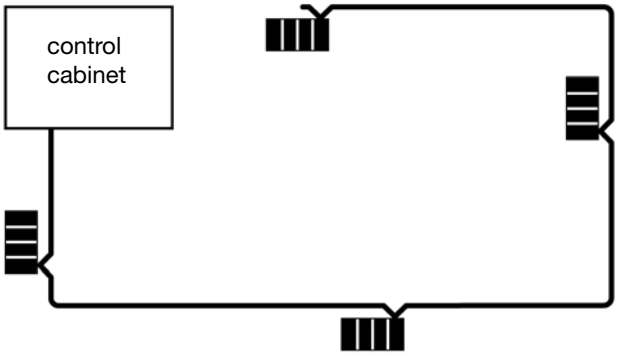



The «Actuator Sensor interface» (AS-i) bus protocol is ideally suited to most electro-pneumatic applications. AS-i standards also include transmission cables for easy IP65 protected vampire connections.

New generations of pneumatic valve islands now include specific modules for AS-i bus connections.

Valve islands for AS-i bus connections

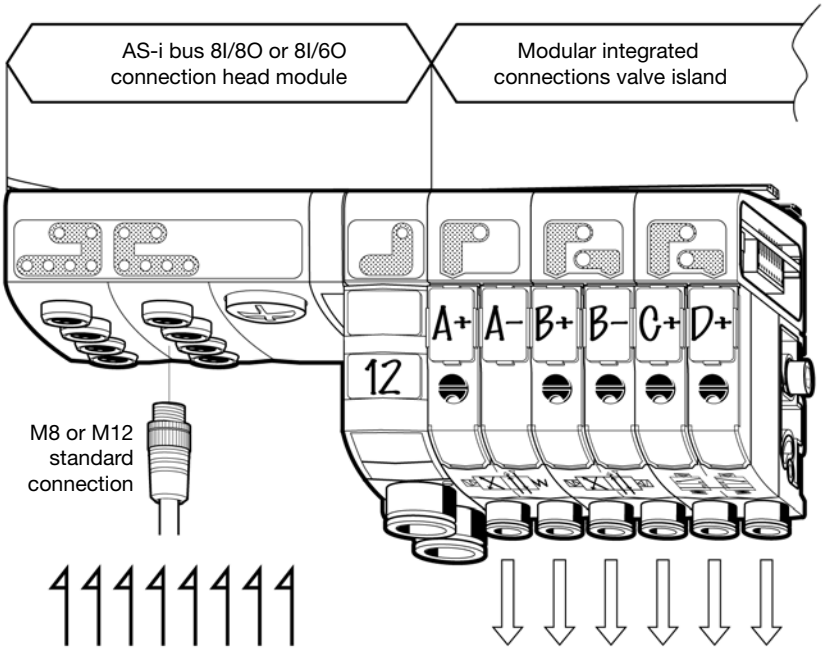

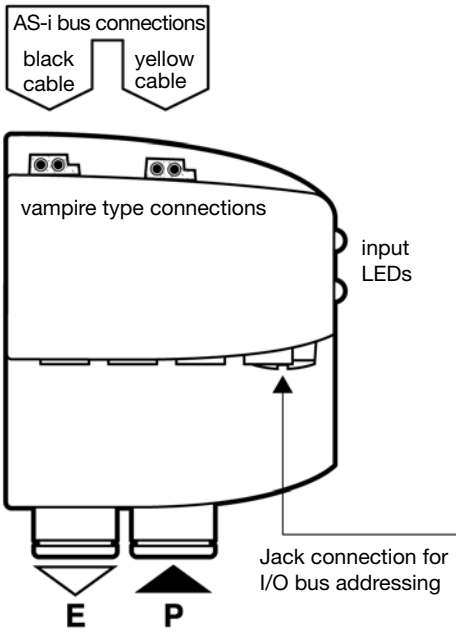

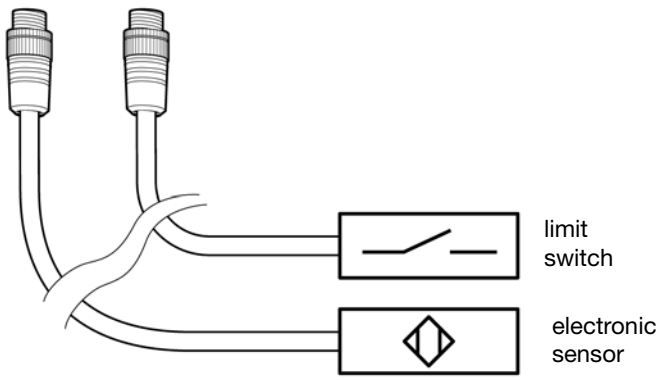

Valve islands with integrated connections can be supplied with an AS-i bus head enabling the following:


1 - IP65 vampire connections for the two AS-i bus cables.
2 - Decoding the bus signals and energising the required solenoid.
3 - Supply of power to sensors, receive input signals and coding them for the AS-i bus transmission.

Any type of electrical or electronic sensor may be connected to AS-i bus island head modules.


Outputs and inputs have separate power supplies, thus preventing any interference.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


AS-i bus electro-pneumatic automation practice

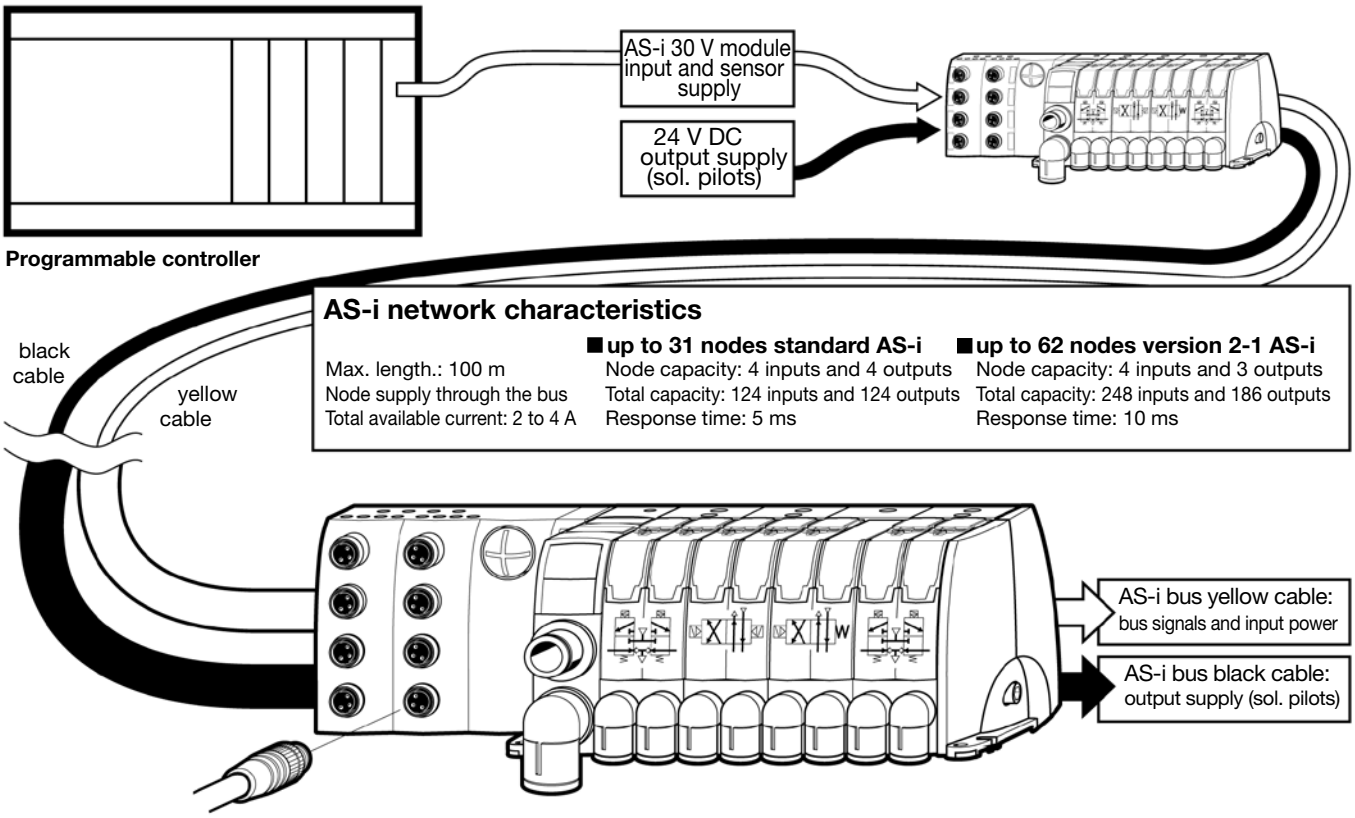


head module versions ▶ **8 M8 input connections**
for 8 input signals to the island



4 M12 input connections
for 8 input signals to the island



no input connection
for no input signal to the island (2 input signals per M12 connection)




Depending upon the application, the valve island may be supplied with 8 M8 input connections, 4 M12 input connections or no input connection when inputs and outputs are separate.

Islands are IP 65 water and dust protected. They may be installed remote from enclosure near pneumatic actuators, this resulting in simpler piping, reduced air consumption and reduced response time.

Separate access to pneumatic and to electronic sections

When the valve island has been installed, it is a simple operation to separate the AS-i head module from the valve island as shown in the diagram.


This will ease maintenance if necessary as the electronic and pneumatic sections of the island can be completely separated.

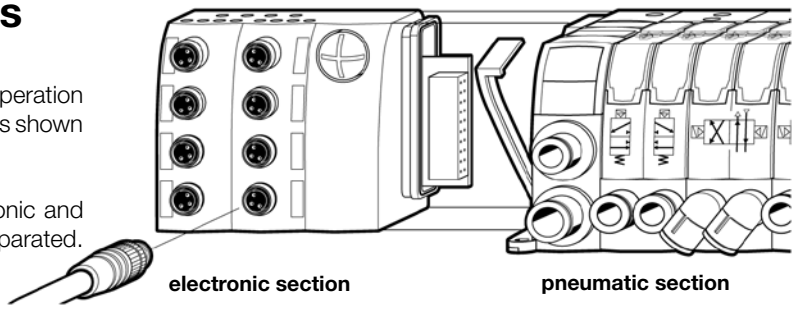

electronic section **pneumatic section**

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

18 Valve islands with device bus connections

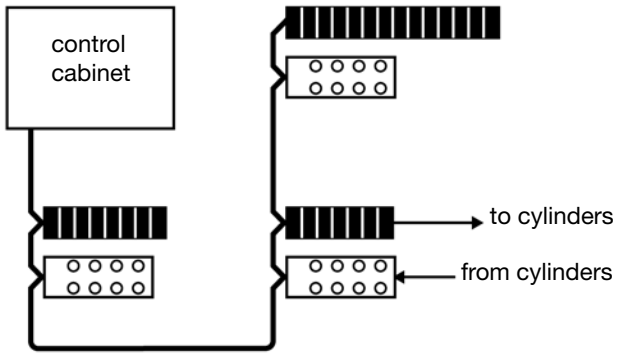


Some applications require device bus controls with IP 65 - 67 protection requirements;

The IP 65 integrated electrical connections valve islands with their electrical head module version for direct device bus connections, are designed for this purpose.

Valve islands with device bus connections

Device bus may be Profibus DP, Interbus S, Device Net, etc. i.e. any protocole that may be useful to industrial automation.


Modular valve island is configured to the application: up to 16 solenoid pilots per island. 3/2, 4/2, double 3/2 and 4/3 functions, monostable or bistable valves etc.

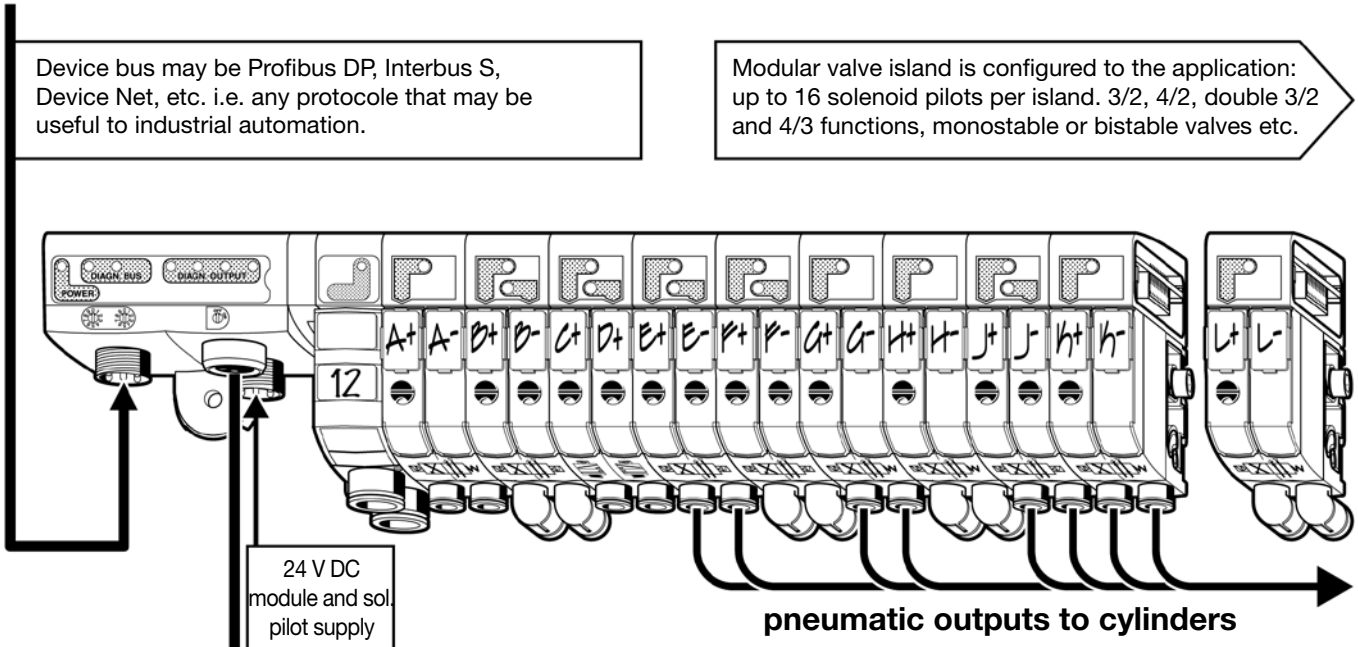

24 V DC module and sol. pilot supply

pneumatic outputs to cylinders

electrical input feed-back signals

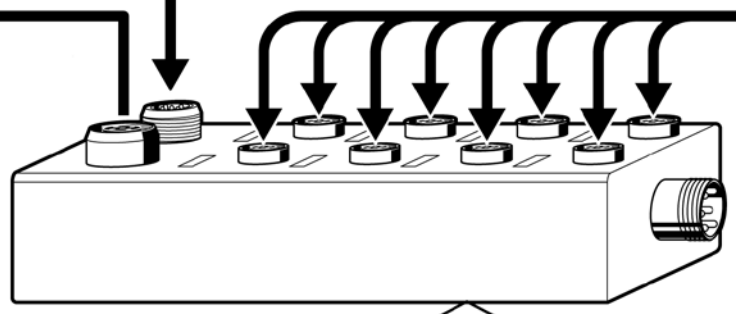

supply


Device bus towards next station

Device bus IP 67 input blocks available from your usual electrical automation supplier. They may be either non modular, or modular, or adaptable with electrical inputs and outputs.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Device bus electro-pneumatic automation practice

from short remote valve islands.....to longer valve islands

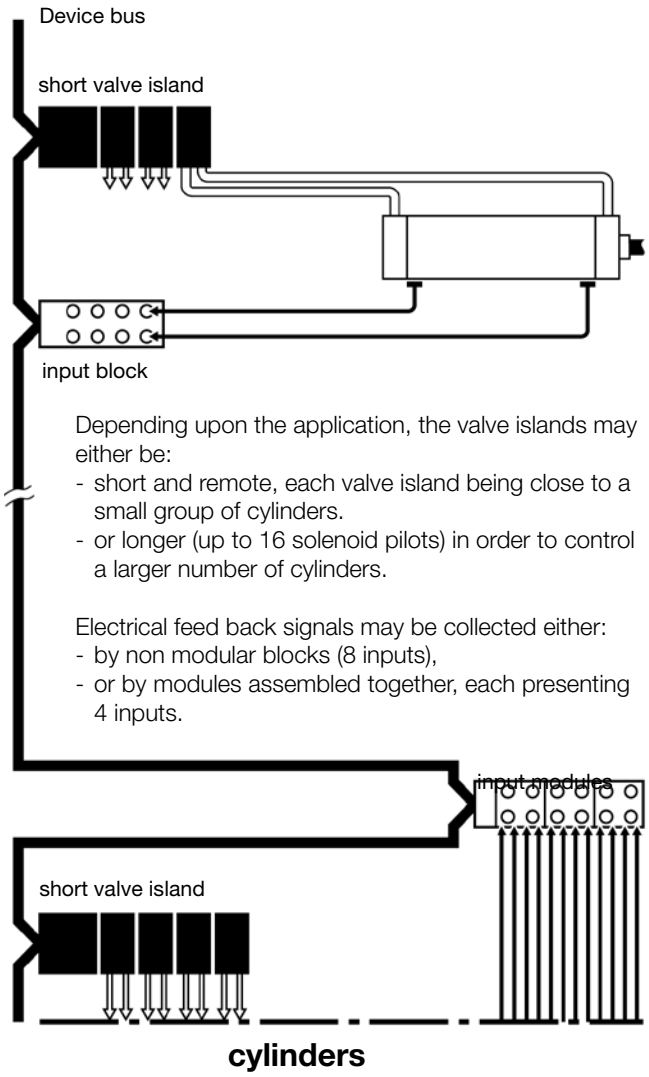

Depending upon the application, the valve islands may either be:
- short and remote, each valve island being close to a small group of cylinders.
- or longer (up to 16 solenoid pilots) in order to control a larger number of cylinders.


Electrical feed back signals may be collected either:
- by non modular blocks (8 inputs),
- or by modules assembled together, each presenting 4 inputs.

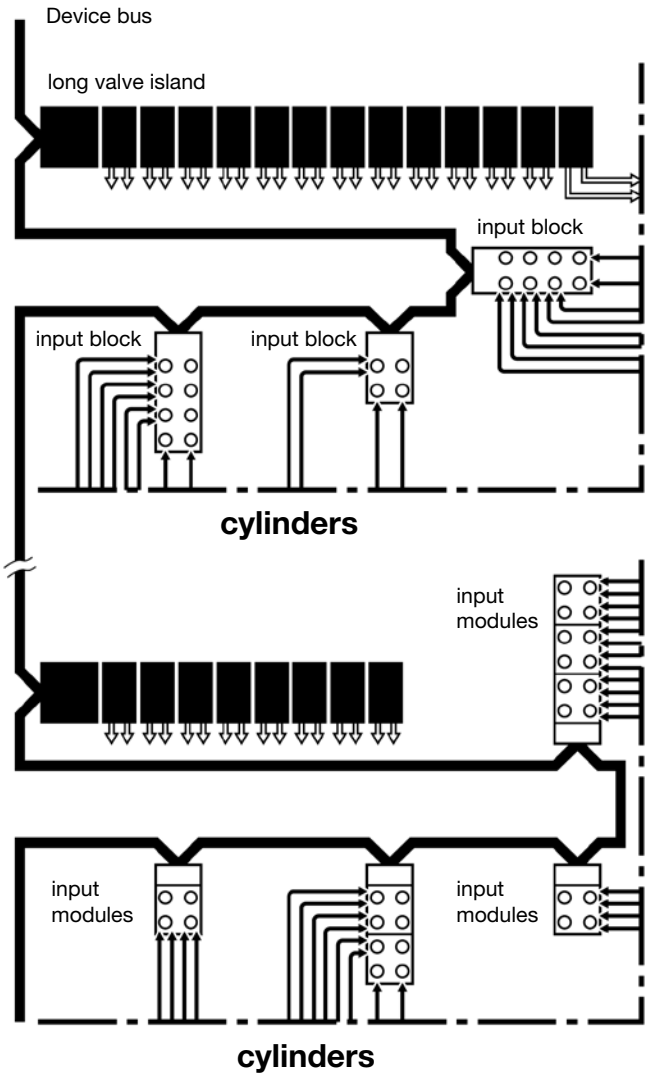

Separate access to pneumatic and to electronic sections

When the valve island has been installed, it is a simple operation to separate the bus head module from the valve island as shown in the diagram.

This will ease maintenance if necessary as the electronic and pneumatic sections of the island can be completely separated.

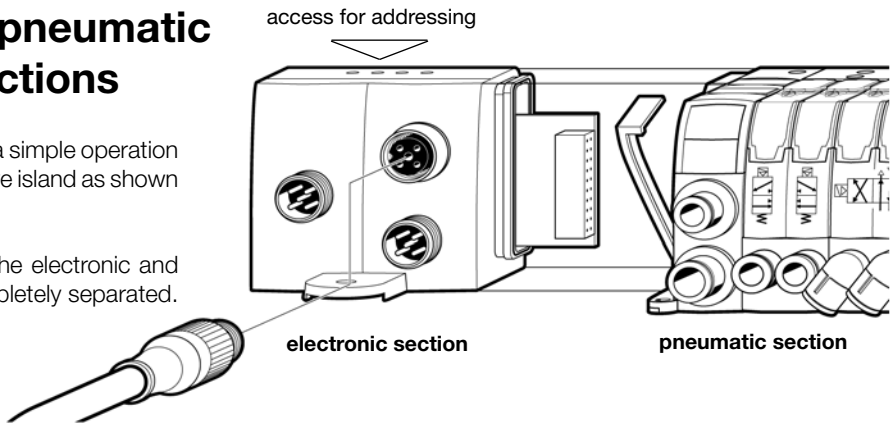


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Moduflex: a simple and complete «user system»

The illustration of the opposite page resumes the system organization with:
- the 4 module series V, T, S and P;
- the module and pneumatic connector sizes 1 and 2;
- all basic modules functions and order codes;
- all electrical and pneumatic plug-in connector order codes.

With local inventories reduced to the modules and connectors shown here, any local distributor, machine manufacturer or user easily obtains the valve island or stand-alone that he needs and will then completely master any evolution required by the machine commissioning.

Note : the functional poster proposed below reproduces this illustration at A1 format (60 x 84 cm).



The machine designer Moduflex workshop


Valves are the centre of electro-pneumatic automation. They are now designed into compact islands that are easily configured to each application. For full efficiency in this enhanced automation practice, machine designers are helped by 3 complementary design tools:

1 - the Moduflex valve island configurator, an easy to use **CD-ROM** (see p. 12 and 13);

2 - the Moduflex functional **poster**, a «one glance synopsis» of the Moduflex System;

3 - this **catalogue**, that includes «The manual of modular pneumatic valves islands».

Make sure your Moduflex workshop is complete.

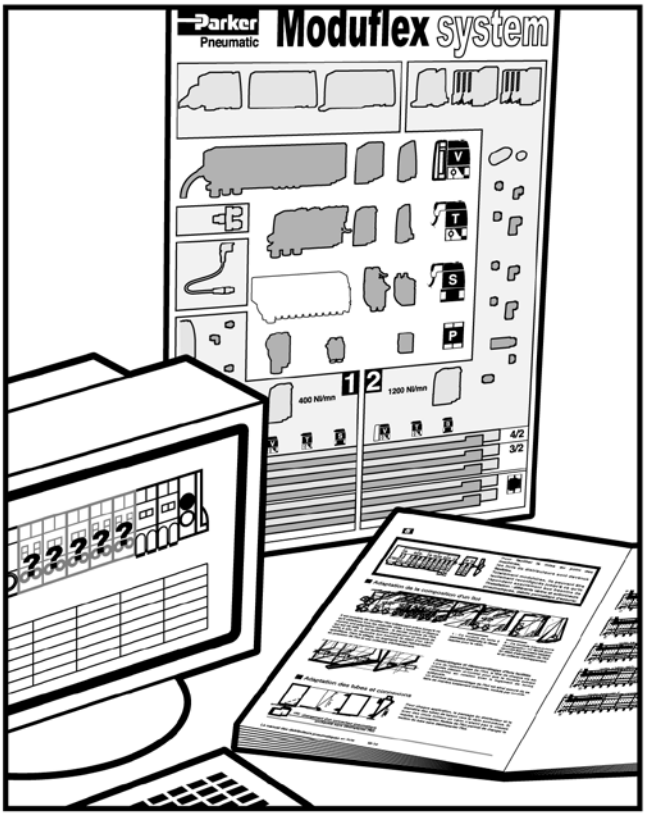

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Moduflex Valve System

V series
Integrated connection field bus or multi-connector valve island



T series
Individual connector valve islands
Solenoid clip or lockable connector or remote air pilot



S series
Stand alone valves
Solenoid clip or lockable connector or remote air pilot



P series
Peripheral modules
Flow control, check valves, pressure regulator, vacuum



1

Electrical field bus head modules



ASi Sa3	4O		P2M2HBVA10400
	4O/Si M12		P2M2HBVA10404B
	8O		P2M2HBVA10800
	8O/Si M8		P2M2HBVA10808A
	8O/Si M12		P2M2HBVA10808B
ASi v 2.1	6O		P2M2HBVA20600
	6O/Si M8		P2M2HBVA20606A
	6O/Si M12		P2M2HBVA20606B
ProfiBus DP	16O		P2M2HBVP11600
DeviceNet	16O		P2M2HBVD11600
CANopen	16O		P2M2HBVC11600
InterBus S	16O		P2M2HBVS11600

Island head and intermediate module sets

		Size 2	
		V series	T series
	Valve island pneumatic head and tail module set	P2M2HXT01	P2M2HXT01
	Valve island intermediate supply module with a set of 4 configuration plates	P2M2BXV0A	P2M2BXT0A

Electrical multi-connector head module



Description		Protection	Cable length	
Guillotine type	Multi-connection head module	IP65		P2M2HEV0A
	Guillotine connector with flying leads multi-cable		2 m	P8LMH26M2A
			5 m	P8LMH26M5A
			9 m	P8LMH26M9A
Standard Sub-D 25 type	Multi-connection head module	IP40		P2M2HEV0D
	Sub-D 25 connector with flying leads multi-cable		3 m	P8LMH25M3A
			9 m	P8LMH25M9A
		IP65	9 m	P8LMH25B9A

Electrical connectors



Description	Connector type	Cable length	
Individual lockable connector – IP67 including LED and surge protection 2 Flying leads	M8 / 3 x Flying leads	2 m	P8LS06L226C
		5 m	P8LS06L526C
		9 m	P8LS06L926C
Clip connector – IP40	1 x Clip connector	1 m	P8LW021C
individual : Including 2 flying leads	2 x Clip connectors	1 m	P8LW021C02
Multiple : Including 1 common (0 Vdc) and 1 flying lead per connector	4 x Clip connectors	1 m	P8LW021C04
	8 x Clip connector	1 m	P8LW021C08
Straight cable quick connect to thread connector, IP67 protected	M8		P8CS0803J
	M12		P8CS1204J
« Y » shape	M12 Male - 2 x M12 Female		P8CSY1212A

2

150 Nl/mn | 400 Nl/mn | 1200 Nl/mn




24 V⎓ P= - 0.9 bar / +8 bar



		Size 1					Size 2				
		IP65	IP67		IP40		IP65	IP67		IP40	
		V	T	S	T	S	V	T	S	T	S
4/2		P2M1V4ES2CV	P2M1T4ES2C	P2M1S4ES2C	P2M1T4ES2CW	P2M1S4ES2CW	P2M2V4ES2CV	P2M2T4ES2C	P2M2S4ES2C	P2M2T4ES2CW	P2M2S4ES2CW
		P2M1V4EE2CV	P2M1T4EE2C	P2M1S4EE2C	P2M1T4EE2CW	P2M1S4EE2CW	P2M2V4EE2CV	P2M2T4EE2C	P2M2S4EE2C	P2M2T4EE2CW	P2M2S4EE2CW
		P2M1VJEE2CV	P2M1TJEE2C	P2M1SJEE2C	P2M1TJEE2CW	P2M1SJEE2CW					
3/2		P2M1VDEE2CV	P2M1TDEE2C	P2M1SDEE2C	P2M1TDEE2CW	P2M1SDEE2CW	P2M2VDEE2CV	P2M2TDEE2C	P2M2SDEE2C	P2M2TDEE2CW	P2M2SDEE2CW
		P2M1VCEE2CV	P2M1TCEE2C	P2M1SCEE2C	P2M1TCEE2CW	P2M1SCEE2CW	P2M2VCEE2CV	P2M2TCEE2C	P2M2SCEE2C	P2M2TCEE2CW	P2M2SCEE2CW
		P2M1VEEE2CV	P2M1TEEE2C	P2M1SEEE2C	P2M1TEEE2CW	P2M1SEEE2CW	P2M2VEEE2CV	P2M2TEEE2C	P2M2SEEE2C	P2M2TEEE2CW	P2M2SEEE2CW
		P2M1V3ES2CV	P2M1T3ES2C	P2M1S3ES2C	P2M1T3ES2CW	P2M1S3ES2CW	P2M2V3ES2CV	P2M2T3ES2C	P2M2S3ES2C	P2M2T3ES2CW	P2M2S3ES2CW

3

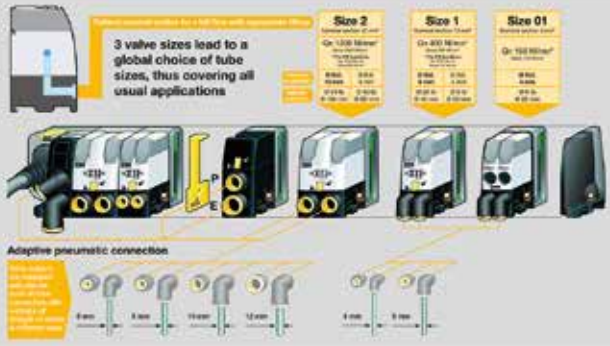

Clip-On pneumatic connectors

		Tube OD	Size 1	Size 2
	Straight connector	G1/8	FMDG1-1	
		4mm	FMD04-1	
		6mm	FMD06-1	FMD06-2
		8mm		FMD08-2
		10mm		FMD10-2
		12mm		FMD12-2
	Elbow connector	G1/8	CMDG1-1	
		4mm	CMD04-1	
		6mm	CMD06-1	CMD06-2
		8mm		CMD08-2
		10mm		CMD10-2
		12mm		CMD12-2
	Double male union		HMDXX1	HMDXX2
	Silencer		MMDVA1	MMDVA2
	Plug		PMDXX1	PMDXX2

4

Basic peripheral modules (without connector)

				Size 1	Size 2
		Dual flow control		P2M1P3FA	P2M2P3FA
		Dual P.O. check valve		P2M1PXCA	P2M2PXCA
		Pressure regulator	Pressure range	Gauge	
			0 - 2 bar	0 - 4 bar	P2M1PXSR	P2M2PXSR
				Without	P2M1PXST	P2M2PXST
			0 - 4 bar	0 - 7 bar	P2M1PXSM	P2M2PXSM
				Without	P2M1PXSL	P2M2PXSL
			0 - 8 bar	0 - 11 bar	P2M1PXSG	P2M2PXSG
				Without	P2M1PXSN	P2M2PXSN
		90% Vacuum generator			P2M1PXVA	

Clip-on accessories

	Description	Connection	Pressure range	
	Clip-on pressure gauge for pressure regulator modules, size 1 or size 2	Clip-on	0 to 4 bar	P2M1K0QT
			0 - 7 bar	P2M1K0QL
			0 - 11 bar	P2M1K0QN
	Analog (1 - 5 Vdc) Vacuum Sensor Flying lead 2 m cable	4 mm tube	0 to -1 bar	MPS-V6T4-AG
		6 mm tube	0 to -1 bar	MPS-V6T-AG
	Dig. PNP / Ana (4 - 20 mA) Vacuum Sensor 15 cm cable - M8 4 pin's connector	G1/8" male	0 to -1 bar	MPS-V34G-PCI

www.parker.com/pde/p2m

PDE2536PMEU

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Parker Worldwide

Europe, Middle East, Africa

AE – United Arab Emirates, Dubai
Tel: +971 4 8127100
parker.me@parker.com

AT – Austria, Wiener Neustadt
Tel: +43 (0)2622 23501-0
parker.austria@parker.com

AT – Eastern Europe, Wiener Neustadt
Tel: +43 (0)2622 23501 900
parker.easteurope@parker.com

AZ – Azerbaijan, Baku
Tel: +994 50 2233 458
parker.azerbaijan@parker.com

BE/LU – Belgium, Nivelles
Tel: +32 (0)67 280 900
parker.belgium@parker.com

BG – Bulgaria, Sofia
Tel: +359 2 980 1344
parker.bulgaria@parker.com

BY – Belarus, Minsk
Tel: +375 17 209 9399
parker.belarus@parker.com

CH – Switzerland, Etoy
Tel: +41 (0)21 821 87 00
parker.switzerland@parker.com

CZ – Czech Republic, Klecany
Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE – Germany, Kaarst
Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK – Denmark, Ballerup
Tel: +45 43 56 04 00
parker.denmark@parker.com

ES – Spain, Madrid
Tel: +34 902 330 001
parker.spain@parker.com

FI – Finland, Vantaa
Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR – France, Contamine s/Arve
Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR – Greece, Athens
Tel: +30 210 933 6450
parker.greece@parker.com

HU – Hungary, Budaörs
Tel: +36 23 885 470
parker.hungary@parker.com

IE – Ireland, Dublin
Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IT – Italy, Corsico (MI)
Tel: +39 02 45 19 21
parker.italy@parker.com

KZ – Kazakhstan, Almaty
Tel: +7 7273 561 000
parker.easteurope@parker.com

NL – The Netherlands, Oldenzaal
Tel: +31 (0)541 585 000
parker.nl@parker.com

NO – Norway, Asker
Tel: +47 66 75 34 00
parker.norway@parker.com

PL – Poland, Warsaw
Tel: +48 (0)22 573 24 00
parker.poland@parker.com

PT – Portugal, Leca da Palmeira
Tel: +351 22 999 7360
parker.portugal@parker.com

RO – Romania, Bucharest
Tel: +40 21 252 1382
parker.romania@parker.com

RU – Russia, Moscow
Tel: +7 495 645-2156
parker.russia@parker.com

SE – Sweden, Spånga
Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SL – Slovenia, Novo Mesto
Tel: +386 7 337 6650
parker.slovenia@parker.com

TR – Turkey, Istanbul
Tel: +90 216 4997081
parker.turkey@parker.com

UA – Ukraine, Kiev
Tel: +380 44 494 2731
parker.poland@parker.com

UK – United Kingdom, Warwick
Tel: +44 (0)1926 317 878
parker.uk@parker.com

ZA – South Africa, Kempton Park
Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

North America

CA – Canada, Milton, Ontario
Tel: +1 905 693 3000

US – USA, Cleveland
Tel: +1 216 896 3000

Asia Pacific

AU – Australia, Castle Hill
Tel: +61 (0)2-9634 7777

CN – China, Shanghai
Tel: +86 21 2899 5000

HK – Hong Kong
Tel: +852 2428 8008

IN – India, Mumbai
Tel: +91 22 6513 7081-85

JP – Japan, Tokyo
Tel: +81 (0)3 6408 3901

KR – South Korea, Seoul
Tel: +82 2 559 0400

MY – Malaysia, Shah Alam
Tel: +60 3 7849 0800

NZ – New Zealand, Mt Wellington
Tel: +64 9 574 1744

SG – Singapore
Tel: +65 6887 6300

TH – Thailand, Bangkok
Tel: +662 186 7000

TW – Taiwan, Taipei
Tel: +886 2 2298 8987

South America

AR – Argentina, Buenos Aires
Tel: +54 3327 44 4129

BR – Brazil, Sao Jose dos Campos
Tel: +55 12 4009 3500

CL – Chile, Santiago
Tel: +562 2303 9640

MX – Mexico, Toluca
Tel: +52 72 2275 4200

European Product Information Centre
Free phone: 00 800 27 27 5374
(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)

© 2015 Parker Hannifin Corporation. All rights reserved.

Catalogue PDE2536TCUK - V6 - September 2015

Parker Hannifin Ltd.
Tachbrook Park Drive
Tachbrook Park, Warwick CV34 6TU
United Kingdom
Tel.: +44 (0) 1926 317 878
Fax: +44 (0) 1926 317 855
parker.uk@parker.com
www.parker.com

Your local authorized Parker distributor

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP