ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Parker / Compumotor VIX500AE* at our website: *Click HERE*

ViX Series



Winner of Control Engineering Magazine's Editors' Choice Award 2002

Small, Intelligent and Powerful Digital Servo/ Stepper Drives and Drive/Controllers

With its all-digital, DC-powered design, the ViX family of award-winning drives and drive/controllers offers a new level of economical servo performance. Available in both drive-only and intelligent-drive/controller platforms, the ViX family gives users a robust and cost-effective DC product, particularly in multi-axis applications.

Designed for easy set-up and tuning, the ViX uses wizards-based software that enables users to implement a fully configured system within minutes of unpacking the unit. Its small size–just 4.9 x 1.65 x 3.35 inches–makes it ideal for narrow applications and for direct-panel mounting, or for attachment to a standard DIN rail using an optional adapter.

ViX General Features

- Up to 80VDC bus voltage
- Compact size: 4.9 x 1.65 x 3.35 inches
- Standard RS232C ASCII interface
- 5 digital inputs and 3 digital outputs (software configurable)
- CE (EMC & LVD), UL compliant
- Auto-correction of motor phase/feedback wiring (servo only)

Servo-Specific Features

- Accepts analog (±10V), step/direction, CW/CCW signals
- Encoder following
- Current outputs of 2.5A RMS continuous and 5A RMS continuous
- Resolver or encoder feedback

Stepper-Specific Features

- Integer selectable resolution from 200 to 51,200 steps/rev
- Anti-resonance circuitry suppresses mid-range instability
- Recommended motor inductance range of 0.5 mH to 20 mH

Servo and Stepper Optional Controller-Specific Features

- Storage of up to 16 sequences
- Encoder following, registration, feed-rate override
- 5 digital inputs, 3 digital outputs, 1 analog input
- Conditional statements
- Optional RS485/CANbus interface

ViX Part Numbering System

ViX — **500** — **I** — **E**

ViX Digital Drive Series

Example: ViX500IE

Continuous Current Level

Servo
- 250 - 2.5A continuous, 7.5A peak (RMS)
- 500 - 5A continuous, 15A peak (RMS)

Stepper
- 250 - 4.0A peak, (2.8A RMS)
- 500 - 8.0A peak, (15.6A peak RMS)

Drive Type

- A - Drive only*
- I - Drive/controller
- C - Drive/controller with CANopen/RS485

Drive Type

- E - Servo with encoder or resolver feedback
- H - Servo with high-resolution rotary encoder or linear encoder feedback
- M - Microstepper

* Available in servo version only

Parker Automation
Parker Hannifin Corporation
Electromechanical Automation Division
parkermotion.com

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

ViX Common Specifications

Drive Input Power		
Voltage		
ViX500	48-80VDC +5%, -15%	
ViX250	24-80VDC +5%, -15%	
Controller input power	24VDC, 250mA (no outputs loaded)	
Drive Output Current	Servo	Stepper
ViX500	5A RMS continuous, 15A RMS peak*	8.0A pk (5.6 Arms)
ViX250	2.5A RMS continuous, 7.5A RMS peak*	4.0A pk (2.8 Arms)
Physical		
Compumotor motors	See table on page 3	
Motor inductance range	0.5-10mH recommended (speed range reduced if >10mH)	
Motor current limit	Selectable by software	
PWM/Motor ripple frequency	20 KHz/40 KHz	
Protection	Short-circuit, brownout, over-voltage, under-voltge, drive/motor over-temperature I^2t, feedback fault	
Performance		
Feedback device (servo only)	Resolver or quadrature encoder (selected by software)	
Resolver feedback (servo only)	12-bit A-to-D input (gives 4096 counts/rev), absolute accuracy 30 arc-min	
Encoder feedback	5V differential, 400 KHz max. input frequency (pre-quadrature), resolution 1000, 1024, 2000 or 5000 lines (i.e., up to 20,000 counts/rev). The H series has fully variable resolution and will support up to 2.5 MHz pre-quadrature encoder input.	
Encoder supply	5V output for feedback and following encoder, 250mA maximum loading	
Drive Command Inputs		
(AE, AH models only)		
Velocity and Torque modes	±10V differential, 12-bit resolution	
Position mode	Step/direction, step+/step- or quadrature encoder** input with resolution equivalent to feedback device	
Digital Inputs	5, of which 4 are configurable as Home, Limits and Registration. Operating range 5V to 24V. Software configurable 4K7 pull-up/active low or 4K7 pull-down/active high	
Encoder following input	Compatible with feedback resolution, max. input frequency 2.5MHz. Also configurable as step/direction or step+/step- input	
Outputs		
Digital outputs	3 - 1 is configurable as Drive OK. Software-configurable active-low/sinking (5V-24V) or active-high/sourcing (24V only). 50mA maximum per output	
Encoder output	Fixed resolution (dependent on feedback device)	
Fault output	NPN open-collector output, normally low, active high	
Analog output	10-bit filtered PWM monitor output, torque or velocity	
Motor brake output	24V, 2A maximum, energized to release	
Communication		
Communication interface	9-pin D-shell (female) connector for RS232 (standard); combined RS485 & CANopen option available	
High-speed interface	Dual RJ45 connectors for CANopen, RS485 option, etc., also provide daisychain ports for multi-drop RS232 connections	
Diagnostics		
LEDs	3 LEDs for feedback, drive and communication status	
Environmental		
Drive temperature range	32-122°F (0-50°C) local environment fan (fan cooling required about 104°F (40°C)	
Humidity	0-95% non-condensing	


* Maximum duration at peak current - 2 seconds; maximum duty cycle - 10%. The time limit is set by an I^2t circuit and will be reduced if the motor is stationary.

** ViX drive/controller versions (IE, IH) also accept quadrature encoder signals for following.

Parker Automation
Parker Hannifin Corporation
Electromechanical Automation Division
parkermotion.com


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Servo Motor Speed-Torque Performance Curves

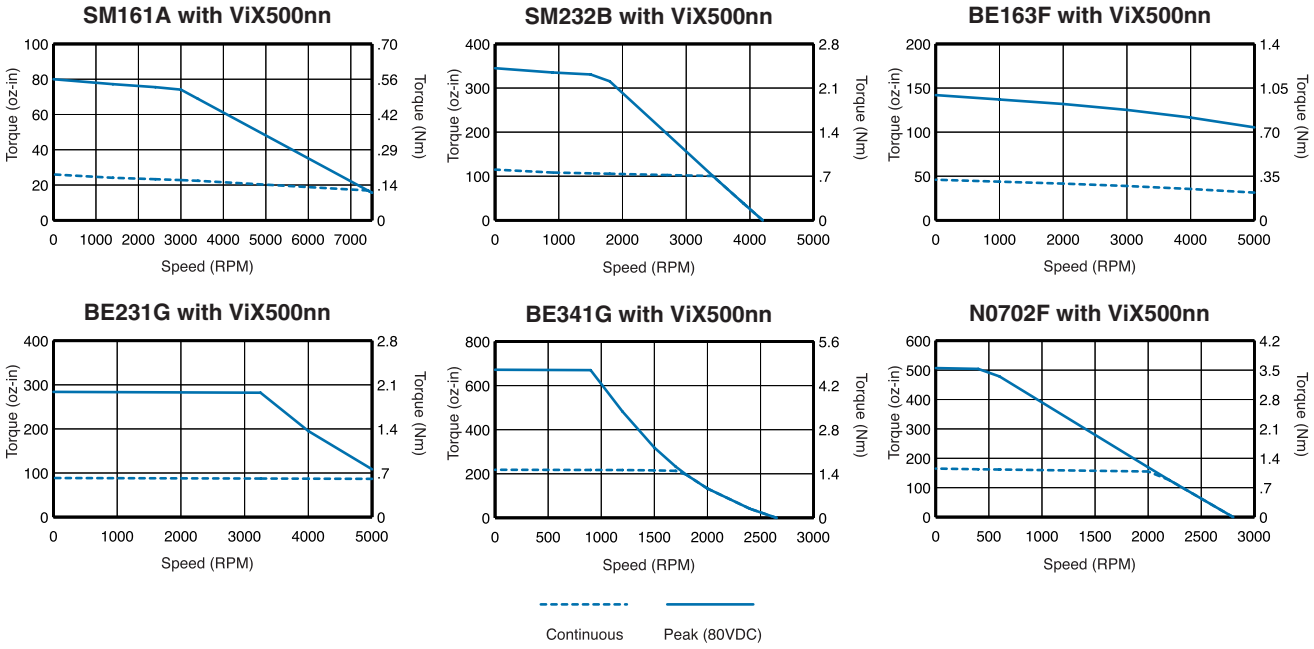

Stepper Motor Speed-Torque Performance Curves

Note: Motors in speed-torque curves are wired in series.

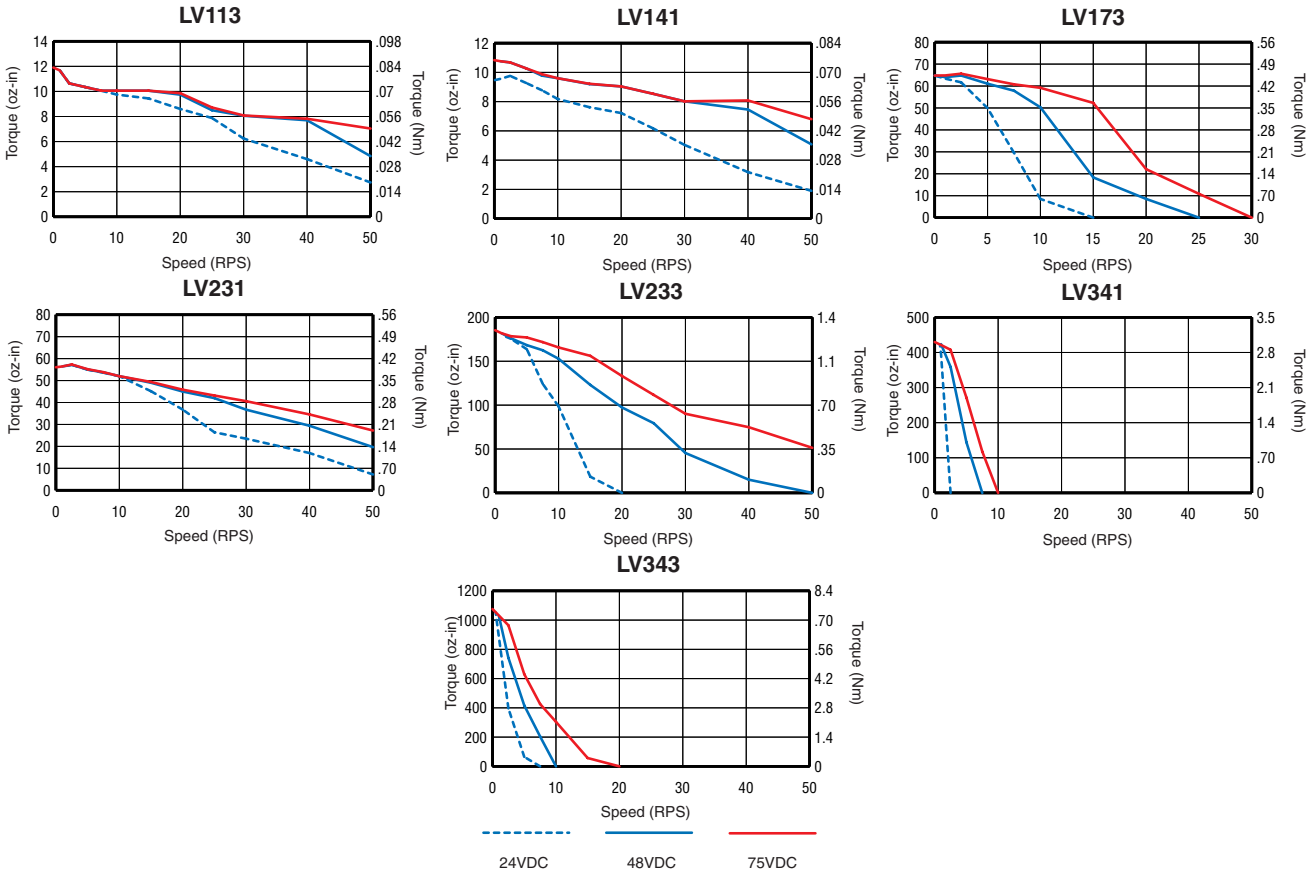

For a comprehensive display of all ViX drive/motor speed-torque curves, please log on to parkermotion.com

Parker Automation
Parker Hannifin Corporation
Electromechanical Automation Division
parkermotion.com

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

ViX Compatible Motors & Accessories

Servo Drives	Servo Motors
ViX250AE **ViX250AH** **ViX250IE** **ViX250IH**	SM160An-nPSn SM161An-nPSn SM162An-nPSn SM230An-nPSn SM231An-nPSn SM232An-nPSn SM233An-nPSn BE161Cn-nPSn BE162Cn-nPSn BE163Cn-nPSn BE164Cn-nPSn BE230Gn-nPSn BE231Gn-nPSn BE232Gn-nPSn BE233Gn-nPSn N0701Dn-nPSn N0702En-nPSn


Servo Drives	Servo Motors
ViX500AE **ViX500AH** **ViX500IE** **ViX500IH**	SM160An-nPSn SM161An-nPSn SM162An-nPSn SM230An-nPSn SM231An-nPSn SM231Bn-nPSn SM232Bn-nPSn SM233Bn-nPSn BE161Fn-nPSn BE162Fn-nPSn BE163Fn-nPSn BE164Fn-nPSn BE230Gn-nPSn BE231Gn-nPSn BE232Gn-nPSn BE233Gn-nPSn BE341Gn-nPSn BE342Hn-nPSn N0701Fn-nPSn N0702Fn-nPSn

ViX Stepper Drive/Controller Compatible Motors & Accessories

Stepper Drives	Stepper Motors
ViX250IM **ViX500IM**	LV113 LV141 LV173 LV231 LV233 LV341 LV343

ViX Accessories	
XL-PSU	80 VDC, 250 W Power Supply Module
ViX RS232-08	8' RS232 Communication Cable (CE)
ViX RS232-16	16' RS232 Communication Cable (CE)
VM15-PF	ViX Breakout Module and Cable for I/O Connector
VM15-PM	ViX Breakout Module and Cable for Analog/Encoder Connector
DIN Rail Kit	ViX DIN Rail Mounting Kit

ViX Dimensions in inches (mm) – all models

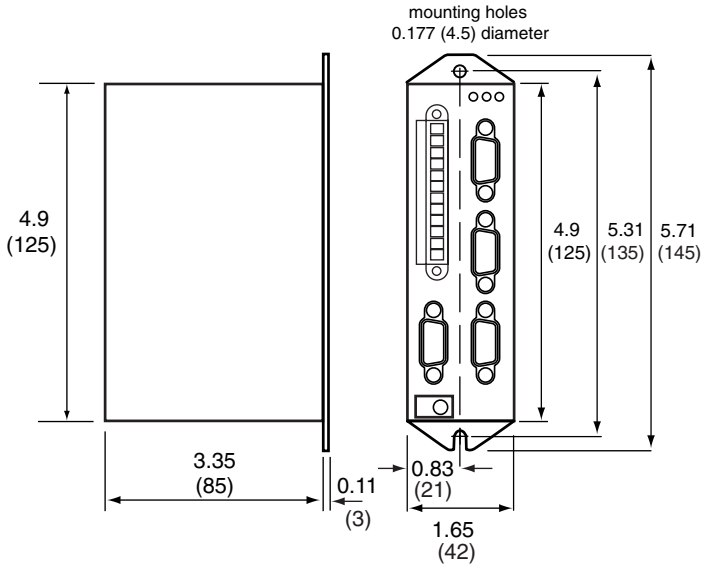

Parker Automation
Parker Hannifin Corporation
Electromechanical Automation Division
parkermotion.com

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP