

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Payne Engineering 18TBP-1-10* at our website: *Click HERE*

PAYNE ENGINEERING
Rt. 29 ⎮ Scott Depot WV ⎮ 25560-0070

Model 18TBP/TB
SCR Power Controls

APPLICATION ASSISTANCE - 304/757-7354
24 HOUR FAX - 304/757-7305



Model 18TBP/TB

- **Description:** Variable-Voltage Power Control
- **Product Range:** 120-240 VAC, 5-25 amps.
- **Application** Resistance Loads

FEATURES

- All Solid-State Construction
- Short Circuit Protection
- Integral Heatsink Chassis
- No Thermal Derating

TYPICAL APPLICATIONS

- Replace Variable Transformers
- Electric Heater Control
- Light Dimming
- Hot-Wire Cutting
- Heat Sealing and Packaging
- Plastic Molding and Extruding
- Food Preparation Equipment

Model 18TBP/TB controls provide infinitely variable control of single-phase a.c. voltage to resistive heating elements. These controls are solid-state replacements for variable transformers, mercury relays, saturable core reactors, and electromechanical contactors. Power Triacs replace contacts and brushes to control electric power without moving parts, and, when operated within their stated ratings for current, voltage, and temperature, have no known MTBF or life expectancy rating.

PANEL- OR CHASSIS-MOUNT

Model 18TBP controls are compact, lightweight packages that employ single hole mounting to panels and enclosure doors. Model 18TB controls are designed for rear or rack mounting. Both utilize an electrically isolated heatsink chassis.

EXCLUSIVE ADVANCED TECHNOLOGY: Three Pillars Of Protection

Model 18TBP/TB controls incorporate exclusive design features to protect power semiconductor components against damage. “2 millisecond” fuses protect against short-circuit damage; an R-C snubber network protects against dv/dt failure; an integral heatsink chassis allows continuous operation in ambients to 50^{o}C with no derating.

SPECIFICATIONS

Power Circuit power Triac with parallel R-C circuit for dv/dt protection and current-clamping 2 millisecond fuse for short-circuit protection.

Control Circuit: R-C network with variable-resistance potentiometer adjusts firing capacitor into bilateral diode connected to power Triac gate for stable, full-range control.

Mains Frequency 50/60 Hz.

Output Voltage: 0-95% of input.

Overall Efficiency 99%.

Power Loss: approximately 1.5 watts/amp.

Voltage Drop Across Power Circuit at 100% Output: 1-2 volts maximum/phase.

Control Input: manual control via variable potentiometer.

Control Power: 1 watt.

Fuse Protection: 2 millisecond I^2t fuses are factory tested and coordinated with all power semiconductors, considering:

a. fuse element melt time t_{melt};
b. peak melt current I_{melt};
c. arc quench time t_{arc};
d. peak arc current I_{arc}.

Ambient Temperature Range: -10 to +50^{o}C.

Terminal Connections Bakelite or thermoplastic blocks.

SIZING CONSIDERATIONS

Model 18TBP/TB controls are rated for use with constant resistance loads. Size units by actual load current, not kW.

1> Always use maximum possible load current for sizing purposes.

2> The amp rating is determined by the fuse. Current draw must not exceed the fuse rating at any time.

3> Rated voltage of connected load should match control input voltage.

SIZING EXAMPLE

Application: single-phase, 800 watt nichrome heating element; input voltage 120 VAC, 60 Hz.

Model Number Selection:

a. Triac-based variable-voltage: SC
b. Panel-mount: E
c. 120 VAC input: 12
d. Amp rating, calculated as follows:

$\frac{800}{120}$ = 6.66 amps

Since 6.66<10, amp rating: -10

Model Number: SCE12-10.

WHEN ORDERING, SPECIFY:

- Model Number
- Input Voltage
- Load Specifications

PERFORMANCE NOTE: Triac power circuits may “slave” when multiple units are used on 240 VAC lines derived from three phase mains. For optimum performance, use on single phase, 240 VAC derived from 3-wire, 120/240 VAC mains.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


PAYNE ENGINEERING

Model 18TBP/TB
SCR Power Controls


Rt. 29 ⎤ Scott Depot WV ⎤ 25560-0070

APPLICATION ASSISTANCE - 304/757-7354
24 HOUR FAX - 304/757-7305


Model Number	Max. Amps	KVA @ Max. Rated Voltage	Fuse Number	OPEN CHASSIS DIMEN-SIONS Inches (millimeters) Height	Width	Depth
Single-Phase, 120 VAC, 50/60 Hz Input, 0-118 VAC Output						
18TBP-1-5	5	0.6	49C25-10	3.2 (81)	2.5 (64)	2.5 (54)
18TBP-1-10	10	1.2	49C25-10	3.2 (81)	2.5 (64)	2.5 (54)
18TBP-1-15	15	1.8	49C25-15	3.2 (81)	2.5 (64)	2.5 (54)
18TB-1-15	15	1.8	49C25-15	4 (102)	4 (102)	2.6 (66)
18TB-1-25	25	3.0	49B25-30	6 (152)	4 (102)	2.75 (70)
Single-Phase, 208/220/240 VAC Input, 0-206/218/238 VAC Output						
18TBP-2-5	5	1.2	49C25-10	3.2 (81)	2.5 (64)	2.5 (54)
18TBP-2-10	10	2.4	49C25-10	3.2 (81)	2.5 (64)	2.5 (54)
18TBP-2-15	15	3.6	49C25-15	3.2 (81)	2.5 (64)	2.5 (54)
18TB-2-15	15	3.6	49C25-15	4 (102)	4 (102)	2.6 (66)
18TB-2-25	25	6.0	49B25-30	6 (152)	4 (102)	2.75 (70)

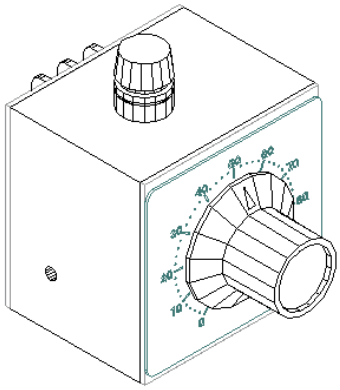


MODEL 18TBP

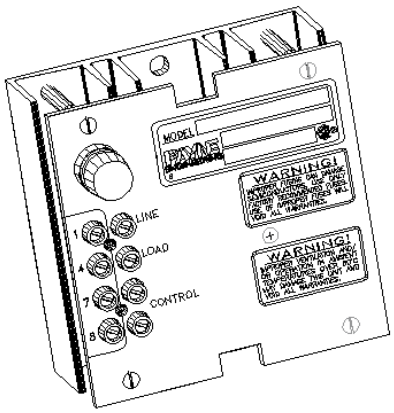

MODEL 18TB

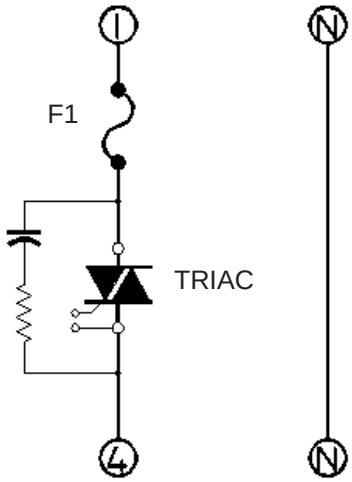

POWER CIRCUIT SCHEMATIC

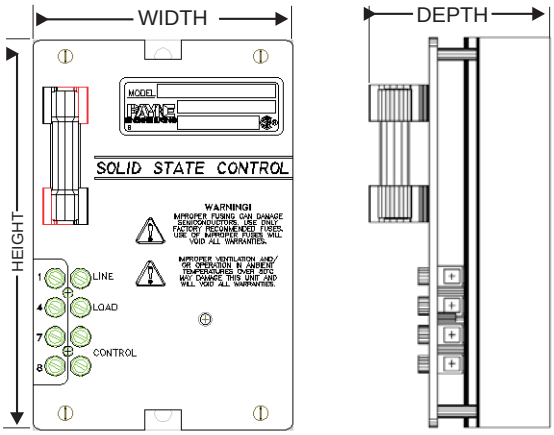

OPEN CHASSIS DIMENSION

All dimensions are approximate, and are not to be used for construction purposes. Payne Engineering Company Inc. reserves the right to make changes to product design, construction, and component parts in the interest of technical advancement without prior notification.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP