ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Pentair / Schroff ZR3CPCI-W17120-001* at our website: *Click HERE*

INPUT CHARACTERISTICS: MIN-6250P

- VOLTAGE: 90 ~ 264 VAC FULL RANGE
- FREQUENCY : 47 ~ 63 Hz
- INPUT CURRENT: 6.0 / 3.0 A FOR 115 / 230 VAC
- INRUSH CURRENT: 50A / 70A MAX. FOR 115 / 230 VAC PER POWER MODULE

OUTPUT CHARACTERISTICS:

OUTPUT VOLTAGE	OUTPUT CURRENT			REGULATION		OUTPUT
	MIN.[A]	MAX.[A]	PEAK(A)	LOAD	LINE	RIPPLE & NOISE MAX. [P-P]
5V	3.0	25		± 5%	± 1%	50mV
12V	2	16		± 7%	± 1%	120mV
-5V	0.05	0.5		±10%	± 1%	150mV
-12V	0.05	0.5		±10%	± 1%	150mV
3.3V	1.0	15		± 5%	± 1%	50mV
+5VSB	0.1	2.0		± 5%	± 1%	60mV

REMARKS: TOTAL CURRENT OF +5V AND + 3.3V NOT EXCEED 28 A


TOTAL +5V AND 3.3V AND 12V POWER NOT EXCEED 232 W

- TEMPERATURE RANGE : OPERATING 0^0C --- 40^0C, STORAGE –20^0C --- 70^0C
- HOLD UP TIME: 16 ms MINIMUM AT FULL LOAD & 90 VAC INPUT VOLTAGE
- DIELECTRIC WITHSTAND: INPUT / OUTPUT 1500 VAC FOR 1 MINUTE
  INPUT TO FRAME GROUND 1500 VAC FOR 1 MINUTE
- EFFICIENCY: 63% TYPICAL, AT FULL LOAD
- POWER GOOD SIGNAL: ON DELAY 100 ms TO 500 ms, OFF DELAY 1 ms
- OVER LOAD PROTECTION: 110 ~ 160% MAX.
  SHORT CIRCUIT PROTECTION : SHUT DOWN
- EMI NOISE FILTER: FCC CLASS B, CISPR22 CLASS B
- SAFETY: UL 1950, CSA 22.2 NO/ 950, TÜV IEC 950
- REMOTE ON / OFF CONTROL
- FAULTY ALARM METHODS : LED, BUZZER, TTL SIGNAL
- HOT-SWAPPABLE / HOT-PLUGGABLE N + 1 REDUNDANCY FUNCTION
- BALANCE LOAD SHARING DESIGN
- REMOTE SENSING DESIGN
- ISOLATION: BUILT-IN IN THE POWER MODULE
- MEET IEC-1000-3-2 CLASS D (ACTIVE PFC)
- DIMENSION: 40(H) X 79(W) X 200 (D) mm
- COOLING : ONE 40 mm DC FAN & CHASSIS COOLING

Revision: A02

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

修訂 REVISIONS		
版次 REV.	記述 DESCRIPTION	日期

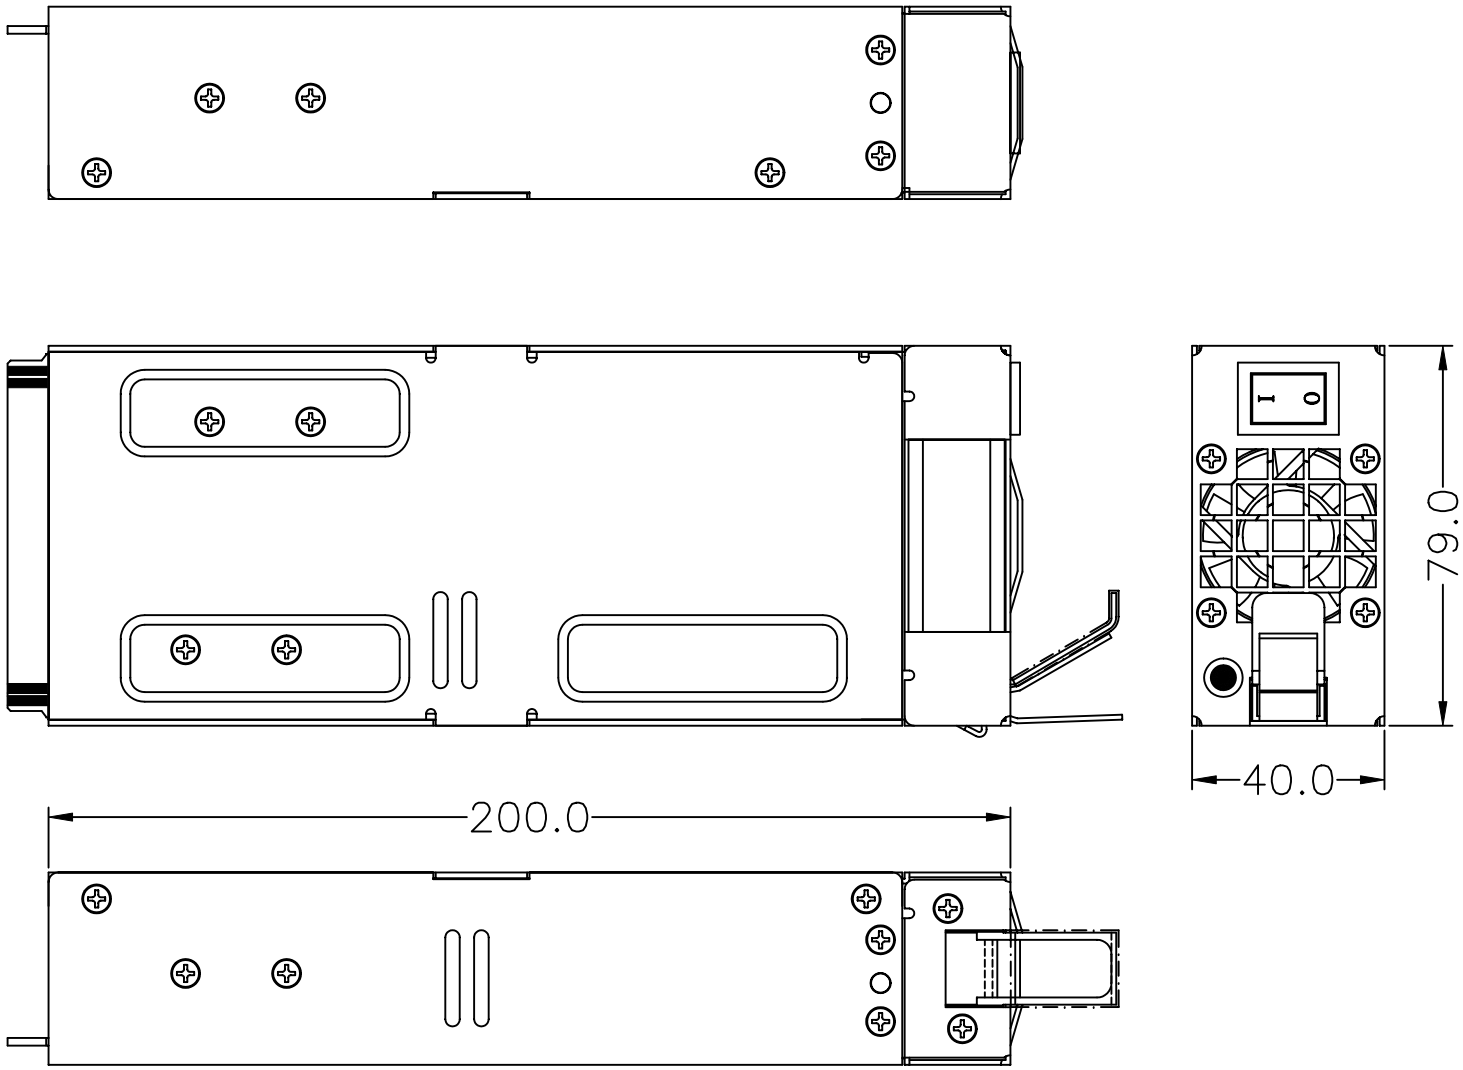

容許公差: TOLERANCES: .XXX ±.025 .XX ±.100 .X ±.250	材料規格: MATERIAL:		新巨企業股份有限公司 ZIPPY TECHNOLOGY CORP. POWER DIVISION
	核准者: APPROVE BY:	日期: DATE:	品名: MODEL NO: MIN外觀尺寸圖
投影法: PROJECTION: 第三角法	審核者: CHECK BY:	日期: DATE:	料號: PART NO:
	繪圖者: DRAW BY:	日期: DATE: JUL-26-2001	圖號: DRAW NO: MIN0MA00 / 檔號: FILE NO: MIN0MA00
			單位: UNITS: mm / 版次: REV. NO: A1 / 規格: SPEC.: A3 / 編號: SHEET: 0F

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP