ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.


Find the *Kontron / PEP PB-DIO3* at our website: *Click HERE*

PB-DIO2/3

20 Channel Optoisolated Digital Input/Output MODPACKs



Input/OutputChannel Schematic

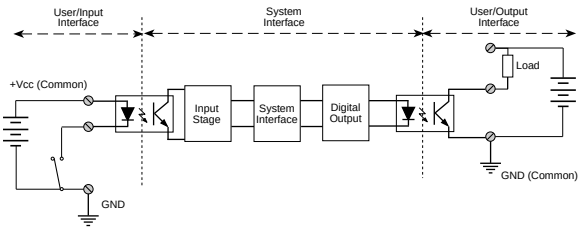

A 20 channel, optoisolated 24V DC range of digital input/output industrial piggybacks based on the MC68230 PIT from Motorola for the PEP VMOD-2 and CXM-IMOD carrier boards.

The 8 filtered inputs connected to port B together with the 2 controller inputs H1 and H3, which may be used to generate an IRQ on change-of-state, are supplied by a common Vcc (or common GND). The 8 outputs connected to port A are grouped together via a common GND (or common Vcc) and 2 additional outputs H2 and H4 from the controller form the 68230 handshake lines. The 24-bit timer may be used internally for IRQ generation but no signals are available on the process side of the PB-DIO2. The TIN input of the PB-DIO3 can be accessed externally.

Specifications

Input /Output	: 20 optoisolated 24V DC digital input and output channels with 8 outputs appearing on port A, 8 inputs on port B, 2 inputs for change-of-state IRQ generation on H1 and H3 and 2 handshake outputs on H2 and H4
Controller	: Motorola or SGS Thomson 68230 @ 8 MHz
Timer/Counter	: 24-bit @ 8 MHz; TIN can be configured as an input on the PB-DIO3
Input Voltage	: 24V DC (typ.)
Input Current	: 5mA (typ.)
Input Switching Level	: < 5V = low, > 7.5 V = high
Output Voltage	: 24V DC (typ.)
Output Current	: 100mA (max.)
Input/Output Types	: Common Vcc or common GND
Isolation	: 2500V DC between input/output and system, 100V DC between inputs/outputs on PB-DIO3
Power Requirements	: +5V DC (+/- 5%), 500mA typ.
Operating Temperature	: 0ºC to +70ºC
Extended Temperature	: -40ºC to + 85ºC (Optional)
Storage Temperature	: -55ºC to +85ºC
Operating Humidity	: 0% to 95% (non-condensing)

Product	Description	Order No.
PB-DIO2	A 20 channel optoisolated 24V DC I/O piggyback with com. Vcc inputs and com. GND outputs	2954
PB-DIO2	As version 2954 but with common Vcc outputs	2955
PB-DIO3	As version 2954 but with common GND inputs and common GND outputs	2994
PB-DIO3	As version 2994 but with common Vcc outputs	2995

CERTIFIED DIN ISO 9001 QUALITY SYSTEM
Reg. No. 0548 - 01

Modular Computers®

Artisan Scientific - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisan-scientific.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP