

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

Double-Level Spring Cage Terminal Blocks STTB

The potentials of the STTB double-level terminal blocks routed on two levels reduce space requirements compared with single level terminal blocks by 50%. The STTB series can be bridged on both levels with the plug-in bridge system FBS for the most varied switching tasks. Labeling options are provided on each terminal point.
The hybrid variants PE/L, PE/N and L/N were created by combining double-level feed-through terminal blocks and ground terminal blocks of the same shape. Types PE/L- and PE/N- provide ground conductor contact with the mounting rail in the lower level. The upper level is designed as a feed-through level. The color coding of the PE and N levels makes clear and unambiguous potential distribution possible.

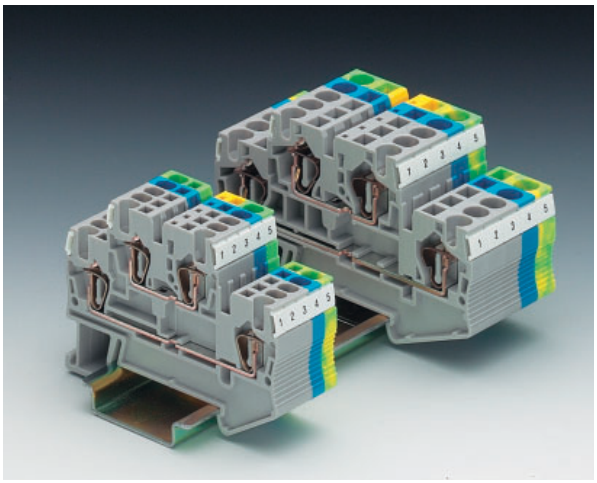

Phoenix Contact GmbH & Co. KG • 32823 Blomberg, Germany
Phone +49 52 35 3-00 • Fax +49 52 35 3-4 12 00 • www.phoenixcontact.com

Double-Level Spring Cage Terminal Block

STTB 1,5



(IEC) [mm²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
IEC 60 947-7-1	0.14-1.5	0.14-1.5	26-16	17.5	500
EN 50 019*	0.14-1.5	0.14-1.5	26-16	17.5	420

* EC Prototype certificate no.: KEMA 01ATEX2129U
For information on installation and usage of accessories for EEx e applications, see www.clipline.phoenixcontact.com.

KEMA

Technical data

			Type		Order No.	Pcs. Pkt.
Spring cage terminal block, for mounting on ⊔	gray	terminal width 4.2	**STTB 1,5**		**30 31 15 7**	**50**
	blue	terminal width 4.2	**STTB 1,5 BU**		**30 31 16 0**	**50**
	gray	terminal width 4.2	**STTB 1,5 PV [1])**		**30 31 52 6**	**50**
(1) **End cover**	gray		**D-STTB 2,5**		**30 30 45 9**	**50**
(2) **Insulating stop sleeve,** prevents unintentional clamping of the insulation in the case of smaller cross sections						
Cross section range:	0.2 mm²	white	**ISH 1,5/0,2**		**32 06 13 1**	**50**
	0.25-0.5 mm²	gray	**ISH 1,5/0,5**		**30 31 03 4**	**50**
(3) **Plug-in bridge,** for cross-connections in the terminal center	2-pos.		**FBS 2-4**	$I_{max.}$: 15 A	**30 30 11 6**	**50**
	3-pos.		**FBS 3-4**	15 A	**30 30 12 9**	**50**
	4-pos.		**FBS 4-4**	15 A	**30 30 13 2**	**50**
	5-pos.		**FBS 5-4**	15 A	**30 30 14 5**	**50**
	10-pos.		**FBS 10-4**	15 A	**30 30 15 8**	**10**
	20-pos.		**FBS 20-4**	15 A	**30 30 35 2**	**10**
(4) **Partition plate,** for visual and electrical separation of terminal groups, 2 mm thick			**ATP-STTB 4**		**30 30 74 7**	**50**
(5) **Test adapter,** for 4 mm ∅ test connector PS and 4 mm ∅ safety test connectors, making contact in the bridge shaft			**PAI 4**		**30 30 92 5**	**10**
(6) **Modular test connector**, for individual assembly of test connector strips, can be labeled with ZBFM 4			**PS-4**		**30 30 97 0**	**10**
(7) **Double marker carrier,** snaps into double-level spring cage terminal blocks, STTB, can be labeled with ZB 4 and ZBFM 4			**STP 4-2**		**08 10 57 5**	**10**
(8) **Warning cover,** for the operating shafts of the "mini-spring" ST spring cage terminal blocks			**WST 1,5**		**30 30 95 8**	**10**
(9) **Screwdriver,** for actuating the tension spring			**SZF 0 - 0,4 x 2,5**		**12 04 50 4**	**10**
(10) **Zack marker sheet,** flat, 100-section, for labeling the outer marker grooves		white	**ZBFM 4 /WH:UNPRINTED**		**08 03 57 9**	**10**

Dimensions		
Width / length / end cover width	[mm]	4.2 / 67.5 / 2.2
Height (NS 35:7.5 / NS 35:15)	[mm]	47.5 / 55
Technical data in accordance with IEC/ DIN VDE		
Maximum load current / cross section	[A] / [mm²]	17.5 / 1.5
Rated surge voltage / contamination class	[kV] / –	6 / 3
Surge voltage category / insulation material group	– / –	III / I
Connection capacity		
Stranded with ferrule with plastic sleeve	[mm²]	0.25 - 1.5
Stranded with ferrule without plastic sleeve	[mm²]	0.25 - 1.5
Stranded with TWIN ferrule with plastic sleeve	[mm²]	0.5
Stripping length	[mm]	10
Internal cylindrical gauge (IEC 60 947-1)		A 1
Insulating material		PA
Inflammability class in acc. with UL 94		V0
Approval data (UL and CSA/CUL)		
Nom. voltage / nom. current / conduc. sizes	UL: [V] / [A] / AWG	–
	CSA/CUL: [V] / [A] / AWG	–

[1]) With equipotential bonding between the levels.
The max. load current must not be exceeded by the residual current of all connected conductors.

Double-Level Ground Terminal Block

STTB 1,5-PE



(IEC) [mm²]	rigid solid	flexible stranded	AWG
IEC 60 947-7-2	0.14-1.5	0.14-1.5	26-16
EN 50 019*	0.14-1.5	0.14-1.5	26-16

* EC Prototype certificate no.: KEMA 01ATEX2129U
For information on installation and usage of accessories for EEx e applications, see www.clipline.phoenixcontact.com.
Observe the current carrying capacity of mounting rails.

KEMA


Technical data

			Type	Order No.	Pcs. Pkt.
Spring cage terminal block, for mounting on ⊔	green-yellow	terminal width 4.2	**STTB 1,5-PE**	**30 36 01 3**	**50**
(1) **End cover**	gray		**D-STTB 2,5**	**30 30 45 9**	**50**
(2) **Insulating stop sleeve,** prevents unintentional clamping of the insulation in the case of smaller cross sections					
Cross section range:	0.2 mm²	white	**ISH 1,5/0,2**	**32 06 13 1**	**50**
	0.25-0.5 mm²	gray	**ISH 1,5/0,5**	**30 31 03 4**	**50**
(3) **Double marker carrier,** snaps into double-level spring cage terminal blocks, STTB, can be labeled with ZB 4 and ZBFM 4			**STP 4-2**	**08 10 57 5**	**10**
(4) **Screwdriver,** for actuating the tension spring			**SZF 0 - 0,4 x 2,5**	**12 04 50 4**	**10**
(5) **Zack marker sheet,** flat, 100-section, for labeling the outer marker grooves		white	**ZBFM 4 /WH:UNPRINTED**	**08 03 57 9**	**10**

Dimensions		
Width / length / end cover width	[mm]	4.2 / 67.5 / 2.2
Height (NS 35:7.5 / NS 35:15)	[mm]	47.5 / 55
Technical data in accordance with IEC/ DIN VDE		
Maximum load current / cross section	[A] / [mm²]	–
Rated surge voltage / contamination class	[kV] / –	6 / 3
Surge voltage category / insulation material group	– / –	III / I
Connection capacity		
Stranded with ferrule with plastic sleeve	[mm²]	0.25 - 1.5
Stranded with ferrule without plastic sleeve	[mm²]	0.25 - 1.5
Stranded with TWIN ferrule with plastic sleeve	[mm²]	0.5
Stripping length	[mm]	10
Internal cylindrical gauge (IEC 60 947-1)		A 1
Insulating material		PA
Inflammability class in acc. with UL 94		V0
Approval data (UL and CSA/CUL)		
Nom. voltage / nom. current / conduc. sizes	UL: [V] / [A] / AWG	–
	CSA/CUL: [V] / [A] / AWG	–

Double-Level Spring Cage Terminal Block

STTB 2,5

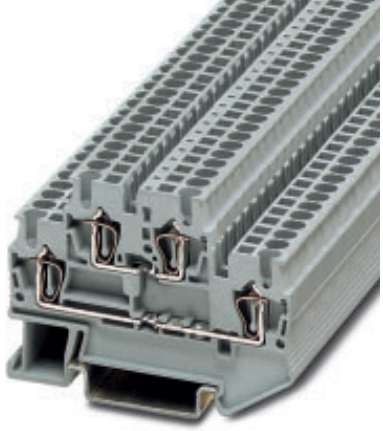

(IEC) [mm²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
IEC 60 947-7-1	0.2-4	0.2-2.5	24-12	26	500
EN 50 019*	0.2-4	0.2-2.5	24-12	23/19	420

* EC Prototype certificate no.: KEMA 00ATEX2052U
For information on installation and usage of accessories for EEx e applications, see www.clipline.phoenixcontact.com.

KEMA

Technical data


			Type		Order No.	Pcs. Pkt.
Spring cage terminal block, for mounting on ⊔	gray	terminal width 5.2	**STTB 2,5**		**30 31 27 0**	**50**
	blue	terminal width 5.2	**STTB 2,5 BU**		**30 31 28 3**	**50**
	gray	terminal width 5.2	**STTB 2,5 PV [1])**		**30 31 53 9**	**50**
(1) **End cover**	gray		**D-STTB 2,5**		**30 30 45 9**	**50**
(2) **Insulating stop sleeve,** prevents unintentional clamping of the insulation in the case of smaller cross sections						
Cross section range:	0.2 mm²	white	**ISH 2,5/0,2**		**30 02 84 3**	**50**
	0.25-0.5 mm²	gray	**ISH 2,5/0,5**		**30 02 85 6**	**50**
	0.75-1 mm²	black	**ISH 2,5/1**		**30 02 86 9**	**50**
(3) **Plug-in bridge,** for cross-connections in the terminal center	2-pos.		**FBS 2-5**	$I_{max.}$: 20 A	**30 30 16 1**	**50**
	3-pos.		**FBS 3-5**	20 A	**30 30 17 4**	**50**
	4-pos.		**FBS 4-5**	20 A	**30 30 18 7**	**50**
	5-pos.		**FBS 5-5**	20 A	**30 30 19 0**	**50**
	10-pos.		**FBS 10-5**	20 A	**30 30 21 3**	**10**
	20-pos.		**FBS 20-5**	20 A	**30 30 22 6**	**10**
(4) **Partition plate,** for visual and electrical separation of terminal groups, 2 mm thick			**ATP-STTB 4**		**30 30 74 7**	**50**
(5) **Test adapter,** for 4 mm ∅ test connector PS and 4 mm ∅ safety test connectors, making contact in the bridge shaft			**PAI 4**		**30 30 92 5**	**10**
(6) **Modular test connector**, for individual assembly of test connector strips, can be labeled with ZBFM 5			**PS-5**		**30 30 98 3**	**10**
(7) **Double marker carrier,** snaps into double-level spring cage terminal blocks, STTB, can be labeled with ZB 5 and ZBFM 5			**STP 5-2**		**08 00 96 7**	**10**
(8) **Warning cover,** for the operating shafts of the "mini-spring" ST spring cage terminal blocks			**WST 2,5**		**30 30 94 1**	**10**
(9) **Screwdriver,** for actuating the tension spring			**SZF 1 - 0,6 x 3,5**		**12 04 51 7**	**10**
(10) **Zack marker sheet,** flat, 120-section, for labeling the outer marker grooves		white	**ZBFM 5 /WH:UNPRINTED**		**08 03 59 5**	**10**

Dimensions		
Width / length / end cover width	[mm]	5.2 / 67.5 / 2.2
Height (NS 35:7.5 / NS 35:15)	[mm]	47.5 / 55
Technical data in accordance with IEC/ DIN VDE		
Maximum load current / cross section	[A] / [mm²]	26 / 4
Rated surge voltage / contamination class	[kV] / –	6 / 3
Surge voltage category / insulation material group	– / –	III / I
Connection capacity		
Stranded with ferrule with plastic sleeve	[mm²]	0.25 - 2.5
Stranded with ferrule without plastic sleeve	[mm²]	0.25 - 2.5
Stranded with TWIN ferrule with plastic sleeve	[mm²]	0.5
Stripping length	[mm]	10
Internal cylindrical gauge (IEC 60 947-1)		A 3
Insulating material		PA
Inflammability class in acc. with UL 94		V0
Approval data (UL and CSA/CUL)		
Nom. voltage / nom. current / conduc. sizes	UL: [V] / [A] / AWG	300 / 20 / 26 - 12
	CSA/CUL: [V] / [A] / AWG	300 / 20 / 26 - 12

[1]) With equipotential bonding between the levels.
The max. load current must not be exceeded by the residual current of all connected conductors.

Double-Level Ground Terminal Block

STTB 2,5-PE


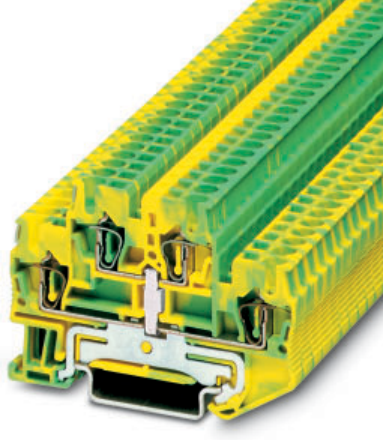


(IEC) [mm²]	rigid solid	flexible stranded	AWG
IEC 60 947-7-2	0.2-4	0.2-2.5	24-12
EN 50 019*	0.2-4	0.2-2.5	24-12

* EC Prototype certificate no.: KEMA 00ATEX2052U
For information on installation and usage of accessories for EEx e applications, see www.clipline.phoenixcontact.com.
Observe the current carrying capacity of mounting rails.

KEMA


Technical data

			Type	Order No.	Pcs. Pkt.
Spring cage terminal block, for mounting on ⊔	green-yellow	terminal width 5.2	**STTB 2,5-PE**	**30 36 02 6**	**50**
(1) **End cover**	gray		**D-STTB 2,5**	**30 30 45 9**	**50**
(2) **Insulating stop sleeve,** prevents unintentional clamping of the insulation in the case of smaller cross sections					
Cross section range:	0.2 mm²	white	**ISH 2,5/0,2**	**30 02 84 3**	**50**
	0.25-0.5 mm²	gray	**ISH 2,5/0,5**	**30 02 85 6**	**50**
	0.75-1 mm²	black	**ISH 2,5/1**	**30 02 86 9**	**50**
(3) **Double marker carrier,** snaps into double-level spring cage terminal blocks, STTB, can be labeled with ZB 5 and ZBFM 5			**STP 5-2**	**08 00 96 7**	**10**
(4) **Screwdriver,** for actuating the tension spring			**SZF 1 - 0,6 x 3,5**	**12 04 51 7**	**10**
(5) **Zack marker sheet,** flat, 120-section, for labeling the outer marker grooves		white	**ZBFM 5 /WH:UNPRINTED**	**08 03 59 5**	**10**

Dimensions		
Width / length / end cover width	[mm]	5.2 / 67.5 / 2.2
Height (NS 35:7.5 / NS 35:15)	[mm]	47.5 / 55
Technical data in accordance with IEC/ DIN VDE		
Maximum load current / cross section	[A] / [mm²]	–
Rated surge voltage / contamination class	[kV] / –	6 / 3
Surge voltage category / insulation material group	– / –	III / I
Connection capacity		
Stranded with ferrule with plastic sleeve	[mm²]	0.25 - 2.5
Stranded with ferrule without plastic sleeve	[mm²]	0.25 - 2.5
Stranded with TWIN ferrule with plastic sleeve	[mm²]	0.5
Stripping length	[mm]	10
Internal cylindrical gauge (IEC 60 947-1)		A 3
Insulating material		PA
Inflammability class in acc. with UL 94		V0
Approval data (UL and CSA/CUL)		
Nom. voltage / nom. current / conduc. sizes	UL: [V] / [A] / AWG	–
	CSA/CUL: [V] / [A] / AWG	–



Double-Level Spring Cage Terminal Block

STTB 2,5-PE/L

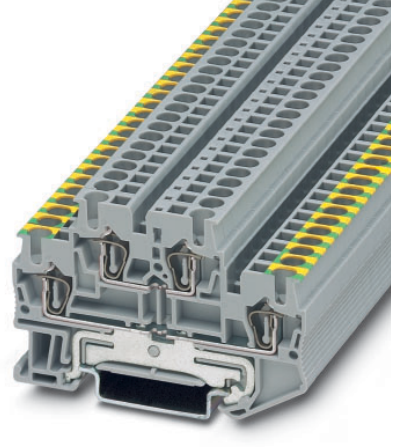

(IEC) [mm²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
DIN VDE 0611	0.2-4	0.2-2.5	24-12	32	500


Technical data

			Type		Order No.	Pcs. Pkt.
Spring cage terminal block, for mounting on ⊔	gray	terminal width 5.2	**STTB 2,5-PE/L**		**30 36 31 4**	**50**
(1) **End cover**	gray		**D-STTB 2,5**		**30 30 45 9**	**50**
(2) **Insulating stop sleeve,** prevents unintentional clamping of the insulation in the case of smaller cross sections						
Cross section range:	0.2 mm²	white	**ISH 2,5/0,2**		**30 02 84 3**	**50**
	0.25-0.5 mm²	gray	**ISH 2,5/0,5**		**30 02 85 6**	**50**
	0.75-1 mm²	black	**ISH 2,5/1**		**30 02 86 9**	**50**
(3) **Plug-in bridge,** for cross-connections in the terminal center	2-pos.		**FBS 2-5**	$I_{max.}$: 20 A	**30 30 16 1**	**50**
	3-pos.		**FBS 3-5**	20 A	**30 30 17 4**	**50**
	4-pos.		**FBS 4-5**	20 A	**30 30 18 7**	**50**
	5-pos.		**FBS 5-5**	20 A	**30 30 19 0**	**50**
	10-pos.		**FBS 10-5**	20 A	**30 30 21 3**	**10**
	20-pos.		**FBS 20-5**	20 A	**30 30 22 6**	**10**
(4) **Partition plate,** for visual and electrical separation of terminal groups, 2 mm thick			**ATP-STTB 4**		**30 30 74 7**	**50**
(5) **Test adapter,** for 4 mm ∅ test connector PS and 4 mm ∅ safety test connectors, making contact in the bridge shaft			**PAI 4**		**30 30 92 5**	**10**
(6) **Modular test connector**, for individual assembly of test connector strips, can be labeled with ZBFM 5			**PS-5**		**30 30 98 3**	**10**
(7) **Double marker carrier,** snaps into double-level spring cage terminal blocks, STTB, can be labeled with ZB 5 and ZBFM 5			**STP 5-2**		**08 00 96 7**	**10**
(8) **Warning cover,** for the operating shafts of the “mini-spring” ST spring cage terminal blocks			**WST 2,5**		**30 30 94 1**	**10**
(9) **Screwdriver,** for actuating the tension spring			**SZF 1 - 0,6 x 3,5**		**12 04 51 7**	**10**
(10) **Zack marker sheet,** flat, 120-section, for labeling the outer marker grooves		white	**ZBFM 5 /WH:UNPRINTED**		**08 03 59 5**	**10**

Dimensions		
Width / length / end cover width	[mm]	5.2 / 67.5 / 2.2
Height (NS 35:7.5 / NS 35:15)	[mm]	47.5 / 55
Technical data in accordance with IEC/ DIN VDE		
Maximum load current / cross section	[A] / [mm²]	32 / 4
Rated surge voltage / contamination class	[kV] / –	6 / 3
Surge voltage category / insulation material group	– / –	III / I
Connection capacity		
Stranded with ferrule with plastic sleeve	[mm²]	0.25 - 2.5
Stranded with ferrule without plastic sleeve	[mm²]	0.25 - 2.5
Stranded with TWIN ferrule with plastic sleeve	[mm²]	0.5
Stripping length	[mm]	10
Internal cylindrical gauge (IEC 60 947-1)		A 3
Insulating material		PA
Inflammability class in acc. with UL 94		V0
Approval data (UL and CSA/CUL)		
Nom. voltage / nom. current / conduc. sizes	UL: [V] / [A] / AWG	–
	CSA/CUL: [V] / [A] / AWG	–



Double-Level Spring Cage Terminal Block

STTB 2,5-PE/N

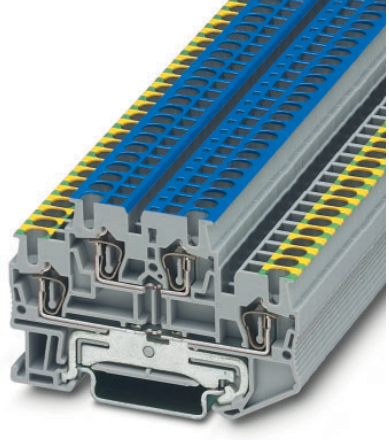

(IEC) [mm²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
DIN VDE 0611	0.2-4	0.2-2.5	24-12	32	500

Technical data

			Type		Order No.	Pcs. Pkt.
Spring cage terminal block, for mounting on ⊔	gray	terminal width 5.2	**STTB 2,5-PE/N**		**30 36 32 7**	**50**
(1) **End cover**	gray		**D-STTB 2,5**		**30 30 45 9**	**50**
(2) **Insulating stop sleeve,** prevents unintentional clamping of the insulation in the case of smaller cross sections						
Cross section range:	0.2 mm²	white	**ISH 2,5/0,2**		**30 02 84 3**	**50**
	0.25-0.5 mm²	gray	**ISH 2,5/0,5**		**30 02 85 6**	**50**
	0.75-1 mm²	black	**ISH 2,5/1**		**30 02 86 9**	**50**
(3) **Plug-in bridge,** for cross-connections in the terminal center	2-pos.		**FBS 2-5**	$I_{max.}$: 20 A	**30 30 16 1**	**50**
	3-pos.		**FBS 3-5**	20 A	**30 30 17 4**	**50**
	4-pos.		**FBS 4-5**	20 A	**30 30 18 7**	**50**
	5-pos.		**FBS 5-5**	20 A	**30 30 19 0**	**50**
	10-pos.		**FBS 10-5**	20 A	**30 30 21 3**	**10**
	20-pos.		**FBS 20-5**	20 A	**30 30 22 6**	**10**
(4) **Partition plate,** for visual and electrical separation of terminal groups, 2 mm thick			**ATP-STTB 4**		**30 30 74 7**	**50**
(5) **Test adapter,** for 4 mm ∅ test connector PS and 4 mm ∅ safety test connectors, making contact in the bridge shaft			**PAI 4**		**30 30 92 5**	**10**
(6) **Modular test connector**, for individual assembly of test connector strips, can be labeled with ZBFM 5			**PS-5**		**30 30 98 3**	**10**
(7) **Double marker carrier,** snaps into double-level spring cage terminal blocks, STTB, can be labeled with ZB 5 and ZBFM 5			**STP 5-2**		**08 00 96 7**	**10**
(8) **Warning cover,** for the operating shafts of the “mini-spring” ST spring cage terminal blocks			**WST 2,5**		**30 30 94 1**	**10**
(9) **Screwdriver,** for actuating the tension spring			**SZF 1 - 0,6 x 3,5**		**12 04 51 7**	**10**
(10) **Zack marker sheet,** flat, 120-section, for labeling the outer marker grooves		white	**ZBFM 5 /WH:UNPRINTED**		**08 03 59 5**	**10**

Dimensions		
Width / length / end cover width	[mm]	5.2 / 67.5 / 2.2
Height (NS 35:7.5 / NS 35:15)	[mm]	47.5 / 55
Technical data in accordance with IEC/ DIN VDE		
Maximum load current / cross section	[A] / [mm²]	32 / 4
Rated surge voltage / contamination class	[kV] / –	6 / 3
Surge voltage category / insulation material group	– / –	III / I
Connection capacity		
Stranded with ferrule with plastic sleeve	[mm²]	0.25 - 2.5
Stranded with ferrule without plastic sleeve	[mm²]	0.25 - 2.5
Stranded with TWIN ferrule with plastic sleeve	[mm²]	0.5
Stripping length	[mm]	10
Internal cylindrical gauge (IEC 60 947-1)		A 3
Insulating material		PA
Inflammability class in acc. with UL 94		V0
Approval data (UL and CSA/CUL)		
Nom. voltage / nom. current / conduc. sizes	UL: [V] / [A] / AWG	–
	CSA/CUL: [V] / [A] / AWG	–



Double-Level Spring Cage Terminal Block

STTB 2,5-L/N



(IEC) [mm²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
DIN VDE 0611	0.2-4	0.2-2.5	24-12	26	500


Technical data

			Type		Order No.	Pcs. Pkt.
Spring cage terminal block, for mounting on ⊔	gray	terminal width 5.2	**STTB 2,5-L/N**		**30 36 33 0**	**50**
(1) **End cover**	gray		**D-STTB 2,5**		**30 30 45 9**	**50**
(2) **Insulating stop sleeve,** prevents unintentional clamping of the insulation in the case of smaller cross sections						
Cross section range:	0.2 mm²	white	**ISH 2,5/0,2**		**30 02 84 3**	**50**
	0.25-0.5 mm²	gray	**ISH 2,5/0,5**		**30 02 85 6**	**50**
	0.75-1 mm²	black	**ISH 2,5/1**		**30 02 86 9**	**50**
(3) **Plug-in bridge,** for cross-connections in the terminal center	2-pos.		**FBS 2-5**	$I_{max.}$: 20 A	**30 30 16 1**	**50**
	3-pos.		**FBS 3-5**	20 A	**30 30 17 4**	**50**
	4-pos.		**FBS 4-5**	20 A	**30 30 18 7**	**50**
	5-pos.		**FBS 5-5**	20 A	**30 30 19 0**	**50**
	10-pos.		**FBS 10-5**	20 A	**30 30 21 3**	**10**
	20-pos.		**FBS 20-5**	20 A	**30 30 22 6**	**10**
(4) **Partition plate,** for visual and electrical separation of terminal groups, 2 mm thick			**ATP-STTB 4**		**30 30 74 7**	**50**
(5) **Test adapter,** for 4 mm ∅ test connector PS and 4 mm ∅ safety test connectors, making contact in the bridge shaft			**PAI 4**		**30 30 92 5**	**10**
(6) **Modular test connector**, for individual assembly of test connector strips, can be labeled with ZBFM 5			**PS-5**		**30 30 98 3**	**10**
(7) **Double marker carrier,** snaps into double-level spring cage terminal blocks, STTB, can be labeled with ZB 5 and ZBFM 5			**STP 5-2**		**08 00 96 7**	**10**
(8) **Warning cover,** for the operating shafts of the “mini-spring” ST spring cage terminal blocks			**WST 2,5**		**30 30 94 1**	**10**
(9) **Screwdriver,** for actuating the tension spring			**SZF 1 - 0,6 x 3,5**		**12 04 51 7**	**10**
(10) **Zack marker sheet,** flat, 120-section, for labeling the outer marker grooves		white	**ZBFM 5 /WH:UNPRINTED**		**08 03 59 5**	**10**

Dimensions		
Width / length / end cover width	[mm]	5.2 / 67.5 / 2.2
Height (NS 35:7.5 / NS 35:15)	[mm]	47.5 / 55
Technical data in accordance with IEC/ DIN VDE		
Maximum load current / cross section	[A] / [mm²]	26 / 4
Rated surge voltage / contamination class	[kV] / –	6 / 3
Surge voltage category / insulation material group	– / –	III / I
Connection capacity		
Stranded with ferrule with plastic sleeve	[mm²]	0.25 - 2.5
Stranded with ferrule without plastic sleeve	[mm²]	0.25 - 2.5
Stranded with TWIN ferrule with plastic sleeve	[mm²]	0.5
Stripping length	[mm]	10
Internal cylindrical gauge (IEC 60 947-1)		A 3
Insulating material		PA
Inflammability class in acc. with UL 94		V0
Approval data (UL and CSA/CUL)		
Nom. voltage / nom. current / conduc. sizes	UL: [V] / [A] / AWG	–
	CSA/CUL: [V] / [A] / AWG	–

Double-Level Spring Cage Terminal Block

STTB 4



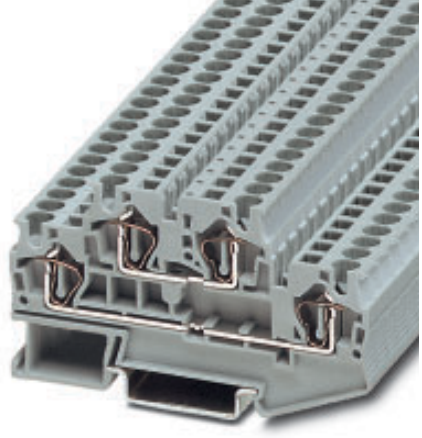


(IEC) [mm²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
IEC 60 947-7-1	0.2-6	0.2-4	24-10	32	500
EN 50 019*	0.2-6	0.2-4	24-10	30/27	420

* EC Prototype certificate no.: KEMA 00ATEX2129U
For information on installation and usage of accessories for EEx e applications, see www.clipline.phoenixcontact.com.

KEMA

Technical data


			Type		Order No.	Pcs. Pkt.
Spring cage terminal block, for mounting on ⊔	gray	terminal width 6.2	**STTB 4**		**30 31 42 9**	**50**
	blue	terminal width 6.2	**STTB 4 BU**		**30 31 43 2**	**50**
	gray	terminal width 6.2	**STTB 4 PV [1])**		**30 31 54 2**	**50**
(1) **End cover**	gray		**D-STTB 4**		**30 30 46 2**	**50**
(2) **Insulating stop sleeve,** prevents unintentional clamping of the insulation in the case of smaller cross sections						
Cross section range:	0.25-0.5 mm²	gray	**ISH 4/0,5**		**30 02 88 5**	**50**
	0.75-1 mm²	black	**ISH 4/1**		**30 02 89 8**	**50**
(3) **Plug-in bridge,** for cross-connections in the terminal center	2-pos.		**FBS 2-6**	$I_{max.}$: 22 A	**30 30 33 6**	**50**
	3-pos.		**FBS 3-6**	22 A	**30 30 24 2**	**50**
	4-pos.		**FBS 4-6**	22 A	**30 30 25 5**	**50**
	5-pos.		**FBS 5-6**	22 A	**30 30 34 9**	**50**
	10-pos.		**FBS 10-6**	22 A	**30 30 27 1**	**10**
	20-pos.		**FBS 20-6**	22 A	**30 30 36 5**	**10**
(4) **Partition plate,** for visual and electrical separation of terminal groups, 2 mm thick			**ATP-STTB 4**		**30 30 74 7**	**50**
(5) **Test adapter,** for 4 mm ∅ test connector PS and 4 mm ∅ safety test connectors, making contact in the bridge shaft			**PAI 4**		**30 30 92 5**	**10**
(6) **Modular test connector**, for individual assembly of test connector strips, can be labeled with ZBFM 6			**PS-6**		**30 30 99 6**	**10**
(7) **Double marker carrier,** snaps into double-level spring cage terminal blocks, STTB, can be labeled with ZB 5 and ZBFM 5			**STP 5-2**		**08 00 96 7**	**10**
(8) **Warning cover,** for the operating shafts of the “mini-spring” ST spring cage terminal blocks			**WST 4**		**30 30 95 4**	**10**
(9) **Screwdriver,** for actuating the tension spring			**SZF 1 - 0,6 x 3,5**		**12 04 51 7**	**10**
(10) **Zack marker sheet,** flat, 100-section, for labeling the outer marker grooves		white	**ZBFM 6 /WH:UNPRINTED**		**08 03 61 8**	**10**

Dimensions		
Width / length / end cover width	[mm]	6.2 / 83.5 / 2.2
Height (NS 35:7.5 / NS 35:15)	[mm]	47.5 / 55
Technical data in accordance with IEC/ DIN VDE		
Maximum load current / cross section	[A] / [mm²]	32 / 6
Rated surge voltage / contamination class	[kV] / –	6 / 3
Surge voltage category / insulation material group	– / –	III / I
Connection capacity		
Stranded with ferrule with plastic sleeve	[mm²]	0.25 - 4
Stranded with ferrule without plastic sleeve	[mm²]	0.25 - 4
Stranded with TWIN ferrule with plastic sleeve	[mm²]	0.5 - 1
Stripping length	[mm]	10
Internal cylindrical gauge (IEC 60 947-1)		A 4
Insulating material		PA
Inflammability class in acc. with UL 94		V0
Approval data (UL and CSA/CUL)		
Nom. voltage / nom. current / conduc. sizes	UL: [V] / [A] / AWG	300 / 30 / 20 - 10
	CSA/CUL: [V] / [A] / AWG	300 / 30 / 20 - 10

[1]) With equipotential bonding between the levels.
The max. load current must not be exceeded by the residual current of all connected conductors.

Double-Level Ground Terminal Block

STTB 4-PE

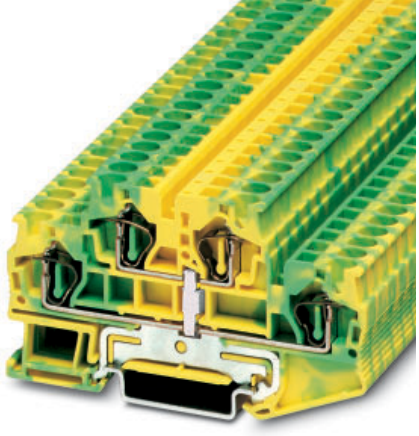

(IEC) [mm²]	rigid solid	flexible stranded	AWG
IEC 60 947-7-2	0.2-6	0.2-4	24-10
EN 50 019*	0.2-6	0.2-4	24-10

* EC Prototype certificate no.: KEMA 00ATEX2129U
For information on installation and usage of accessories for EEx e applications, see www.clipline.phoenixcontact.com.
Observe the current carrying capacity of mounting rails.


KEMA

Technical data


			Type	Order No.	Pcs. Pkt.
Spring cage terminal block, for mounting on ⊔	green-yellow	terminal width 6.2	**STTB 4-PE**	**30 36 03 9**	**50**
(1) **End cover**	gray		**D-STTB 4**	**30 30 46 2**	**50**
(2) **Insulating stop sleeve,** prevents unintentional clamping of the insulation in the case of smaller cross sections					
Cross section range:	0.25-0.5 mm²	gray	**ISH 4/0,5**	**30 02 88 5**	**50**
	0.75-1 mm²	black	**ISH 4/1**	**30 02 89 8**	**50**
(3) **Double marker carrier,** snaps into double-level spring cage terminal blocks, STTB, can be labeled with ZB 5 and ZBFM 5			**STP 5-2**	**08 00 96 7**	**10**
(4) **Screwdriver,** for actuating the tension spring			**SZF 1 - 0,6 x 3,5**	**12 04 51 7**	**10**
(5) **Zack marker sheet,** flat, 100-section, for labeling the outer marker grooves		white	**ZBFM 6 /WH:UNPRINTED**	**08 03 61 8**	**10**

Dimensions		
Width / length / end cover width	[mm]	6.2 / 83.5 / 2.2
Height (NS 35:7.5 / NS 35:15)	[mm]	47.5 / 55
Technical data in accordance with IEC/ DIN VDE		
Maximum load current / cross section	[A] / [mm²]	–
Rated surge voltage / contamination class	[kV] / –	6 / 3
Surge voltage category / insulation material group	– / –	III / I
Connection capacity		
Stranded with ferrule with plastic sleeve	[mm²]	0.25 - 4
Stranded with ferrule without plastic sleeve	[mm²]	0.25 - 4
Stranded with TWIN ferrule with plastic sleeve	[mm²]	0.5 - 1
Stripping length	[mm]	10
Internal cylindrical gauge (IEC 60 947-1)		A 3
Insulating material		PA
Inflammability class in acc. with UL 94		V0
Approval data (UL and CSA/CUL)		
Nom. voltage / nom. current / conduc. sizes	UL: [V] / [A] / AWG	–
	CSA/CUL: [V] / [A] / AWG	–


Technical data




STTB 1,5, STTB 2,5, STTB 2,5-L/N




STTB 1,5-PV, STTB 2,5-PV




STTB 1,5-PE, STTB 2,5-PE




STTB 2,5-PE/L, STTB 2,5-PE/N



STTB 4



STTB 4-PV



STTB 4-PE

© PHOENIX CONTACT 15.10.02TNR: 5124907-02 http://www.phoenixcontact.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP