



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗


LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

UM 45-FLKS50

Order No.: 2962696

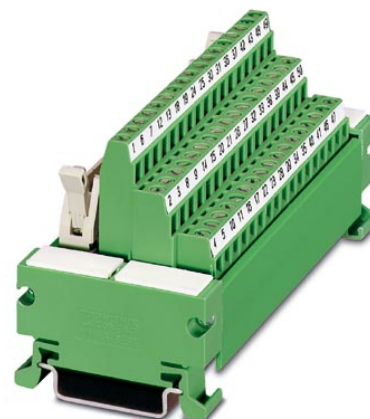

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2962696>

VARIOFACE module, with screw connection and flat-ribbon cable connector, for assembly on NS 35/7.5, 50 positions

| Commercial data | |
|--------------------------|--------------------|
| EAN | 4017918087364 |
| Pack | 1 pcs. |
| Customs tariff | 85369010 |
| Weight/Piece | 0.1506 KG |
| Catalog page information | Page 245 (IF-2007) |

Product notes

WEEE/RoHS-compliant since:
08/11/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

| General data | |
|---|-----------|
| Nominal voltage U_N | < 50 V AC |
| | 60 V DC |
| Max. current carrying capacity per branch | 1 A |
| Number of positions | 50 |

| | |
|---|------------------|
| Width | 110 mm |
| Height | 53 mm |
| Depth | 45 mm |
| Ambient temperature (operation) | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |
| Test voltage input/output | 500 V AC |
| Mounting position | Any |
| Standards/regulations | IEC 60664 |
| | DIN VDE 0110 |
| Pollution degree | 2 |
| Surge voltage category | II |

Connection data

| | |
|--|--|
| Connection 1 | PCB connection |
| Connection in acc. with standard | IEC / EN |
| Type of connection | Screw connection |
| Conductor cross section solid min. | 0.14 mm ² |
| Conductor cross section solid max. | 1.5 mm ² |
| Conductor cross section stranded min. | 0.14 mm ² |
| Conductor cross section stranded max. | 1.5 mm ² |
| Conductor cross section AWG/kcmil min. | 26 |
| Conductor cross section AWG/kcmil max | 16 |
| Stripping length | 6 mm |
| Screw thread | M3 |
| Connection 2 | Flat-ribbon cable connection |
| Number of connections | 1 |
| Type of connection | Flat-ribbon cable plug connector in acc. with IEC 60603-13 |
| Number of positions | 50 |

Certificates / Approvals



Certification

CUL, GOST, UL

CUL

| | |
|-----------------------|-------|
| Nominal voltage U_N | 125 V |
| Nominal current I_N | 1 A |

UL

| | |
|-----------------------|-------|
| Nominal voltage U_N | 125 V |
| Nominal current I_N | 1 A |


Accessories

| Item | Designation | Description |
|------------------------|----------------------------|--|
| Cable/conductor | | |
| 2289065 | FLK 50/EZ-DR/ 50/KONFEK | Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 0.5 m |
| 2299097 | FLK 50/EZ-DR/ 50/KONFEK/S | Round shielded cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 0.5 m |
| 2289078 | FLK 50/EZ-DR/ 100/KONFEK | Round cable sets, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 1 m |
| 2299107 | FLK 50/EZ-DR/ 100/KONFEK/S | Round shielded cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 1 m |
| 2289081 | FLK 50/EZ-DR/ 150/KONFEK | Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 1.5 m |
| 2299110 | FLK 50/EZ-DR/ 150/KONFEK/S | Round shielded cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 1.5 m |
| 2289094 | FLK 50/EZ-DR/ 200/KONFEK | Round cable sets, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 2 m |
| 2299123 | FLK 50/EZ-DR/ 200/KONFEK/S | Round shielded cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 2 m |
| 2289104 | FLK 50/EZ-DR/ 250/KONFEK | Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 2.5 m |
| 2289117 | FLK 50/EZ-DR/ 300/KONFEK | Round cable sets, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 3 m |
| 2299136 | FLK 50/EZ-DR/ 300/KONFEK/S | Round shielded cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 3 m |
| 2289120 | FLK 50/EZ-DR/ 350/KONFEK | Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 3.5 m |
| 2289133 | FLK 50/EZ-DR/ 400/KONFEK | Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 4 m |
| 2299149 | FLK 50/EZ-DR/ 400/KONFEK/S | Round shielded cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 4 m |
| 2289573 | FLK 50/EZ-DR/ 450/KONFEK | Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 4,5 m |

| | | |
|---------|----------------------------|---|
| 2289586 | FLK 50/EZ-DR/ 500/KONFEK | Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 5 m |
| 2289599 | FLK 50/EZ-DR/ 550/KONFEK | Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 5,5 m |
| 2289609 | FLK 50/EZ-DR/ 600/KONFEK | Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 6 m |
| 2299152 | FLK 50/EZ-DR/ 600/KONFEK/S | Round shielded cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 6 m |
| 2289612 | FLK 50/EZ-DR/ 650/KONFEK | Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 6.5 m |
| 2289625 | FLK 50/EZ-DR/ 700/KONFEK | Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 7 m |
| 2289638 | FLK 50/EZ-DR/ 750/KONFEK | Round cable set, with two 50-pos. female connectors (1:1 connection), for connecting 32 channels, cable length: 7.5 m |
| 2289641 | FLK 50/EZ-DR/ 800/KONFEK | Round cable sets, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 8 m |
| 2299165 | FLK 50/EZ-DR/ 800/KONFEK/S | Round shielded cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 8 m |
| 2289654 | FLK 50/EZ-DR/ 850/KONFEK | Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 8.5 m |
| 2289667 | FLK 50/EZ-DR/ 900/KONFEK | Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 9 m |
| 2289670 | FLK 50/EZ-DR/ 950/KONFEK | Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 9.5 m |
| 2289683 | FLK 50/EZ-DR/1000/KONFEK | Round cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 10 m |
| 2299178 | FLK 50/EZ-DR/1000/KONFEK/S | Round shielded cable set, with two 50-pos. socket strips (1:1 connection), for connecting 32 channels, cable length: 10 m |
| 2295046 | FLK EZ-DR-S.../.../... | Round cable, with preassembly, shielded, variable cable length |
| 2295059 | FLK EZ-DR.../.../... | Round cable, with preassembly, not shielded, variable cable length |

Diagrams/Drawings

Circuit diagram

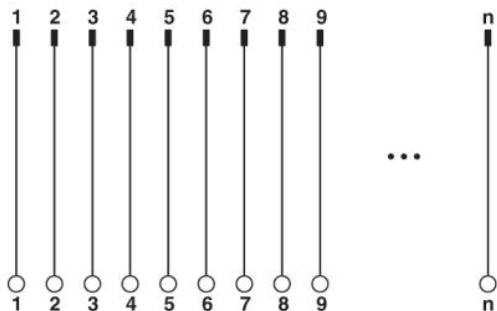

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com