

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

PXI Battery Simulator Module

41-753

- Single Slot Battery Simulator
- Remote Voltage Sense
- Isolated Outputs
- Output Voltage Up To 6 V
- Power Supplied From PXI Backplane
- Programmable Output Resistance
- Programmable Current Sink Capability To 0.5 A For Charger Load Simulation
- VISA and Kernel Drivers Supplied For Windows Plus Soft Front Panel
- Supported by PXI or LXI Chassis




The 41-753 is a battery simulator module that can be used to simulate the power supplies of cellular phones and other portable battery devices. It features fully floating output terminals that can deliver up to 6 V. The fast responding remote sense connections allow the module to regulate the supply voltage at the device under test. The output terminals can float ±50 V relative to the front panel ground to ensure the accurate simulation of battery operation.

The module can source or sink current to simulate a battery supply or a battery under charge. The programmable current sink can be set to divert up to 0.5 A of the load current, permitting the battery simulator to act as a net current sink when connected to a charger circuit. The 41-753 is capable of delivering up to 2.8 A.

The output resistance can be programmed up to 1.15 Ω to simulate the effect of battery output resistance when connected to time varying loads.

The module derives its power from the PXI backplane and requires no external power source.


It can be configured so that if the remote sense lines are not connected to the device under test, the power supply is automatically closed down. The alternative configuration regulates the voltage at the front panel connector if the sense lines are not connected to the load.

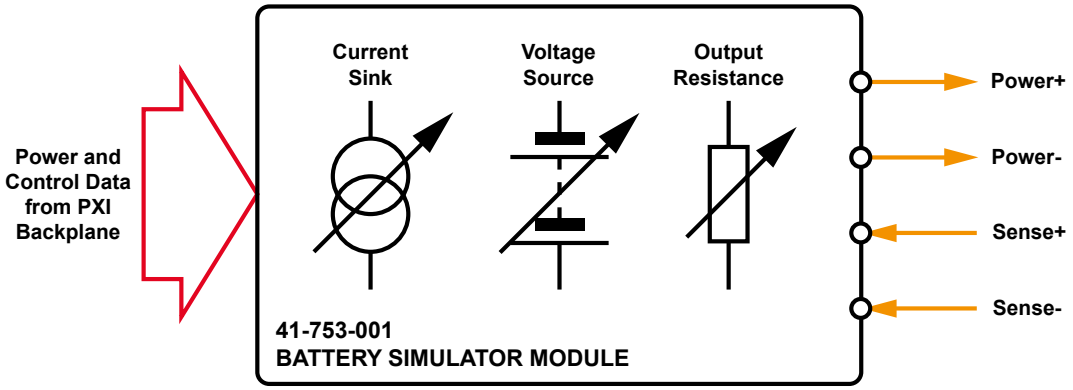

Block Diagram For 41-753 Battery Simulator

Specification

Number of Channels:	1 (isolated)
Output Voltage Range:	0 to 6 V (at front panel), isolated ±50 V maximum common mode voltage.
Voltage Resolution:	Set with 16-bit resolution.
Voltage Sense:	Remote sensing of load voltage, mechanically configurable to either regulate front panel voltage or close down if not connected.
Output Current:	Up to 2.8 A at 5.5 V Up to 2.5 A at 6 V (includes set sink current).
Output Resistance:	Programmable from 0 Ω to 1.15 Ω
Current Sink:	Programmable current sink from 0 to 0.5 A available for output voltages above 0.5V. Current sink setting reduces the available maximum output current delivered to the load if an external current source is not applied.
Load Response Time:	15 µs (1 A to 2 A, 2 m connection wire, using all connection pins).
Power Source:	PXI backplane +5 V.
Monitor:	Provided through monitor pins to measure output voltages and current. Can be used to measure load voltage, front panel voltage, load current and sink current. Current is measured by voltage sensing across a resistor.
Monitor Accuracy:	Voltage DMM ±30 µV Current 1 % ±1 mA (after zero correction).
Load Detection:	Read back flag indicates if load is drawing more than 10 mA.
Protection:	Short circuit protection. Thermal protection. Operation of protection is reported. Prolonged operation of protection is not recommended.
Output Connector:	25-pin male D-type. Each connection is supported by two pins to permit doubling up of connections.

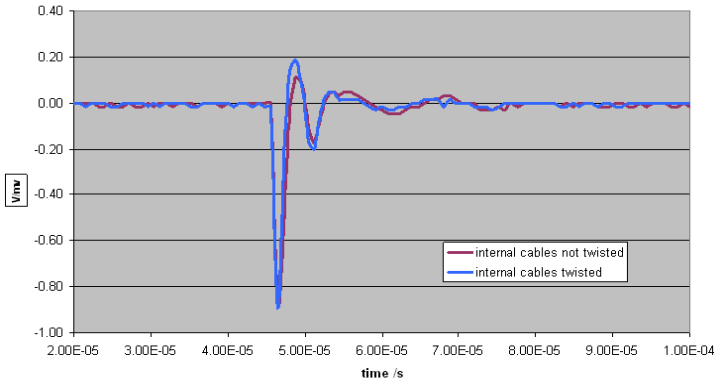

Typical load transient response of 41-753 for 6 V output when load is changed abruptly from 1A to 2A in <<1µs

Mechanical Characteristics

Single slot 3U PXI (CompactPCI card).
3D models for all versions in a variety of popular file formats are available on request.

Connectors

PXI bus via 32-bit P1/J1 backplane connector.
Signals via front panel 25-pin male D-type connector, for pin outs please refer to the operating manual.

Power Requirements

+3.3 V	+5 V	+12 V	-12 V
0.2 A	6 A	0.15 A	0.1 A

PXI & CompactPCI Compliance

The module is compliant with the PXI Specification 2.2. Local Bus, Trigger Bus & Star Trigger are not implemented.

Uses a 33 MHz 32-bit backplane interface.

Safety & CE Compliance

All modules are fully CE compliant and meet applicable EU directives:

Low-voltage safety EN61010-1:2010,
EMC Immunity EN61326-1:2013,
Emissions EN55011:2009+A1:2010.

Operating/Storage Conditions

Operating Temperature:	0 °C to +55 °C
Humidity:	Up to 90 % non-condensing
Altitude:	5000 m
Storage/Transport Temperature:	-20 °C to +75 °C
Humidity:	Up to 90 % non-condensing
Altitude:	15000 m

Product Order Codes

Battery Simulator, 2.8 Amps	41-753-001


Product Customization

Pickering PXI modules are designed and manufactured on our own flexible manufacturing lines, giving complete product control and enabling simple customization to meet very specific requirements.

All customized products are given a unique part number, fully documented and may be ordered at any time in the future. Please contact your local sales office to discuss.

Mating Connectors & Cabling

For connection accessories for the 41-753 module please refer to the 90-008D 25-pin D-type Connector Accessories data sheet where a complete list and documentation can be found for accessories, or refer to the website.

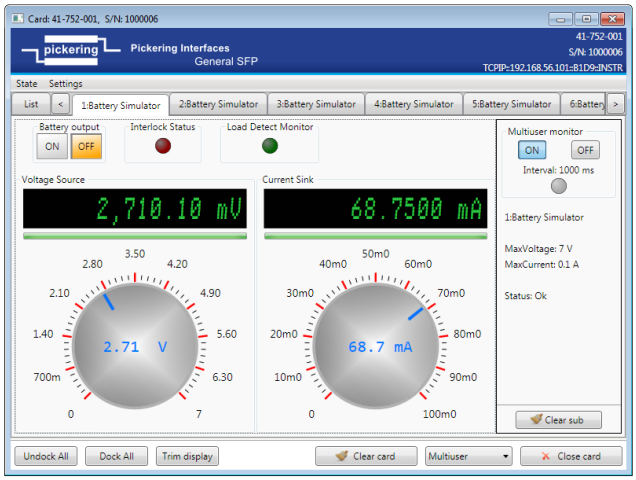

Soft Front Panel for Battery Simulator Modules

Chassis Compatibility

This PXI module must be used in a suitable chassis. It is compatible with the following chassis types:

- All chassis conforming to the 3U PXI and 3U Compact PCI (cPCI) specification
- Legacy and Hybrid Peripheral slots in a 3U PXI Express (PXIe) chassis
- Pickering Interfaces LXI or LXI/USB Modular Chassis

Chassis Selection Guide

Standard PXI or hybrid PXIe Chassis From Any Vendor:

- Mix our 1000+ PXI switching & simulation modules with any vendor's PXI instrumentation
- Embedded or remote Windows PC control
- Real-time Operating System Support
- High data bandwidths, especially with PXI Express
- Integrated module timing and synchronization



Pickering LXI or LXI/USB Modular Chassis
Only accept our PXI Switching & Simulation Modules:

- Choose from 1000+ Pickering PXI Modules
- Ethernet or USB control enables remote operation
- Low-cost control from practically any controller
- LXI provides manual control via Web browsers
- Driverless software support
- Power sequencing immunity
- Ethernet provides chassis/controller voltage isolation
- Independence from Windows operating system



Connectivity Solutions




We provide a full range of supporting cable and connector solutions for all our switching products—20 connector families with **1200+** products. We offer everything from simple mating connectors to complex cables assemblies and terminal blocks. All assemblies are manufactured by Pickering and are guaranteed to mechanically and electrically mate to our modules. These accessories are detailed in Connector Accessories data sheets, where a complete list and documentation can be found for each accessory.



Connectors & Backshells



Multi-way Cable Assemblies



RF Cable Assemblies




Breakouts



Connector Blocks

We also offer customized cabling and have a free online **Cable Design Tool** that can be used to create custom cable solutions for many applications.

- Fully supported on modern browsers and tablet operating systems.
- Built-in tutorials and videos allow you to get quickly up to speed.
- Store cable assemblies in the Cloud and develop over time.
- Each cable design has a downloadable PDF documentation file detailing all specifications

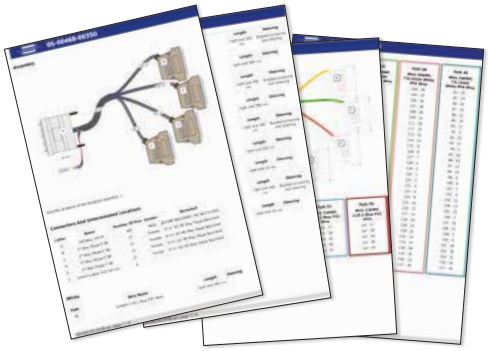

Start designing your custom cabling, go to pickeringtest.com/cdt


Mass Interconnect

We recommend the use of a mass interconnect solution when an Interchangeable Test Adapter (ITA) is required for PXI/LXI based test systems. Our modules are fully supported by Virginia Panel and MacPanel.

Pickering Reed Relays

We are the only switch provider with in-house reed relay manufacturing capability via our Relay Division. These instrument grade reed relays feature ***SoftCenter***™ technology, ensuring long service life and repeatable contact performance.

To learn more go to pickeringrelay.com

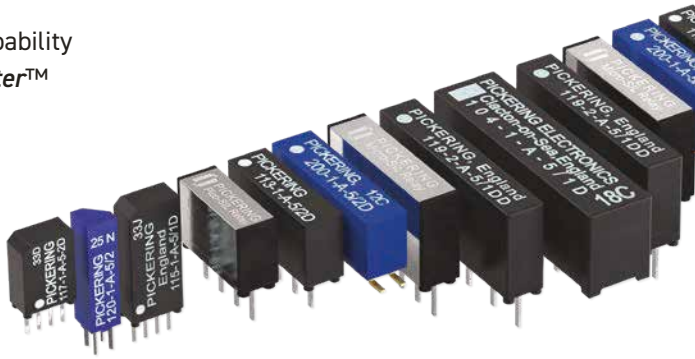

Programming

Pickering provide kernel, IVI and VISA (NI & Keysight) drivers which are compatible with all Microsoft supported versions of Windows and popular older versions.

For more information go to pickeringtest.com/os

The VISA driver support is provided for LabVIEW Real Time Operating Systems (Pharlap and Linux-RT). For other RTOS support contact Pickering. These drivers may be used with a variety of programming environments and applications including:

- **Pickering Interfaces Switch Path Manager**
- **National Instruments** products (LabVIEW, LabWindows/CVI, Switch Executive, MAX, TestStand, VeriStand, etc.)
- **Microsoft Visual Studio** products (Visual Basic, Visual C++)
- **Programming Languages** C, C++, C#, Python
- **Keysight** VEE and OpenTAP
- **Mathworks MATLAB, Simulink**
- **Marvin** ATEasy
- **MTQ Testsolutions** Tecap Test & Measurement Suite


Drivers for popular Linux distributions are available, other environments are also supported, please contact Pickering with specific enquiries. We provide Soft Front Panels (SFPs) for our products for familiarity and manual control, as well as comprehensive documentation and example programs to help you develop test routines with ease.

To learn more about software drivers and development environments go to pickeringtest.com/software

Signal Routing Software

Our signal routing software, Switch Path Manager, automatically selects and energizes switch paths through Pickering switching systems. Signal routing is performed by simply defining test system endpoints to be connected together, greatly accelerating Test System software development.

To learn more go to pickeringtest.com/spm

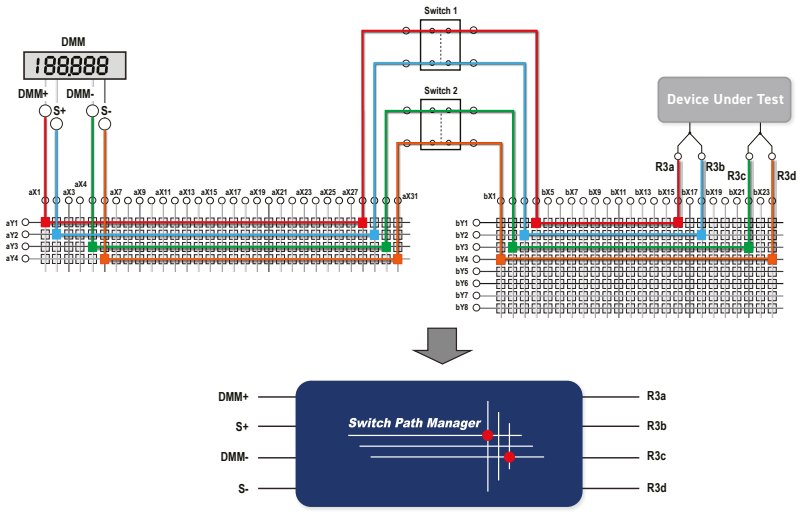

Diagnostic Relay Test Tools

eBIRST Switching System Test Tools are designed specifically for our PXI, PCI or LXI products, these tools simplify switching system fault-finding by quickly testing the system and graphically identifying the faulty relay.

To learn more go to pickeringtest.com/ebirst



Three Year Warranty & Guaranteed Long-Term Support

All standard products manufactured by Pickering Interfaces are warranted against defective materials and workmanship for three years from the date of delivery to the original purchaser. Extended warranty and service agreements are available with various levels for your requirements. Although we offer a 3-year warranty as standard, we also include guaranteed long-term support—with a history of supporting our products for typically 15-20 years.

To learn more go to pickeringtest.com/support

Available Product Resources

We have a library of resources including success stories, product and support videos, articles and white papers as well as application-specific brochures to assist you. We have also published reference books on switching technology and the PXI and LXI standards.

To view, download or request any of our product resources go to pickeringtest.com/resources



© Copyright (2026) Pickering Interfaces. All Rights Reserved
Pickering Interfaces maintains a commitment to continuous product development, consequently we reserve the right to vary from the description given in this data sheet.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP