

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

LK SERIES

POLYESTER | METAL CASE

FEATURES:


- 6 ~ 50 KVDC Rated Models
- Up to 50 µf Capacitance
- ±10% Tolerance (Standard), optional ±5%
- -55 to 85°C at full rated voltage
- Insulation Resistane of 40 - 80k ΩF
- <0.6% Dissipation Factor @ 1,000Hz
- Tested 150% of Rated Voltage (1 min)
- Glazed Staetite Busing Terminals
- 2.5k hours Reliability (85°C and 100% Rated Voltage)
- ISO 9001:2015 Qualified Processes
- Tested to MIL-STD-202
- ROHS Compliance upon Request





Made in USA · RoHS COMPLIANT UPON REQUEST · ISO 9001:2015 CERTIFIED · MIL-STD-202


TYPE 'LK' CAPACITORS are specifically designed for filter, bypass and coupling applications in the low audio frequency range. The CP70 style container and internal construction permit operation in any position. Glazed steatite bushings are used, and in the voltage ranges of 2000 and greater, steatite is the electrical insulation in the terminal assembly. The threaded stud terminal is supplied with nut and solder lug. The whole assembly is hermetically sealed.

CHARACTERISTICS:

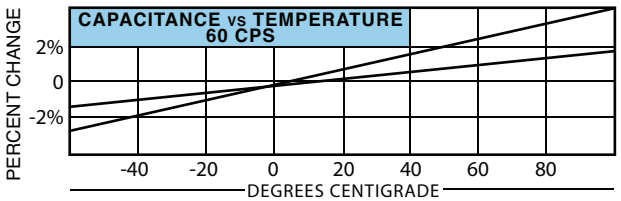

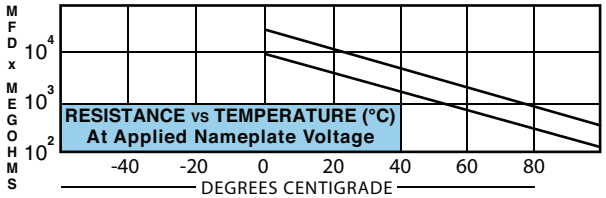

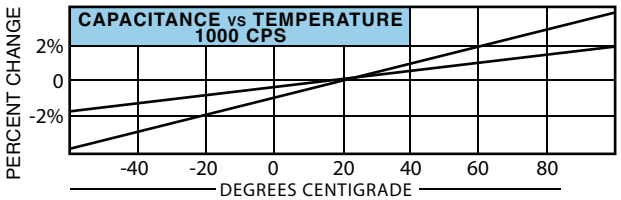

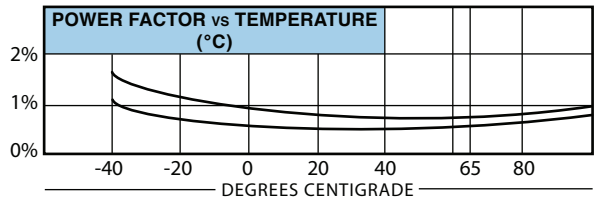

1100 S. Plumer Avenue
Tucson, AZ 85719
www.plasticcapacitors.com

tel: 520.573.0221
fax: 520.573.0520

AN ELECTRO TECHNIK COMPANY
ELECTRO TECHNIK
www.electrotechnik.com

VDC	Model	µF	Length	Width	Height	Term Dist	Term Height
600	LK6-104	0.1	1.750	1.000	2.125	1.813	0.750
	LK6-105	1	1.750	1.000	2.125	1.813	0.750
	LK6-106	10	3.750	1.250	4.500	2.000	0.750
	LK6-106Y	10	3.750	1.750	3.500	2.000	0.750
	LK6-126	12	3.750	1.250	5.000	2.000	0.750
	LK6-126Y	12	3.750	1.750	3.750	2.000	0.750
	LK6-156	15	3.750	1.250	6.000	2.000	0.750
	LK6-156Y	15	3.750	1.750	4.500	2.000	0.750
	LK6-156Z	15	3.750	2.250	3.750	2.000	0.750
	LK6-205	2	1.750	1.000	3.250	1.813	0.750
	LK6-206	20	3.750	1.750	5.500	2.000	0.750
	LK6-206Y	20	3.750	2.250	4.500	2.000	0.750
	LK6-254	0.25	1.750	1.000	2.125	1.813	0.750
	LK6-256	25	3.750	2.250	5.750	2.000	0.750
	LK6-256Y	25	3.750	3.188	4.000	2.000	0.750
	LK6-306	30	3.750	2.250	6.250	2.000	0.750
	LK6-306Y	30	3.750	3.188	4.750	2.000	0.750
	LK6-306Z	30	4.563	3.750	3.500	2.000	0.750
	LK6-405	4	1.750	1.000	5.250	1.813	0.750
	LK6-405Y	4	2.500	1.188	3.250	1.125	0.750
	LK6-504	0.5	1.750	1.000	2.125	1.813	0.750
	LK6-605	6	2.500	1.188	4.500	1.125	0.750
	LK6-805	8	2.500	1.188	5.500	1.125	0.750
	LK6-805Y	8	3.750	1.250	4.000	2.000	0.750
1,000	LK10-104	0.1	1.750	1.000	2.125	1.813	0.750
	LK10-105	1	1.750	1.000	2.125	1.813	0.750
	LK10-106	10	3.750	1.250	5.000	2.000	0.750
	LK10-106Y	10	3.750	1.750	3.750	2.000	0.750
	LK10-126	12	3.750	1.250	5.750	2.000	0.750
	LK10-126Y	12	3.750	1.750	4.250	2.000	0.750
	LK10-156	15	3.750	1.750	5.250	2.000	0.750
	LK10-156Y	15	3.750	2.250	4.000	2.000	0.750
	LK10-205	2	1.750	1.000	3.500	1.813	0.750
	LK10-206	20	3.750	1.750	6.250	2.000	0.750
	LK10-206Y	20	3.750	2.250	5.250	2.000	0.750
	LK10-206Z	20	3.750	3.188	4.000	2.000	0.750
	LK10-254	0.25	1.750	1.000	2.125	1.813	0.750
	LK10-256	25	3.750	2.250	6.250	2.000	0.750
	LK10-256Y	25	3.750	3.188	4.750	2.000	0.750
	LK10-306	30	3.750	3.188	5.250	2.000	0.750
	LK10-306Y	30	4.563	3.750	4.000	2.000	0.750
	LK10-405	4	1.750	1.000	5.750	1.813	0.750
	LK10-405Y	4	2.500	1.188	3.750	1.125	0.750
	LK10-504	0.5	1.750	1.000	2.125	1.813	0.750
	LK10-605	6	2.500	1.188	5.000	1.125	0.750
	LK10-605Y	6	3.750	1.250	3.500	2.000	0.750
	LK10-805	8	2.500	1.188	6.250	1.125	0.750
	LK10-805Y	8	3.750	1.250	4.250	2.000	0.750
1,500	LK15-205Y	2	1.750	1.000	4.500	0.813	1.125
	LK15-405Y	4	2.500	1.188	4.750	0.813	1.125
	LK15-605Y	6	2.500	1.188	6.500	1.125	1.125
	LK15-805Y	8	2.500	1.188	8.250	1.125	1.125
	LK15-106Y	10	3.750	1.250	6.750	1.125	1.125
	LK15-126Y	12	3.750	1.250	7.500	2.000	1.125
	LK15-156Y	15	3.750	1.750	6.750	2.000	1.125
	LK15-206Y	20	3.750	1.750	8.500	2.000	1.125
	LK15-256Y	25	3.750	2.250	8.750	2.000	1.125
	LK15-306Y	30	3.750	3.188	7.250	2.000	1.125
	LK15-406Y	40	4.563	3.750	6.750	2.000	1.125

VDC	Model	µF	Length	Width	Height	Term Dist	Term Height
2,000	LK20-104	0.1	1.750	1.000	2.125	0.813	1.125
	LK20-254	0.25	1.750	1.000	2.125	0.813	1.125
	LK20-504	.5	1.750	1.000	2.125	0.813	1.125
	LK20-105	1	1.750	1.000	3.250	0.813	1.125
	LK20-205	2	2.500	1.188	3.500	1.125	1.125
	LK20-205Y	2	1.750	1.000	5.000	0.813	1.125
	LK20-405	4	1.500	1.188	5.500	1.125	1.125
	LK20-405Y	4	3.750	1.250	3.750	2.000	1.125
	LK20-605	6	3.750	1.250	5.000	2.000	1.125
	LK20-605Y	6	3.750	1.750	3.750	2.000	1.125
	LK20-805	8	3.750	1.250	6.250	2.000	1.125
	LK20-805Y	8	3.750	1.750	4.500	2.000	1.125
	LK20-106	10	3.750	1.750	5.250	2.000	1.125
	LK20-106Y	10	3.750	2.250	4.500	2.000	1.125
	LK20-126	12	3.750	1.750	6.250	2.000	1.125
	LK20-126Y	12	3.750	2.250	5.000	2.000	1.125
	LK20-126Z	12	3.750	3.188	4.000	2.000	1.125
	LK20-156	15	3.750	2.250	6.000	2.000	1.125
	LK20-156Y	15	3.750	3.188	5.000	2.000	1.125
	LK20-156Z	15	4.563	3.750	3.750	2.000	1.125
	LK20-206	20	3.750	3.188	6.000	2.000	1.125
	LK20-206Y	20	4.563	3.750	4.250	2.000	1.125
	LK20-256	25	3.750	3.188	6.750	2.000	1.125
	LK20-306	30	4.563	3.750	5.750	2.000	1.125
	LK20-406	40	4.563	3.750	7.750	2.000	1.125
	LK20-506	50	4.563	3.750	9.250	2.000	1.125
3,000	LKJ0-104	.1	1.750	1.000	2.125	0.813	1.125
	LKJ0-254	.25	1.750	1.000	2.500	0.813	1.125
	LKJ0-504	.50	1.750	1.000	3.250	0.813	1.125
	LK30-105	1	1.750	1.000	5.250	1.125	1.125
	LK30-105Y	1	2.500	1.188	3.500	1.125	1.125
	LK30-205	2	2.500	1.188	5.500	2.000	1.125
	LK30-205Y	2	3.750	1.250	3.750	2.000	1.125
	LK30-405	4	3.750	1.250	6.250	2.000	1.125
	LK30-405Y	4	3.750	1.750	4.750	2.000	1.125
	LK30-405Z	4	3.750	2.250	4.000	2.000	1.125
	LK30-605	6	3.750	1.750	6.250	2.000	1.125
	LK30-605Y	6	3.750	2.250	5.250	2.000	1.125
	LK30-605Z	6	3.750	3.188	4.000	2.000	1.125
	LK30-805	8	3.750	2.250	6.500	2.000	1.125
	LK30-805Y	8	3.750	3.188	5.000	2.000	1.125
	LK30-805Z	8	4.563	3.750	3.750	2.000	1.125
	LK30-106	10	3.750	3.188	5.750	2.000	1.125
	LK30-106Y	10	4.563	3.750	4.500	2.000	1.125
	LK30-126	12	4.563	3.188	6.750	2.000	1.125
	LK30-126Y	12	4.563	3.750	5.000	2.000	1.125
	LK30-156	15	4.563	3.750	6.000	2.000	1.125
	LK30-206Y	20	4.563	3.750	7.000	2.000	1.125
	LK30-256Y	25	4.563	3.750	10.000	2.000	1.125
	LK30-306Z	30	4.563	3.750	11.500	2.000	1.125
	LK30-406	40	3.375	5.625	9.000	3.000	1.125
	LK30-506Y	50	3.375	5.625	8.000	3.000	1.125

AN ELECTRO TECHNIK COMPANY

1100 S. Plumer Avenue
Tucson, AZ 85719
www.plasticcapacitors.com

tel: 520.573.0221
fax: 520.573.0520

ELECTRO TECHNIK
www.electrotechnik.com

VDC	Model	µF	Length	Width	Height	Term Dist	Term Height
4,000	LK40-105	1	2.5	1.1875	4	1.125	1.125
	LK40-205	2	2.5	1.1875	6.75	1.125	1.125
	LK40-205Y	2	3.75	1.75	3.75	2	1.125
	LK40-405	4	3.75	1.75	6.75	2	1.125
	LK40-405Y	4	3.75	2.25	4.75	2	1.125
	LK40-605	6	3.75	2.25	6.5	2	1.125
	LK40-605Y	6	3.75	3.1875	5	2	1.125
	LK40-605Z	6	4.8125	3.75	3.75	2	1.125
	LK40-805	8	3.75	3.1875	6	2	1.125
	LK40-805Y	8	4.8125	3.75	4.75	2	1.125
	LK40-106	10	4.8125	3.75	5.5	2	1.125
	LK40-126	12	4.8125	3.75	6.5	2	1.125
	LK40-156	15	4.8125	3.75	8.5	2	1.125
	LK40-206Z	20	4.8125	3.75	9	2	1.125
	LK40-256Y	25	4.8125	3.75	11	2	1.125
	LK40-306Y	30	6	4.6875	9.25	3	1.125
	LK40-406	40	7.375	5.625	8.5	3	1.125
	LK40-506	50	7.375	5.625	11	3	1.125
5,000	LK50-104	.1	1.75	1	2.125	.8125	1.125
	LK50-254	.25	1.75	1	3	.8125	1.125
	LK50-504	.50	1.75	1	4.75	.8125	1.125
	LK50-504Y	.5	2.5	1.1875	3.25	1.125	1.125
	LK50-105	1	2.5	1.1875	5	1.125	1.125
	LK50-105Y	1	3.75	1.25	3.75	2	1.125
	LK50-205	2	3.75	1.25	6	2	1.125
	LK50-205Y	2	3.75	1.75	4.5	2	1.125
	LK50-205Z	2	3.75	2.25	3.75	2	1.125
	LK50-405	4	3.75	2.25	6.25	2	1.125
	LK50-405Y	4	3.75	3.1875	4.75	2	1.125
	LK50-405Z	4	3.75	3.75	3.75	2	1.125
	LK50-605	6	3.75	3.1875	6.5	2	1.125
	LK50-605Y	6	4.812	3.75	4.75	2	1.125
	LK50-805	8	4.812	3.75	6.25	2	1.125
	LK50-106Y	10	4.812	3.75	7.5	2	1.125
	LK50-126Y	12	4.812	3.75	8	2	1.125
	LK50-156Y	15	4.812	3.75	9.25	2	1.125
	LK50-206Y	20	7.375	5.625	5.75	2	1.125
	LK50-206Z	20	6	46875	8.5	3	1.125
	LK50-256Y	25	6	4.6875	10	3	1.125
	LK50-306Y	30	7.375	5.625	8	3	1.125
	LK50-406Y	40	7.375	5.625	11	3	1.125
6,000	LK60-104	.1	3.75	1.25	2.25	2	1.4375
	LK60-254	.25	3.75	1.25	2.5	2	1.4375
	LK60-504	.50	3.75	1.25	3.75	2	1.4375
	LK60-105	1	3.75	1.25	5.5	2	1.4375
	LK60-105Y	1	3.75	1.75	4.5	2	1.4375
	LK60-205	2	3.75	2.25	6.25	2	1.4375
	LK60-205Y	2	3.75	3.375	4.75	2	1.4375
	LK60-405	4	4.5625	3.75	6	2	1.4375
	LK60-605	6	5.5625	3.75	8.25	2	1.4375
	LK60-805	8	6	3.75	10.25	2	1.4375
	LK60-106Y	10	6	4.6875	8.75	3	1.4375
	LK60-126Y	12	7.375	4.6875	9.75	3	1.4375
	LK60-156Z	15	7.375	5.625	8.75	3	1.4375
	LK60-206Y	20	13.5	5.625	10.25	3	1.4375
	LK60-306Y	30	13.5	5.125	11.875	6.75	2.125
	LK60-406	40	13.5	5.125	12.875	6.75	2.125
	LK60-506	50	13.5	7.125	11.875	6.75	2.125

VDC	Model	µF	Length	Width	Height	Term Dist	Term Height
8,000	LK80-104Y	.1	2.5	1.1875	3	1.125	2.125
	LK80-104	.1	3.75	1.25	2.5	2	2.125
	LK80-254Y	.25	2.5	1.1875	5.25	1.125	2.125
	LK80-254	.25	3.75	1.25	3.75	2	2.125
	LK80-504	.5	3.75	1.25	5.75	2	2.125
	LK80-504Y	.5	3.75	1.75	4.25	2	2.125
	LK80-105	1.0	3.75	1.75	7	2	2.125
	LK80-105Y	1.0	3.75	2.25	5.75	2	2.125
	LK80-105Z	1.0	3.75	3.1875	4.5	2	2.125
	LK80-205	2.0	3.75	3.1875	7	2	2.125
	LK80-205Y	2.0	4.5625	3.75	5.25	2	2.125
	LK80-405Y	4.0	4.5625	3.75	8.5	2	2.125
	LK80-605Y	6.0	6	4.6875	8.25	3	2.125
	LK80-805Y	8.0	6	4.6875	10	3	2.125
	LK80-106Y	10.0	7.375	5.625	9	3	2.125
	LK80-126Y	12.0	7.375	5.625	10.5	3	2.125
	LK80-156Y	15.0	13.5	4.125	11	6.75	2.125
	LK80-206Y	20.0	13.5	5.125	11.875	6.75	2.125
	LK80-256	25.0	13.5	6.125	11.875	6.75	2.125
	LK80-306	30.0	13.5	7.125	11.875	6.75	2.125
10,000	LK100-104	.1	3.75	1.75	3.25	2	2.125
	LK100-254	.25	3.75	1.75	3.75	2	2.125
	LK100-254Y	.25	3.75	2.25	3.25	2	2.125
	LK100-504	.5	3.75	1.75	5.75	2	2.125
	LK100-504Y	.5	3.75	2.25	4.5	2	2.125
	LK100-504Z	.5	3.75	3.1875	3.75	2	2.125
	LK100-105	1.0	3.75	2.25	7.25	2	2.125
	LK100-105Y	1.0	3.75	3.1875	5.25	2	2.125
	LK100-105Z	1.0	4.5625	3.75	4.5	2	2.125
	LK100-205	2.0	4.5625	3.75	6.75	2	2.125
	LK100-405Y	4.0	4.5625	3.75	11	2	2.125
	LK100-505	5.0	7.375	5.625	8.75	3	2.125
	LK100-605Y	6.0	7.375	5.625	10.5	3	2.125
	LK100-805Y	8.0	7.375	5.625	9.25	3	2.125
	LK100-106Y	10.0	7.375	5.625	11	3	2.125
	LK100-126Y	12.0	13.5	4.125	11	6.75	2.125
	LK100-156Y	15.0	13.5	5.125	11.875	6.75	2.125
	LK100-206	20.0	13.5	6.125	11.875	6.75	2.125
12,500	LK125-503	.05	3.75	1.75	3	2	2.75
	LK125-104	.1	3.75	1.75	3.625	2	2.75
	LK125-254	.25	3.75	1.75	5.875	2	2.75
	LK125-505	.5	3.75	3.1875	5.625	2	2.75
	LK125-504Y	.5	4.5625	3.75	4.375	2	2.75
	LK125-105	1.0	4.5625	3.75	6.625	2	2.75
	LK125-205	2.0	4.5625	3.75	11	2	2.75
	LK125-205Z	2.0	6	4.6875	7.75	3	2.75
	LK125-405Y	4.0	7.375	5.625	9.5	3	2.75
	LK125-505	5.0	7.375	5.625	12.125	3	2.75
	LK125-606	6.0	13.5	4.125	11	6.75	2.75
	LK125-805Y	8.0	13.5	5.125	11.875	6.75	2.75
	LK125-106	10.0	13.5	5.125	13.75	6.75	2.75
	LK125-106Y	10.0	13.5	6.125	11.875	6.75	2.75

1100 S. Plumer Avenue
Tucson, AZ 85719
www.plasticcapacitors.com


tel: 520.573.0221
fax: 520.573.0520


ELECTRO TECHNIK
www.electrotechnik.com


VDC	Model	µF	Length	Width	Height	Term Dist	Term Height
15,000	LK150-203	.1	3.75	1.75	3.25	2	2.75
	LK150-503	.05	3.75	1.75	3.5	2	2.75
	LK150-104	.1	3.75	1.75	3.75	2	2.75
	LK150-254	.25	3.75	1.75	7	2	2.75
	LK150-254Y	.25	3.75	2.25	5.25	2	2.75
	LK150-504	.5	3.75	3.1875	6.5	2	2.75
	LK150-504Y	.5	4.5625	3.75	5	2	2.75
	LK150-105	1.0	4.5625	3.75	8.5	2	2.75
	LK150-205Y	2.0	6	4.6875	9.25	3	2.75
	LK150-405Y	4.0	7.375	5.625	12.125	3	2.75
	LK150-505	5.0	13.5	4.125	11.875	6.75	2.75
	LK150-605	6.0	13.5	5.125	11.875	6.75	2.75
	LK150-805	8.0	13.5	6.125	11.875	6.75	2.75
20,000	LK200-203	.01	3.75	2.25	3.25	2	2.75
	LK200-203	.20	3.75	2.25	3.25	2	2.75
	LK200-503	.05	3.75	2.25	3.75	2	2.75
	LK200-104	.1	3.75	2.25	4.75	2	2.75
	LK200-254	.25	3.75	3.1875	6	2	2.75
	LK200-254Y	.25	4.5625	3.75	4.75	2	2.75
	LK200-504	.5	4.5625	3.75	7.5	2	2.75
	LK200-105	1.0	8	4	9.25	4.5	2.75
	LK200-105Y	1.0	4.5625	3.75	12	2	2.75
	LK200-205	2.0	13.5	4.125	9.25	6.75	2.75
	LK200-205Y	2.0	7.375	5.625	10	3	2.75
	LK200-405	4.0	13.5	5.125	11.875	6.75	2.75
	LK200-505	5.0	13.5	6.125	11.875	6.75	2.75
	LK200-605	6.0	13.5	7.125	11.875	6.75	2.75
25,000	LK250-203	.01	3.75	3.1875	3.5		3.875
	LK250-203	.02	3.75	3.1875	3.5		3.875
	LK250-503	.05	3.75	3.1875	4		3.875
	LK250-104	.1	3.75	3.1875	4.75		3.875
	LK250-254	.25	4.5625	3.75	6.5		3.875
	LK250-504	.5	4.5625	3.75	11.5		3.875
	LK250-504Y	.5	8	4	9.25	4.5	3.875
	LK250-504Z	.5	6	4.6875	6.25	3	3.875
	LK250-105	1.0	13.5	4.125	9.25	6.75	3.875
	LK250-205	2.0	13.5	5.125	13.75	6.75	3.875

VDC	Model	µF	Length	Width	Height	Term Dist	Term Height
30,000	LK300-103	.01	3.75	3.1875	4		3.875
	LK300-204	.02	3.75	3.1875	4		3.875
	LK300-503	.05	3.75	3.1875	5.5		3.875
	LK300-104	.1	3.75	3.1875	8.75		3.875
	LK300-254Y	.25	4.5625	3.75	8.75		3.875
	LK300-254Z	.25	6	4.6875	6	3	3.875
	LK300-504Y	.5	6	4.6875	9.25		3.875
	LK300-504Z	.5	6	4.6875	9.25	3	3.875
	LK300-105Y	1.0	13.5	4.125	11	6.75	3.875
	LK300-205	2.0	13.5	6.125	11.875	6.75	3.875
40,000	LK400-502	.005	4.5625	3.75	5		3.875
	LK400-103	.01	4.5625	3.75	5		3.875
	LK400-203	.02	4.5625	3.75	5		3.875
	LK400-503	.05	4.5625	3.75	5.5		3.875
	LK400-104	.1	4.5625	3.75	10.75	±.125	3.875
	LK400-254	.25	13.5	4.125	9.25	6.75	3.875
	LK400-504	.5	13.5	5.125	11.875	6.75	3.875
50,000	LK500-203	.02	4.5625	3.75	7.5		3.625
	LK500-503	.05	4.5625	3.75	11		3.625
	LK500-503Y	.05	8	4	7	4.5	3.625
	LK500-104	.1	8	4	9.25	4.5	3.625
	LK500-104Y	.1	8	4	9.25		3.625
	LK500-104Z	.1	6	4.6875	6.5		3.625
	LK500-254	.25	13.5	4.125	11	6.75	3.625
	LK500-254Y	.25	13.5	4.125	11		3.625
	LK500-254Z	.25	7.375	5.625	11		3.625
	LK500-504	.5	13.5	5.125	13.75	6.75	3.625
	LK500-504Y	.5	13.5	5.125	13.75		3.625

HOW DO YOU DESIGNATE THE CONNECTOR TYPES, WHAT ARE THE CONNECTOR TYPES? WHAT DO THE Y & Z SUFFIXES DESIGNATE? WHY ARE THERE 3 DRAWINGS?

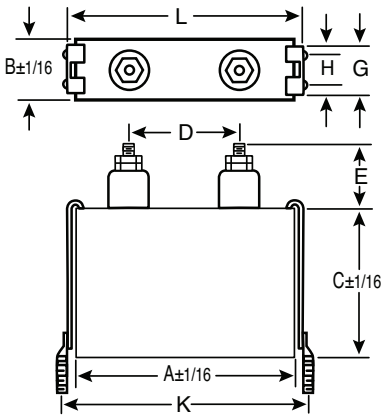

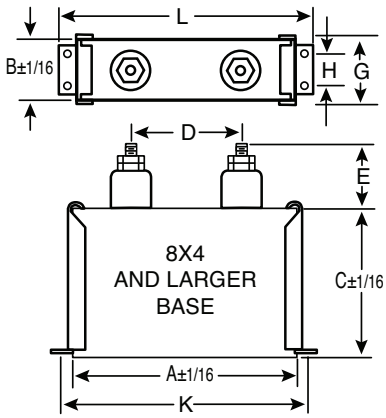

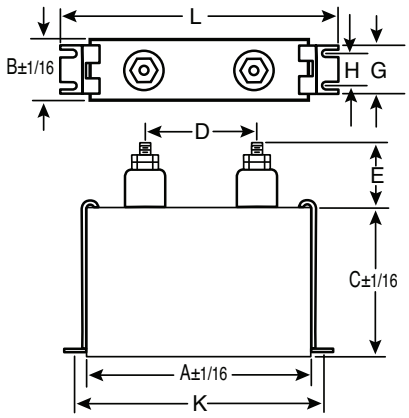

AN ELECTRO TECHNIK COMPANY

1100 S. Plumer Avenue
Tucson, AZ 85719
www.plasticcapacitors.com

tel: 520.573.0221
fax: 520.573.0520

ELECTRO TECHNIK
www.electrotechnik.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP