

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

Polytec

IVS-400 Industrial Vibration Sensor

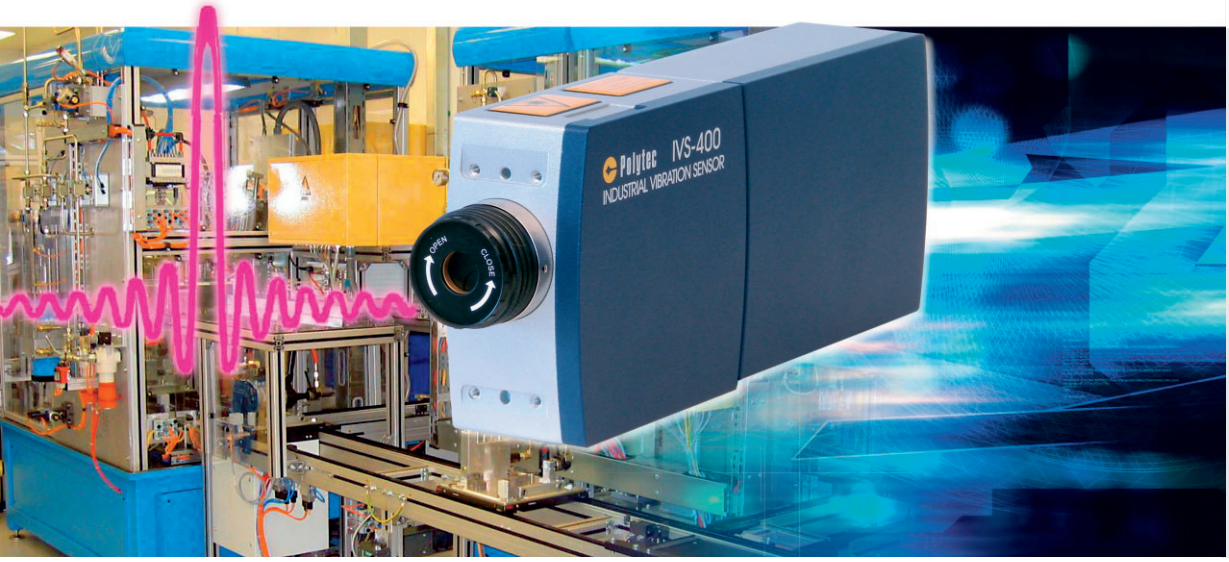

Polytec Industrial Vibrometers

- OFV-2500 Series Vibrometer Controllers
- OFV Series Sensor Heads
- CLV-2534 Compact Laser Vibrometer
- **IVS-400 Industrial Vibration Sensor**

Measuring equipment employed in production environments requires a compact and robust design to be suitable for the challenges met in harsh industrial areas. Polytec's Industrial Vibrometers combine a robust integrated single-box design with the clear advantages of non-contact, laser-based vibration measurement. With a special focus on reliable measurement results, the IVS-400 produces optimal results on every measurement surface regardless of environmental conditions. These outstanding properties make it the first choice for process-integrated acoustic quality inspection.

Cost-effective and Flexible Quality Control

The IVS-400 Industrial Vibration Sensor measures structure-borne noise of objects reliably and without contact. The acquired data provide valuable information on manufacturing quality and compliance with a product's acoustic emission limits. Direct integration of the vibrometer into a production line makes up a real-time quality control system which enables automatic PASS/FAIL decisions on the basis of structure-borne vibration. Meaningful input data from the IVS-400 enhance proper classification dramatically. Thus, besides sustainable assurance of product quality, the IVS-400 substantially increases the cost efficiency of your production process.

The vibrometer is non-contact, wear-free and does not require servo-mechanisms or noise protection for performing measurements. The inherent fast cycle times between measurements are a direct result of high-speed data processing and the convenience of non-contact measurement.

Key Features and Benefits

- Robust and compact single-box design
- Simple to install and operate
- Non-contact, reliable and free from wear
- Easy to integrate into test setups and existing control systems
- Reduced impact from surface features due to DESPEC technology
- Covers acoustic measurement range up to 22 kHz frequency response
- Eye-safe visible low power laser (Class II)
- Automatic PASS/FAIL decision with optional QuickCheck software


Business Unit
Optical Measurement Systems
Tel. +49 (0) 7243 6 04-178
Tel. +49 (0) 7243 6 04-104
oms@polytec.de

Industrial Applications


The IVS-400 Industrial Vibration Sensor is specifically designed for quality inspection: recording acoustic and vibration data as well as in-line testing of serial parts and products.

Higher Levels of Quality Control are Now Possible: 100% Certified Testing of Steering Gears Using Industrial Vibration Sensors

To ensure that hydraulic steering gears pumps do not make any unwanted noises in operation, all motor pump assemblies (MPA) at TRW Automotive in Gelsenkirchen are subjected to numerous tests prior to integration in the steering system. The vibration characteristics are measured by more than fifteen Industrial Vibration Sensors and are used as an indicator of the actual noise under normal operating conditions in an automobile. Based on the vibration spectrum, the process controller either approves the assembly for subsequent processing or rejects it as being faulty. MPA's that pass this test assure that only quiet assemblies are put into manufactured vehicles.

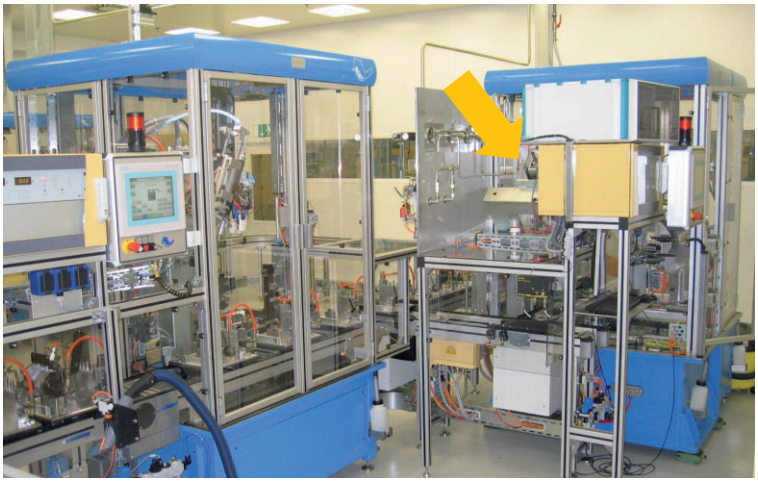

Automatic test station for motor pump assemblies (MPA). Mark: Industrial vibrometer

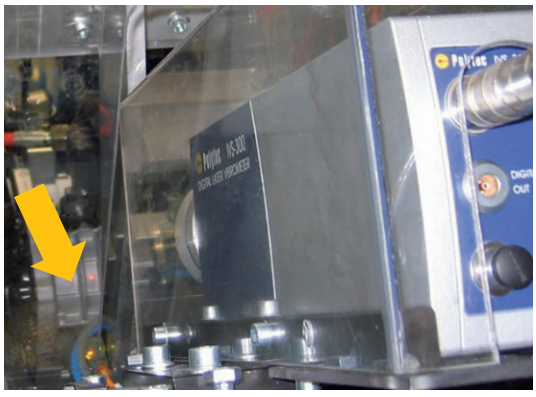

Vibration measurement on the MPA. Mark: red laser reflection

Other Applications:

Automotive

- Electric drives (window-lift motors, servo drives, gear motors)
- Transmissions (powertrain, steering gears)
- Antifriction bearings
- Compressors (cooling compressors)
- Fans for air-conditioners

Appliances

- Electric drives
- Pumps
- Cooling compressors for air-conditioners and refrigerators

Consumer Electronics

- Fan drives for instruments and electronics
- Acoustic inspection of hard disk and optical data storage devices
- Loudspeaker membranes

Medical technology

- Inhalation systems (membranes, pumps)

Industrial applications

- Solar cells (wafer inspection)
- Determination of Young's modulus (natural materials, e.g. wood)

How it works

Introduction to Laser-Doppler Vibrometry

If a light beam is reflected by a moving object, the frequency of the light is shifted proportional to its velocity, a phenomenon referred to as the Doppler Shift. Through this process, the velocity information becomes coded in the frequency of the light and is subsequently used by the laser-Doppler vibrometry to measure the vibration. A precision interferometer and digital decoding electronics transform the frequency shift into a voltage signal that can be processed by standard data acquisition systems. A significant property of the technology, the velocity information is independent of the intensity of the reflected light; hence, the robust measuring principle works well for objects with low reflectivity surfaces.

More information:
www.polytec.com/vib-university


A Complete Solution with QuickCheck Software

Automatic PASS/FAIL Evaluation by QuickCheck


The QuickCheck evaluation software was specially developed for laser vibrometer based in-line acoustic quality checks. QuickCheck acquires and evaluates measurement data from the IVS-400 as well as from other sensors, controls the QC process and interacts with the PLC operating the production line.

- Straight forward threshold configuration in frequency domain and time domain
- Process integration by integrated trigger on sample and product type
- Test database with interface for statistics
- Safe operation through cascaded user levels

Please find more information in our QuickCheck datasheet on www.polytec.com/software

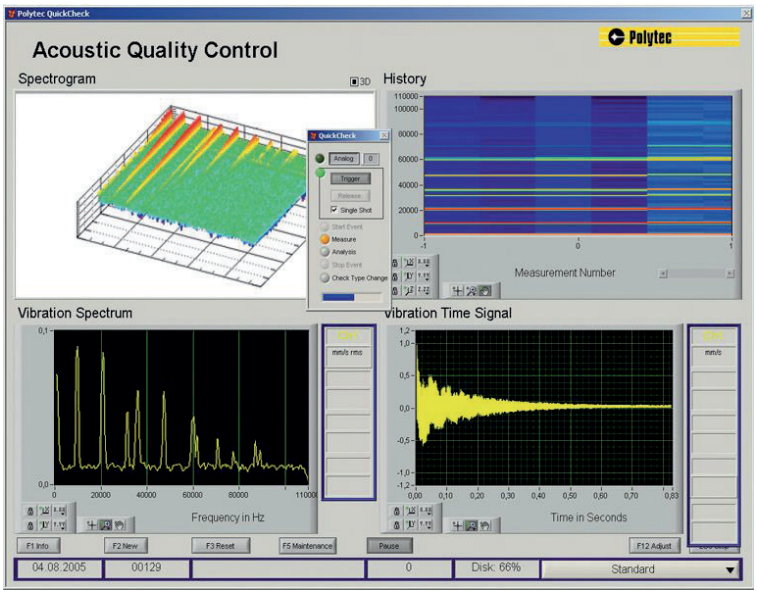


Accessories for Process Integration

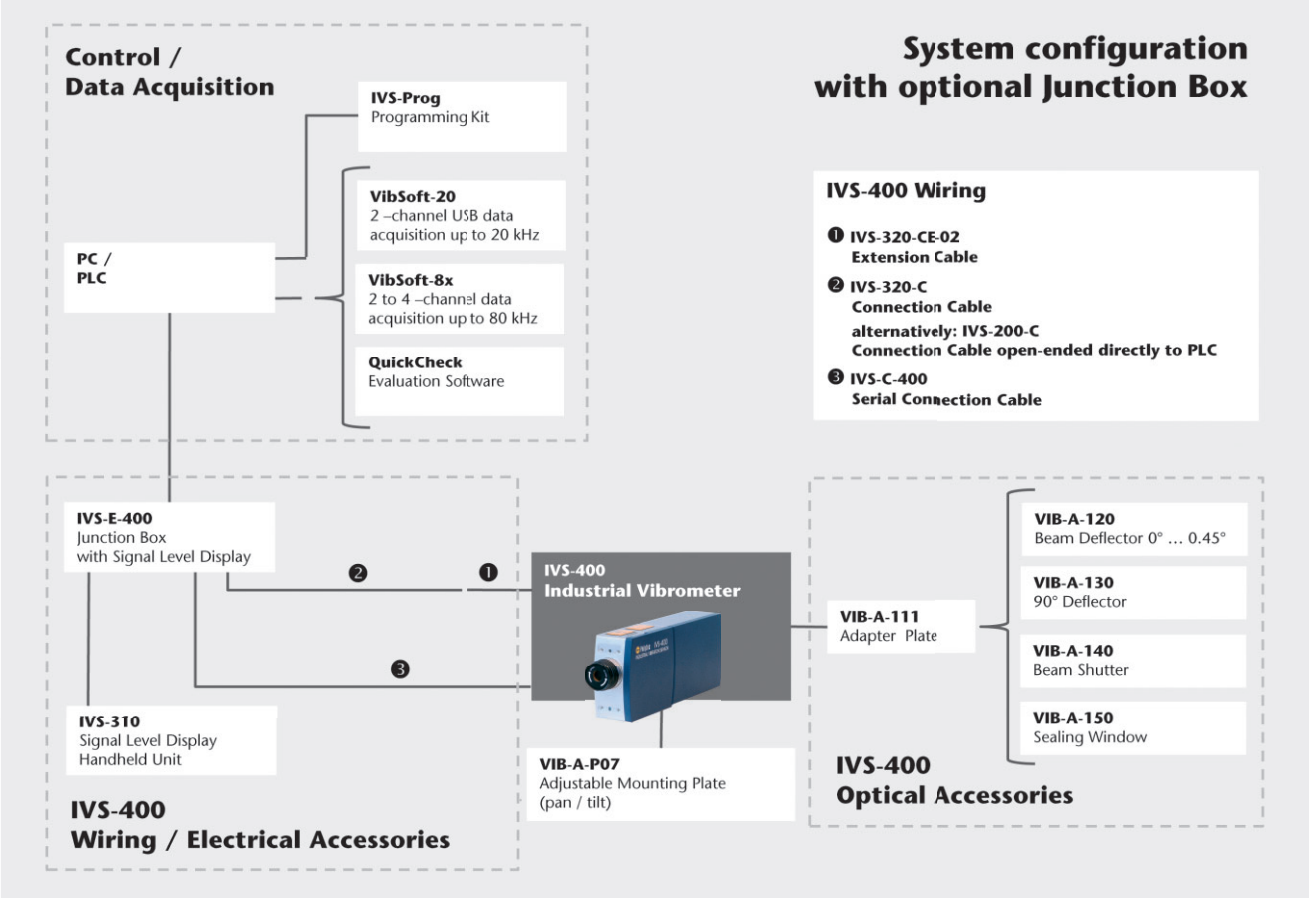

Equipment for a wide range of applications and measurements combined with tailored software for data acquisition and analysis allow for a broad range of applications.

IVS-400 Technical Data			
Operating temperature	+5 °C … +40 °C (41 °F … 104 °F)		
Storage temperature	–10 °C … +65 °C (14 °F … 149 °F)		
Relative humidity	max. 80%, non-condensing		
Protection rating	IP 64		
Dimensions	see drawings below		
Weight	~2.6 kg		
Power	11 V … 14.5 V DC, max. 15 W		
Decoder type	DSP velocity decoder, 3 measurement ranges		
Velocity ranges	±20 mm s^{-1}	±100 mm s^{-1}	±500 mm s^{-1}
Scaling factor	5 mm s^{-1}/V	25 mm s^{-1}/V	125 mm s^{-1}/V
Velocity resolution[1)]	< 0.02 µm $s^{-1}/\sqrt{Hz}$	< 0.02 µm $s^{-1}/\sqrt{Hz}$	< 0.1 µm $s^{-1}/\sqrt{Hz}$
Frequency range	0 … 22 kHz (digital output) 0.5 Hz … 22 kHz (analog output)		
Filters	■ Digital low pass filter 1kHz / 5 kHz / 22 kHz (-1 dB), roll-off >120 dB/dec (analog and digital output) ■ Analog high pass filter 100 Hz (-3 dB) /off, roll-off about 60 dB/dec (analog output only) ■ DESPEC filter for optimization of signals measured on rough surfaces, effective up to 5 kHz		
Outputs analog	±4 V, 24-bit DAC, ranges: 5 / 25 / 125 (in mm s^{-1}/V)		
Outputs digital	S/P-DIF (Sony/Philips Digital Audio Interface) 24 bit, 48 kSa/s		
Connectors	■ Industrial connector for voltage supply, optical signal level and velocity output ■ Connector for IVS-310 signal level indicator and RS-232 cable ■ Triax connector for S/P-DIF digital output		
Optical system	■ Fixed focus lens (ff): 226 mm stand-off distance ■ Variable focus lens (vf): 90 mm to 3 m stand-off distance		
Laser safety	< 1 mW output power, laser safety class II, visible 632.8 nm laser		

[1)] The resolution is defined as the signal amplitude (rms) at which the signal-to-noise ratio is 0 dB in a 1 Hz spectral band width (RBW), measured on 3M Scotchlite Tape®.

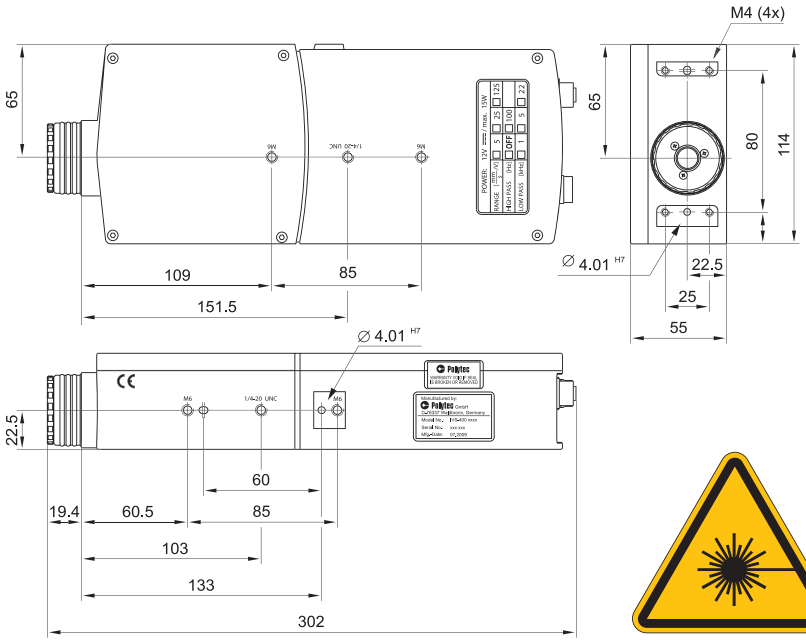

Laser Radiation
Do not stare into beam
Class 2 Laser Product
According to IEC/EN 60825-1 (2008)
Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice no. 50, dated 24 June 2007
P ≤ 1 mW/cw; λ = 633 nm

For more information please contact your Polytec application/sales engineer or visit our homepage **www.polytec.com/vibrometers**.

Polytec GmbH (Germany)
Polytec-Platz 1-7
76337 Waldbronn
Tel. +49 7243 604-0
info@polytec.de

Polytec France S.A.S.
Bâtiment Orion – 1er étage
39, rue Louveau
92320 Châtillon
Tel. +33 1 496569-00
info@polytec.fr

Polytec Ltd.
(Great Britain)
Lambda House, Batford Mill
Harpenden, Herts AL5 5BZ
Tel. +44 1582 711670
info@polytec-ltd.co.uk

Polytec Japan
Arena Tower, 13th floor
3-1-9, Shinyokohama
Kohoku-ku, Yokohama-shi
Kanagawa, 222-0033
Tel. +81 45 478-6980
info@polytec.co.jp

Polytec, Inc. (USA)
North American Headquarters
16400 Bake Parkway
Suites 150 & 200
Irvine, CA 92618
Tel. +1 949 943-3033
info@polytec.com

Central Office
1046 Baker Road
Dexter, MI 48130
Tel. +1 734 253-9428

East Coast Office
25 South Street, Suite A
Hopkinton, MA 01748
Tel. +1 508 417-1040

Polytec South-East Asia Pte Ltd
Blk 4010 Ang Mo Kio Ave 10
#06-06 TechPlace 1
Singapore 569626
Tel. +65 6451 0886
info@polytec-sea.com

www.polytec.com

Technical specifications are subject to change without notice. OM_DS_IVS-400_2013_01_PDF_E

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP