ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.


- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Precision MicroControl DCX-PCI100* at our website: *Click HERE*

DCX Motion Control Modules




DCX-MC100 Servo Motor Control Module (to be used in conjunction with an external servo amplifier

Supported motor type: DC Brushless, Brush, Hydraulic Servo Valves, Pneumatic Servo Valves

Command output: **+/- 10 volt, 12 bit analog for use with servo amplifier**

I/O
Inputs, TTL (0 - +5V, low active), Encoder Coarse Home, Limit +, Limit -, and Amplifier Fault
Output TTL (0 - +5V, low active, 10ma max.) – Amplifier Inhibit
Feedback: Quadrature Incremental Encoder , 750 KHz maximum frequency,
Differential (A+, A-, B+, B-, Z-) or Single ended (A, B, Z-)




DCX-MC110 Servo Motor Control Module (for direct drive of small brush motors)

Supported motor type: Small DC Brush

Command output: **+/- 12 volt, 8 bit, 0.5A max.**


I/O
Inputs, TTL (0 - +5V, low active), Encoder Coarse Home, Limit +, Limit -, and Amplifier Fault
Output TTL (0 - +5V, low active, 10ma max.) – Amplifier Inhibit
Feedback: Quadrature Incremental Encoder, 750 KHz maximum frequency,
Differential (A+, A-, B+, B-, Z-) or Single ended (A, B, Z-)

DCX General Purpose I/O Modules



DCX-MC400 - 16 Channel Digital I/O Expansion module

Each channel is individually programmable as either an input or output
TTL level (0 – 5 volt, 2 ma sink/source)




DCX-MC500 – 4 Channel Analog I/O Expansion module

Inputs – 4 channels, 0 – 5 volts, 12 bit
Outputs – 4 channels, 0 – 5 volts and/or –10 - +10 volts, 12 bit

Ordering Options:
MC510 – 4 input channels only
MC520 – 4 output channels only

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

DCX Motion Control Breakout Assemblies

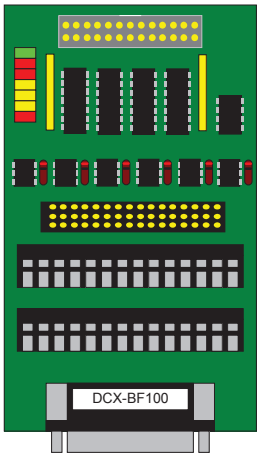


DCX-BF100 – Opto isolation and Interconnect assembly for DCX Servo Motor Control Modules (DCX-MC100, DCX-MC110)

Opto isolated inputs – Enc. Coarse Home, Limit +, Limit -, Amp Fault
Open collector output – Amplifier Enable
Differential receiver for Index +, Index –
External system connections via DB25 or two 14 contact screw terminal strip

LED indicators for:
- Amplifier enable
- Encoder Coarse Home
- Limit +
- Limit –
- Amplifier Fault

DCX Motion Control Accessories

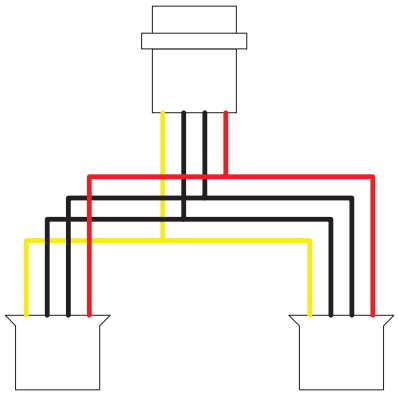

Disk Drive Power Splitter Cable (P/N 71.060.A) – Connects PC computer +12 volts to the DCX-PCI100 motion controller

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

DCX-MC100 - +/- 10 Volt Analog Servo Motor Control Module

Function	Closed Loop Servo Controller
Installation	DCX-PCI100 Motion Control Motherboard
Operating Modes	Position, Velocity
Filter Algorithm	PID
Filter Update Rate	2.932 KHz
Trajectory Generator	Trapezoidal with common Acceleration / Deceleration
Position Feedback	Incremental Encoder with Index
Position and Velocity Resolution	30 bit
Output	Analog Signal (+/- 10 vdc @ 10 ma, 12 bit)
Encoder and Index Inputs	Differential or single ended, -7 to +7 vdc max.
Encoder Count Rate	750,000 Quadrature Counts/Sec.
Encoder Supply Voltage	+5 or +12 vdc, user selectable
Axis Inputs	Limit+, Limit-, Coarse Home, Amplifier Fault (TTL level, low active)
Axis Outputs	Amplifier Inhibit (TTL compatible)
Operating Temperature range	0 degrees C to 60 degrees C

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

DCX-MC110 – Direct Drive Servo Control Module

Function	Closed Loop Servo Controller
Installation	DCX-PCI100 Motion Control Motherboard
Operating Modes	Position, Velocity
Filter Algorithm	PID
Filter Update Rate	2.932 KHz
Trajectory Generator	Trapezoidal with common Acceleration / Deceleration
Position Feedback	Incremental Encoder with Index
Position and Velocity Resolution	30 bit
Output	0 - +12 volt @ 0.5A
Encoder and Index Inputs	Differential or single ended, -7 to +7 vdc max.
Encoder Count Rate	750,000 Quadrature Counts/Sec.
Encoder Supply Voltage	+5 or +12 vdc, user selectable
Axis Inputs	Limit+, Limit-, Coarse Home, Amplifier Fault (TTL level, low active
Axis Outputs	Amplifier Inhibit (TTL compatible)
Operating Temperature range	0 degrees C to 60 degrees C

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

DCX-MC400 - 16 channel Digital I/O Module

Function	16 Channel Digital I/O module
Installation	DCX-PCI100 Motion Control Motherboard
Channels	16, individually programmable as inputs or outputs
Output low voltage (min)	0.0 volt
Output high voltage (min)	2.4 volt
Current sink	1 ma max.
Current source	1 ma max.
Input Low voltage	-0.3V min. to 0.8V max.
Input High voltage	2.0V min. to 5.3V max.
Input termination	4.7K ohm per channel
Relay rack interface	DCX-BF022
Operating Temperature range	0 degrees C to 60 degrees C

DCX-MC5X0 - Analog I/O Module

Function	DCX-MC500 – 4 A/D channels, 4 D/A channels DCX-MC510 – 4 A/D channels DCX-MC520 – 4 D/A channels
Installation	DCX-PCI100 Motion Control Motherboard
Input resolution	12 bit
Input voltage range	0.0V to +5.0V
Output resolution	12 bit
Output voltage range	0.0V to +5.0V (@ 5ma), -10V to +10V (@ 5ma)
Output Offset Adjustment	20 turn trim pot (+/- 10V outputs only)
Output Full Scale Adjustment	single turn trim pot (+/- 10V outputs only)
Operating Temperature range	0 degrees C to 60 degrees C

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

DCX-MC500 Electrical Specifications

Parameter	Min.	Max	Unit
Input Resolution	12		Bits
Input Conversion Rate		10	KHz
Input Zero Error Using Internal Reference Using External Reference		 +/- 3 +/- 1/2	 LSB LSB
Input Full-Scale Error Using Internal Reference Using External Reference		 +/- 15 +/- 1/2	 LSB LSB
Input Zero Temp. Coefficient		0.5	ppm/C
Input Differential Nonlinearity		+/- 1	LSB
Input Total Unadjusted Error Using Internal Reference Using External Reference		 +/- 15 +/- 1	
Input Voltage Range Using Internal Reference Using External Reference	 0.0 0.0	 5.0 Vref	
Input Capacitance		8	
Input Leakage Current		100	
External Reference Voltage	4.0	6.0	

Parameter	Min.	Max	Unit
Output Resolution	12		Bits
Output Zero Code Error *			LSB
Output Full Scale Error *			LSB
Output Nonlinearity *			LSB
Output Total Unadjusted Error *			LSB
Output Voltage Range	0.0 -10.0	5.0 +10.0	V V

* These values are for 0 to +5.0 volt outputs

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP