

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Procon Series 4* at our website: ***Click HERE***

PROCON®
SERIES 4 and 5 PUMPS
ROTARY VANE TYPE

GENERAL INFORMATION

PROCON's Series 4 and 5 pumps are positive displacement rotary vane type with capacities from 115 to 330 gallons per hour and discharge pressures up to 250 PSI.

- They are ideally suited for handling many clean fluids.
- They have the unique ability to handle many liquids with low lubricating characteristics at relatively high pressure.
- Special internal materials and unique design eliminate metal-to-metal contact and make PROCON pumps low in starting torque.
- PROCON vane pumps are self priming.
- PROCON vane pumps are quiet and have low vibration and pulsation characteristics.
- Flow remains constant over the entire pressure range.
- You can mount PROCON vane pumps on NEMA 56C frame motors for a coupling drive or attach them to NEMA 48YZ motors with a V-band clamp.
- PROCON vane pumps do not have to be lubricated and are virtually maintenance-free throughout their entire life.
- PROCON provides a quick and low cost factory rebuild service.
- NSF International listed pumps are available.

OPTIONS

Most PROCON pumps are available with or without a built-in relief valve. The relief valve temporarily protects against dangerous overpressure. All relief valves are preset at the factory to your specifications (30 to 250 PSI range). At the specified setting, the flow will fully by-pass from the outlet to the inlet through the relief valve chamber.

PROCON offers a wide range of options, so we can tailor-make a pump for most systems. Some of the options we offer include special seals, mounting flanges, rotations, and clearances.


STANDARD SPECIFICATIONS

Body Material	Type 303 stainless steel or brass
Capacity	115-330 GPH
Nominal Speed	1725 RPM
Typical Horsepower Required	.25 to 1.5 H.P.
Maximum Discharge Pressure	250 PSI
Rotation (viewed from nameplate end)	Clockwise
Dry Weight	Approximately 4.5 lbs.
Dimensions	4.1" x 3.88" x 4.48"
Self Priming (water)	6 ft. Maximum Lift
Port Size	1/2 NPT Inlet and Outlet



Series 4
Brass

Series 5
Stainless Steel

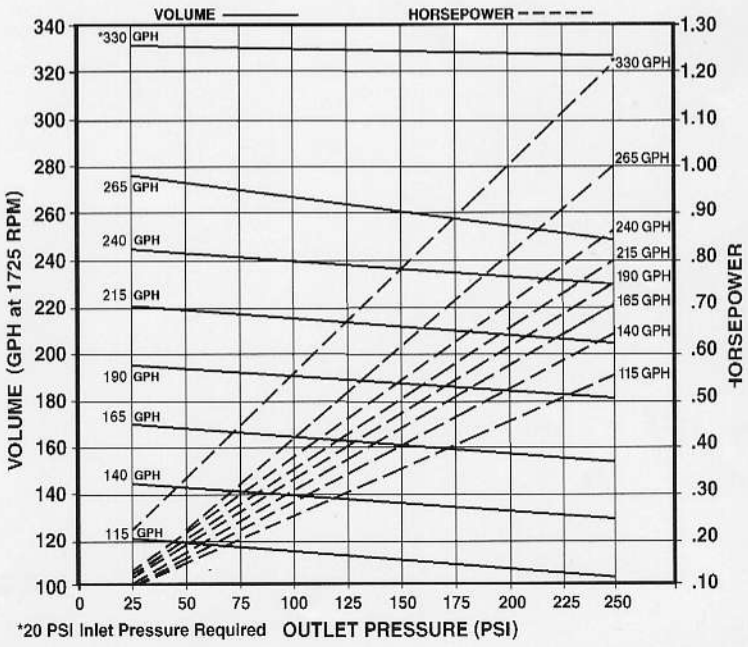

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP