



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

PTS Synthesizer Specifications

PTS D310 DUAL CHANNEL FREQUENCY SYNTHESIZER



- two fully independent channels, each covering 0.1-310 MHz
- +3 to +13 dBm output
- low phase noise
- fast switching, 3-20 μ s
- fully programmable, BCD or GPIB
- DDS standard with phase-continuous switching
- low power consumption, high reliability


NOTE: PTS D310 shown for illustration in "R" cabinet. Consult catalog for full cabinet style listing and cabinet mechanical specifications.

SPECIFICATIONS (apply to both independently programmable output channels)

Number of channels	2 fully independent output channels	
Frequency	Range:	0.100 000 0 to 309.999 999 9 MHz
	Resolution:	0.1 Hz
	Accuracy:	same as frequency standard
	Control:	remote by TTL-level parallel entry BCD or GPIB (optional)
Switching Time	(to within 0.1 radian at new frequency)	
	100 MHz-10 MHz digits:	20 μ seconds
	1 MHz digit:	5 μ seconds
	100 KHz-0.1 Hz digits:	1 μ second transient, 2 μ second delay
Phase-Continuous Switching Range	100 KHz through 0.1 Hz digits (-1 MHz bandwidth)	
Output	Level:	+3 to +13 dBm (1V max, 50 Ω)
	Flatness:	\pm 0.5 dB
	Impedance:	50 Ω
	Control:	preset and remote by analog voltage
Spurious Outputs	(at full power output, +13 dBm)	
	Discrete:	-70 dBc
	Harmonics:	-30 dBc at full output (-40 dBc at lower levels)
	Phase Noise:	-63 dBc (0.5 Hz to 15 KHz) including effects of internal standard
	\mathcal{L} (1Hz):	100 Hz/ -105 dBc, 1 KHz/ -115 dBc, 10 KHz/ -123dBc, 100 KHz/ -127 dBc
	Noise Floor:	- 135 dBc/Hz
Frequency Standard	Internal:	OCXO or TCXO 3x10 ⁻⁹ /day or 1x10 ⁻⁹ /day \pm 1x10 ⁻⁸ /0-50° C or \pm 1x10 ⁻⁶ /0-50° C 1x10 ⁻⁶ /year or 2x10 ⁻⁶ /year
	External:	10.000 MHz, 0.4-2.0 Vrms into 300 Ω ; 5.000 MHz, 0.5-2.0 Vrms into 300 Ω
	Aux. Output:	10.000 MHz, 0.4 Vrms into 50 Ω (Note: internal or external standard required for operation)
General	Operating Ambient:	0 - 50° C, 95% R.H
	Power:	110 - 125V, 50 - 400 Hz, 75W (100, 220, 240V optional)
	Dimensions:	19 x 5.25 x 17.5 inches (relay rack or bench cabinet)
	Weight:	40 lbs.
	Optional Phase Rotation:	0-360° in 0.225° steps

Pricing (USA domestic)

\$8,810 plus any options

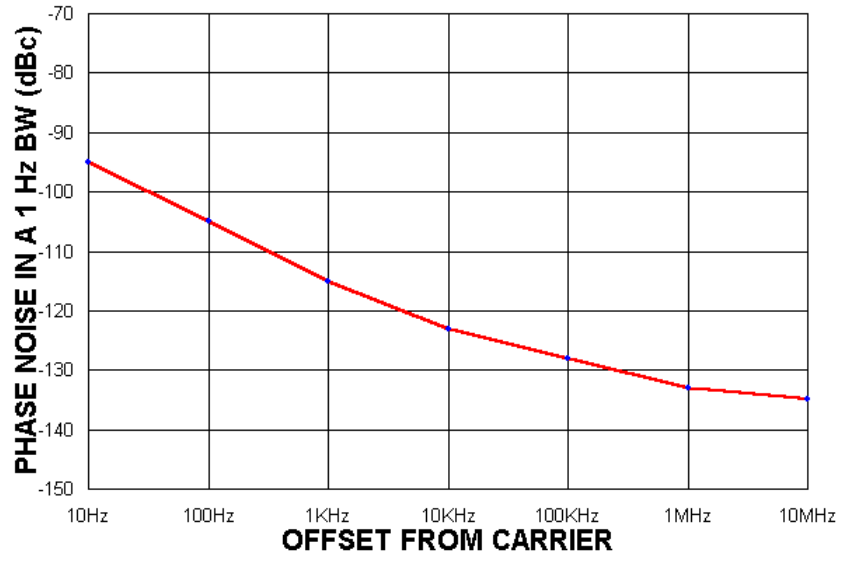



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com