

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

Quantum Devices, Inc.

"Improving the Quality of Life through the Power in Light"

QPhase™

QD200 (2.00") Diameter Optical Encoder

Design Features:

- 500 kHz Fundamental Frequency Response
- Low profile, 0.93" assembled height
- Bearing design simplifies encoder attachment
- Resolutions up to 5000 lines per revolution direct read
- 4, 6 or 8 pole commutation
- Conductive carbon fiber housing
- Standard 2.375" Bolt Circle mounting
- Through shaft sizes up to 0.625" Diameter
- High Noise Immunity



Description:

Quantum Devices, Inc. Model QD200 provides an improved feedback solution in applications typically using modular encoders. With an overall length of 0.93" and the stability of a bearing encoder design, the model QD200 can provide significant performance upgrades in applications limited by traditional modular encoder solutions. Outputs consist of a quadrature with reference pulse and three-phase commutation, which can be configured with either the industrial standard 5 volt RS422A Line Driver or the 5 to 26 volt OL7272 line driver. A flexible spring mount allows for much greater tail shaft run out than can be tolerated by modular encoder designs, plus it provides 30 degrees of rotation for commutation timing. A housing constructed of conductive carbon fiber composite provides the EMI shielding of an all metal housing and the performance of a lightweight robust assembly.

Ordering Information:

QD200-05/26-1000-6-02-T3-01-02

Voltage
05/05 = 5VDC +/-5%
05/26 = 5-26VDC

***Resolution**
500
512
1000
1024
2000
2048
2500
4096
5000
**8192
**10000

***Motor Poles**
0 = No Com
4 = 4 Pole
6 = 6 Pole
8 = 8 Pole

Output Option
01 = RS422A Line Driver
02 = OL7272 5-26VDC
03 = TTL Output
04 = RS422A for A, B, Z;
Open Collector for U, V, W

Bore Size
T3 = 0.375"
T8 = 0.500"
T9 = 0.625"
T10 = 12mm
SS = Special


Mounting
01 = STD 2.375" Flex
SS = Special

Index Gating
Blank = Ungated Index
01 = Gated to A, 180°
02 = Gated to A & B, 90°

**Consult Factory for Resolution and Pole Count Availability.*
*** 2x Interpolated Line Counts.*

ISO 9001
CERT. NO. FM 52711

Quantum Devices, Inc. 112 Orbison St., P.O. Box 100 , Barneveld, WI 53507
Tel: (608) 924-3000 Fax: (608) 924-3007 URL: www.quantumdev.com E-mail: qdisales@quantumdev.com

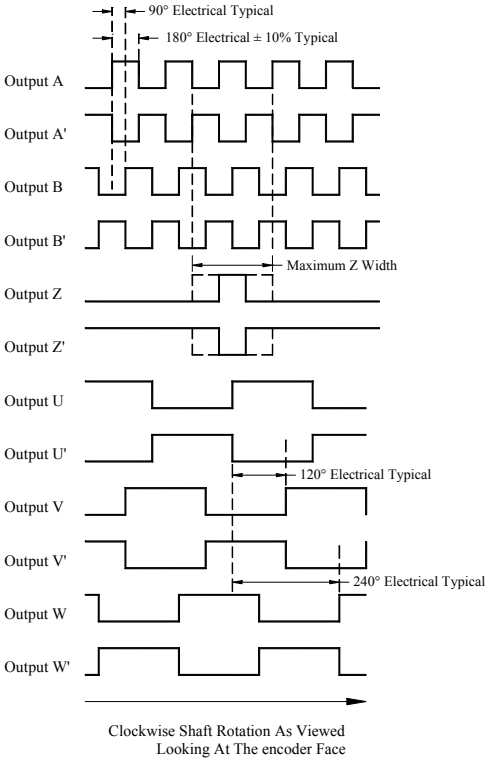

See figure below

Output Waveforms

Note: TTL Output Option consists of +VDC, Common, Case Ground and Output's A, B & Z wires only

QD200 Wiring Diagram

Red -+VDC
Black – Common
Brown – Output A
White – Output A´
Blue – Output B
Green – Output B´
Orange – Output Z
Yellow – Output Z´
Violet – Output U
Gray – Output U´
Brown/White – Output V
Red/White – Output V´
Orange/White – Output W
Yellow/White – Output W´
Black/White – Case Ground
Drain Wire – Cable Shield

Electrical Specifications

Input Voltage	5 VDC ± 5% or 5-26 VDC
Input Current Requirements	125mA Typical @ 5VDC Plus Interface Loads
Input Ripple	2% Peak to Peak @ 5 VDC
Output Circuits	AM26LS31 RS 422A line driver OL7272 High Voltage Line Driver TTL Output
Incremental Output Format	Quadrature with A leading B for CW rotation with Index Pulse centered over A for 2500 line count and below. Index Pulse true over A and B High for 2500 line count and above
Frequency Response	500 kHz
Symmetry	180 Degrees ± 10% Typical
Minimum Edge Separation	54 electrical degrees
Commutation Format	Three Phase 4, 6 or 8 poles
Commutation Accuracy	± 1° mechanical


Environmental Specifications

Storage Temperature	-40 to 125° C
Operating Temperature	-20 to 100° C Typical -20 to 120° C Optional**
Humidity	98% Non-Condensing
Vibration	20 g's @ 50 to 500 CPS
Shock	50 g's @ 11mS Duration

Mechanical Specification

Maximum Shaft Speed	8000 RPM
Through Shaft Diameter	0.375", 0.500", 0.625", 12mm (-0.0000, + 0.0005)
Radial Shaft Movement	0.007" TIR
Axial Shaft Movement	± 0.030"
Housing	Carbon Fiber Composite (case ground via cable)
Housing Volume Resistivity	10^{-2} ohm-cm
Termination	15 conductor Cable, 28 AWG 18" long, 9 conductor Cable for non-commutated and TTL outputs
Mounting	2.375" Bolt Circle
Moment of Inertia vs. Shaft Ø	Ø0.375(6.5×10^{-4} oz -in -s^2), Ø0.500(6.0×10^{-4} oz -in -s^2), Ø0.625(5.1×10^{-4} oz -in -s^2)
Acceleration	$1x10^5$ Radians/S^2
Accuracy	± 1.0 arc minute

** Contact Factory for more information

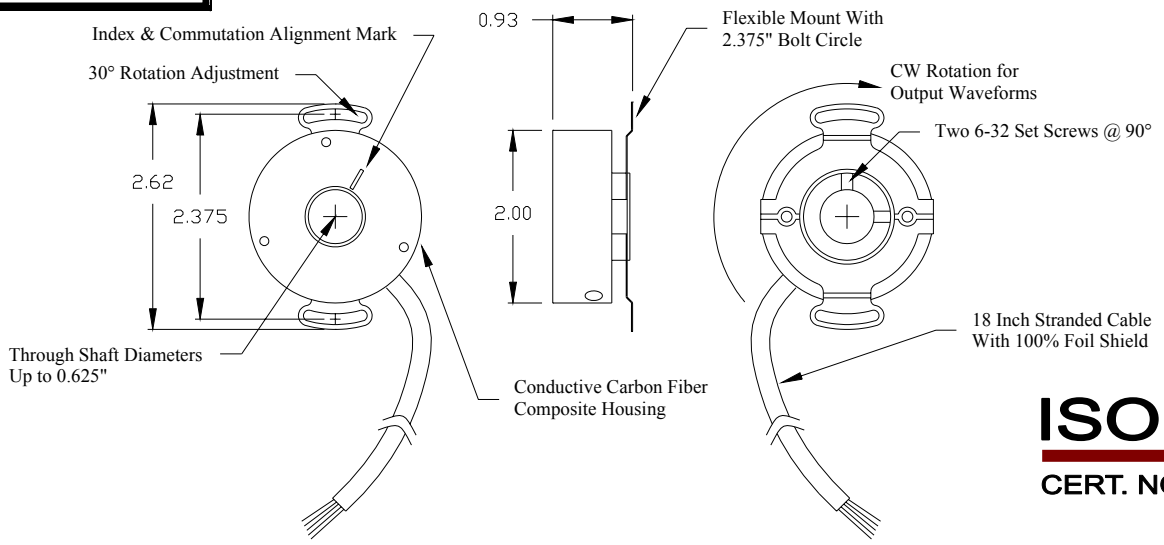

ISO 9001
CERT. NO. FM 52711

Quantum Devices, Inc. 112 Orbison St., P.O. Box 100 , Barneveld, WI 53507

Tel: (608) 924-3000 Fax: (608) 924-3007 URL: www.quantumdev.com E-mail: qdisales@quantumdev.com

Quantum Devices, Inc. reserves the right to make changes in design, specifications and other information at any time without prior notice.* ***Rev. 071218*

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP