

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.


Visit our website - *Click HERE*


Reinventing Telemetry™

Quasonix

3rd GENERATION COMPACT RDMS™ TELEMETRY RECEIVER



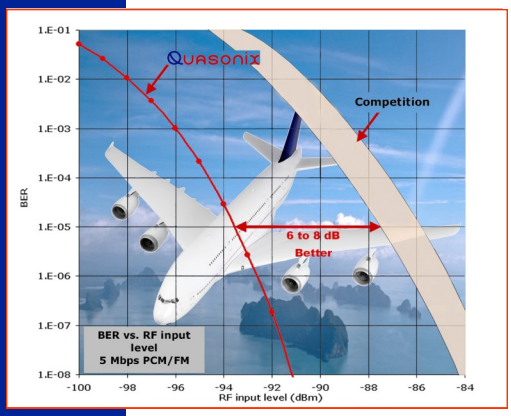

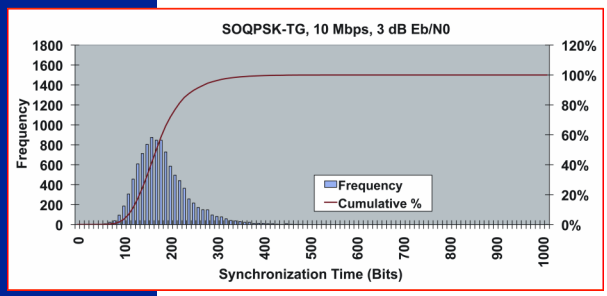

- ***Complete Receiver – RF to Bits***
  A single-box solution that accepts RF signals, and delivers baseband clock and data. No external add-ons required.
- ***Available with Adaptive Equalization***
  Reduces dropouts caused by multipath reflections
- ***Compact Flight-Ready Package***
  Ultra-compact 12 cubic-inch chassis affords flexibility with system integration
- ***True Trellis Demodulation in all ARTM Modes***
  Provides true trellis detection in all three ARTM modes for optimal demodulation
- ***3.5 to 5 dB Improvement in PCM/FM Performance***
  Improves BER performance by 3.5 to 5 dB over the best single-symbol demodulators, to within 0.2 dB of the theoretical limit
- ***Modulation Index Tracking* for PCM/FM***
  *Maintains superior BER performance even if the received signal's modulation index varies by as much as 500%, a breakthrough for tracking legacy analog transmitters (*patented)*
- ***Phase Noise Compensation***
  Optimizes demodulator performance for use with legacy TM packs and transmitters with excessive phase noise
- ***Best SOQPSK-TG Detection in the Industry***
  RDMS' trellis detection for SOQPSK-TG yields improvements of 2 dB or more over the competition's single-symbol detectors
- ***Lowest Noise Figure***
  3.5 dB noise figure bests all other ARTM receivers on the market, hands down
- ***Rapid Synchronization***
  Synchronizes up to 100 times faster – and maintains sync at lower signal-to-noise ratios – than any other ARTM demodulator

ISO 9001:2015 Certified

All Quasonix products are under U.S. Dept. of Commerce jurisdiction, not covered by ITAR

www.quasonix.com

QSX-CATALOG-180201

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com



COMPACT RDMS™ TELEMETRY RECEIVER SPECIFICATIONS

Characteristic	Specification
Receiver Section	
Type	Dual-conversion superheterodyne
Input RF Frequency	Refer to page 4
Tuning resolution	Tunes in 62.5 kHz increments, to the 70 MHz IF output; after the 70 MHz IF output, receiver tunes in increments of less than 1 Hz
Frequency stability	1 ppm over temperature 1 ppm per year aging
Reference oscillator	20 MHz
Noise figure	3.5 dB (typical), 5 dB (maximum)
LO phase noise, measured at 70 MHz IF output	-115 dBc/Hz @ 1 MHz offset
Maximum RF input	+20 dBm (+10 dBm for C-band)
Available gain (to 70 MHz IF output)	114 dB
Gain control	128 dB control range; User selectable: AGC or MGC (AGC freeze)
AGC time constant	Adjustable, 0.1 ms to 1000 ms
First IF bandwidth	60 MHz (nominal)
IF rejection	> 90 dB
Image rejection	70 dB
RF input impedance	50 ohms
Second IF Section	
IF frequency	70 MHz
IF output level	-10 to –20 dBm nominal (AGC mode)
IF output impedance	50 ohms
IF bandwidths	250 kHz, 500 kHz, 1 MHz, 2 MHz, 4.5 MHz, 10 MHz, 20 MHz, 40 MHz. Automatic selection based on data rate, with manual override Optional: 70 kHz, 1.4 MHz, 3 MHz, 6 MHz, 14 MHz, 28 MHz
Demodulator Section	
Demodulator type	ARTM Tier 0 (PCM/FM), ARTM Tier I (SOQPSK-TG), ARTM Tier II (Multi-h CPM) Legacy suite: Analog FM, BPSK, QPSK, Offset QPSK (OQPSK), Asymmetric QPSK (AQPSK), Unbalanced QPSK (UQPSK), Asymmetric Unbalanced QPSK (AUQPSK), Digital PM, Space Time Coding (STC)
Bit Rates	Tier 0: 24 kbps to 23 Mbps in 1 bps steps Tier I: 100 kbps to 46 Mbps in 1 bps steps Tier II: 1 Mbps to 46 Mbps in 1 bps steps STC: 5 Mbps to 22 Mbps in 1 bps steps Legacy: 25 kbps to 23 Mbps in Analog FM, 25 kbps to 23 Mbps in BPSK, 50 kbps to 46 Mbps in QPSK in 1 bps steps
Synchronization time (Average, at BER = 1e-5)	Tier 0: 250 bits, Tier I: 385 bits, Tier II: 2,800 bits
Synchronization threshold	Tier 0: -8.0 dB Eb/N0; RF Input (dBm): -118.0 (1 Mbps), -108.0 (10 Mbps) Tier I: -6.0 dB Eb/N0; RF Input (dBm): -116.0 (1 Mbps), -106.0 (10 Mbps) Tier II: -7.0 dB Eb/N0; RF Input (dBm): -117.0 (1 Mbps), -107.0 (10 Mbps)
Sensitivity (BER = 1e-5)	Tier 0: 8.6 dB Eb/N0; RF Input (dBm): -101.4 (1 Mbps), -91.4 (10 Mbps) Tier I: 11.2 dB Eb/N0; RF Input (dBm): -98.8 (1 Mbps), -88.8 (10 Mbps) Tier II: 13.0 dB Eb/N0; RF Input (dBm): -97.0 (1 Mbps), -87.0 (10 Mbps)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com




COMPACT RDMS™ TELEMETRY RECEIVER SPECIFICATIONS

Bit Synchronizer Section	
Input codes	NRZ-L/M/S, BIΦ-L/M/S
Output codes	NRZ-L; or input code unaltered
Data and clock out	TTL or RS-422
Lock detector out	TTL
RSSI	Single 0 – 5 VDC, 50 kHz bandwidth (-37 option required)
Video out	Four (4) wideband outputs, DC to 35 MHz (-37 option required)
Environmental Section	
Operating Temperature	-20°C to +70°C
Non-operating Temperature	-40°C to +85°C
Operating Humidity	0 to 95% (non-condensing)
Vibration	20 G, 5 Hz to 2 kHz (all axes)
Acceleration	100 G (all axes)
Shock	100 G pk, half-sine, 5 ms (all axes)
Altitude	Up to 100,000 ft.
Physical Section	
Size / Weight	4.00" x 3.00" x 1.00" / 11 oz.
Connectors	RF input: SMA female IF output: SMA female Baseband: MDM-15 or MDM-37 ("37" option)
Power	28 VDC ± 4 VDC, 750 mA typical

OPTIONAL FEATURES

- > 14 14 SAW filters (adds 70 kHz, 1.4, 3, 6, 14, and 28 MHz filters)
- > EN Ethernet Payload
- > ET Extended temperature range (-40°C to +85°C)
- > EQ Adaptive Equalizer
- > K7 K7 Viterbi Decoder (k=7, rate 1/2)
- > WV Wide operating voltage (15 – 35 VDC)

Compact RDMS™ Part Numbering Example

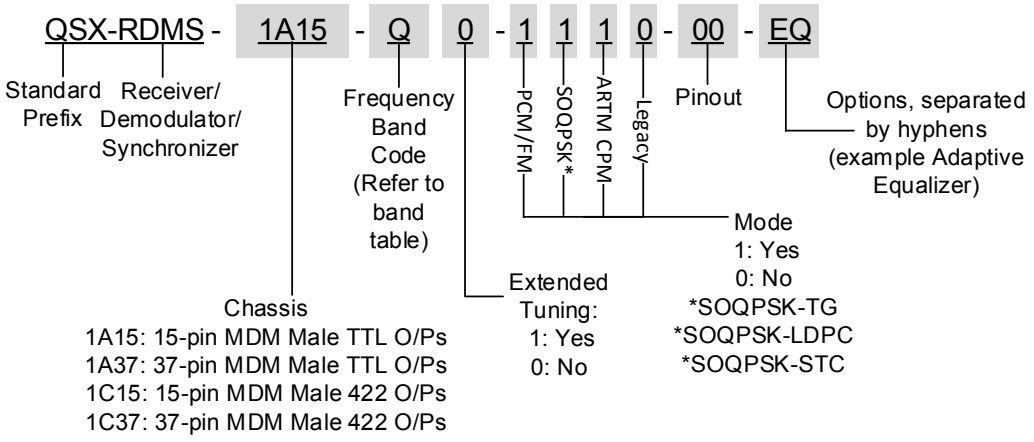


© 2018 Quasonix, Inc.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com



COMPACT RDMS™ RECEIVER BAND CONFIGURATIONS

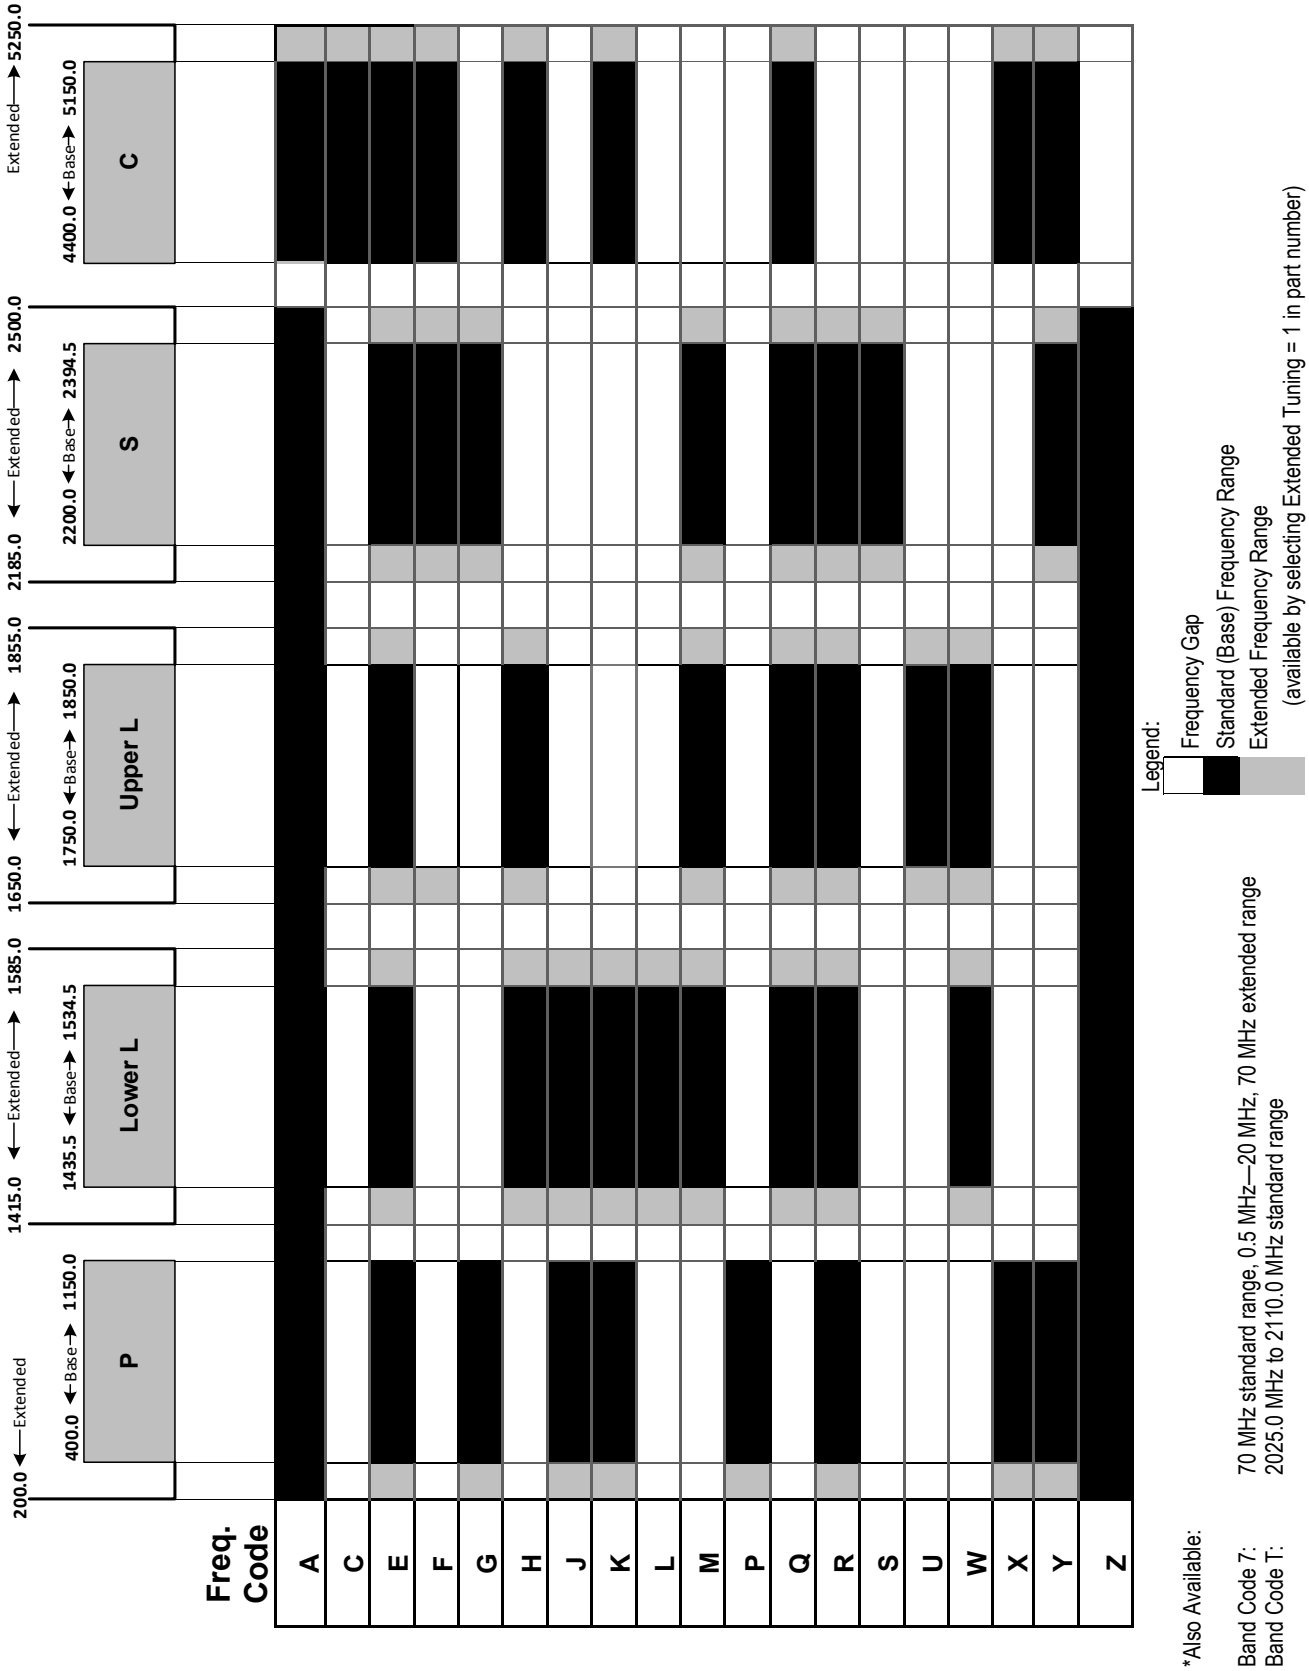

Quasonix
6025 Schumacher Park Drive
West Chester, OH 45069
T: 513-942-1287
F: 513-942-7812
www.quasonix.com

© 2018 Quasonix, Inc.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP