ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.


- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Astronics / EADS / Racal 4152A* at our website: *Click HERE*

RACAL INSTRUMENTS™ 4152A

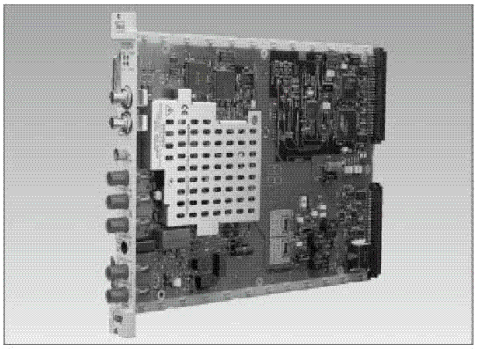

6.5 Digit Multimeter

- **"Test System" Multimeter Supports Limit Testing, Averaging, Math and Vector Operations**
- **Measures AC and DC Voltages and Currents, 2/4 Wire Ohms, Frequency and DC/DC Ratios**
- **Supports Scanner via VXI Backplane**
- **Up to 65 Range Changes Per Second and 30 Function Changes Per Second**
- **Up to 6 Readings/s at 6.5 Digits, 1000 Readings/s at 4.5 Digits**
- **Driver Support Includes LabVIEW, LabWindows/CVI and VXI*plug&play***

Racal Instruments™ 4152A, 6.5 digit Digital Multimeter (DMM), combines DC and AC current and voltage measurements as well as 2/4 wire Ohms, frequency and DC ratio measurements into a one slot, C-sized VXIbus-based instrument. The 4152A includes instrument driver support for standard environments like LabWindows/CVI and Lab-VIEW.

Advanced Features for High "Test System" Throughput
The 4152A's advanced features like limit testing, averaging, speed/resolution trade-offs, and fast function changes provide the high "test system" throughput required in today's production test environments. The 4152A's limit testing feature supports high-speed go/no-go testing and increases throughput by reducing the need to store and retrieve data. Averaged and vector (multiple read) measurements can be made to reduce external processing and increase throughput.

By fine-tuning the measurement speed of the 4152A's continuously integrating, multi-slope A/D converter, a balance between the need for fast throughput and measurement accuracy can be reached. For example, at 6.5 digits, the 4152A can take up to 6 readings per second with up to 0.0019% accuracy, or, at 4.5 digits, the 4152A can take up to 1000 readings per second with up to 0.012% accuracy. Since real-world test systems sometimes require range and function changes within a test cycle, the 4152A can change ranges within a function at a rate of up to 65 per second and can change measurement functions at the rate of up to 30 per second.

Software Driver Support
We provide LabWindows/CVI, and LabVIEW instrument drivers as well as a VXIplug&play Install Disk for the WIN and WIN32 Frame-works which adds support for Visual Basic, C and C++, to support quick integration into the most popular software platforms for VXIbus-based test systems. Because DMM's used in test systems often require scanned measurements, application examples are given interfacing the 4152A to Racal Instruments™ 1260 Series switching for automatic scanned measurements.

EADS NORTH AMERICA DEFENSE

DC VOLTAGE CHARACTERISTICS

Summary

Voltage (max): 300 V

Voltage Accuracy: ± 0.0019%

Measurement Method

Continuously integrating, multi-slope III A/D converter

A/D Linearity

0.0002% of reading + 0.0001% of range

Input Resistance

0.1 V, 1 V, 10 V Ranges: 10 MΩ or10 GΩ, selectable

100 V, 300 V Ranges: 10 MΩ ± 1%

Input Bias Current

<30 pA at 25°C

Input Protection

300 VDC/300Vrms on all ranges

VDC Accuracy ± (% of reading + % of range)

(specifications are for 1 hour warm-up at 6.5 digits)

Range[2]	24 Hour[1] 23°C ± 1°C	90 Day 23°C ± 5°C	1 Year 23°C ± 5°C
100.0000mV	0.0030+0.0030	0.0040+0.0035	0.0050+0.0035
1.000000V	0.0020+0.0006	0.0030+0.0007	0.0040+0.0007
10.00000V	0.0015+0.0004	0.0020+0.0005	0.0035+0.0005
100.0000V	0.0020+0.0006	0.0035+0.0006	0.0045+0.0006
300.0000V	0.0020+0.0018	0.0035+0.0030	0.0045+0.0030

[1]Relative to calibration standards

[2] 20% overrange on all ranges, except 300VDC range.

Additional Error With Autozero Off

100 mV-100 V Ranges: Add 0.002% of reading + 5 mV

300 V Range: Add 0.0006% of reading

Temperature Coefficient

± (% of reading + % of range)

(0°C-18°C, 28°C-55°C, after 1 hour warm-up at 6.5 digits)

100 mV Range: 0.0005 + 0.0005

1 V, 10 V, 100 V Ranges: 0.0005 + 0.0001

300 V Range: 0.0005 + 0.0003

AC VOLTAGECHARACTERISTICS

Summary

Voltage (max): 300V_{rms}

Voltage Accuracy: ± 0.07%

Measurement Method

AC-coupled True RMS – measures the AC component of the input with up to 300 VDC of bias on any range (Max AC+DC = 300 V_{rms}).

AC Filter Bandwidth

Slow: 3 Hz-300 kHz

Medium: 20 Hz-300 kHz

Fast: 200 Hz-300 kHz

Noise Rejection (for 1kΩ imbalance in LO lead)

AC CMRR: 70 dB

Input Impedance

1 MΩ ± 2% || 100 pF

Input Protection

300 VDC/300 V_{rms} on all ranges

True RMS VAC Accuracy[2, 4]

± (% of reading + % of range)

(1 hour warm-up, 6.5 digits, slow AC filter, sine input)

Frequency	24 Hour[1] 23°C ± 1°C	90 Day 23°C ± 5°C	1 Year 23°C ± 5°C
3-5Hz	1.00+0.02[6]	1.00+0.03[6]	1.00+0.03[6]
5-10Hz	0.35+0.02[6]	0.35+0.03[6]	0.35+0.03[6]
10Hz-20kHz	0.04+0.02[6]	0.05+0.03[6]	0.06+0.03[6]
20-50kHz	0.10+0.04	0.11+0.05	0.12+0.05
50-100kHz	0.55+0.08	0.60+0.08	0.60+0.08
100-300kHz[5]	5.00+0.50	5.00+0.50	5.00+0.50

[1]Relative to calibration standards

[2] 20% overrange on all ranges, except 300VAC range which has 1% overrange.

[3]100mV to 100V range specifictions are for sine wave input >5% of range. For inputs from 1% to 5% of range and <50kHz, add 0.1% of range additional error.

[4]For 300V range, use (% reading) shown in table and multiply each (% range) x 3.

[5] 300VAC range limited to 50kHz. For frequencies > 50kHz, signals must be ≤1.5x10 7 VHz

[6]For 100mV range, add 0.01% of range additional error.

Additional Low-Frequency Errors

(% reading)

(frequencies < 100Hz, slow AC filter, sine input)

Frequency	AC Filter Medium	Fast
10-20 Hz	0.74	———
20-40 Hz	0.22	———
40-100 Hz	0.06	0.73
100-200 Hz	0.01	0.22
200 Hz-1 kHz	0	0.18
>1 kHz	0	0

Additional Crest Factor Errors

(crest factor range: % of reading add'l error)

1-2: 0.05% of reading

2-3: 0.15% of reading

3-4: 0.30% of reading

4-5: 0.40% of reading

Additional Error With Autozero Off

100mV-100V Ranges: Add 0.002% of reading + 5 µV

300 V Range: Add 0.0006% of reading

Temperature Coefficient

± (% of reading + % of range)

(0°C-18°C, 28°C-55°C, 1 hour warm-up, 6.5 digits, slow AC filter, sine input)

3-5 Hz: 0.100 + 0.003[1]

5-10 Hz: 0.035 + 0.003[1]

10 Hz-20 kHz: 0.005 + 0.003[1]

20-50 kHz: 0.011+0.005

50-100 kHz: 0.060+0.008

100-300 kHz: 0.200+0.020[2]

[1] For 100mV range, add 0.001% of range additional error.

[2] 300VAC range limited to 50kHz. For frequencies >50kHz, signals must be ≤1.5x10[7] VHz

DC CURRENT CHARACTERISTICS

Summary

Current (max): 3 A

Current Accuracy: ± 0.015%

Shunt Resistance

10 mA, 100 mA Ranges: 5 Ω

1 A, 3 A Ranges: 0.1 Ω

Input Protection

3 A, 250 V fuse (externally accessible)

Burden Voltage

10 mA Range: <0.1 V

100 mA Range: <0.6 V

1 A Range: <1 V

3 A Range: <3 V

DC Current Accuracy

± (% of reading + % of range)

(specifications are for 1 hour warm-up at 6.5 digits)

Range[2]	24 Hour[1] 23°C ± 1°C	90 Day 23°C ± 5°C	1 Year 23°C ± 5°C
10.00000mA	0.005+0.010	0.050+0.020	0.70+0.020
100.0000mA	0.01+0.004	0.040+0.005	
0.070+0.005			
1.000000mA	0.10+0.006	0.130+0.010	
0.150+0.010			
3.000000mA	0.70+0.020	0.720+0.020	0.720+0.020

[1]Relative to calibration standards

[2]20% overrange on all ranges, except 3A range.

Temperature Coefficient

± (% of reading + % of range)

(0°C-18°C, 28°C-55°C, after 1 hour warm-up at 6.5 digits)

10 mA Range: 0.005 + 0.0020

100 mA Range: 0.006 + 0.0005

1 A Range: 0.005 + 0.0010

3 A Range: 0.005 + 0.0020

AC CURRENT CHARACTERISTICS

Summary

Current (max): 3 A_{rms}

Current Accuracy: ± 0.19%

Measurement Method

Direct couple to the fuse and shunt.

AC coupled True RMS measurement (measures the AC component only).

Shunt Resistance

0.1 Ω

Input Protection

3 A, 250 V fuse (externally accessible)

Burden Voltage

1 A Range: <1 V_{rms}

3 A Range: <3 V_{rms}

DC Current Accuracy

± (% of reading + % of range)

(specifications are for 1 hour warm-up at 6.5 digits)

Range[2]	24 Hour[1] 23°C ± 1°C	90 Day 23°C ± 5°C	1 Year 23°C ± 5°C
10.00000mA	0.005+0.010	0.050+0.020	0.70+0.020
100.0000mA	0.01+0.004	0.040+0.005	
0.070+0.005			
1.000000mA	0.10+0.006	0.130+0.010	
0.150+0.010			
3.000000mA	0.70+0.020	0.720+0.020	0.720+0.020

[1]Relative to calibration standards

[2]20% overrange on all ranges, except 3A range.

Temperature Coefficient

± (% of reading + % of range)

(0°C-18°C, 28°C-55°C, after 1 hour warm-up at 6.5 digits)

10 mA Range: 0.005 + 0.0020

10 0mA Range: 0.006 + 0.0005

1 A Range: 0.005 + 0.0010

3 A Range: 0.005 + 0.0020

AC CURRENT CHARACTERISTICS

Summary

Current (max): 3 A_{rms}

Current Accuracy: ± 0.19%

Measurement Method

Direct couple to the fuse and shunt.

AC coupled True RMS measurement (measures the AC component only).

Shunt Resistance

0.1 Ω

Input Protection

3 A, 250 V fuse (externally accessible)

Burden Voltage

1 A Range: <1 V_{rms}

3 A Range: <3 V_{rms}

True RMS Current Accuracy[2, 4]

±(% of reading + % of range)

(1 hour warm-up, 6.5 digits, slow AC filter, sine input)

Frequency	24 Hour[1] 23°C ± 1°C	90 Day 23°C ± 5°C	1 Year 23°C ± 5°C
3-5Hz	1.05+0.04	1.05+0.04	1.05+0.04
5-10Hz	0.35+0.04	0.35+0.04	0.35+0.04
10Hz-1kHz	0.15+0.04	0.15+0.04	0.15+0.04
1-50kHz	0.40+0.04	0.40+0.04	0.40+0.04

[1] Relative to calibration standards

[2]20% overrange on all ranges, except 3A range which has overrange.

[3] For inputs from 1% to 5% of range and 50 kHz, add 0.1% range additional error. For 50 kHz to 100 kHz, add 0.13% additional error. 300V range specifications are for sinewave input 15% of range. For inputs from 3% to 15% of range and 50 kHz, add 0.30% of kHz, add 0.40% of range additional error.

[4]Accuracy for 1A range given. For 3A range, add 0.60+0.02 table values and an extra 0.05+0.00 between 3-5Hz.

Low-Frequency & Crest Factor Errors

See VAC section

Temperature Coefficient[2]

±(% of reading + % of range)

(0°C-18°C, 28°C-55°C, 1 hour warm-up, 6.5 digits, slow AC filter, sine input)

3-5 Hz: 0.100 + 0.006

5-10 Hz: 0.035 + 0.006

10 Hz-1 kHz: 0.015 + 0.006

1-50 kHz: 0.015+0.006[1]

1 For 3A range, add 0.135+0.00 additional error.

2 For inputs from 1% to 5% of range and 50 kHz, add 0.1% of range additional error. For 50 kHz to 100 add 0.13% additional error. 300V range specifications are for sinewave input 15% of range. For inputs from 3% to 15% of range and 50 kHz, add 0.30% of kHz, add 0.40% of range additional error.

RESISTANCE CHARACTERISTICS

Summary

Resistance (max): 100 MΩ

Resistance Accuracy: ± 0.0025%

Measurement Method

Selectable 4-wire or 2-wire Ω

(current source referenced to low input)

Lead Resistance (max)

100 Ω Range: 10% of range per lead

Other Ranges: 1 kΩ per lead

Input Protection

300 VDC/300 V_{rms} on all ranges

Test Current

100 Ω, 1k Ω Range: 1 mA

10k Ω Range: 100 mA

100 kΩ Range: 10 mA

1 MΩ Range: 5 mA

10 MΩ Range: 500 nA

100 MΩ Range: 500 nA || 10 MΩ

Ohms Accuracy±(% of reading + % of range)

(specifications are for 1 hour warm-up at 6.5 digits)

Range[2]	24 Hour[1] 23°C ± 1°C	90 Day 23°C ± 5°C	1 Year 23°C ± 5°C
100.0000Ω	0.0030+0.0030	0.008+0.004	0.010+0.004
1.000000 kΩ	0.0020+0.0005	0.008+0.001	0.010+0.001
10.00000 kΩ	0.0020+0.0005	0.008+0.001	0.010+0.001
100.0000 kΩ	0.0020+0.0005	0.008+0.001	0.010+0.001
1.000000 MΩ	0.002+0.001	0.008+0.001	0.010+0.001
10.0000 MΩ	0.015+0.001	0.035+0.001	0.054+0.001
100.0000 MΩ	0.300+0.010	0.8+0.010	0.8+0.010

[1]Relative to calibration standards

[2]Specifications are for 4-wire Ω function, or 2-wire Ω using Math Null. Without Math Null, add 0.2Ω additional error in 2-wire Ω function.

Temperature Coefficient[1]

±(% of reading + % of range)

(0°C-18°C, 28°C-55°C, after 1 hour warm-up at 6.5 digits)

100 Ω Range: 0.0006 + 0.0005

1 kΩ, 10 kΩ, 100kΩ Ranges: 0.0006 + 0.0001

1MΩ Range: 0.0010 + 0.0002

10 MΩ Range: 0.0030 + 0.0004

100 MΩ Range: 0.1500 + 0.0002

[1]Specifications are for 4-wire Ω function, or 2-wire Ω using Math Null. Without Math Null, add 0.2Ω additional error in 2-wire Ω function.

FREQUENCY AND PERIOD

Summary

Voltage (max): 300 V_{rms}

Accuracy: 0.006% of reading

Measurement Method

Reciprocal-counting technique.

AC-coupled input using the AC voltage measurement function.

Voltage Ranges

100 mV_{rms} to 300 V_{rms}, auto or manual.

Gate Time

10 ms, 100 ms or 1 s

Settling Considerations

Errors will occur when attempting to measure the frequency or period of an input following a dc offset voltage change. The input blocking RC time constant must be allowed to fully settle (up to 1 s) before the most accurate measurements are possible.

Measurement Considerations

All frequency counters are susceptible to error when measuring low-voltage, low-frequency signals. Shielding inputs from external noise pickup is critical for minimizing measurement errors.

Frequency and Period Accuracy[2]

(% of reading)

(1 hour warm-up, 6.5 digits)

Frequency	24 Hour[1] 23°C ± 1°C	90 Day 23°C ± 5°C	1 Year 23°C ± 5°C
3-5Hz	0.10	0.10	0.10
5-10Hz	0.05	0.05	0.06
10Hz-40Hz	0.03	0.03	0.03
40Hz-300kHz	0.006	0.01	0.01

[1]Relative to calibration standards

[2]20% overrange on all ranges, except 300VAC range which has 1% overrange.

Additional Low-Frequency Errors

(% of reading)

(input >100mV. For mV input, multiply % of reading error x 10)

Frequency	6.5 Digits	5.5 Digits	4.5 Digits
3-5Hz	0	0.12	0.12
5-10Hz	0	0.17	0.17
10-40Hz	0	0.2	0.2
40-100Hz	0	0.06	0.21
100-300Hz	0	0.03	0.21
300Hz-1kHz	0	0.01	0.07
>1kHz	0	0	0.02

Temperature Coefficient[1]

±(% of reading + % of range)

(0°C-18°C, 28°C-55°C, 1 hour warm-up, 6.5 digits, slow AC filter, sine input)

3-5 Hz: 0.005

5-1 0Hz: 0.005

10 Hz-40 Hz: 0.001

40 Hz-300 kHz: 0.001

[1]20% overrange on all ranges, except 300VAC range
which has 1% overrange.

DC-DC RATIO CHARACTERISTICS

Measurement Method

Input HI-LO/Reference HI-LO (apply "reference HI-LO" signal to Ohms 4-wire sense terminals.

Input Signal Range

Input HI to Input LO: 100 mV to 300 V

Reference HI to Input LO: <12 V on 100 mV to 10 V ranges (autoranged)

Reference LO to Input LO: <2 V

DC-DC Ratio Accuracy

(Input Accuracy[1]) + (Reference Accuracy[2])

[1]Input Accuracy = accuracy specification for the HI-LO input signal

[2]Reference Accuracy = accuracy specification for HI-LO
reference input signal

SYSTEM CONSIDERATIONS

Settling Considerations

Reading settling times are affected by source impedance, cable dielectric characteristics, and input signal changes.

Measurement Considerations

We recommend the use of Teflon® or other high impedance, low-dielectric absorption wire insulation for these measurements.

Teflon is a registered trademark of E.I. DuPont deNemours and Co.

4152A PRODUCT SPECIFICATIONS

DCV, DCI and Ω Reading Speeds

(readings speeds for 60Hz and[50Hz] operation, autozero off)

Digits	Readings/s	Additional Noise Error
6.5	0.6[0.5]	0% of range
6.5	6[5]	0% of range
5.5	60[50]	0.001% of range*
5.5	300	0.001% of range*
4.5	1000	0.01% of range*

*For 300V range: use 0.003% of range for 5.5 digits and 0.030% of range for 4.5 digits. For all ranges: add 20µV for DC Volts, 4µA for DC current, or 20mΩ for resistance.

DC System Speeds

(Speeds are for 4.5 digits, Delay=0, Autozero Off. Includes measurement and data over VXI backplane)

Function Change: 30/s
Range Change: 65/s
Autorange Time: <30 ms
Internal Trigger Rate (max): 1000/s
External Trigger Rate to Memory (max): 1000/s

ACV and ACI Reading Speeds

(maximum reading rates 0.01% of AC step additional error. Additional settling delay required when input DC level varies.)

Digits	Readings/s	AC Filter
6.5	7s/reading	Slow
6.5	1	Medium
6.5	1.6[1]	Fast
6.5	10	Fast
6.5	50[2]	Fast

[1]For External Trigger or when using default settling delay (Delay Auto).
[2] Maximum useful limit within default settling delays used.

AC System Speeds

(Maximum useful limit with default settling delays used; speeds are for 4.5 digits, delay 0, and fast AC filter.)

Function Change: 5/s
Range Change: 5/s
Autorange Time: <0.8 s
Internal Trigger Rate (max): 50/s
External Trigger Rate to Memory (max): 50/s

Frequency and Period Reading Speeds

(Speeds are for 4.5 digits, Delay=0, and fast AC filter.)

Digits	Readings/s
6.5	1
5.5	9.8
4.5	80

Frequency and Period System Speeds

Configuration Rates: 14/s
Autorange Time: <0.6s
Internal Trigger Rate (max): 80/s
External Trigger Rate to Memory(max): 80/s

TRIGGER CHARACTERISTICS

Input Sources

Internal: 1 kHz max
External: Front Panel BNC, 1 kHz max
VXI Backplane: TTLTrg0-7
Software: *TRG, WS Trigger Cmd.

Trigger Delay

Range: 0-3600 seconds
Resolution: 2 ms

VM (Voltmeter) Complete Out

Front Panel: BNC
VXI Backplane: TTLTrg0-7

FRONT PANEL I/O

Trigger Input

Connector: BNC
Level: TTL

VM Complete Output

Connector: BNC
Level: TTL

Ground Connection

Connector: Uninsulated banana jack

Voltage

Connectors: Copper Alloy Banana Jacks (Hi/Lo)
Impedance: 10 MΩ or 10 GΩ, selectable
Protection: 300 VDC/300 V_{rms}

Resistance (2-wire)

Connectors: Copper Alloy Banana Jacks (Hi/Lo)
Protection: 300 VDC/300 V_{rms}

Current

Connectors: Copper Alloy Banana Jacks ("I"/Lo)
Impedance: 0.1Ω or 5Ω, depending on range
Protection: 3A/250V fuse

Resistance (4-wire)

Connectors: Copper Alloy Banana Jacks (Ω4W Sense Hi/Lo)
Protection: 300 VDC/300 V_{rms}

VXIBUS INTERFACE DATA

(Single-slot, Message-based, VXIbus 1.4 Compliant)

Software Compliance

SCPI 1993, IEEE488.2

Drivers

LabVIEW, LabWindows/CVI, VXI*plug&play* (WIN, WIN95, WIN NT Frameworks)

Backplane Signal Support

TTLTrg0-7: Trigger In, VM Complete Out

Status Lights

Red: Power-On Self-Test Failure
Red: Error(s) in error queue
Green: Module accessed on VXIbus
Green: Sample taken

Cooling (10°C Rise)

0.80 l/s @ 0.05mmH_2O

Peak Current & Power Consumption

	+24	+12	+5	-2	-5.2	-12	-24
I_{Pm} (A)	0.0	0.7	0.2	0.0	0.0	0.0	0.0
I_{Dm} (A)	0.0	0.06	0.1	0.0	0.0	0.0	0.0

Total Power: 9.4 Watts

ENVIRONMENTAL

Temperature

Operating: 0° C-55° C
Storage: -40° C-70° C

Humidity (non-condensing)

<40° C: 65%[1]

[1]RH > 65% may necessitate recalibration

Overvoltage

Category 1 (1500 V peak max impulse)

Weight

2 lbs. 10 oz. (1.2 kg)

EMC (Council Directive 89/336/EEC)

CISPR11, EN55011 Group 1 Class A, EN50082-1, IEC 801-2, 3, 4

Safety (Low Voltage Directive 73/23/EEC)

EN61010-1, IEC1010-1, UL3111-1, CSA 22.2#1010

ORDERING INFORMATION

MODEL/DESCRIPTION	PART NUMBER
Racal Instruments 4152A, 6.5 Digit Multimeter	407654

The CE Mark indicates that the product has completed and passed rigorous testing in the area of RF Emissions, Immunity to Electromagnetic Disturbances and complies with European electrical safety standards.

The EADS North America Defense Test and Services policy is one of continuous development, consequently the equipment may vary in detail from the description and specification in this publication.

EADS North America Defense Test and Services
1.800.722.2528/1.949.859.8999 sales@eads-nadefense.com

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP