ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Reactel 5B4-285-X10N12* at our website: *Click HERE*

Tubular Filters

Reactel Tubular Filters are able to satisfy a variety of filter requirements. These versatile units cover the broad frequency range of 10 MHz to 18 GHz, range in diameters from 1/4" to 1 1/8" and can handle power up to 200 watts in our standard design. All standard tubular filters utilize a low ripple Chebyshev design which offers the best compromise of low loss, low VSWR, and high selectivity. Each filter situation is unique, and the data provided on the following pages offers only a small glimpse of our capabilities. Should a different design become necessary to meet your requirements, Bessel, Butterworth, Gaussian or Linear Phase responses are also available. Please contact the factory for filters designed to your unique requirement.

- 10 MHz to 18 GHz
- Bandwidths up to 50%
- Low Loss
- Flexible Design Options
- Lowpass and Bandpass Designs Available

Part Numbering System

8 B 2 — 1500 — 100 S 1 1
1 2 3 4 5 6 7 8



Part Number Definition:
1 - Number of Sections
2 - Filter Type Designation
3 - Series Identification
4 - Center Frequency in MHz
5 - 3 dB Bandwidth in MHz
6 - Connector Definition (See Page 27)
7 - Input Connector Type
8 - Output Connector Type





Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com



Tubular Filter Specifications

	Series 0	Series 1	Series 2	Series 3	Series 4
Frequency Range (MHz)	100-18000	100-10000	40-6000	20-3500	10-1000
3 dB BW for Bandpass (% of CF)	1 - 70%	1 - 70%	1 - 85%	1 - 90%	0.5 - 95%
Available Impedances	50Ω & 75Ω	50Ω & 75Ω	50Ω & 75Ω	50Ω & 75Ω	50Ω & 75Ω
Maximum VSWR @ CF	1.5:1	1.5:1	1.5:1	1.5:1	1.5:1
Diameter (inches)	0.25	0.375	0.50	0.75	1.125
* Standard Input Power	5 Watts	10 Watts	20 Watts	50 Watts	200 Watts
Shock	30G @ 11mS	30G @ 11mS	30G @ 11mS	15G @ 11mS	15G @ 11mS
Vibration	10G	10G	10G	10G	10G
Humidity	up to 95%	up to 95%	up to 95%	up to 95%	up to 95%
Altitude	Space Rated	Space Rated	Space Rated	Space Rated	Space Rated
Temperature	-55° to +125° C	-55° to +125° C	-55° to +125° C	-55° to +125° C	-55° to +125° C


* Higher power is available, please consult the factory.

All Reactel standard tubular filters are designed to a low ripple Chebyshev configuration. Other configurations are available. Please call the factory to discuss your specific requirements.


Reactel, Incorporated — Reacting First to Your Filter Requirements
8031 Cessna Avenue ◆ Gaithersburg, Maryland 20879
Phone: 301-519-3660 ◆ Fax: 301-519-2447 ◆ reactel@reactel.com ◆ www.reactel.com
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Tubular Bandpass Filter Attenuation Curves


2 - 5% 3 dB Bandwidth

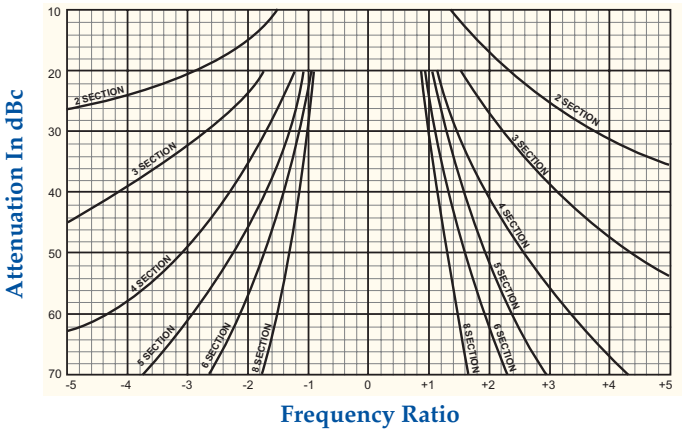


5 - 10% 3 dB Bandwidth

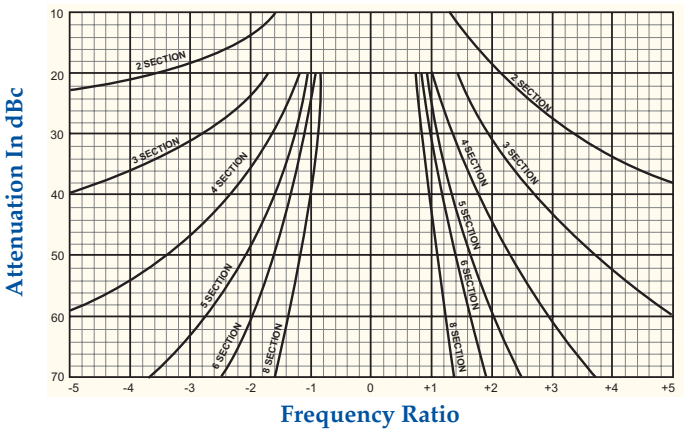

10 - 20% 3 dB Bandwidth

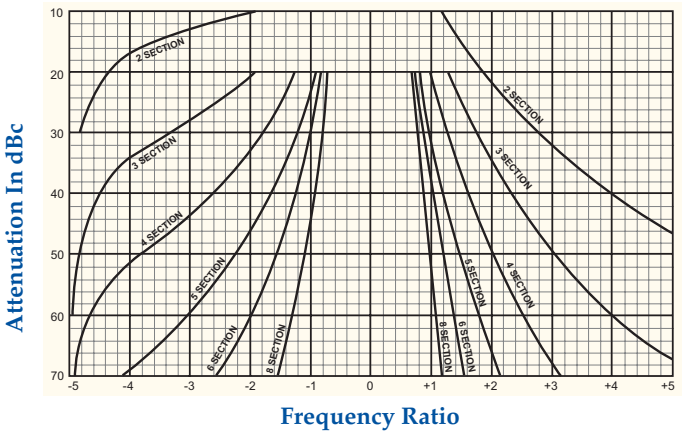

20 - 30% 3 dB Bandwidth

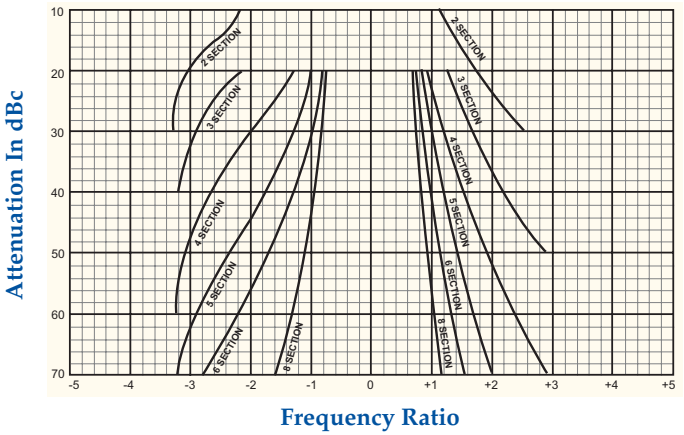

These attenuation curves are normalized to be reasonably representative of performance characteristics for filters with 3 dB bandwidths approximating the percentages shown. For more precise values at specific frequency points, please contact Reactel.

The rejection for bandpass filters can be determined from the curves. Calculate the frequency ratio as follows:

$$\text{Frequency Ratio} = \frac{\text{Rejection Frequency - Center Frequency}}{\text{3 dB Cutoff Frequency}}$$


Example:

Center Frequency = 1000 MHz
3 dB Bandwidth = 150 MHz
Number of Sections = 6
Reject Frequencies = 800 & 1200 MHz
% Bandwidth = 15%

$$\text{Frequency Ratio} = \frac{800 - 1000}{150} = -1.33$$

Rejection from Curve = 42.8 dB

Tubular Lowpass Filter Attenuation Curves

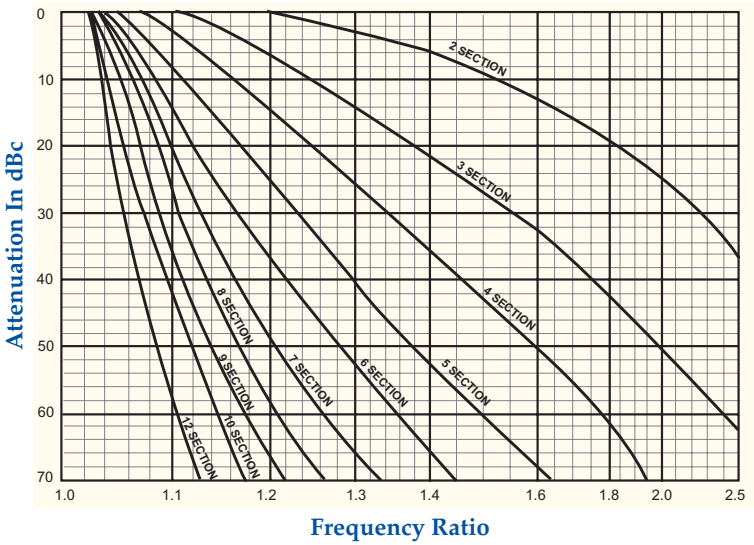

The rejection of lowpass filters can be determined from the attenuation curves. For frequencies above the 3 dB cutoff, calculate the frequency ratio as follows:

$$\text{Frequency Ratio} = \frac{\text{Rejection Frequency}}{\text{3 dB Cutoff Frequency}}$$


Example:

Rejection Frequency = 196 MHz
3 dB Cutoff Frequency = 150 MHz
No. of Sections = 6

$$\text{Frequency Ratio} = \frac{196}{150} = 1.3$$

Rejection from Curve = 53.5 dB

Tubular Bandpass Filter Insertion Loss Curves

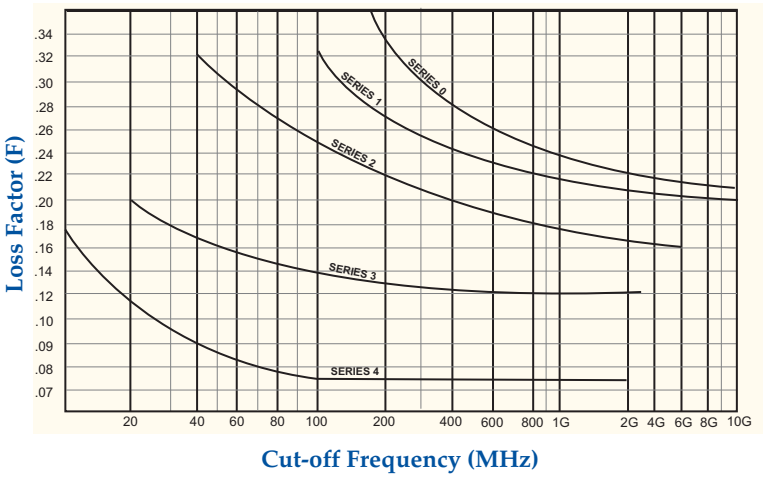

Insertion Loss = F x N + .05
Where F = Loss Factor
And N = Number of Sections


Example:

Number of Sections = 5
Series = 2
Cut-off Frequency = 1500 MHz
Insertion Loss = FN + .05
Insertion Loss = .17 x 5 + .05
Insertion Loss = .9 dB max up to 90% of 3 dB cutoff

The curves on this page are theoretical values only. For more precise values at specific frequency points, please contact the factory.

Reactel, Incorporated — Reacting First to Your Filter Requirements
8031 Cessna Avenue ◆ Gaithersburg, Maryland 20879
Phone: 301-519-3660 ◆ Fax: 301-519-2447 ◆ reactel@reactel.com ◆ www.reactel.com
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Length Definition

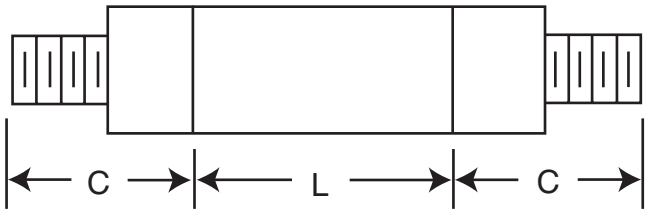

L = Filter Length (see tables on pages 28 & 29)
C = Connector Length (see table below)

* Tubular Filter Connector Length "C" (inches)

Connector Type	Connector Code	Type M/F	Filter Series 0	1	2	3	4
SMA	S	2/1	0.72/0.60	0.75/0.75	0.75/0.75	0.75/0.75	0.90/0.75
SMA Right Angle	SR	2/1	N/A	0.60/0.60	0.60/0.60	0.60/0.60	0.60/0.60
SMA Flush	SF	2/1	0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75	0.90/0.75
SMB (Snap On)	M	2/1	0.60/0.60	0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
SMC (Screw On)	O	2/1	0.60/0.60	0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
BNC	B	2/1	N/A	1.10/1.10	1.00/1.00	1.42/1.42	1.42/1.42
TNC	T	2/1	N/A	1.10/1.10	1.00/1.00	1.42/1.42	1.42/1.42
Type N	N	2/1	N/A	1.35/1.37	1.25/1.27	1.67/1.70	1.67/1.70
PC Pin	P	---	0.50	0.60	0.60	0.60	0.75
Cable	G	---	TBD	TBD	TBD	TBD	TBD

* Dimensions are approximate and are subject to change.

3 dB BW Tolerance
(Unless Otherwise Specified)

3 dB BW % of f_0	Tolerance on % BW
1 - 5%	+0.5 to -0%
5.1 - 25%	+2.5 to -0%
25.1 - 55%	+4.5 to -0%
55.1% - and up	+5.5 to -0%

Insertion Loss v. 1.5:1 VSWR BW And Number of Sections

I.L. dB	Number of Sections 2	3	4	5	6 & up
0 - 3	50 - 55%	65 - 75%	75 - 80%	80 - 90%	95% & up
3 - 4	55 - 65%	75 - 82%	83 - 90%	89 - 95%	95% & up
4 - 5	60 - 70%	80 - 95%	90% & up	95% & up	95% & up

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Tubular Bandpass Filter Lengths

Series B0 Length (inches)

CF (MHz)	Number of Sections								
	2	3	4	5	6	7	8	9	10
160-200	2.75	3.75	4.75	5.25	6.75	7.75	8.75	9.75	1025
201-300	2.75	3.5	4.25	5.0	5.75	6.5	7.25	8.0	8.75
301-800	2.5	3.25	3.75	4.25	4.75	5.25	6.5	7.25	8.0
801-2000	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0
2001-4000	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5
4001-6000	0.5	0.75	1.0	1.25	1.5	1.75	2.0	2.25	2.5

Series B1 Length (inches)

CF (MHz)	Number of Sections								
	2	3	4	5	6	7	8	9	10
100-200	3.0	4.0	5.0	5.5	6.0	6.5	7.0	8.5	9.0
201-300	2.75	3.0	3.75	3.75	4.0	5.0	5.5	6.5	6.75
301-500	2.5	2.75	3.5	3.5	3.75	4.75	5.0	6.25	6.5
501-700	2.0	2.5	3.0	3.25	3.75	4.5	5.0	6.0	6.5
701-1000	1.75	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.25
1001-2000	1.5	1.75	2.0	2.5	3.0	3.5	3.75	4.0	4.5
2001-3000	1.25	1.5	1.75	2.25	2.5	3.0	3.5	3.75	4.25
3001-5000	1.0	1.25	1.5	2	2.25	2.5	3.0	3.5	4.0

Series B2 Length (inches)

CF (MHz)	Number of Sections								
	2	3	4	5	6	7	8	9	10
50-70	5.5	8.0	10.0	12.0	14.5	17.0	17.5	18.5	19.5
71-100	3.5	4.5	6.0	8.0	9.75	11.5	13.5	15.5	17.0
101-140	3.0	3.5	5.0	6.5	7.5	8.5	9.5	11.0	12.5
141-200	2.5	3.0	4.25	5.25	6.25	7.0	8.0	9.0	10.0
201-300	2.25	2.75	3.5	4.25	5.0	5.5	6.25	7.0	8.0
301-400	2.0	2.5	3.0	3.5	4.25	5.0	5.5	6.5	7.5
401-700	1.5	2.0	2.5	3.0	3.5	4.5	5.0	6.0	7.0
701-3000	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0

Series B3 Length (inches)

CF (MHz)	Number of Sections								
	2	3	4	5	6	7	8	9	10
40-50	5.0	7.0	9.0	11.5	14.0	17.0	19.0	21.5	24.0
51-75	4.5	6.5	8.0	9.5	11.5	13.0	15.0	16.0	17.0
76-150	3.0	3.5	4.0	5.5	6.5	8.0	9.0	10.0	11.0
151-300	2.5	3.0	3.5	4.0	5.0	5.5	6.5	7.0	8.0
301-700	2.0	2.5	3.0	3.5	4.0	4.5	5.0	6.0	7.0
701-2000	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	6.0

Series B4 Length (inches)

CF (MHz)	Number of Sections								
	2	3	4	5	6	7	8	9	10
20-40	4.5	6.5	9.0	10.5	13.0	16.0	19.0	22.0	25.0
41-60	4.0	5.0	6.5	8.5	10.0	13.0	15.0	17.0	19.0
61-80	3.5	4.0	5.5	7.0	8.5	9.5	11.0	13.0	14.5
81-200	3.0	4.0	4.5	6.0	7.0	8.0	9.5	11.0	12.0
201-500	3.0	3.5	4.0	5.0	6.0	7.0	8.0	9.0	10.0
501-1000	2.5	3.0	3.5	4.5	5.0	5.5	6.5	7.0	8.0

Tubular Bandpass Weight per Section (oz.)

Series	B0	B1	B2	B3	B4
Weight	0.25	0.50	0.75	1.00	1.50

The lengths and weights shown in these tables are approximate and should only be used as a guide. Reactel reserves the right to alter these dimensions to meet a particular specification.

Reactel, Incorporated — Reacting First to Your Filter Requirements
8031 Cessna Avenue ◆ Gaithersburg, Maryland 20879
Phone: 301-519-3660 ◆ Fax: 301-519-2447 ◆ reactel@reactel.com ◆ www.reactel.com
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Tubular Lowpass Filter Lengths

Series L0 Length (inches)

CF (MHz)	Number of Sections								
	2	3	4	5	6	7	8	9	10
100-200	1.75	2.5	3.25	4.0	4.75	5.5	7.25	8.0	8.75
201-300	1.25	1.75	2.25	2.75	3.25	3.75	4.25	4.75	5.25
301-800	1.0	1.5	1.75	2.0	2.25	2.5	3.0	3.5	4.0
801-2000	1.0	1.5	1.75	2.0	2.25	2.5	2.75	3.5	3.75
2001-4000	1.0	1.5	1.75	2.0	2.25	2.5	2.5	3.0	3.5
4001-7000	0.75	1.0	1.75	1.5	1.75	2.0	2.25	2.5	3.0
7001-10000	0.5	0.75	1.0	1.25	1.5	2.0	2.25	2.5	2.75
10001-18000	0.5	0.65	0.75	0.9	1.0	2.0	2.25	2.5	2.75

Series L1 Length (inches)

CF (MHz)	Number of Sections								
	2	3	4	5	6	7	8	9	10
100-200	2.5	3.5	4.5	5.5	6.5	7.5	8.5	9.5	10.0
201-400	1.5	2.0	3.0	3.5	4.0	4.5	5.5	6.5	7.0
401-600	1.5	2.0	2.5	3.0	3.5	4.5	4.75	5.0	5.5
601-1000	1.5	2.0	2.25	2.5	3.0	4.0	4.25	4.5	5.0
1001-2000	1.0	1.5	1.75	2.5	2.75	3.25	3.5	4.0	4.5
2001-3000	1.0	1.5	1.75	2.0	2.5	3.0	3.25	3.5	4.0
3001-4000	0.75	1.25	1.5	2.0	2.5	2.75	3.0	3.25	3.5
4001-10000	0.75	1.0	1.25	1.75	2.25	2.5	3.0	3.25	3.5

Series L2 Length (inches)

CF (MHz)	Number of Sections								
	2	3	4	5	6	7	8	9	10
40-50	4.0	6.0	8.5	10.5	12.5	15.0	17.5	18.0	19.5
51-70	3.0	5.0	6.5	8.5	10.5	12.5	15.0	16.0	19.0
71-100	2.5	4.0	5.5	6.5	8.0	10.0	11.5	13.0	14.5
101-250	2.0	3.5	4.5	5.5	6.5	7.0	7.5	8.0	8.5
251-500	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5
501-1000	1.25	1.5	2.25	2.5	3.0	3.5	4.0	4.5	5.0
1001-2500	1.0	1.5	2.0	2.25	2.5	3.0	3.5	4.0	4.5
2501-6000	0.75	1.0	1.5	2.0	2.5	2.75	3.0	3.5	4.0

Series L3 Length (inches)

CF (MHz)	Number of Sections								
	2	3	4	5	6	7	8	9	10
20-40	5.0	8.0	11.5	15.5	18.0	21.5	25.0	26.5	28.0
41-60	3.0	6.0	8.0	10.5	13.0	15.0	17.5	21.0	24.0
61-90	2.5	4.5	6.0	8.0	10.0	11.5	12.5	14.5	16.0
91-150	1.5	3.0	4.5	5.0	6.0	6.5	7.5	8.0	9.0
151-500	1.5	3.0	3.5	4.5	5.5	6.0	6.5	7.0	8.0
501-1000	1.5	2.5	3.5	4.5	5.0	5.25	6.0	6.5	7.5
1001-3500	1.0	2.5	3.0	3.5	4.5	4.75	5.0	6.0	6.5

Series L4 Length (inches)

CF (MHz)	Number of Sections								
	2	3	4	5	6	7	8	9	10
10-20	7.0	10.5	13.5	17.5	20.5	23.0	26.0	28.5	30.0
21-35	5.0	7.0	9.5	13.0	15.0	17.0	21.0	22.0	24.5
36-60	4.0	5.5	6.5	7.5	10.0	11.5	13.0	14.5	16.0
61-150	3.5	4.0	4.5	5.5	7.0	8.0	9.0	10.0	11.0
151-400	3.0	3.5	4.0	5.0	5.5	6.5	7.5	8.0	8.5
401-1000	2.5	3.0	3.5	4.5	5.5	6.5	7.0	7.5	8.0

Tubular Lowpass Weight per Section (oz.)

Series	L0	L1	L2	L3	L4
Weight	0.25	0.50	0.75	1.00	1.50

The lengths and weights shown in these tables are approximate and should only be used as a guide. Reactel reserves the right to alter these dimensions to meet a particular specification.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Tubular Filter Mounting Options

The "Type S Spring Clip" is a light to medium duty fastening method, and is good for most applications.

For more rugged environments the "Type R High Shock Bracket" would be appropriate.

Type S Spring Clip (dimensions in inches)


Series	X	Y	D	Material
0	0.30	0.50	0.130	Phos-Bronze
1	0.32	0.50	0.085	Plastic
2	0.45	0.75	0.200	Phos-Bronze
3	0.50	0.80	0.150	Plastic
4	0.62	1.15	0.130	Phos-Bronze
5	0.62	1.15	0.130	Phos-Bronze

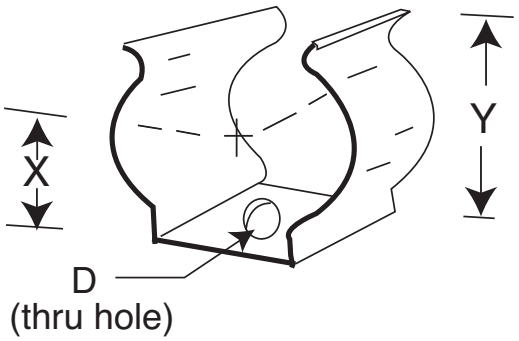

All tubular filters ordered in quantities of 10 or fewer are supplied with Type S Spring Clips free of charge. For larger quantities, please consult the factory.

Type R High Shock Bracket (dimensions in inches)

Series	A	B	C	D	E
0	0.12	0.50	0.22	0.093	0.375
1	0.25	0.87	0.35	0.113	0.620
2	0.25	1.00	0.47	0.144	0.750
3	0.37	1.50	0.70	0.169	1.125
4	0.37	2.00	1.00	0.193	1.575
5	0.50	2.00	1.00	0.193	1.575

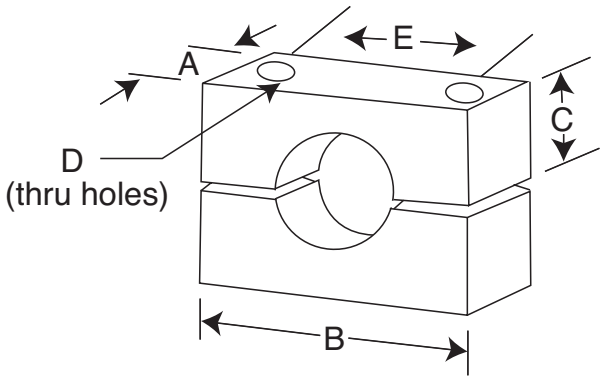

Type R High Shock Brackets can be supplied with tubular filters for an additional charge. Please consult the factory for a price quote.

Reactel, Incorporated — Reacting First to Your Filter Requirements
8031 Cessna Avenue ◆ Gaithersburg, Maryland 20879
Phone: 301-519-3660 ◆ Fax: 301-519-2447 ◆ reactel@reactel.com ◆ www.reactel.com
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP