

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

QRC series
C9-A4x
14-pin, miniature relay, 4-pole, plug-in, faston

Type	**C9-A4x/ ... V** Standard relays 4 change-over contacts
Maximum contact load	**5 A/250 V AC 1 5 A/30 V DC1**
Recommended minimum contact load	**1 mA/10 V** (with 10 µ Au) **10 mA/10 V** (standard contact)

Contacts

Material	Standard	Code 1	AgNi + 0,2 µ Au
	Optional	Code 2	AgNi + 10 µ Au
Rated current			5 A
Switch-on current max. (2,5 ms)			15 A
Switching voltage max			250 V
AC load			1,250 kVA
DC load			see Fig. 2

Coil

Coil resistance	see table; tolerance ± 10 %
Pick-up voltage	≥ 0,8 x U_N
Release voltage	≥ 0,1 x U_N
Nominal power	1,2 VA (AC)/1 W (DC)

Coil table

VAC	Ω	mA	VDC	Ω	mA
24	174	50	12	148	85
48	686	25	24	594	43
115	4K3	10,4	48	2K3	21
230	18K6	5,2	110	11K4	11

Insulation

	Volt rms, 1 min
Contact open	1000 V
Contact/contact	2,5 kV
Contact/coil	2,5 kV
Insulation resistance at 500 V	≥1 GΩ
Insulation, IEC 61810-5	2,5 kV/3

Specifications

Ambient temperature operation/storage	-40 (no ice)….60 °C /-40 ... 80 °C
Pick-up time/bounce time	10 ms/≤ 3 ms
Release time/bounce time	6 ms/≤ 1 ms
Mechanical life	AC: 10 Mill./DC: 20 Mill. switching cycles
AC voltage endurance at rated load	≥100000 switching cycles
Switching frequency at rated load	≤ 1200/h
Protection class	IP40
Weight	43 g


Standard types

AC 50 Hz/60 Hz: 24, 48, 115, 230, (240)	**C9-A41/AC ... V**	**C9-A42/AC ... V**
LED	**C9-A41X/AC ... V**	**C9-A42X/AC ... V**
DC 12, 24, 48, 110	**C9-A41/DC ... V**	**C9-A42/DC ... V**
LED	**C9-A41X/DC ... V**	**C9-A42X/DC ... V**
Free wheeling diode	**C9-A41DX/DC ... V**	**C9-A42DX/DC ... V**
Polarity and free wheeling diode	**C9-A41FX/DC ... V**	**C9-A42FX/DC ... V**
AC/DC bridge rectifier 24 V, 48 V, 60 V	**C9-A41BX/UC ... V**	**C9-A42BX/UC ... V**

"..." Enter the voltage for full type designation

Accessories

Socket:	**S9-M, S9-L, S9-P, S9-P0**
Operational accessories (blanking plug):	**S9-NP, S9-OP**



Connection diagram




Fig. 1 AC voltage endurance



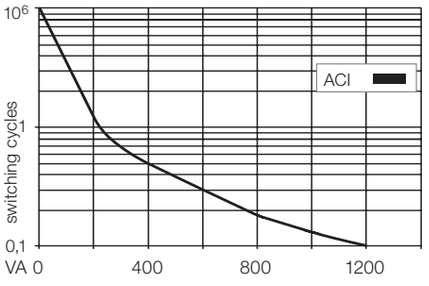


Fig. 2 DC load limit curve

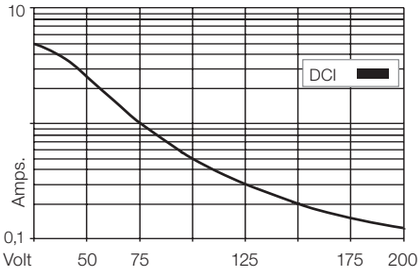

Dimensions [mm]

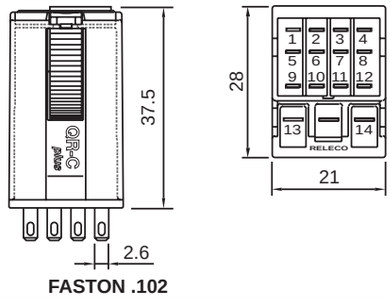

FASTON .102

Technical approvals, conformities

IEC 61810; EN 60947

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP