



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)

# Thermo Scientific Revco Freezers


*Our chest and upright freezers share an advanced technology and design platform with three distinct series – Ultima II, Elite and Value – our portfolio offers multiple levels of control sophistication to meet your needs.*



## Advanced Refrigeration Technology

Our freezers feature the Legaci® refrigeration system with fully integrated cooling technology for ultra-low temperature use. Our Legaci system is more dependable, specifically designed and tested to operate at temperatures from -40°C to -86°C in a rugged laboratory environment without exceeding parameters of any sub-component within the system.

- Our Legaci system meets or exceeds the highest performance standards in accelerated life testing
- Sets a new standard for reliability
- Performs in demanding environments
- Tolerates recurring voltage fluctuations, high ambient temperatures, heavy traffic in/out of freezer

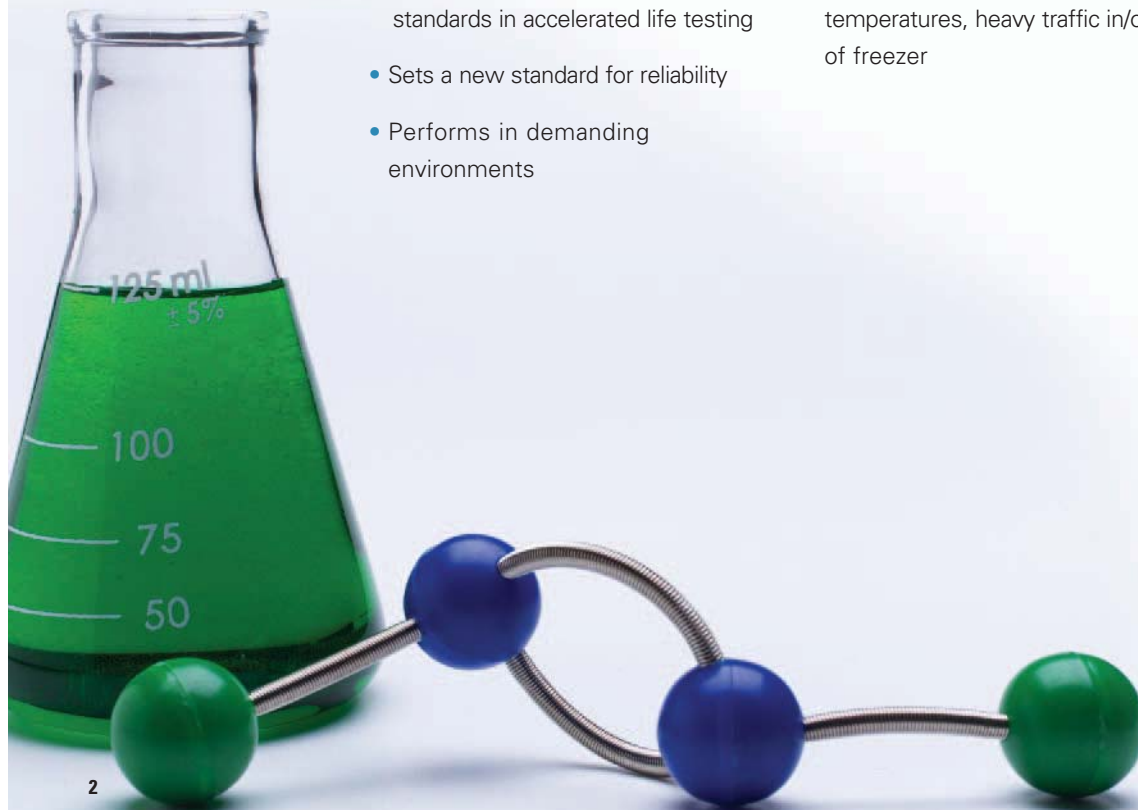

# Advanced Cabinet Construction

## Outer Door

Minimum 3" (76mm) high-strength, foamed-in-place urethane insulation

## Outer Door Hinges

Independently mounted for each door

## Access Port

1" diameter (25.4mm) on rear wall, left corner

## Inner Doors


High-impact plastic with recessed handle

## Interior Shelves

Stainless steel, top shelf fixed, three adjustable

## Inventory Racks

Optional, stainless steel with fiberboard boxes and dividers

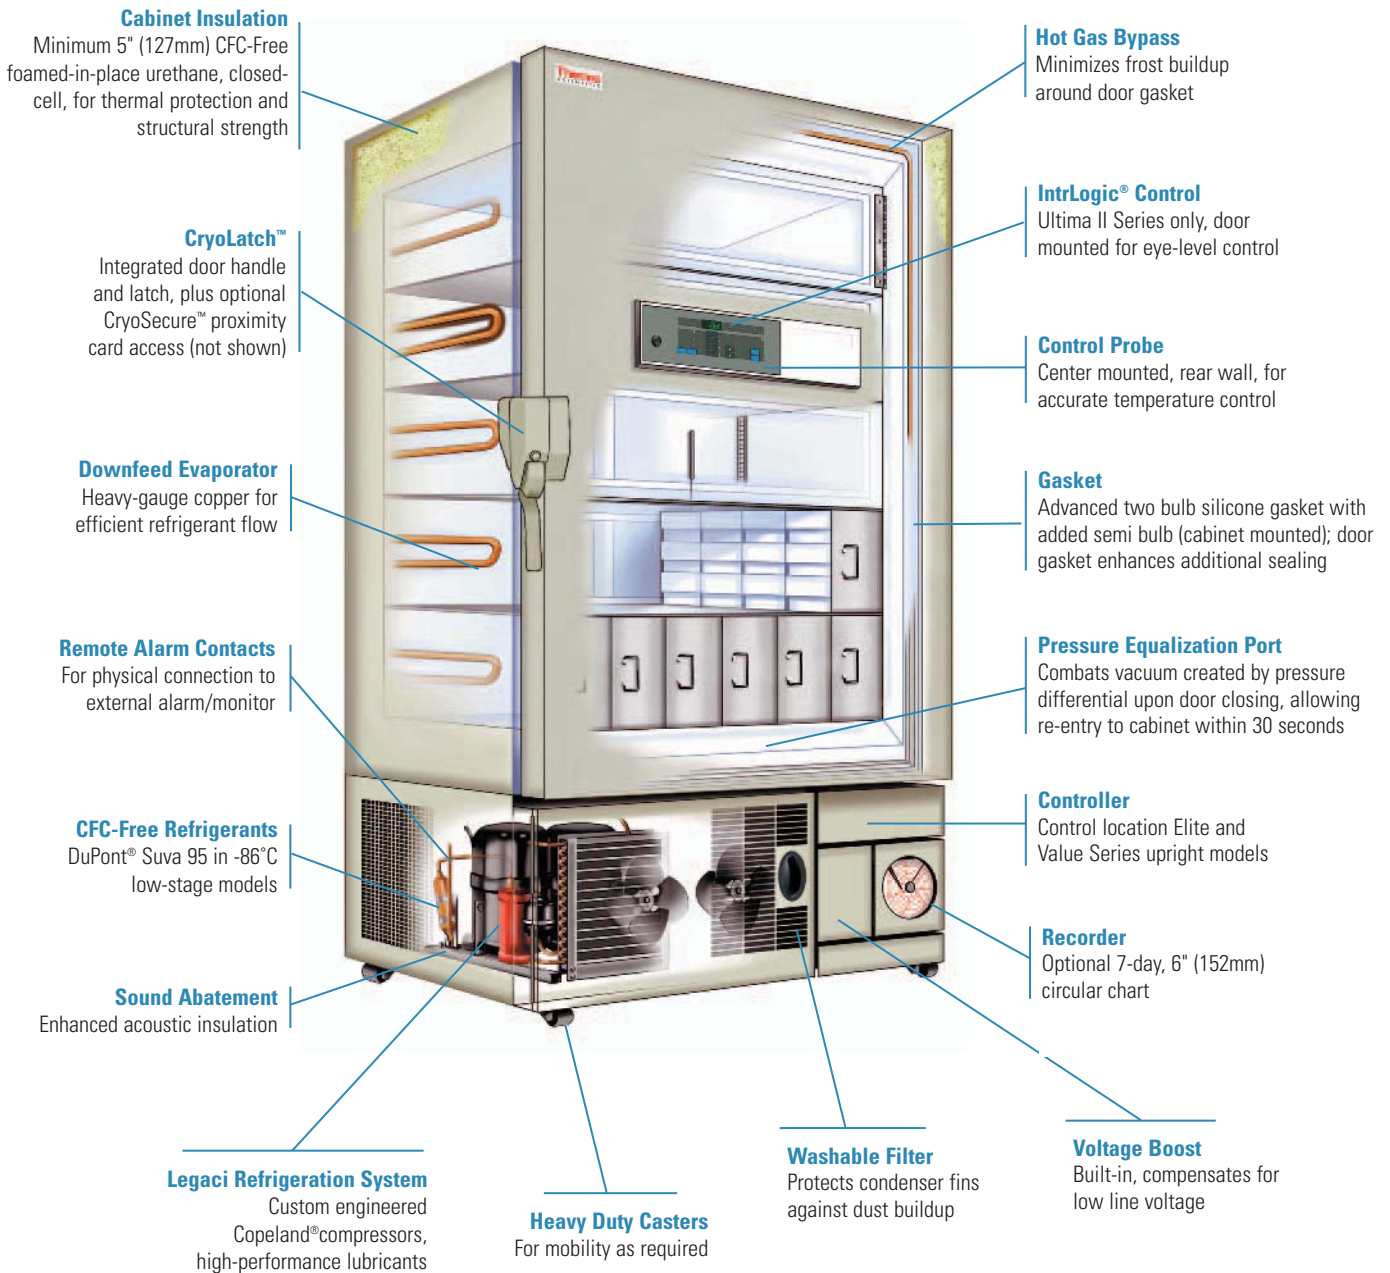

# Thermo Scientific Revco Value Freezers

*Our Revco Value freezers offer a cost-effective alternative for a variety of industrial process and non-critical storage uses. They feature our Legaci refrigeration with rugged cabinet construction and a reliable solid-state control for basic but dependable operation.*



Our Revco Value freezers feature a solid-state control system with keyed on/off switch for security.

## Control System

- Solid-state control system with adjustable temperature setpoint
- Digital temperature display
- Push-button setpoint display
- Key-operated main power switch

## Electrical System

- Automatic voltage boost compensates for low voltage and brownout conditions
- Optional free-standing surge suppressor minimizes effect of voltage spikes from incoming electrical service

## Alarm System

- Integrated overtemperature safety alarm with battery back-up and audible warning of temperature deviation
- Exterior alarm contacts for connection to remote monitoring system

# Thermo Scientific Revco Freezers

## Revco Value Upright Freezers

Temperature Range: -50°C to -86°C

Model No.	Cu.Ft. (L)	Electrical	Amps/ Breaker (Plug)	Interior Dimensions* H x D x W inches (mm)	Exterior Dimensions* H x D x W inches (mm)	Ship Weight lb (kg)
ULT-1386-3-A	13.4 (379)	115V 60Hz 1Ø	16/20 (P2)	50.5 x 19.5 x 23.5 (1280 x 500 x 600)	77.5 x 31.3 x 37.1 (1970 x 796 x 942)	655 (297)
ULT-1386-3-D	13.4 (379)	208/230V 60Hz 1Ø	7.5/15 (P4)			
ULT-1386-3-V	13.4 (379)	230V 50Hz 1Ø	7.5/15 (P7)			
ULT-1386-3-W	13.4 (379)	230V 50Hz 1Ø	7.5/15 (P8)			

## Revco Value Chest Freezers

Temperature Range: -40°C to -86°C

Model No.	Cu.Ft. (L)	Electrical	Amps/ Breaker (Plug)	Interior Dimensions* H x D x W inches (mm)	Exterior Dimensions* H x D x W inches (mm)	Ship Weight lb (kg)
ULT-390-3-A	3.1(88)	115V 60Hz 1Ø	16/20 (P2)	17.0 x 17.0 x 19.0 (430 x 430 x 480)	44.5 x 29.9 x 30.2 (1156 x 760 x 766)	415 (188)
ULT-390-3-D	3.1(88)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-390-3-V	3.1(88)	230V 50Hz 1Ø	12/16 (P7)			
ULT-390-3-W	3.1(88)	230V 50Hz 1Ø	12/13 (P8)	26.5 x 19.0 x 23.5 (670 x 480 x 600)	41.0 x 31.8 x 48.5 (1040 x 808 x 1230)	525 (238)
ULT-790-3-A	6.8 (193)	115V 60Hz 1Ø	16/20 (P2)			
ULT-790-3-D	6.8 (193)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-790-3-V	6.8 (193)	230V 50Hz 1Ø	12/16 (P7)	26.5 x 19.0 x 32.25 (670 x 480 x 900)	41.0 x 31.8 x 60.25 (1040 x 808 x 1530)	680 (308)
ULT-790-3-W	6.8 (193)	230V 50Hz 1Ø	12/13 (P8)			
ULT-1090-3-A	10.3 (292)	115V 60Hz 1Ø	16/20 (P2)			
ULT-1090-3-D	10.3 (292)	208/230V 60Hz 1Ø	12/15 (P4)	26.5 x 19.0 x 47.0 (670 x 480 x 1190)	41.0 x 31.8 x 72.0 (1040 x 808 x 1830)	650 (295)
ULT-1090-3-V	10.3 (292)	230V 50Hz 1Ø	12/16 (P7)			
ULT-1090-3-W	10.3 (292)	230V 50Hz 1Ø	12/13 (P8)			
ULT-1490-3-A	13.7 (388)	115V 60Hz 1Ø	16/20 (P2)	26.5 x 19.0 x 58.75 (670 x 480 x 1490)	41.0 x 31.8 x 83.75 (1040 x 808 x 2130)	770 (350)
ULT-1490-3-D	13.7 (388)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-1490-3-V	13.7 (388)	230V 50Hz 1Ø	12/16 (P7)			
ULT-1490-3-W	13.7 (388)	230V 50Hz 1Ø	12/13 (P8)	26.5 x 19.0 x 70.5 (670 x 480 x 1790)	41.0 x 31.8 x 95.5 (1040 x 808 x 2430)	940 (427)
ULT-1790-3-A	17.1 (484)	115V 60Hz 1Ø	16/20 (P2)			
ULT-1790-3-D	17.1 (484)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-1790-3-V	17.1 (484)	230V 50Hz 1Ø	12/16 (P7)	26.5 x 19.0 x 70.5 (670 x 480 x 1790)	41.0 x 31.8 x 95.5 (1040 x 808 x 2430)	940 (427)
ULT-1790-3-W	17.1 (484)	230V 50Hz 1Ø	12/13 (P8)			
ULT-2090-3-A	20.5 (580)	115V 60Hz 1Ø	16/20 (P2)			
ULT-2090-3-D	20.5 (580)	208/230V 60Hz 1Ø	12/15 (P4)	26.5 x 19.0 x 70.5 (670 x 480 x 1790)	41.0 x 31.8 x 95.5 (1040 x 808 x 2430)	940 (427)
ULT-2090-3-V	20.5 (580)	230V 50Hz 1Ø	12/16 (P7)			
ULT-2090-3-W	20.5 (580)	230V 50Hz 1Ø	12/13 (P8)			

\*All dimensions and specifications subject to change without notice. External dimensions include allowances for cabinet door, hinges, latches, handles, and control panel protrusions.

*Our freezers share a standardized inventory configuration of optional racks, boxes and baskets. Chest and upright inventory systems are ordered separately.*



## Revco Value Upright Freezers

Temperature Range: -10°C to -40°C

Model No.	Cu.Ft. (L)	Electrical	Amps/ Breaker (Plug)	Interior Dimensions* H x D x W inches (mm)	Exterior Dimensions* H x D x W inches (mm)	Ship Weight lb (kg)
ULT-1340-3-A	13.4 (379)	115V 60Hz 1Ø	16/20 (P2)	50.5 x 19.5 x 23.5 (1280 x 500 x 600)	77.5 x 31.3 x 37.1 (1970 x 796 x 942)	595 (270)
ULT-1340-3-D	13.4 (379)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-1340-3-V	13.4 (379)	230 V 50Hz 1Ø	12/16 (P7)			
ULT-1340-3-W	13.4 (379)	230V 50Hz 1Ø	12/13 (P8)	50.5 x 25 x 23.5 (1280 x 640 x 600)	77.5 x 36.8 x 37.1 (1970 x 935 x 942)	630 (286)
ULT-1740-3-A	17.2 (487)	115V 60Hz 1Ø	16/20 (P2)			
ULT-1740-3-D	17.2 (487)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-1740-3-V	17.2 (487)	230V 50Hz 1Ø	12/16 (P7)	50.5 x 24.25 x 28.5 (1280 x 620 x 720)	77.5 x 36.1 x 42.2 (1970 x 916 x 1070)	680 (309)
ULT-1740-3-W	17.2 (487)	230V 50Hz 1Ø	12/13 (P8)			
ULT-2140-3-A	20.2 (572)	115V 60Hz 1Ø	16/20 (P2)			
ULT-2140-3-D	20.2 (572)	208/230V 60Hz 1Ø	12/15 (P4)	50.5 x 24.25 x 34.5 (1280 x 620 x 880)	77.5 x 36.1 x 48.1 (1970 x 916 x 1222)	770 (350)
ULT-2140-3-V	20.2 (572)	230V 50Hz 1Ø	12/16 (P7)			
ULT-2140-3-W	20.2 (572)	230V 50Hz 1Ø	12/13 (P8)			
ULT-2540-3-A	24.4 (691)	115V 60Hz 1Ø	16/20 (P2)	50.5 x 24.25 x 34.5 (1280 x 620 x 880)	77.5 x 36.1 x 48.1 (1970 x 916 x 1222)	770 (350)
ULT-2540-3-D	24.4 (691)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-2540-3-V	24.4 (691)	230V 50Hz 1Ø	12/16 (P7)			
ULT-2540-3-W	24.4 (691)	230V 50Hz 1Ø	12/13 (P8)			

## Revco Value Chest Freezers

Temperature Range: -10°C to -40°C

Model No.	Cu.Ft. (L)	Electrical	Amps/ Breaker (Plug)	Interior Dimensions* H x D x W inches (mm)	Exterior Dimensions* H x D x W inches (mm)	Ship Weight lb (kg)
ULT-350-3-A	3.1(88)	115V 60Hz 1Ø	16/20 (P2)	17.0 x 17.0 x 19.0 (430 x 430 x 480)	44.5 x 29.9 x 30.2 (1156 x 760 x 766)	355 (161)
ULT-350-3-D	3.1(88)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-350-3-V	3.1(88)	230V 50Hz 1Ø	12/16 (P7)			
ULT-350-3-W	3.1(88)	230V 50Hz 1Ø	12/13 (P8)	26.5 x 19.0 x 23.5 (670 x 480 x 600)	41.0 x 31.8 x 48.5 (1040 x 808 x 1230)	470 (213)
ULT-750-3-A	6.8 (193)	115V 60Hz 1Ø	16/20 (P2)			
ULT-750-3-D	6.8 (193)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-750-3-V	6.8 (193)	230V 50Hz 1Ø	12/16 (P7)	26.5 x 19.0 x 32.25 (670 x 480 x 900)	41.0 x 31.8 x 60.25 (1040 x 808 x 1530)	500 (227)
ULT-750-3-W	6.8 (193)	230V 50Hz 1Ø	12/13 (P8)			
ULT-1050-3-A	10.3 (292)	115V 60Hz 1Ø	16/20 (P2)			
ULT-1050-3-D	10.3 (292)	208/230V 60Hz 1Ø	12/15 (P4)	26.5 x 19.0 x 47.0 (670 x 480 x 1190)	41.0 x 31.8 x 72.0 (1040 x 808 x 1830)	650 (295)
ULT-1050-3-V	10.3 (292)	230V 50Hz 1Ø	12/16 (P7)			
ULT-1050-3-W	10.3 (292)	230V 50Hz 1Ø	12/13 (P8)			
ULT-1450-3-A	13.7 (388)	115V 60Hz 1Ø	16/20 (P2)	26.5 x 19.0 x 58.75 (670 x 480 x 1490)	41.0 x 31.8 x 83.75 (1040 x 808 x 2130)	650 (295)
ULT-1450-3-D	13.7 (388)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-1450-3-V	13.7 (388)	230V 50Hz 1Ø	12/16 (P7)			
ULT-1450-3-W	13.7 (388)	230V 50Hz 1Ø	12/13 (P8)	26.5 x 19.0 x 70.5 (670 x 480 x 1790)	41.0 x 31.8 x 95.5 (1040 x 808 x 2430)	685 (311)
ULT-1750-3-A	17.1 (484)	115V 60Hz 1Ø	16/20 (P2)			
ULT-1750-3-D	17.1 (484)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-1750-3-V	17.1 (484)	230V 50Hz 1Ø	12/16 (P7)	26.5 x 19.0 x 70.5 (670 x 480 x 1790)	41.0 x 31.8 x 95.5 (1040 x 808 x 2430)	685 (311)
ULT-1750-3-W	17.1 (484)	230V 50Hz 1Ø	12/13 (P8)			
ULT-2050-3-A	20.5 (580)	115V 60Hz 1Ø	16/20 (P2)			
ULT-2050-3-D	20.5 (580)	208/230V 60Hz 1Ø	12/15 (P4)			
ULT-2050-3-V	20.5 (580)	230V 50Hz 1Ø	12/16 (P7)			
ULT-2050-3-W	20.5 (580)	230V 50Hz 1Ø	12/13 (P8)			

\*All dimensions and specifications subject to change without notice. External dimensions include allowances for cabinet door, hinges, latches, handles and control panel protrusions.



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)