ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Abaco Systems / SBS ASF-V6-1* at our website: *Click HERE*

ASF-V6

MIL-STD-1553 Interface

I/O & COMMUNICATIONS

Features

1 to 4 dual redundant 1553 channels featuring 100% independent operation as one of the following:

- Bus Controller
- Remote Terminal
- Dual Function Bus Monitor

Bus Controller

- Programmable frame lists
- BC-RT, RT-BC, RT-RT
- Mode codes, broadcasts, and time delays

RT Functionality

- RT level protocol selection
- RT definition tables
- Programmable response time
- Optional multiple RT support

Bus Monitor


- Map monitoring
- Sequential monitoring
- Time stamped
- Double buffered
- Error tables
- Definable monitoring

Architecture

- On-the-fly data structures
- BC and RT link lists
- High-speed DSP
- Flexible memory structure
- Variable voltage 1553 transceivers (1 and 2 channel versions only)

Software Support

- Complimentary drivers for most operating systems
- Integrated Avionics Library, including source code

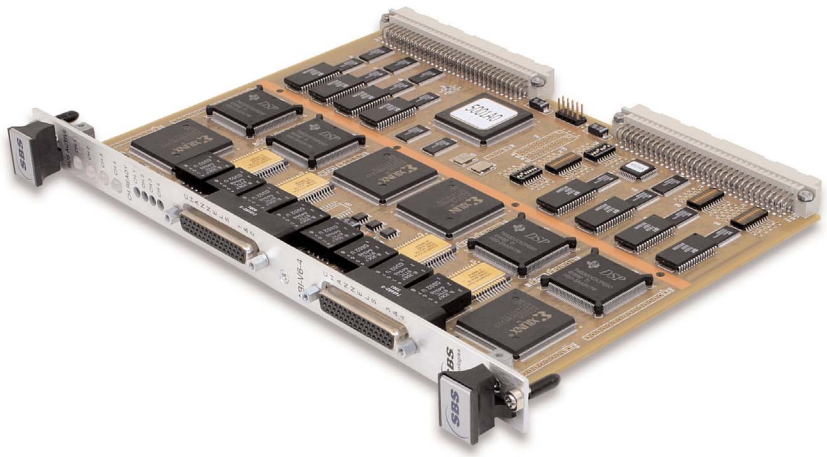

ASF-V6 is a flexible interface providing a single function, one to four channel, dual redundant MIL-STD-1553 interface to the VMEbus system. This Advanced Single Function (ASF) architecture provides operation as a Bus Controller (BC), Remote Terminal (RT), or dual function Bus Monitoring (BM). The MRT option allows multiple RT capability. The ASF-V6C interface equips the VMEbus system with a complete 1553 interface. This includes 1553A/1553B selections, pointer-driven transmit and receive buffers and extensive programmable event interrupts.

BC simulation structures consist of linked lists of 1553 command messages: BC-to-RT, RT-to-BC, RT-to-RT, mode code, broadcast and time delay block transmissions. We define RT simulation as a simple series of pointers to RT definition tables. The RT definition tables in turn point to control data buffers. We define the bus activity we want to monitor in both the Map and Sequential monitoring modes. This provides user defined linked lists of data buffers and sequential 1553 activity. The user can time stamp and/or double buffer the 1553 activity. Both monitoring modes perform broad error monitoring. They also provide a comprehensive error table that the host processor can read at any time.


Hardware Overview

SBS bases the ASF interface upon an advanced high-speed DSP, programmable logic and dual port RAM. It delivers a highly reliable hardware platform that is feature rich and user friendly. Through the 128 kB of dual port RAM per channel, the host processor has access to set up, monitor, and change the 1553 interface data structures at any time. Link-list memory architecture allows the user to structure interface memory usage for the maximum in flexibility and usefulness. The ASF-V6 provides storage for on-board firmware via Flash Memory.

Software Support Overview

SBS distributed software includes host processor device drivers to the dual port control and data structures as well as an application layer to these structures. SBS also provides low-level drivers for most operating systems, and the Integrated Avionics Library with source code, with the interface at no additional cost.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

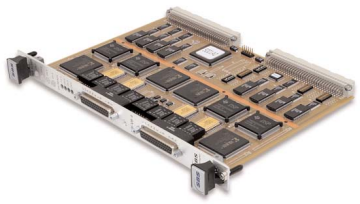

ASF-V6

Configurations

Model Number	Configuration
ASF-V6-X	Multichannel 1553 to VME
ASF-V6XT-X	Multichannel 1553 to VME, Extended Temperature
IRIG	IRIG B Time Receiver (add /IRIG to product number)
MRT	Multiple RT capability (add /MRT to product number)
-X	One to four channels
-	Conformal coat option

Specifications

ASF Functionality

Bus Controller (BC)

- BC Retry
- Minor frame timing and message scheduling
- Programmable intermessage gap
- Programmable delay gaps and null BC blocks
- Multiple BC data buffers in a linked list structure
- Programmable RT no-response timeout
- BC dump feature

Remote Terminal (RT)

- RT and all subaddresses supported
- Transmit/Receive buffers for each subaddress
- Multiple RT data buffers in a linked list structure
- Programmable RT response time and no-response selection

Map Monitoring

- Multiple linked buffers for each transmit/receive subaddress
- Mapped buffers read by host processor as time permits
- Number of buffers per transmit/receive subaddress is programmable or user definable to account for various host speeds

Sequential Monitoring

- Host driver selected messages are double buffered
- Messages timed stamped with a 1 µs 32-bit clock or optional 48-bit IRIG-B clock
- Standard firmware performs broad error monitoring
- Comprehensive error table readable at any time by host processor

Self Test

- Power-up test with status register report
- BIT-RAM and encoder/decoder test
- Run-time health status register
- Unit Test application for 1553 bus functionality

Inputs/Outputs

- Bi-directional external trigger
- IRIG clock input (optional)
- Variable voltage 1553 outputs: 0-22 V p-p (1 and 2 channel versions only)
- External TTL/RS-422 system clock input

VME Functionality

- VMEbus system
- D16/D32 single cycle transfers
- D32/D64 BLT
- A24/A32 addressing
- D08 interrupts
- Memory mapped
- Selectable interrupt requests
- On-board firmware storage via Flash memory

Interface Connections

- $DB26_F$ to coupling harness Cable Assembly: CA-2097
- Coupling harness to bus and I/O connectors
- $DB15_F$ I/O connector
- $BJ77_F$ Triax connector to 1553 bus

Interface Card Specifications

- Maximum power consumption:
  Single channel
  5 V @ 1.0 A, 12 V @ 250 mA
  Dual channel
  5 V @ 1.5 A, 12 V @ 500 mA
- Standard commercial operating temperature:
  0° C to +60° C
  ≤ 95% rH non-condensing
- Optional extended operating temperature:
  -40° C to +85° C
  ≤ 95% rH non-condensing
- Mechanical - single channel or dual channel:
  Standard 6u x 160 mm Size

Software and Documentation Support

- Low-level drivers for most operating systems
- Integrated Avionics Library with source code
- Borland and Microsoft® C Compiler compatible
- Hardware and Integrated Avionics Library documentation included on CD. Hard copies of the documentation are available upon request.

Customer Support

- Two-year warranty
- Extended warranties available
- Driver and library upgrades
- Over 18 operating systems supported on various platforms

Corporate Headquarters
7401Snaproll NE
Albuquerque, NM 87109
Tel 505-875-0600 Fax 505-875-0400
Email info@sbs.com

European Headquarters
Memminger Str. 14
D-86159 Augsburg, Germany
Tel +49-821-5034-0 Fax +49-821-5034-119
Email sales@sbs-europe.com

For additional contact information, please visit our web site at ***www.sbs.com***

SBS Technologies®

Specifications subject to change without notice. All trademarks and logos are property of their respective owners.
©2003 SBS Technologies, Inc. ABQ 20050926

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP