

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Abaco Systems / SBS V5C* at our website: *Click HERE*

V5C


6U VMEBus Embedded PC with Dual Ethernet

Single Board Computers

Features

- Compatible with PC99 Design Specification
- Socket 370 Processor Pentium® III (to 1000 MHz* w/100MHz Front Side Bus) or Celeron® (to 600 MHz* w/66 MHz Front Side Bus)
- Memory sizes up to 1 GB
- Level 2 cache on CPU
- 4 MB 69030 Video RAM
- Dual 10/100Base TX Ethernet
- Fast SCSI-2 interface with Wide option
- Enhanced IDE Hard Disk interface and option for 2nd IDE
- USB, COM1, COM2, LPT1, Mouse and keyboard port
- PCI Expansion interface for Triple PMC Carrier Card (TPMCC)
- VME64-compliant with Universe II PCI to VMEbus interface w/5-row P1/P2
- 32 KB NVSRAM with Auto-Store
- VMEbus hardware-controlled byte swapping.
- Compact Flash Disk on second IDE
- Flash Disk-On-Chip

* Up to currently available processor speeds (consistent with product power requirements).

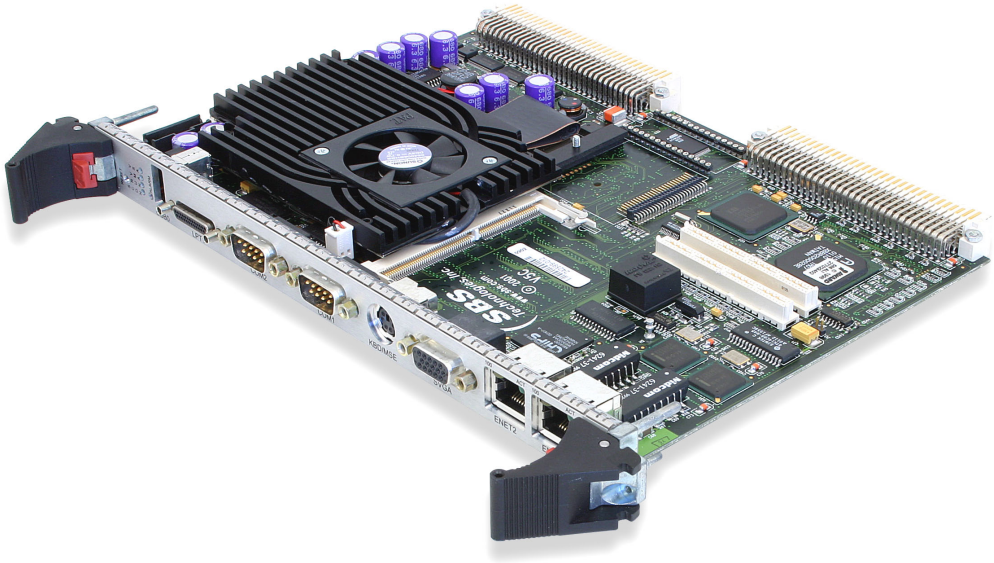

V5C is a high-performance single board embedded computer for the VMEbus. It can be configured with either a Pentium® III or Celeron® processor. The architecture is designed around the PCI local bus. The V5C is designed for real-world performance with advanced memory technologies, processing speeds up to 1000 MHz, SVGA GUI-Accelerated PCI Bus video, Fast SCSI 2/wide, Dual High Speed 10/100BaseT Ethernet and VMEbus VME64 Block Mode Transfer capability. This results in high-end workstation performance in a single-slot VMEbus card.

The V5C Embedded PC is compatible with software that complies with the PC99 Design Guide, so it supports the wide variety of off-the-shelf software available for Pentium-base computers. SBS Technologies provides driver-level support for several common operating systems including Linux, and Windows NT®, as well as real-time operating systems such as QNX Systems Limited QNX®, and Wind River Systems VxWorks®.

The V5C features new architecture based on the high-speed PCI bus. As a result, peripherals such as video and Ethernet, as well as the VME interface have a high-bandwidth connection to the processor. The V5C is designed to provide all the features of a complete PC99-compatible motherboard (excluding audio), along with additional features such as dual Ethernet Controllers, SCSI-2 and hardware extensions necessary for VMEbus Master/Slave capability. The V5C implements the advanced third-generation ALI Aladdin-Pro II® chipset that is fully compatible with industry-standard PC hardware and software. For a fast and flexible interface to the VMEbus, the V5C uses the Tundra Universe® II VMEbus Interface Controller.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Specifications

Processor - Socket 370
- Scalable processing power with flexible processor design
- Pentium III with up to 1000 MHz and 100 MHz FSB
- Celeron with up to 600 MHz and 66 MHz FSB

* Up to currently available processor speeds (consistent with product power requirements).

Level 2 Cache
- L2 cache (integration with CPU dependent on processor option)

System Memory
- 256 MB SDRAM on-board memory (default)
- 256 MB and 512 MB options
- 128 MB to 512 MB with soldered chips
- SODIMM Expansion socket for memory upgrade to 1 GB

SVGA Video
- 69030 Dual HiGVideo™ accelerator
- 4 MB Embedded SDRAM memory
- VGA and SVGA-compatible
- 1600 x 1200 screen resolution (max.)
- Low power

Disk Interfaces
- Integrated floppy disk controller for one or two 1.44 MB 3.5-in. floppy disk drives through rear P2
- IDE interface supporting two IDE drives
- Fast SCSI-2 interface through P2

Enhanced IDE Drive
- Bus mastering EIDE interface through P2
- IDE supports two IDE drives with enhanced PIO access modes
- Secondary IDE supports on-board CompactFlash™ disk or IDE drives through VME P2

On-Board CompactFlash™ Slot
- On-board CompactFlash drive slot, compatible with standard units such as SanDisk™ CompactFlash

Fast SCSI-2 Interface
- Symbios® 53C875E SCSI processor
- Fast SCSI-2 device support in asynchronous or synchronous mode
- Data rates up to 20 MB/s in synchronous mode
- Wide SCSI data rates of 40 MB/s in synchronous mode
- Active SCSI terminators provided on-board to simplify SCSI chain termination

Ethernet
- Two Intel® 82559ER Ethernet Controllers with integrated PHY
- IEEE 802.3-compatible
- Dual front-panel RJ-45 connectors

PCI Bus
- Ali® ALADDiN-Pro 2 1543C North Bridge Controller
- 32-bit 33 MHz PCI local bus

PMC Expansion Slots
- High-density PMC expansion connector
- Triple PMC Carrier Card (TPMCC)
- 32-bit/33 MHz PCI interface
- Fully PCI-compliant PMV for embedded systems
- Isolation and software access to PMC modules through PCI bridge chip on TPMCC
- Concurrent PCI bus transactions for primary and secondary PCI buses

VME Bus
- Tundra Universe II™ VMEbus interface controller
- Programmable byte-swapping capability to integrate to 6800-configured VMEbus
- Support for Intel® 32, Motorola® 32, and Intel® 16 byte-swapping modes
- Configuration: DTB Master, Option A32/A24/A16, D32/D16/D08(E0), RMV
- Configuration: DTB Slave, Option A32/A24/A16, D32/D16/D08, RMV
- Interrupter: Programmable, 1 of 7
- Interrupt Handler: Programmable, 1H(1–7)
- Requester: Programmable, BR(3, 2, 1, 0) Option ROR and RWD
- Arbiter: RRS, PRL, SGL
- Block Mode Transfer: Master and slave BLT and MBLT D64/D32/D16
- Disk interfaces provided onVME P2 connector
- Extended VME signals on VME P2 (row B)
- Floppy, IDE, and SCSI signals on VME P2 (row A and C)
- SCSI Wide, Secondary IDE, and second USB on VME P2 (row D and Z)

Serial Interface
- Ali® Aladdin-Pro 2 1543C Super I/O Controller
- Dual serial port interfaces: COM1—RS-232, COM2—RS-232/422/485
- IBM® PC compatibility
- Signals:TxD, RxD, RTS, CTS, DSR, DTR, DCD, RI
- Front-panel DB9 connector for each port

Parallel Interface
- Ali® Aladdin-Pro 2 1543C Super I/O Controller
- Single parallel port (LPT1)
- Centronics parallel, PS/2bi-directional compatibility
- Buffered parallel interface
- Micro-miniature DB-25 front-panel connector

Mouse/Keyboard Interface
- Ali® Aladdin-Pro 2 1543C Super I/O Controller
- Microsoft® mouse and PS/2-style keyboard compatibility
- Mouse and keyboard resident in a single connector, with reverse IBM standard (keyboard default, mouse through adapter)
- Mini-DIN “Y” adapter cable provided
- Mini-DIN circular 6-pin front-panel connector

USB Interfaces
- Ali® Aladdin-Pro 2 1543C Super I/O Controller
- USB0 routed to standard USB connector on front panel
- USB1 routed to P2 expansion

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Power Requirements

- +5 VDC @ 5A with 256 MB at 566 MHz (typical)
- +12 VDC @ 100mA maximum (CPU and memory dependent)
- -12 VDC @ (dependent on PMC modules installed)

Physical Characteristics

- 160 mm x 233 mm (dual Eurocard) 6U x 4HP
- Multi-layer printed circuit, FR-4
- 94 V-0 flammability rating (UL recognized manufacturers)

Temperature

- Operating: 0° to 55° C, inlet air
- Storage: -40° to 85° C

Cooling

- 100 LFM forced air, minimum required for cooling

Humidity

- 10 to 95% relative humidity, non-condensing

Shock

- Operating: 6G maximum
- Storage: 10G maximum

Programmable Board Configuration

- Configuration set by firmware (reduces need for jumpers)
- Software configuration options set by embedded set-up utility or application software
- Reliable and easy board setup (usually without having to remove board from chassis)

Support

- Software support packages available for Linux®, Windows NT®, Windows 2000®, QNX®, and VxWorks®

Ordering Information

V5C Embedded PC

V5C XXXX - YY - Z

XXXX = Memory (contact SBS for memory capacities available)
YYY = CPU speed in MHz (contact SBS for CPU speeds available)
Z = Front-panel option (contact SBS for availability, please specify if V5B compatibility is required).


Options and Accessories

TPMCC	Single-slot PCI mezzanine carrier card on PCI bus 1
VME-TB21	P2 adapter for floppy and IDE/SCSI cabling
CA25P24	24-in. 25-pin Micro-D parallel cable assembly
FDOCk-XX	Flash Disk-On-Chip up to 144 MB
VME-62XX	IDE hard disk, 3.5-in. floppy (contact SBS for capacities available)
VME-TB51	5-row DIN enhancements
COMFLASH-XXX	Compact Flash

Software Options


Windows NT	Microsoft Windows NT
Windows 2000	Microsoft Windows 2000
Windows XP	Microsoft Windows XP
UNISDK-NT	Universe Software Developers Kit / NT
UNISDK-XP	Universe Software Developers Kit / XP
UNISDK-Linux	Universe Software Developers Kit / Linux
VxWSP-V5C	VxWorks Board Support Package
V5C-SDK-XP	V5C Software Developers Kit
V5C-BSP-NT	V5C Board Support Package

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

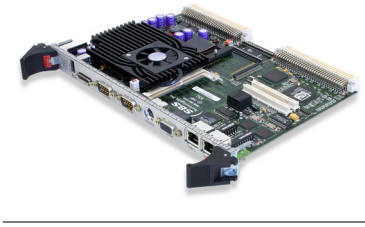

V5C

Block Diagram

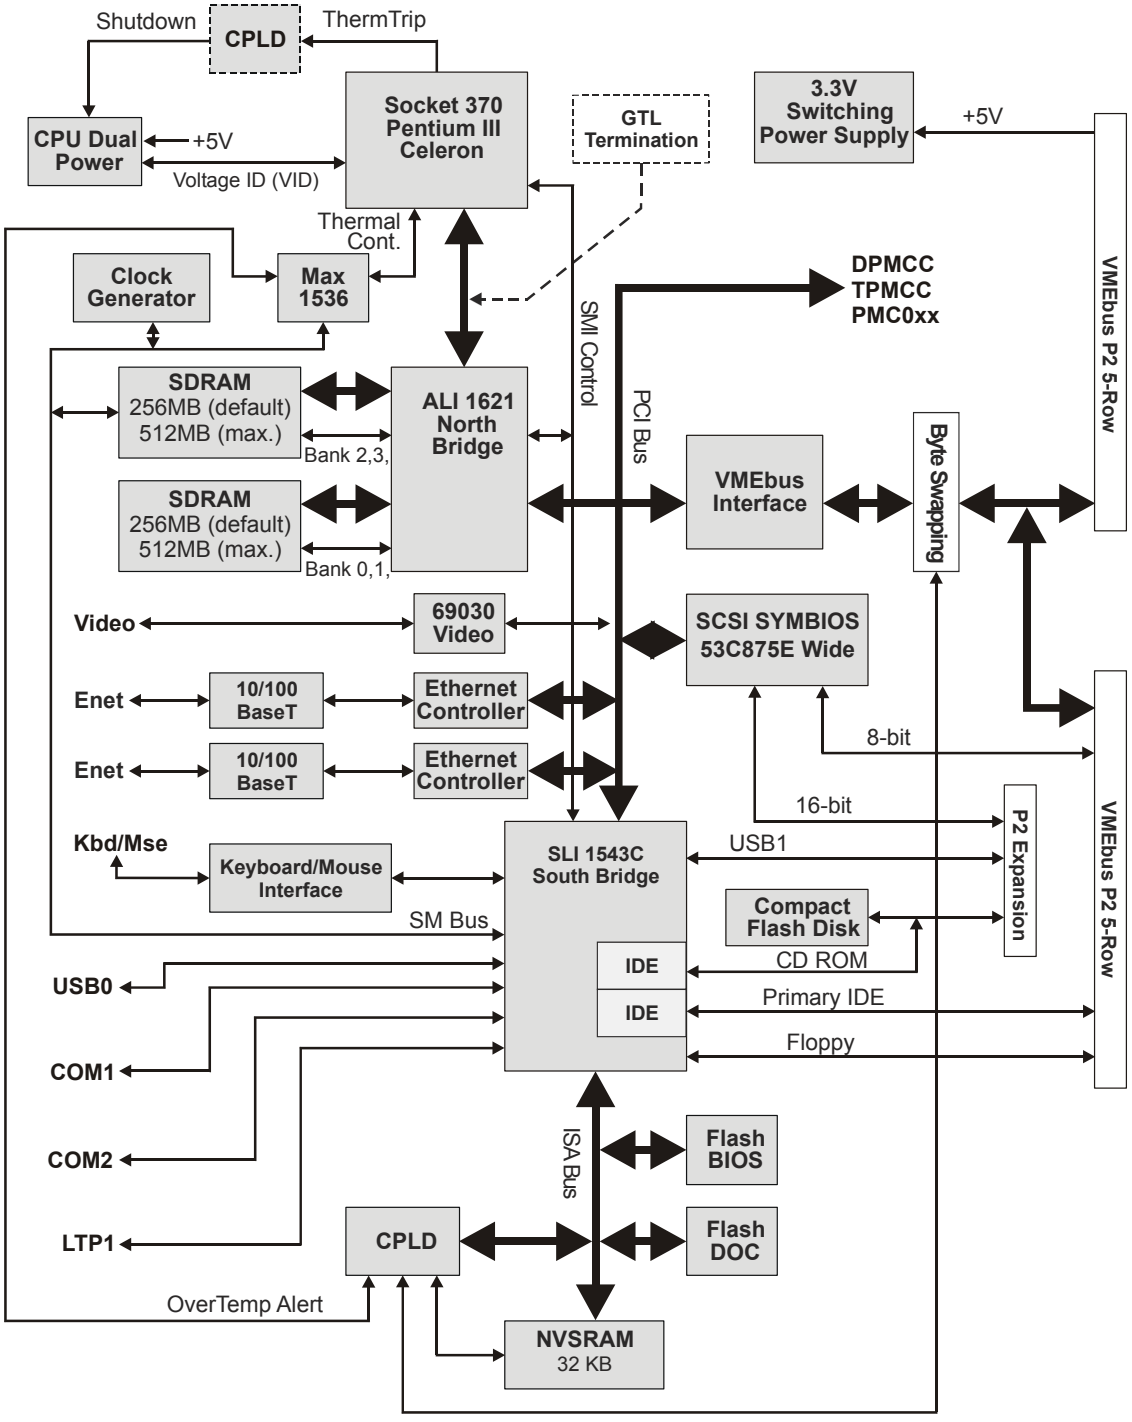

Corporate Headquarters
2400 Louisiana Blvd. NE, #5-600
Albuquerque, NM 87110-4316
Tel 505.875.0600 Fax 505.875.0400
Email info@sbs.com

European Headquarters
Memminger Str. 14
D-86159 Augsburg, Germany
Tel +49-821-5034-0 Fax +49-821-5034-119
Email aug-info@sbs.com

For additional contact information, please visit our web site *at* www.sbs.com

Specifications subject to change without notice. All trademarks and logos are property of their respective owners.
©2004 SBS Technologies, Inc. 20040510

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP