ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Scancon 2RHF1000-526005* at our website: *Click HERE*



Type SCH50F

- **Hollow Shaft Encoder - ø 50 mm**
- **Hollow Bore: ø 6 mm to ø 8 mm**
- **Resolution up to 12.500 ppr**
- **IP 65 (*IP 66 or IP 67 options*) Environmental Protection**
- ***Formerly named 2RHF***

Electrical Specifications

Code:	Incremental
Resolution:	1 to 12.500 ppr (pulses per revolution)
Supply Voltage:	4,5 Vdc min. to 30 Vdc max. (35 mA max. - no load) **
Output Voltage:	Low: 500 mV max. at 10 mA High: (V_{in} – 0,6) at -10 mA (V_{in} – 1,3) at -25 mA
Output Current:	30 mA max. load per output channel **
Frequency Response:	300 kHz max. **
Output Format:	Two channel (A, B) quadrature with Index (Z) and optional complementary (A-, B-, Z-) outputs
Phase Sense:	A leads B clockwise (CW) from the mounting end of the encoder
Index:	Gated with Channels A and B high
Accuracy:	+/- 0,8 arc-min.
Outputs:	ASIC Push pull and Differential OL7272 Push-pull and Differential Line Driver 26C31 Differential Line Driver 5V output (with 5V input)
Electrical Protection:	Reverse polarity and output short circuit protected
Noise Immunity:	Tested to EN61000-6-2 : 2005 (industrial environments) Electromagnetic compatibility (EMC) and EN 61000-6-3 : 2007 (residential, commercial, and light-industrial environments) for Electromagnetic compatibility (EMC)

**= It is recommended user not to combine max. Value for all 3 parameters

Mechanical Specifications

Material:	Housing: Aluminum Cap: Aluminum Hollow Shaft: Brass
Weight:	Encoder: ~ 120 gr (4,23 oz) Cable: 60 gr / meter (2,12 oz / meter)
Bearing Life:	> 1,9 x 10^{10} revolutions at rated load
Shaft Speed:	12.000 rpm (max.)
Starting Torque:	< 0,01 Nm (1,42 oz-in) at 25° C
Mass Moment of Inertia:	4,0 gcm² (5,66 x 10^{-5} oz-in-sec²)
Hollow Shaft Loads:	Axial: 20 N (4,5 lbs) max. Radial: 20 N (4,5 lbs) max.


Environmental Specifications

Operating Temp.:	-40° to +85° C
Storage Temp.:	-40° to +85° C
Shock:	100 G / 11 ms
Vibration:	10-2000 Hz / 10 G
Bump:	10 G / 16 ms (1000 x 3 axis)
Humidity:	98 % RH without condensation
IP Rating:	IP 65 / Nema 5 (approx.) IP 66 / Nema 6 (approx.) option IP 67 / Nema 6 (approx.) option

Connection Options

Cable:	8 leads (0,14 mm², 26 AWG) twisted pairs; shielded
Connector:	5-pin M12 8-pin M12 9-pin M23 12-pin M23

Output waveform

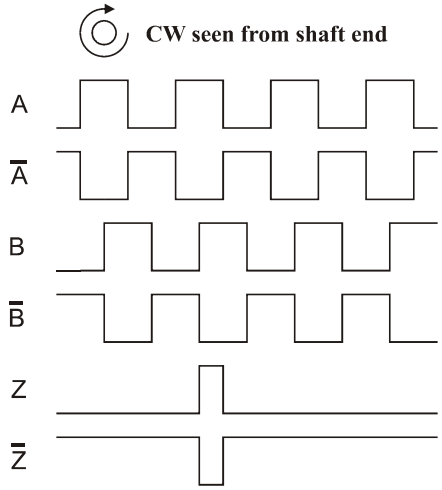

Channel tolerance	**180 e°**	**+/- 36 e°**
Phase difference tolerance	**90 e°**	**+/- 18 e°**
Z channel tolerance	**90 e°**	**+/- 18 e°**


Disk Resolutions (Pulses per revolution)


1	32	125	720	3072
2	36	150	800	3600
5	40	180	1000	4000
6	45	200	1024	4096
7	47	250	1131	5000
8	50	256	1200	8192
10	60	300	1250	9000*
12	64	360	1270	10000*
15	70	400	1500	12500*
16	75	455	2000	
18	80	500	2048	
20	90	512	2400	
25	100	600	2500	
30	120	635	3000	

Other options on request
Pulses per revolution,
min. 1 – max. 12.500

***** *Operating temperature: -20° C to 50° C***


Mechanical Dimensions

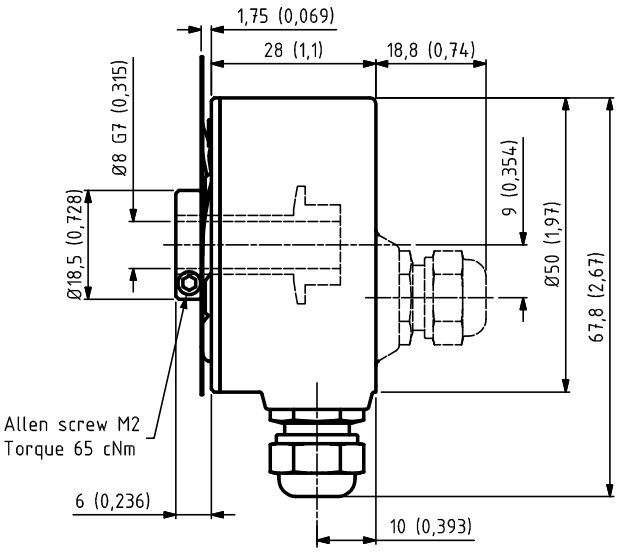

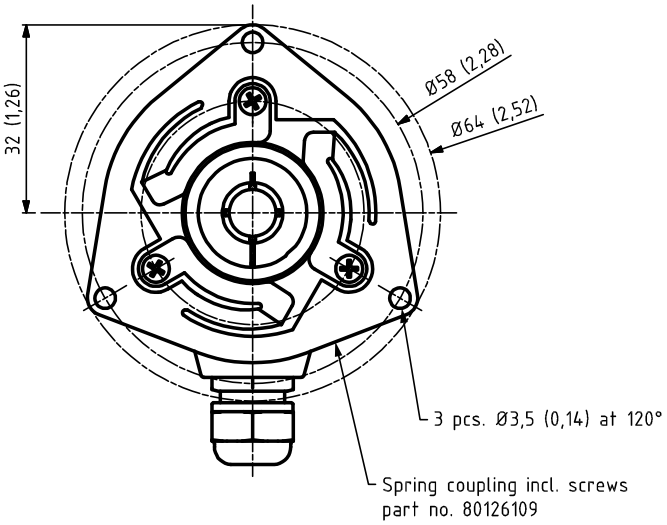


Standard Cable Gland
Side (S) or Back (B)

mm (inches)

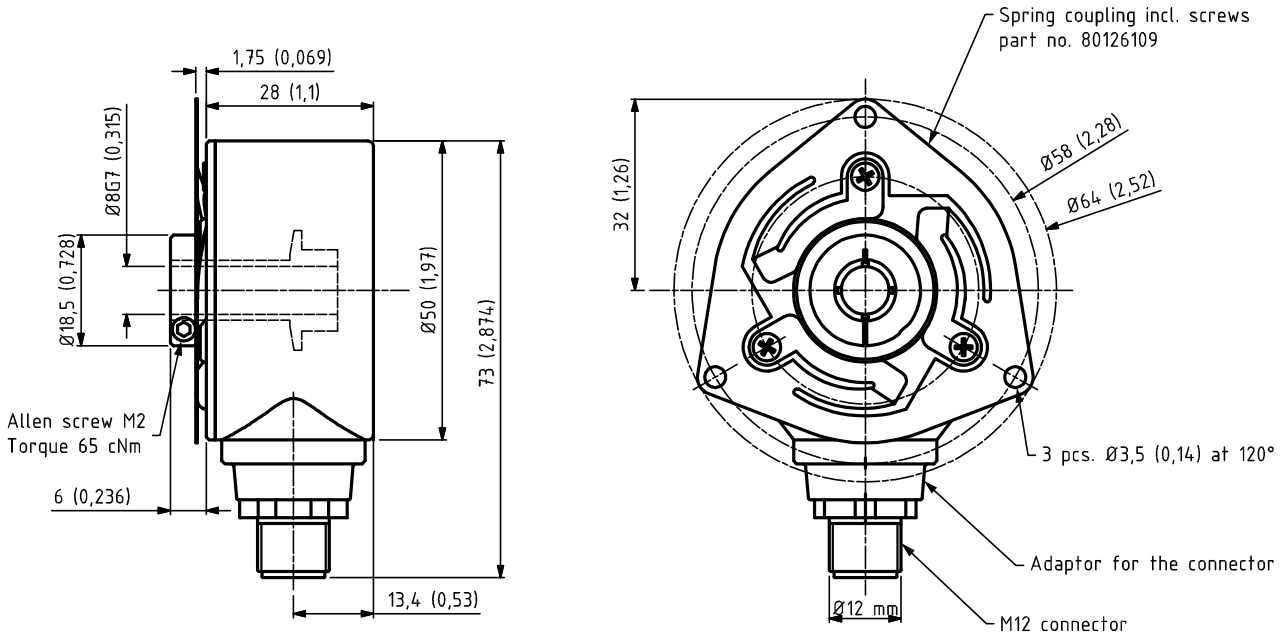



M12 Connector mm (inches)

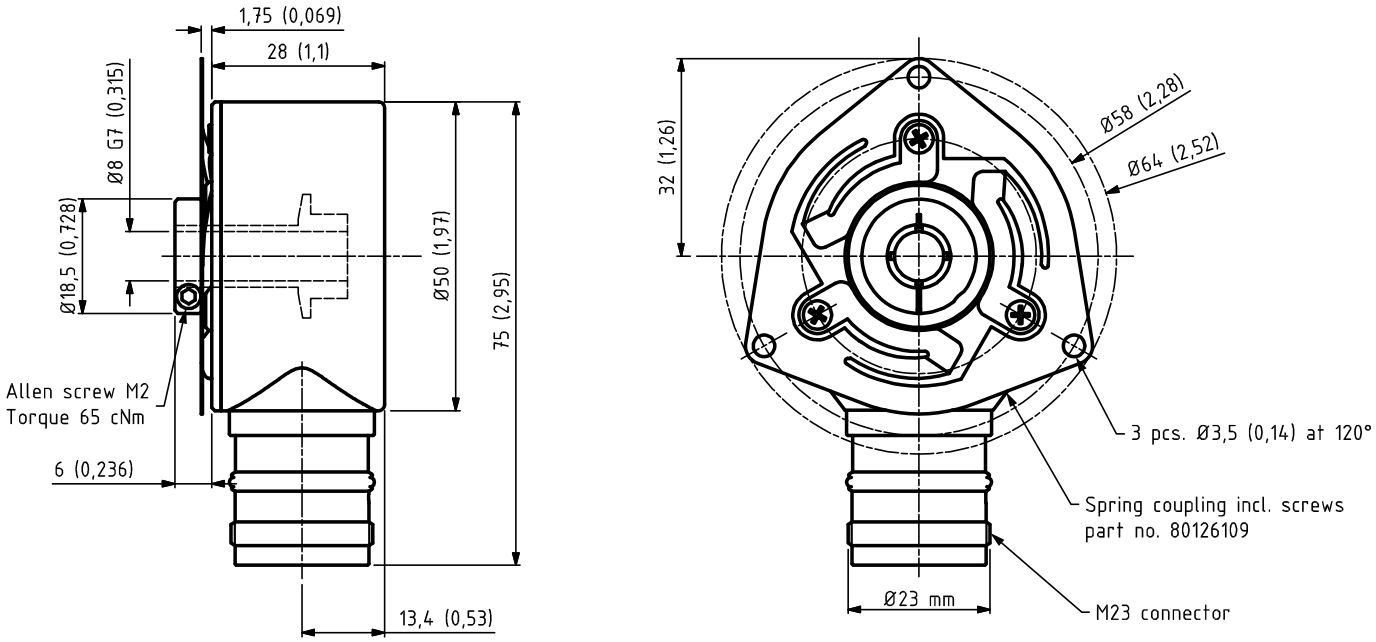



M23 Connector mm (inches)

Output Terminations









	Standard Cable	
	Standard Output	Differential Output
Channel	Wire Color	
A	Pink	Pink
A -	*Gray**	Gray
B	Green	Green
B -	*Yellow**	Yellow
Z	White	White
Z -	*Brown**	Brown
Vsup	Red	Red
GND	Blue	Blue

GND = Circuit Ground

** Internally connected as GND*

	M12 5 - pin	M12 8 - pin	M23 9 - pin	M23 9 - pin	M23 12 - pin	M23 12 - pin
	Standard Output	Differential Output	Standard Output	Differential Output	Standard Output	Differential Output
Pin	Channel	Channel	Channel	Channel	Channel	Channel
1	Vsup	A	A	A	GND	B -
2	B	Vsup	B	B	*NC*	*NC*
3	GND	A -	Z	Z	Z	Z
4	A	B	GND	A -	GND	Z -
5	Z	B -	GND	B -	A	A
6		Z	GND	Z -	GND	A -
7		GND	Vsup	Vsup	*NC*	*NC*
8		Z -	GND	GND	B	B
9			Shield	Shield	Shield	Shield
10					GND	GND
11					*NC*	*NC*
12					Vsup	Vsup

GND = Circuit Ground

Shield = Case Ground

Ordering Code

Example: SCH50F – 1024 – D – 08 – 26 – 65 – 01 – S – 00 – S1

SCH50F	-		-		-		-		-		-		-		-		-		-	

Pulses per Revolution

See table

Output

Standard	**N**
Standard – *Open Collector NPN*	**NON**
Standard – *Open Collector PNP*	**NOP**
Differential	**D**
26C31 Line Driver 5V / 5V only	**L**
OL 7272 Line Driver	**M**

Hollow Shaft Dia. / **Hollow Shaft Length**

IP65

6 mm x 26 mm	**6**	**-**	**26**
7 mm x 26 mm	**7**	**-**	**26**
8 mm x 26 mm	**8**	**-**	**26**
1/4 in x 26 mm	**1/4**	**-**	**26**

IP66/67

6 mm x 26 mm	**6**	**-**	**26**

IP Rating

IP 65	**65**
IP 66*	**66**
IP 67*	**67**

** Encoder total length is 38.2 mm for IP 66 and IP 67 options*

Cable Length

Standard is 1 meter	**01**
Specify length	**XX**
No Cable	**00**

Takeout

Cable	
Side (radial)	**S**
Back (axial)	**B**
Connector	
Side (radial)	**S**

Connector

M12	5-pin	**P5**
M12	8-pin	**P8**
M23	9-pin	**C9**
M23	12-pin	**C12**
No Connector		**00**

Spring Coupling

1 hole	*p/n 80146636*	**S1**
1 hole	*p/n 80141075*	**S2**
3 holes	*p/n 80126109*	**S3**
1 hole	*p/n 80140305*	**S4**
No spring coupling		**00**

See accessories for drawings

Other options on request:
Please contact Scancon A/S

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP