ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Schneider Electric / Invensys / Foxboro FBM201* at our website: ***Click HERE***

INVENSYS PROCESS SYSTEMS

FBM201/b/c/d Analog Input (0 to 20 mA, 0 to 100 mV, 0 to 5 V, 0 to 10 V dc) Interface Modules



The FBM201/b/c/d Analog Input Interface Modules provide eight dc current or dc voltage input channels.

FEATURES

Key features of the FBM201/b/c/d modules are:

- Eight channels for input of analog sensor signals:
  - 0 to 20 mA dc – FBM201
  - 0 to 100 mV dc – FBM201b
  - 0 to 5 V dc – FBM201c
  - 0 to 10 V dc – FBM201d
- Each analog input channel is galvanically isolated from other channels and ground
- Compact, rugged design suitable for enclosure in Class G3 (harsh) environments
- Execution of an analog input application program that provides conversion time and configurable options for integration time and Rate of Change Limits
- High accuracy achieved by sigma-delta data conversions for each channel
- Termination Assemblies (TAs) for locally or remotely connecting field wiring to the FBM201/b/c/d modules
- Termination Assemblies for per channel internally and/or externally loop powered transmitters.

FOXBORO

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

OVERVIEW

Each FBM201/b/c/d Analog Input Interface Module contains eight analog input channels, each channel accepting a 2-wire, dc input from an analog sensor such as a 4 to 20 mA or 0 to 5V transmitter, or a self-powered 20 mA source.

The modules perform the signal conversion required to interface the electrical input signals from the field sensors to the optionally redundant fieldbus.

COMPACT DESIGN

The FBM201/b/c/d modules have a compact design, with a rugged extruded aluminum exterior for physical protection of the circuits. Enclosures specially designed for mounting the FBMs provide various levels of environmental protection, up to harsh environments per ISA Standard S71.04.

HIGH ACCURACY

For high accuracy, the modules incorporate sigma-delta data conversion on a per-channel basis, which can provide a new analog input reading every 25 ms, and a configurable integration period to remove any process noise and power-line frequency noise.

Each time period, the FBM converts each analog input to a digital value, averages these values over the time period, and provides the averaged value to the controller.

EASY REMOVAL/REPLACEMENT

The modules can be removed/replaced without removing field device termination cabling, power or communications cabling.

VISUAL INDICATORS

Light-emitting diodes (LEDs) incorporated into the front of the modules provide visual status indications of Fieldbus Module (FBM) functions.

MODULAR BASEPLATE MOUNTING

The modules mount on a modular baseplate (see Figure 1) which accommodates up to four or eight FBMs. The modular baseplate is either DIN rail mounted or rack mounted, and includes signal connectors for redundant fieldbus, redundant independent dc power, and termination cables.

FIELDBUS COMMUNICATION

A Fieldbus Communication Module or a Control Processor interfaces the redundant 2 Mbps module Fieldbus used by the FBMs. The FBM201/b/c/d modules accept communication from either path (A or B) of the redundant 2 Mbps fieldbus – should one path fail or be switched at the system level, the module continues communication over the active path.

TERMINATION ASSEMBLIES

Field I/O signals connect to the FBM subsystem via DIN rail mounted TAs (see Figure 1). The TAs used with the FBM201/b/c/d modules are described in “TERMINATION ASSEMBLIES AND CABLES” on page 8.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

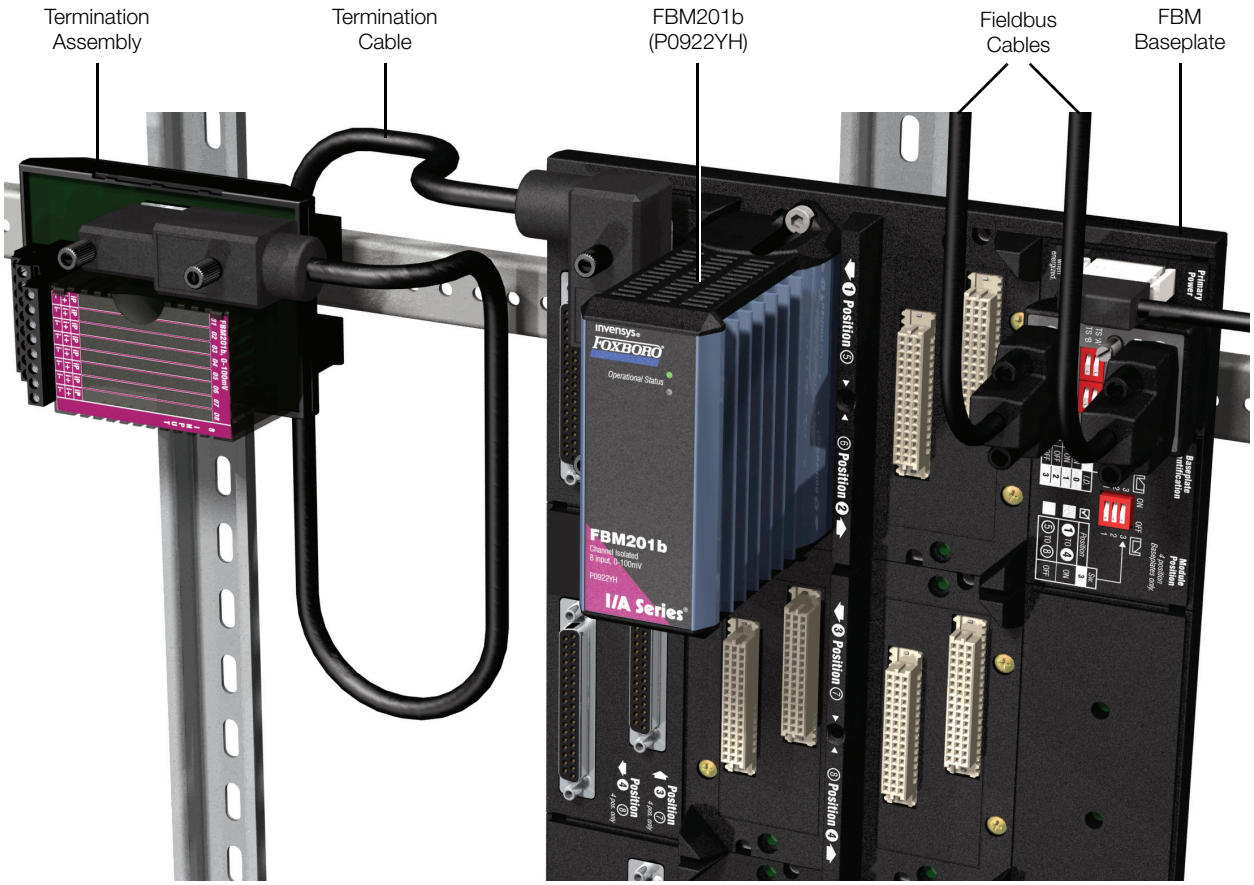


Figure 1. FBM201 Subsystem – Typical

FUNCTIONAL SPECIFICATIONS

Process I/O Communications
Communicates with its associated FCM or FCP via the redundant 2 Mbps module Fieldbus.

Input Channels
8 isolated and independent channels

Input Range (each channel)
FBM201: 0 to 20 mA dc
FBM201b: 0 to 100 mV dc
FBM201c: 0 to 5 V dc
FBM201d: 0 to 10 V dc

Input Channels (8)

ANALOG ACCURACY (INCLUDES LINEARITY)
±0.03% of span
Accuracy temperature coefficient: ±50 ppm/ºC

FIELD DEVICE CABLING DISTANCE
Maximum distance of the field device from the FBM is a function of compliance voltage (22.8 V dc), wire resistance, and voltage drop at the field device.

INPUT CHANNEL IMPEDANCE
FBM201: 61.5 Ω nominal
FBM201b: 10 MΩ
FBM201c: 10 MΩ
FBM201d: 10 MΩ

INPUT SIGNAL A/D CONVERSION
Each channel performs A/D signal conversion using an independent Sigma-Delta converter.

INTEGRATION PERIOD
Software configurable.

COMMON MODE REJECTION
>100 db at 50 or 60 Hz

NORMAL MODE REJECTION
>95 db at 50 or 60 Hz

LOOP POWER SUPPLY PROTECTION
Each channel is channel-to-channel galvanically isolated, current limited, and voltage regulated. All analog inputs are limited by their design to less than 30 mA. If the current limit circuit shorted out, the current is limited to about 100mA.

Input Channel Isolation
Each channel is galvanically isolated from all other channels and earth (ground). The module/TA withstands, without damage, a potential of 600 V ac applied for one minute between any channel and ground, or between a given channel and any other channel.

CAUTION

This does not imply that these channels are intended for permanent connection to voltages of these levels. Exceeding the limits for input voltages, as stated elsewhere in this specification, violates electrical safety codes and may expose users to electric shock.

Power Requirements

INPUT VOLTAGE RANGE (REDUNDANT)
24 V dc +5%, -10%

CONSUMPTION
7 W (maximum)

HEAT DISSIPATION
3 W (maximum)

Calibration Requirements
Calibration of the module and termination assembly is not required.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

FUNCTIONAL SPECIFICATIONS (CONTINUED)

Regulatory Compliance

ELECTROMAGNETIC COMPATIBILITY (EMC)

European EMC Directive 89/336/EEC
Meets: EN 50081-2 Emission standard
EN 50082-2 Immunity standard
EN 61326 Annex A (Industrial Levels)

CISPR 11, Industrial Scientific and Medical (ISM) Radio-frequency Equipment - Electromagnetic Disturbance Characteristics - Limits and Methods of Measurement
Meets Class A Limits

IEC 61000-4-2 ESD Immunity
Contact 4 kV, air 8 kV

IEC 61000-4-3 Radiated Field Immunity
10 V/m at 80 to 1000 MHz

IEC 61000-4-4 Electrical Fast Transient/Burst Immunity
2 kV on I/O, dc power and communication lines

IEC 61000-4-5 Surge Immunity
2kV on ac and dc power lines; 1kV on I/O and communications lines

ELECTROMAGNETIC COMPATIBILITY (CONT.)

IEC 61000-4-6 Immunity to Conducted Disturbances Induced by Radio frequency Fields
10 V (rms) at 150 kHz to 80 MHz on I/O, dc power and communication lines

IEC 61000-4-8 Power Frequency Magnetic Field Immunity
30 A/m at 50 and 60 Hz

PRODUCT SAFETY

Underwriters Laboratories (UL) for U.S. and Canada
UL/UL-C listed as suitable for use in UL/UL-C listed Class I, Groups A-D; Division 2; temperature code T4 enclosure based systems. These modules are also UL and UL-C listed as associated apparatus for supplying non-incendive communication circuits for Class I, Groups A-D hazardous locations when connected to specified I/A Series® processor modules as described in the *I/A Series DIN Rail Mounted Subsystem User's Guide* (B0400FA). Communications circuits also meet the requirements for Class 2 as defined in Article 725 of the National Electrical Code (NFPA No.70) and Section 16 of the Canadian Electrical Code (CSA C22.1). Conditions for use are as specified in the *I/A Series DIN Rail Mounted Subsystem User's Guide* (B0400FA).

European Low Voltage Directive 73/23/EEC and Explosive Atmospheres (ATEX) directive 94/9/EC
CENELEC (DEMKO) certified as EEx nA [nL] IIC T4 for use in CENELEC certified Zone 2 enclosure certified as associated apparatus for supplying non-incendive field circuits for Zone 2, Group IIC, potentially explosive atmospheres when connected to specified I/A Series processor modules as described in the I/A Series DIN Rail Mounted Subsystem User's Guide (B0400FA). Also, see Table 1 on page 9.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

ENVIRONMENTAL SPECIFICATIONS(1)

Operating

TEMPERATURE

FBM201/b/c/d

-20 to +70°C (-4 to +158°F)

Termination Assembly

PVC

-20 to +50°C (-4 to +122°F)

PA

-20 to +70°C (-4 to +158°F)

RELATIVE HUMIDITY

5 to 95% (noncondensing)

ALTITUDE

-300 to +3,000 m (-1,000 to +10,000 ft)

Storage

TEMPERATURE

-40 to +70°C (-40 to +158°F)

RELATIVE HUMIDITY

5 to 95% (noncondensing).

ALTITUDE

-300 to +12,000 m (-1,000 to +40,000 ft)

Contamination

Suitable for use in Class G3 (Harsh) environments as defined in ISA Standard S71.04, based on exposure testing according to EIA Standard 364-65, Class III.

Vibration

7.5 m/S^2 (0.75 g) from 5 to 500 Hz

(1) The environmental limits of this module may be enhanced by the type of enclosure containing the module. Refer to the applicable Product Specification Sheet (PSS) which describes the specific type of enclosure that is to be used.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

PHYSICAL SPECIFICATIONS (CONTINUED)

Mounting

FBM201/b/c/d
The modules mount on a modular baseplate. The baseplate can be mounted on a DIN rail (horizontally or vertically), or horizontally on a 19-inch rack using a mounting kit. Refer to PSS 21H-2W6 B4 for details.

TERMINATION ASSEMBLY
The TA mounts on a DIN rail and accommodates multiple DIN rail styles including 32 mm (1.26 in) and 35 mm 1.38 in).

Mass

FBM201/b/c/d
284 g (10 oz) approximate

TERMINATION ASSEMBLY
Compression
181 g (0.40 lb) approximate
Ring Lug
249 g (0.55 lb) approximate

Dimensions – FBM201/b/c/d

HEIGHT
102 mm (4 in)
114 mm (4.5 in) with mounting lugs

WIDTH
45 mm (1.75 in)

DEPTH
104 mm (4.11 in)

Dimensions – Termination Assembly

See page 10

Part Numbers

FBM201
P0914SQ

FBM201b
P0922YH

FBM201c
P0922YJ

FBM201d
P0922YK

TERMINATION ASSEMBLIES
See “FUNCTIONAL SPECIFICATIONS – TERMINATION ASSEMBLIES” on page 8

Termination Cables

CABLE LENGTHS
Up to 30 m (98 ft)

CABLE MATERIALS
Polyurethane or Hypalon/XLP

TERMINATION CABLE TYPE
Type 1 – See Table 2 on page 9

CABLE CONNECTION
37-pin male D-subminiature

Construction – Termination Assembly

MATERIAL
Polyvinyl Chloride (PVC), compression
Polyamide (PA), compression
PVC, ring lug
PA, ring lug

FAMILY GROUP COLOR
Raspberry red - analog

TERMINAL BLOCKS
Inputs
3 tiers, 8 positions

Field Termination Connections

COMPRESSION-TYPE ACCEPTED WIRING SIZES
Solid/Stranded/AWG
0.2 to 4 mm^2/0.2 to 2.5 mm^2/24 to 12 AWG
Stranded with Ferrules
0.2 to 2.5 mm^2 with or without plastic collar

RING-LUG TYPE ACCEPTED WIRING SIZES
#6 size connectors (0.375 in (9.5 mm))
0.5 to 4 mm^2/22 AWG to 12 AWG

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

TERMINATION ASSEMBLIES AND CABLES

Field input signals connect to the FBM subsystem via DIN rail mounted Termination Assemblies, which are **electrically passive (see Figure 1).** TAs for the FBM201/b/c/d modules are available in the following forms:

- Compression screw type using Polyamide (PA) material
- Compression screw type using Polyvinyl Chloride (PVC) material
- Ring lug type using Polyamide (PA) material
- Ring lug type using Polyvinyl Chloride (PVC) material

See "FUNCTIONAL SPECIFICATIONS – TERMINATION ASSEMBLIES" on page 8 for a list of TAs used with the FBM201/b/c/d modules.

A removable termination cable connects the DIN rail mounted TA to the FBM via a field connector on the baseplate in which the FBM is installed. Termination cables are available in the following materials:

- Polyurethane
- Hypalon XLP.

Termination cables are available in a variety of lengths, up to 30 meters (98 feet), allowing the Termination Assembly to be mounted in either the enclosure or in an adjacent enclosure. See Table 2 for a list of termination cables used with the TAs for the FBM201/b/c/d modules.

FUNCTIONAL SPECIFICATIONS – TERMINATION ASSEMBLIES

FBM Type	Input Signal	TA Part Number[a]		Termination Type[b]	TA Cable Type[c]	TA Certification Type[d]
		PVC	PA			
FBM201	8 channels, 0 to 20 mA dc, passive feedthrough with FBM201 channel isolation	P0916AA P0916AB	P0916XG P0917JK	C RL	1	1, 2
FBM201b	8 channels, 0 to 100 mV dc, passive feedthrough with FBM201b channel isolation		P0922ZM	C	1	1, 2
FBM201c	8 channels, 0 to 5 V dc, passive feedthrough with FBM201c channel isolation		P0922ZN	C	1	1, 2
FBM201d	8 channels, 0 to 10 V dc, passive feedthrough with FBM201d channel isolation		P0922ZP P0926SQ	C RL	1	1, 2

(a) PVC is polyvinyl chloride rated from -20 to +50°C (-4 to +122°F); PA is polyamide rated from -20 to +70°C (-4 to +158°F).
(b) C = TA with compression terminals; RL = TA with ring lug terminals.
(c) See Table 2 for cable part numbers and specifications.
(d) See Table 1 for Termination Assembly certification definitions.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 1. Certification for Termination Assemblies

Type	Certification[a]
Type 1	TAs are UL/UL-C listed as suitable for use in Class I; Groups A-D; Division 2 temperature code T4 hazardous locations. They are CENELEC (DEMKO) certified EEx nA [nL] IIC T4 for use in Zone 2 potentially explosive atmospheres.
Type 2	TAs are UL/UL-C listed as associated apparatus for supplying non-incendive field circuits Class I; Groups A-D; Division 2 hazardous locations when connected to specified DIN rail mounted FBMs and field circuits meeting entity parameter constraints specified in *DIN Rail Mounted Subsystem User's Guide* (B0400FA). They are also CENELEC (DEMKO) certified as associated apparatus for supplying field circuits for Group IIC, Zone 2 potentially explosive atmospheres. Field circuits are also Class 2 limited energy (60 V dc, 30 V ac, 100 VA or less) if customer-supplied equipment meets Class 2 limits.

(a) All TAs are UL/UL-C listed to comply with applicable ordinary location safety standards for fire and shock hazards. Hazardous location types comply with ATEX directive for II 3 G use. They also comply with the requirements of the European Low Voltage Directive. All listings/certifications require installation and use within the constraints specified in DIN Rail Mounted Subsystem User's Guide (B0400FA) and the conditions stated in UL and DEMKO reports.

Table 2. Cables Types and Part Numbers

Cable Length m (ft)	Type 1 P/PVC[a]	Type 1 H/XLPE[b]
0.5 (1.6)	P0916DA	P0916VA
1.0 (3.2)	P0916DB	P0916VB
2.0 (6.6)	P0931RM	P0931RR
3.0 (9.8)	P0916DC	P0916VC
5.0 (16.4)	P0916DD	P0916VD
10.0 (32.8)	P0916DE	P0916VE
15.0 (49.2)	P0916DF	P0916VF
20.0 (65.6)	P0916DG	P0916VG
25.0 (82.0)	P0916DH	P0916VH
30.0 (98.4)	P0916DJ	P0916VJ


(a) P/PVC is polyurethane outer jacket and semi-rigid PVC primary conductor insulation.
(b) H/XLPE is Hypalon outer jacket and XLPE (cross-linked polyethylene) primary conductor insulation.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


DIMENSIONS – NOMINAL

[mm]
in

Compression TA: P0916AA, P0916XG, PO922ZM, P0922ZN, P0922ZP

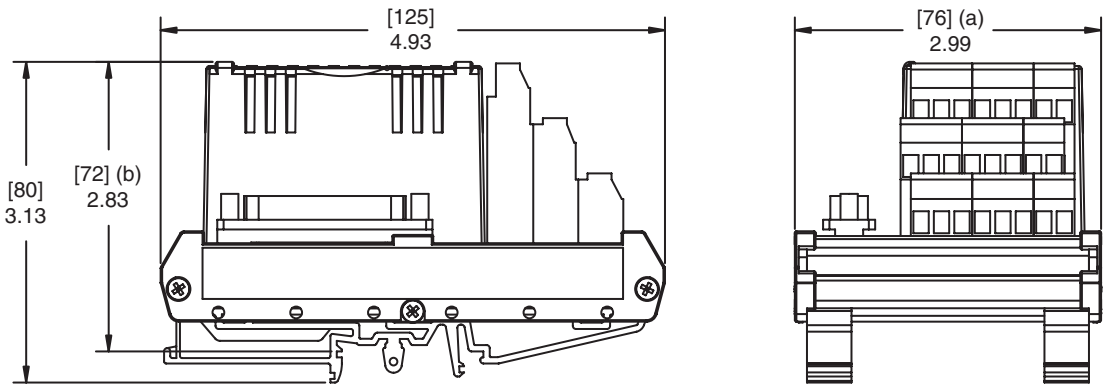

Ring Lug TA: P0916AB, P0917JK, P0926SQ

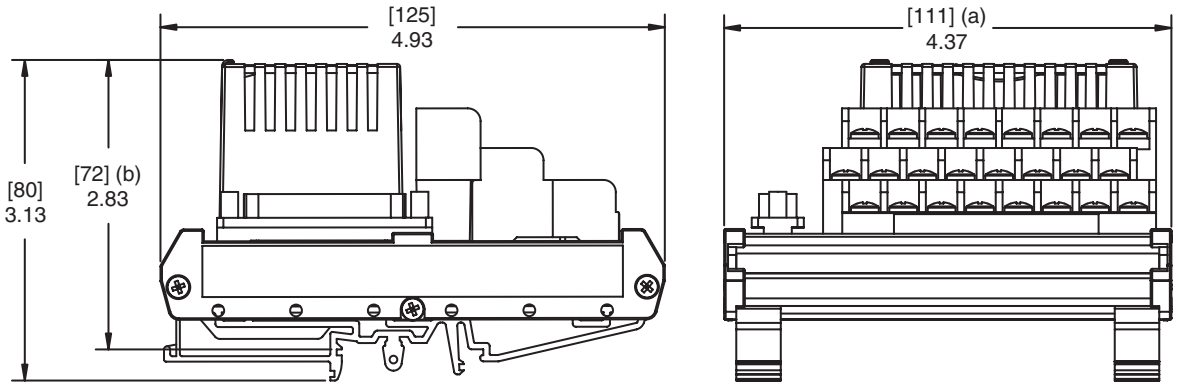

(a) Overall width – for determining DIN rail loading.
(b) Height above DIN rail (add to DIN rail height for total).

RELATED PRODUCT SPECIFICATION SHEETS (PSS)

PSS Number	Description
PSS 21H-2W1 B3	DIN Rail Mounted FBM Subsystem Overview
PSS 21H-2W2 B3	DIN Rail Mounted FBM Equipment, Agency Certification

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

IPS Corporate Headquarters
5601 Granite Parkway Suite 1000
Plano, TX 75024
United States of America
www.ips.invensys.com

Foxboro Global Client Support
Inside U.S.: 1-866-746-6477
Outside U.S.: 1-508-549-2424 or contact your local Foxboro representative.
Facsimile: 1-508-549-4999

Invensys, Foxboro, and I/A Series are trademarks of Invensys plc, its subsidiaries, and affiliates.
All other brand names may be trademarks of their respective owners.

Copyright 1999-2009 Invensys Systems, Inc.
All rights reserved

MB 21A Printed in U.S.A. 0109

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP