

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

Product data sheet
Characteristics

XEAB15361
booted pushbutton - for control circuit - analog output - 0..-15 V DC

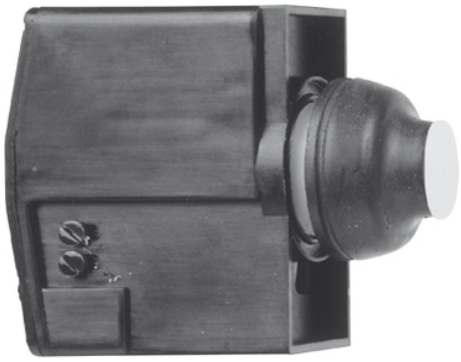

Main

Range of Product	Harmony XAC
Product or Component Type	Booted push-button
Control station name	XACM XACB
Electrical circuit type	Control circuit
[Us] rated supply voltage	0...-15 V
Control circuit type	DC
Operating travel	0.43 in (11 mm)

Complementary

Contacts type and composition	1 NC + 1 NO at start of travel 1 NO at end of travel
Current Consumption	< 15 mA
Connections - terminals	Terminal connectors, 1 x 2.5 mm² Terminal connectors, 2 x 1.5 mm²
Operating force	4 N at start of travel 9 N at end of travel
Mechanical durability	1000000 cycles
[Ithe] conventional enclosed thermal current	6 A
[Ui] rated insulation voltage	250 V 3)IEC 60947-1
Rated power in VA	30 VA AC-15 1000000 cycles 110 V 50/60 Hz IEC 60947-5-1 appendix C 30 VA AC-15 1000000 cycles 230 V 50/60 Hz IEC 60947-5-1 appendix C 30 VA AC-15 1000000 cycles 48 V 50/60 Hz IEC 60947-5-1 appendix C
Rated power in W	DC-13 12 W 110 V inductive IEC 60947-5-1 appendix C 1000000 cycles DC-13 48 W 48 V inductive IEC 60947-5-1 appendix C 1000000 cycles
Net Weight	0.14 lb(US) (0.065 kg)

Environment

Standards	EN 60947-5-1 IEC 60947-5-1
Ambient Air Temperature for Operation	-13…158 °F (-25…70 °C)
Ambient Air Temperature for Storage	-40…158 °F (-40…70 °C)
IP degree of protection	IP65 conforming to IEC 60529

Ordering and shipping details

Category	22473-PUSHBUTTON, PENDANTS
Discount Schedule	CS2
GTIN	3389110655100
Nbr. of units in pkg.	1
Package weight(Lbs)	3.03 oz (85.9 g)
Returnability	No
Country of origin	FR

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein.
This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications.
It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof.
Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	1.57 in (4 cm)
Package 1 width	2.44 in (6.2 cm)
Package 1 Length	2.56 in (6.5 cm)
Unit Type of Package 2	S01
Number of Units in Package 2	20
Package 2 Weight	4.30 lb(US) (1.95 kg)
Package 2 Height	5.91 in (15 cm)
Package 2 width	5.91 in (15 cm)
Package 2 Length	15.75 in (40 cm)


Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACh Regulation	REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Contractual warranty


Warranty	18 months

Dimensions




E Support panel thickness: 1 mm to 3.5 mm / 0.04 in. to 0.14 in.

Panel Cut-Out



(1) Minimum fixing centres between 2 operators.


Output Connection Diagram



Analogue Circuit Characteristics

Analogue Signal Output Curves

With 15 V supply voltage

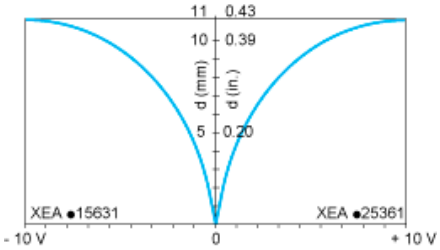

d Distance travelled by the pushbutton operator

Power supply voltage = 15 V, output voltage = 10 V (if supply voltage < 15 V, output voltage < 10 V)

Contact State versus Distance Travelled by the Pushbutton Operator



Contact Closed

Contact Open

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP