ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Sensoray 7409TC* at our website: *Click HERE*


APPLICATION NOTES and technical WHITEPAPERS

Custom Requirements?
TALK TO OUR DESIGN TEAM
GET STARTED

watch now! SENSORAY company overview

Breakout Board, 40-pin, with CJ Sensor and Prototype Area | Model 7409TC/7409TDIN

- Connects 8 sensors to any Sensoray smart sensor interface board
- Supports 4-wire sensor connections
- Screw terminals for easy field wiring
- Eight removable terminal blocks
- DIN rail mountable
- Cold-junction transducer for thermocouples
- Prototyping area for custom circuitry

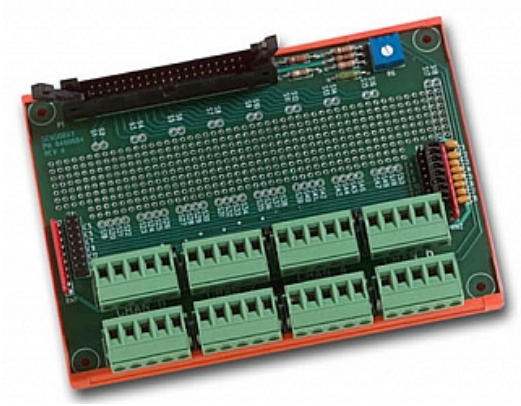

Description
Documentation
Pricing & Ordering

Description

Sensoray's model 7409TC and 7409TDIN termination boards make it quick and easy to connect sensors to any of our Smart A/D sensor interfaces. Both models have removable screw terminal blocks, a temperature sensor, a generous prototyping area, and special signal conditioning area circuitry for thermocouples. The 7409TC is designed for panel mounting, whereas the 7409TDIN can be mounted in seconds by snapping it onto a DIN rail. Both models employ a 40-pin header to connect to the sensor interface board.

Removable Connections

Each of eight sensor channels is supported by a removable terminal block that has five screw terminals: two for voltage input, two for sensor excitation, and one for shield. Field wires need only be stripped and secured to the terminal block.

Thermocouple Reference

An integral temperature sensor provides a reference signal for thermocouples. This sensor uses a dedicated input channel so that all eight sensor interface channels remain available for external sensors. The thermocouple reference sensor is factory calibrated so that termination boards may be painlessly interchanged.


Prototype Area


A matrix of plated-through holes on 0.1-inch centers is available for custom circuitry such as attenuators, filters and isolation amplifiers. All sensor signals, as well as power, are conveniently brought to this area.

Signal Conditioner

A thermocouple signal conditioner, consisting of a low-pass filter and open-sensor-detection circuit, may be connected to any channel by installing option shunts.

Model 7409TC dimensional diagram

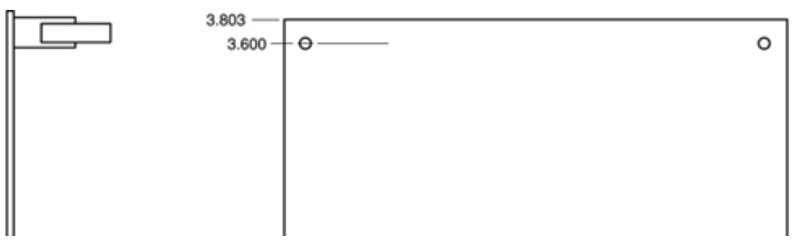

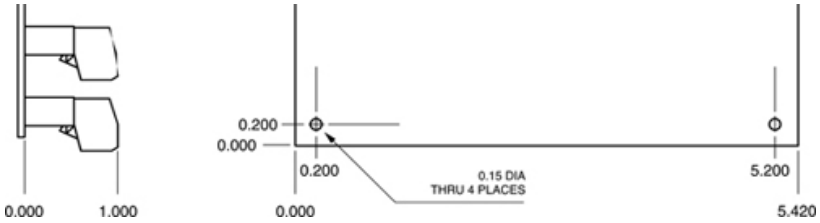

SENSORAY | 7313 SW Tech Center Dr. | Tigard, OR 97223 | 503.684.8005 | Email Us

CONTACT SENSORAY

Employment | Privacy Policy | Press Releases | Copyright © 1982-2017 Sensoray ~ All Rights Reserved

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP