

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Keysight / Signametrics SMX2040* at our website: ***Click HERE***

SMX2040, SM2040 Series


6-½ Digit Digital Multimeter

Features

- Flexible, full-featured auto-ranging DMM
- 6-½ digit resolution
- Up to 1,000 readings/second
- DC & AC Volts & Current, 2-Wire, 4-Wire Ohms
- True AC RMS measurements, 10 Hz to 100 kHz
- Measure 1 µV to 330 V
- Frequency Counter 1 Hz to 300 kHz
- Capacitance, Inductance, Leakage, 6-Wire Guarded Resistance, Temperature measurements (SMX2042/2044, SM2042/2044)
- 330 V Isolation Barrier
- Self-Calibrating
- Plug-and-Play, Windows® 95/98/Me/NT/2000/XP/2003
- Language support - Visual Basic, MSVisual C++, Delphi
- Package support - LabVIEW™, LabWindows/CVI, TestPoint, ATEasy, Matlab, VBA & more.

Operating Systems
- Windows 98/NT/2000/XP/2003

Recommended Software
- VB/VC++/BCB/Delphi
- DAQBench

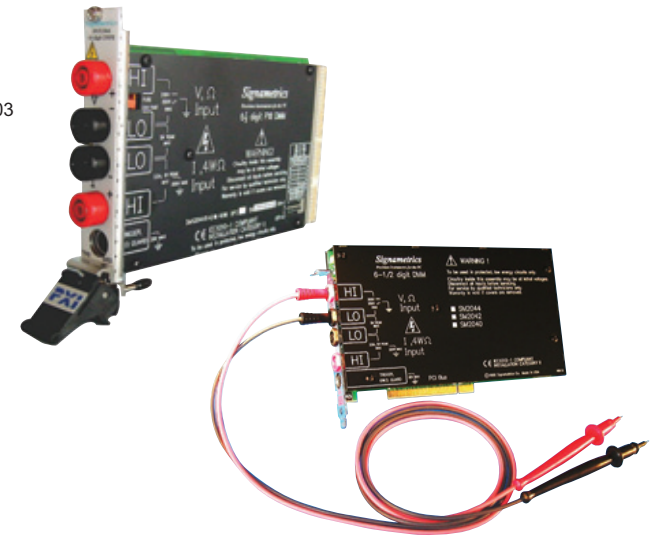

Introduction

The SMX2040 and SM2040 series are 6-½ digit Digital Multimeter which provide a combination of resolution, accuracy, and speed that surpasses rivals. A 6-½ digit display, 0.0045% basic DCV accuracy and 1,000 readings per second assure accurate, fast, and repeatable measurements. The SMX2040 and SM2040 series designed as a universal, multi-function DMM. Measurements commonly associated with "high-end" system DMMs are standard features with the SMX2040 and SM2040 family, such as 2-wire, 4-wire and 6-wire guarded resistance measurements, inductance and capacitance, leakage and temperature, RMS and peak-to-peak, frequency and timing, sourcing of voltage and current, and much more. The SMX2044 and SM2044 are best suited for applications demanding precision sources with simultaneous measurements such as in Parametric testing, while the SMX2040 and SM2040 fit the bill where basic DMM functions are required, such as telecommunication, aerospace, automotive and education fields.

Specifications

Specifications subject to change without notice.
For the most current and complete specifications, please refer to the user manual.

DC Functions

DC Voltage

Accuracy ± (% of reading + Volts) [1]

Range	Full scale 6-½ Digits	Resolution	Input Resistance	24 hours 23˚C±1˚C	90 Days 23˚C±5˚C	One Year 23˚C±5˚C
330 mV	330.0000 mV	100 nV	>10 GΩ	0.003 + 4.5 µV	0.004 + 5.5 µV	0.007 + 8 µV
3.3 V	3.300000 V	1 µV	>10 GΩ	0.002 + 10 µV	0.0025 + 12 µV	0.0045 + 17 µV
33 V	33.00000 V	10 µV	10 MΩ	0.003 + 250 µV	0.004 + 280 µV	0.007 + 330 µV
330 V	330.0000 V	100 µV	10 MΩ	0.004 + 1 mV	0.005 + 1.2 mV	0.008 + 1.5 mV

[1] With reading rate set to 10 readings per second (rps) or slower, and within one hour of DCV zero, using Relative control.

DC Current

Accuracy ± (% of reading + Amps) [1]

Range	Full scale 5-½ Digits	Resolution	Max Burden Voltage	24 hours 23˚C±1˚C	90 Days 23˚C±5˚C	One Year 23˚C±5˚C
3.3 mA	3.30000 mA	10 nA	350 mV	0.052 + 200 nA	0.07 + 350 nA	0.1 + 400 nA
33 mA	33.0000 mA	100 nA	350 mV	0.04 + 1 µA	0.06 + 2 µA	0.1 + 3 µA
330 mA	330.000 mA	1 µA	350 mV	0.05 + 30 µA	0.055 + 40 µA	0.075 + 60 µA
2.5 A	2.50000 A	10 µA	350 mV	0.55 + 50 µA	0.6 + 200 µA	0.65 + 350 µA

[1] With reading rate set to 10 rps or slower, and within one hour of DCI zero, using Relative control.

2-Wire and 4-wire Resistance

Accuracy ± (% of reading + Ω) [1]

Range [3]	Full scale 6-½ Digits	Resolution	Source Current	24 hours 23˚C±1˚C	90 Days 23˚C±5˚C	One Year 23˚C±5˚C
33 Ω[2]	33.00000 Ω	10 µΩ	10 mA	0.0038 + 1 mΩ	0.005 + 1.5 mΩ	0.008+ 2 mΩ
330 Ω	330.0000 Ω	100 µΩ	1 mA	0.0037 + 4.5 mΩ	0.0046 + 5 mΩ	0.007 + 6 mΩ
3.3 kΩ	3.300000 kΩ	1 mΩ	1 mA	0.0023 + 28 mΩ	0.004 + 32 mΩ	0.005 + 33 mΩ
33 kΩ	33.00000 kΩ	10 mΩ	100 µA	0.0025 + 300 mΩ	0.0033 + 330 mΩ	0.006 + 350 mΩ
330 kΩ	330.0000 kΩ	100 mΩ	10 µA	0.0055 + 3.2 Ω	0.007 + 4 Ω	0.009 + 5 Ω
3.3 MΩ	3.300000 MΩ	1 Ω	1 µA	0.018 + 40 Ω	0.03 + 50 Ω	0.04 + 70 Ω
33 MΩ	33.0000 MΩ	100 Ω	100 nA	0.12 + 400 Ω	0.13 + 500 Ω	0.2 + 600 Ω
330 MΩ[2]	330.00 MΩ	1 kΩ	10 nA	1 + 50 kΩ	1.4 + 60 kΩ	2.0 + 80 kΩ

[1] With reading rate set to 2 rps or slower, and within one hour of Ohms zero, using relative control.
[2] 33 Ω and 330 MΩ ranges are only available with the SMX2042, SMX2044, SM2042 and SM2044.
[3] 4-wire ohms is available up to the 330 kΩ range.

Diode Characterization

Maximum Diode Voltage Compliance	Available DC current Uncertainty	Typical Current Value	Typical Voltage Value Uncertainty
4 V	100 nA, 1 µA, 10 µA, 100 µA and 1 mA (SMX2044 and SM2044: 10 mA constant current plus variable current from 10 nA to 12.5 mA)	1 %	0.02 %

AC Functions

AC Voltage (true RMS)

One Year Accuracy ± (% of reading + Volts), 23˚C±5˚C

Range	Full scale 6-½ Digits	Resolution	10 Hz - 20 Hz	20 Hz - 47 Hz	47 Hz - 10 kHz	10 kHz - 50 kHz	50 kHz-100 kHz
330 mV	330.0000 mV	100 nV	3.2 + 430 µV	0.95 + 200 µV	0.15 + 120 µV	0.63 + 230 µV	5.6 + 400 µV
3.3 V	3.300000 V	1 µV	3.2 + 2.5 mV	1.0 + 1.7 mV	0.065 + 1.2 mV	0.70 + 1.5 mV	5.3 + 2 mV
33 V	33.00000 V	10 µV	3.3 + 20 mV	1.0 + 16 mV	0.073 + 13 mV	0.35 + 25 mV	2.4 + 40 mV
250 V	250.0000 V	100 µV	3.3 + 200 mV	1.0 + 150 mV	0.06 + 130 mV	0.45 + 200 mV	3.2 + 300 mV

AC Current (true RMS)

One Year Accuracy ± (% of reading + Volts), 23˚C±5˚C

Range	Full scale 6-½ Digits	Resolution	Max Burden Voltage (RMS)	10Hz - 20Hz[1]	20Hz - 47Hz[1]	47Hz - 1kHz[1]	1kHz - 10kHz[1]
3.3 mA	3.300000 mA	1 nA	350 mV	2.9 + 4 µA	1.0 + 4 µA	0.12 + 4 µA	0.22 + 4 µA
33 mA	33.00000 mA	10 nA	350 mV	2.8 + 30 µA	1.0 + 30 µA	0.16 + 30 µA	0.4 + 40 µA
330 mA	330.0000 mA	100 nA	350 mV	2.8 + 400 µA	1.0 + 400 µA	0.22 + 220 µA	0.6 + 400 µA
2.5 A	2.500000 A	1 µA	350 mV	2.7 + 5 mA	0.9 + 6 mA	0.65 + 4 mA	0.7 + 5 mA

[1] All AC Current ranges have typical measurement capability to 20 kHz.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

03-961214 1/14/2008 5:30 PM 頁面 27

Time Functions (SMX2042, SMX2044, SM2042, SM2044)

Frequency and Period

ACV Mode

Input RMS Voltage range	Input Impedance	Frequency Range	Period Range	Resolution	Uncertainty
33 mV - 250 V	1 MΩ with < 300 pF	1 Hz - 300 kHz	1 s - 3.33 µs	5 1/2digits	±0.002% of reading

ACI Mode

Input RMS Voltage range	Input Impedance	Frequency Range	Period Range	Resolution	Uncertainty
0.33 mA - 2.5 A	10 Ω (3 mA & 30 mA) 0.1 Ω (330 mA & 2.5 A)	1 Hz - 500 kHz	1 s - 2.0 µs	5 1/2 digits	± 0.01% of reading

Pulse Width

Polarity	Frequency Range	Resolution	Width Range	Typical Uncertainty
Positive or negative pulse widths	1 Hz to 100 kHz	2 µs	2 µs to 1 s	0.01 % of reading ±4 µs

Threshold DAC

Selected VAC Range	Threshold range (DC level)	Threshold DAC resolution	Highest allowed input Vp-p	Typical one year setting uncertainty
330 mV	-1.0 V to +1.0 V	0.5 mV	1.900 V	0.2% + 4 mV
3.3 V	-10.0 V to +10.0 V	5.0 mV	19.00 V	0.2% + 40 mV
33 V	-100.0 V to +100.0 V	50 mV	190.0 V	0.2% + 0.4 V
250 V	-500 V to +500 V	500 mV	850.0 V	0.2% + 4 V

Totalizer

Active edge polarity	Maximum Count	Allowed rate	Condition
Positive or negative transition	10^9	1 to 30,000 events per second	Uses Threshold DAC

Capacitance and Inductance Specifications (SMX2042, SMX2044, SM2042 and SM2044)

Capacitance

Accuracy ± (% of reading + farads) [1]

Range	Full scale Reading	Resolution	One Year 23˚C±5˚C
10 nF	11.999 nF	1 pF	2.1 ± 5 pF
100 nF	119.99 nF	10 pF	1.0
1 µF	1.1999 µF	100 pF	1.0
10 µF	11.999 µF	1 nF	1.0
100 µF	119.99 µF	10 nF	1.0
1 mF	1.1999 mF	100 nF	1.2
10 mF	11.999 mF	1 µF	2

[1] Within one hour of zero, using Relative control. Accuracy is specified for values higher than 5% of the selected range with the exception of the 10 nF range, which measures down to 0 pF.

Inductance (SM2044 and SMX2044 only)

Accuracy ±(% of reading + henrys)

Range	Test Frequency	Full Scale 4 1/2 Digits	Resolution	One Year Accuracy 23˚C±5˚C [1]
33 µH	75 kHz	33.000 µH	1 nH	3.0% + 500 nH
330 µH	50 kHz	330.00 µH	10 nH	2.0% + 3 µH
3.3 mH	4 kHz	3.3000 mH	100 nH	1.5% + 25 µH
33 mH	1.5 kHz	33.000 mH	1 µH	1.5% + 200 µH
330 mH	1 kHz	330.00 mH	10 µH	2.5 + 3 mH
3.3 H	100 Hz	3.3000 H	100 µH	3.0 + 35 mH

[1] Within one hour of zero, and Open Terminal Calibration. Accuracy is specified for values greater than 5% of the selected range.

Other measurement functions of the SMX2044 and SM2044: 6-wire guarded resistance, AC peak-to-peak voltage, AC crest factor, AC median value, leakage current, RTD temperature, in circuit AC-based capacitance

Source Functions (SMX2044 and SM2044 only)

- DC Voltage Source
  - Output range: -10.000 V to +10.000 V
  - DAC resolution: 18 bits (closed loop), 12 bits (open loop)
- AC Voltage Source
  - Output range: 50 mV to 7.1 VRMS
  - DAC resolution: 16 bits (closed loop), 12 bits (open loop)
  - Frequency range/resolution: 2 Hz to 75 kHz/ 2 Hz
- DC Current Source
  - Output range: 1.25 µA to 12.5 mA

Trigger Functions

- External Hardware Trigger (at DIN-7 connector)
  - Trigger input voltage level range: High: +3 V to +15 V, Low: -15 V to +0.8 V
  - Trigger high current drive: Min. 1 mA, Max 10 mA (TTL or CMOS logic level)
- PXI Bus Hardware Trigger Inputs (at PXI J2)
  - Trigger Input: TTL or CMOS positive pulse
  - Trigger Pulse Width: Minimum 250 µs
- PXI Bus Hardware Trigger Outputs (to PXI J2)
  - Trigger Output: TTL or CMOS negative pulse. Positive edge = ready
  - Trigger Pulse Width: Approximately 140 µs
- Analog Threshold Trigger
  - Captures up to 64 post-trigger readings
  - Reading rate: 10 rps or higher

General Specifications

- Reading Rate (user selectable):
  - 0.5 to 1,000 readings per second (rps)
  - Up to 10 rps, 6 1/2 digits
  - Up to 30 rps, 5 1/2 digits
- Overload Protection (voltage inputs): 330 VDC, 250 VAC
- Isolation: 330 VDC, 250 VAC from Earth Ground
- Maximum Input (Volt x Hertz):
  - $8x10^6$ Volt x Hz normal mode input
  - $1x10^6$ Volt x Hz common mode input
- Calibration: Calibrations are performed by Signametrics in a computer at a 3˚C internal temperature rise. All calibration constants are stored in a text file.
- Operating Temperature: -10 to 70˚C
- Storage Temperature: -65 to 85˚C
- Power requirements: +5 volts, 300 mA maximum
- Dimensions (not including connectors):
  - SMX2040 series: 160 mm x 100 mm
  - SM2040 series: 208 mm x 112 mm
- Safety: Designed to IEC 1010-1, Installation Category II

Ordering Information

- **SMX2044**
  6-1/2 digits PXI LCR Sourcing Digital Multimeter
- **SMX2042**
  6-1/2 digits PXI Multi-Function Digital Multimeter
- **SMX2040**
  6-1/2 digits PXI Digital Multimeter
- **SM2044**
  6-1/2 digits PCI LCR Sourcing Digital Multimeter
- **SM2042**
  6-1/2 digits PCI Multi-Function Digital Multimeter
- **SM2040**
  6-1/2 digits PCI Digital Multimeter

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP