ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *SK Hynix / Hyundai HY628400A* at our website: *Click HERE*

DESCRIPTION

The HY628400 is a high-speed, low power and 4M bits CMOS SRAM organized as 524,288 words by 8 bits. The HY628400 uses Hyundai's high performance twin tub CMOS process technology and was designed for high-speed and low power circuit technology. It is particulary well suited for use in high-density and low power system applications. This device has a data retention mode that guarantees data to remain valid at the minimum power supply voltage of 2.0V.

FEATURES


- Fully static operation and Tri-state outputs
- TTL compatible inputs and outputs
- Low power consumption
- Battery backup(L/LL-part)
  - 2.0V(min) data retention
- Standard pin configuration
  - 32pin 525mil SOP
  - 32pin 400mil TSOP-II

  (Standard and Reversed)

Product No.	Voltage (V)	Speed (ns)	Operation Current(mA)	Standby Current(uA) L	Standby Current(uA) LL	Temperature (°C)
HY628400	5.0	55/70/85	10	100	30	0~70(Normal)

Note 1. Normal : Normal Temperature
2. Current value are max.


PIN CONNECTION

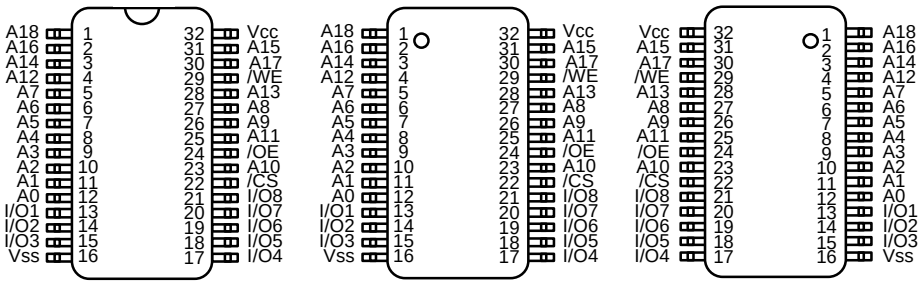

PIN DESCRIPTION

Pin Name	Pin Function
/CS	Chip Select
/WE	Write Enable
/OE	Output Enable
A0 ~ A18	Address Input
I/O1 ~ I/O8	Data Input/Output
Vcc	Power(5.0V)
Vss	Ground

BLOCK DIAGRAM

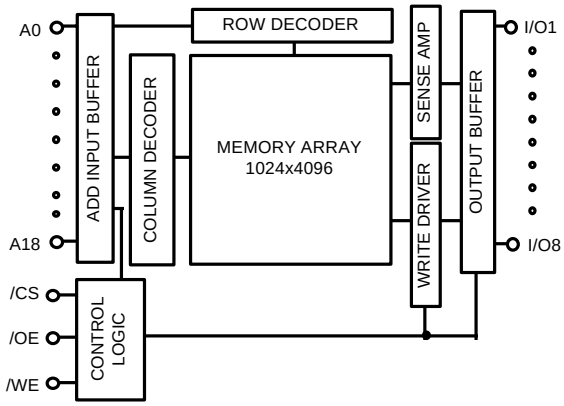

This document is a general product description and is subject to change without notice. Hyundai Electronics does not assume any responsibility for use of circuits described. No patent licenses are implied.

ORDERING INFORMATION

Part No.	Speed	Power	Temp	Package
HY628400LG	55/70/85	L-part		SOP
HY628400LLG	55/70/85	LL-part		SOP
HY628400LT2	55/70/85	L-part		TSOP-II(Standard)
HY628400LLT2	55/70/85	LL-part		TSOP-II(Standard)
HY628400LR2	55/70/85	L-part		TSOP-II(Reversed)
HY628400LLR2	55/70/85	LL-part		TSOP-II(Reversed)

ABSOLUTE MAXIMUM RATING (1)

Symbol	Parameter	Rating	Unit	Remark
V_{CC}, V_{IN}, V_{OUT}	Power Supply, Input/Output Voltage	-0.5 to 7.0	V	
T_A	Operating Temperature	0 to 70	°C	HY628400
T_{STG}	Storage Temperature	-65 to 125	°C	
P_D	Power Dissipation	1.0	W	
T_{SOLDER}	Lead Soldering Temperature & Time	260 • 10	°C•sec	

Note
1. Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is stress rating only and the functional operation of the device under these or any other conditions above those indicated in the operation of this specification is not implied. Exposure to the absolute maximum rating conditions for extended period may affect reliablity.

RECOMMENDED DC OPERATING CONDITION

T_A=0°C to 70°C (Normal)

Symbol	Parameter	Min.	Typ.	Max.	Unit
V_{CC}	Supply Voltage	4.5	5.0	5.5	V
V_{SS}	Ground	0	0	0	V
V_{IH}	Input High Voltage	2.2	-	Vcc+0.5	V
V_{IL}	Input Low Voltage	-0.5(1)	-	0.8	V

Note :
1. V_{IL} = -3.0V for pulse width less than 30ns

TRUTH TABLE

/CS1	/WE	/OE	MODE	I/O OPERATION
H	X	X	Standby	High-Z
L	H	H	Output Disabled	High-Z
L	H	L	Read	Data Out
L	L	X	Write	Data In

Note :
1. H=V_{IH}, L=V_{IL}, X=don't care

DC ELECTRICAL CHARACTERISTICS

Vcc = 5.0V ±10%, T_A = 0°C to 70°C (Normal) unless otherwise specified

Symbol	Parameter		Test Condition		Min.	Typ.	Max.	Unit
I_{LI}	Input Leakage Current		Vss ≤ V_{IN} ≤ Vcc		-1	-	1	uA
I_{LO}	Output Leakage Current		Vss ≤ V_{OUT} ≤ Vcc, /CS = V_{IH} or or /OE = V_{IH} or /WE = V_{IL}		-1	-	1	uA
Icc	Operating Power Supply Current		/CS = V_{IL}, V_{IN} = V_{IH} or V_{IL}, $I_{I/O}$ = 0mA		-	5	10	mA
I_{CC1}	Average Operating Current		/CS = V_{IL} Min Duty Cycle = 100%, $I_{I/O}$ = 0mA		-	50	80	mA
I_{SB}	TTL Standby Current (TTL Input)		/CS = V_{IH}		-	0.4	2	mA
I_{SB1}	Standby Current (CMOS Input)	HY628400	/CS ≥ Vcc - 0.2V	L	-	-	100	uA
				LL	-	-	30	uA
V_{OL}	Output Low Voltage		I_{OL} = 2.1mA		-	-	0.4	V
V_{OH}	Output High Voltage		I_{OH} = -1mA		2.4	-	-	V

Note : Typical values are at Vcc = 5.0V, T_A = 25°C

ERISTICS

Vcc = 5.0V ± 10%, T_A = 0°C to 70°C (Normal) unless otherwise specified


#	Symbol	Parameter	-55		-70		-85		Unit
			Min.	Max.	Min.	Max.	Min	Max.	
	READ CYCLE								
1	Trc	Read Cycle Time	55	-	70	-	85	-	ns
2	TAA	Address Access Time	-	55	-	70	-	85	ns
3	TACS	Chip Select Access Time	-	55	-	70	-	85	ns
4	TOE	Output Enable to Output Valid	-	25	-	35	-	45	ns
5	TCLZ	Chip Select to Output in Low Z	10	-	10	-	10	-	ns
6	TOLZ	Output Enable to Output in Low Z	5	-	5	-	5	-	ns
7	TCHZ	Chip Deselection to Output in High Z	0	20	0	25	0	30	ns
8	TOHZ	Out Disable to Output in High Z	0	20	0	25	0	30	ns
9	tOH	Output Hold from Address Change	10	-	10	-	10	-	ns
	WRITE CYCLE								
10	tWC	Write Cycle Time	55	-	70	-	85	-	ns
11	tCW	Chip Selection to End of Write	45	-	60	-	70	-	ns
12	tAW	Address Valid to End of Write	45	-	60	-	70	-	ns
13	tAS	Address Set-up Time	0	-	0	-	0	-	ns
14	tWP	Write Pulse Width	40	-	50	-	55	-	ns
15	tWR	Write Recovery Time	0	-	0	-	0	-	ns
16	tWHZ	Write to Output in High Z	0	20	0	25	0	30	ns
17	tDW	Data to Write Time Overlap	25	-	30	-	35	-	ns
18	tDH	Data Hold from Write Time	0	-	0	-	0	-	ns
19	tOW	Output Active from End of Write	5	-	5	-	5	-	ns

AC TEST CONDITIONS

T_A = 0°C to 70°C (Normal) unless otherwise specified

PARAMETER	Value
Input Pulse Level	0.8V to 2.4V
Input Rise and Fall Time	5ns
Input and Output Timing Reference Level	1.5V
Output Load	CL = 100pF + 1TTL Load

AC TEST LOADS



Note : Including jig and scope capacitance

CAPACITANCE


Temp = 25°C, f= 1.0MHz

Symbol	Parameter	Condition	Max.	Unit
C_{IN}	Input Capacitance	V_{IN} = 0V	6	pF
C_{OUT}	Output Capacitance	$V_{I/O}$ = 0V	8	pF

Note : This parameter is sampled and not 100% tested


TIMING DIAGRAM

READ CYCLE 1

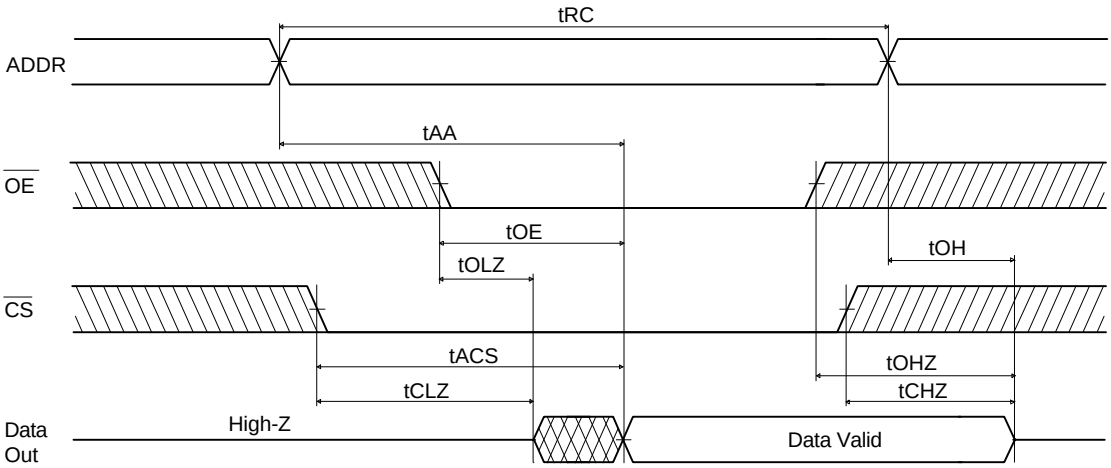

Note(READ CYCLE):
1. tCHZ and tOHZ are defined as the time at which the outputs achieve the open circuit conditions and are not referenced to output voltage levels
2. At any given temperature and voltage condition, tCHZ max. is less than tCLZ min. both for a given device and from device to device.
3. /WE is high for the read cycle.


READ CYCLE 2

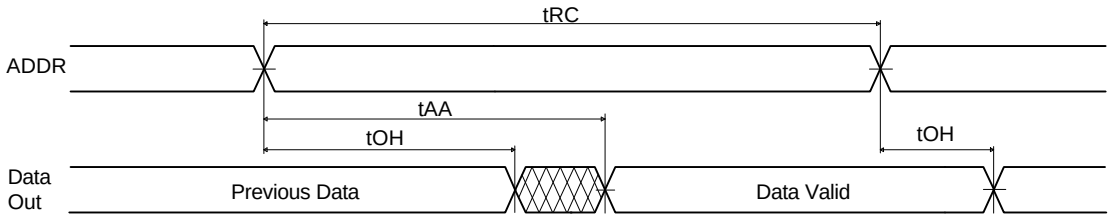


Note(READ CYCLE):

1. /WE is high for the read cycle.
2. Device is continuously selected /CS = V_{IL}
3. /OE =V_{IL}.

WRITE CYCLE 1(/OE Clocked)

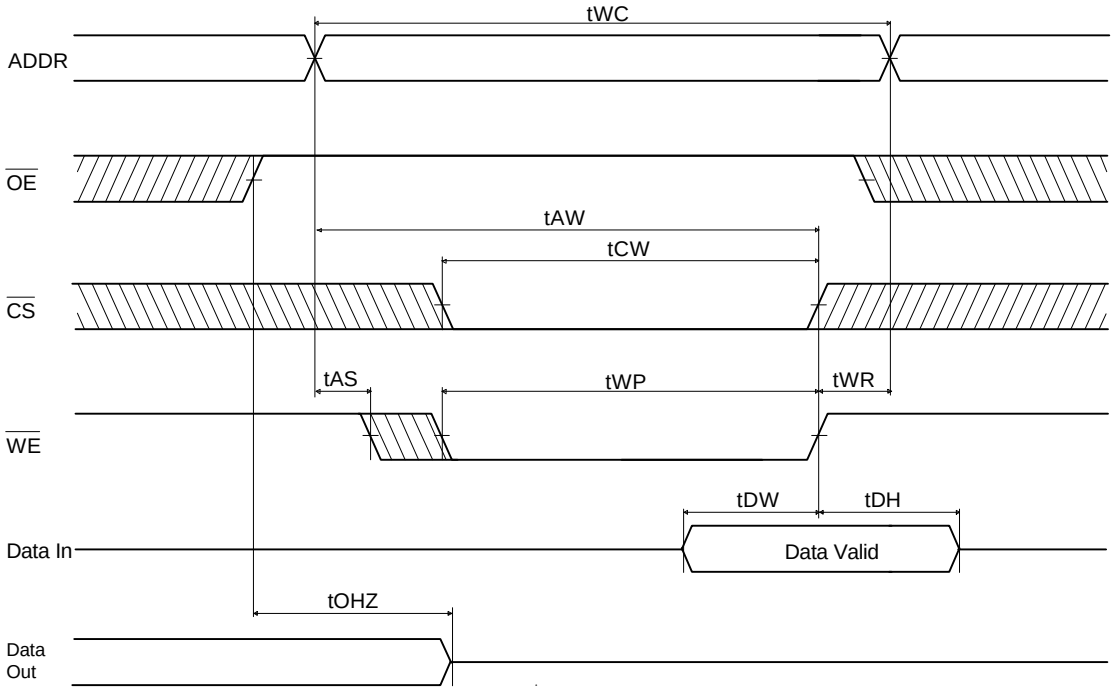

WRITE CYCLE 2 (/OE Low Fixed)

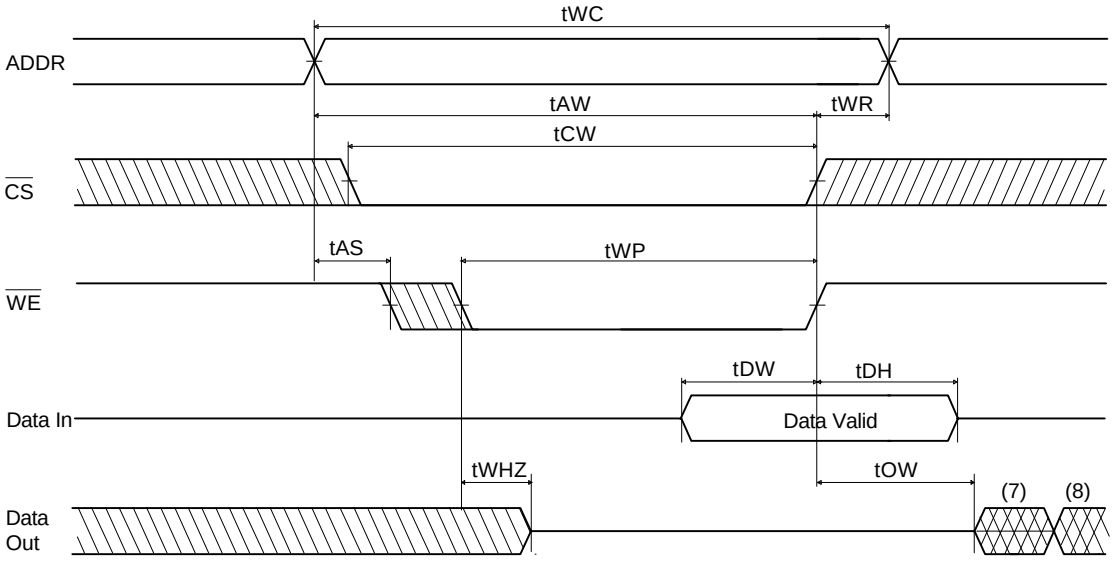

Notes(WRITE CYCLE):

1. A write occurs during the overlap of a low /CS and low /WE. A write begins at the latest transition among /CS going low /WE going low: A write end at the earliest transition among /CS going high and /WE going high. tWP is measured from the beginning of write to the end of write. .
2. tCW is measured from the later of /CS going low to the end of write .
3. tAS is measured from the address valid to the beginning of write.
4. tWR is measured from the end of write to the address change.
5. If /OE and /WE are in the read mode during this period, and the I/O pins are in the output low-Z state. Inputs of opposite phase of the output must not be applied because bus contention can occur.
6. If /CS goes low simultaneously with /WE going low, the outputs remain in high impedance state.
7. Dout is the read data of the new address.
8. When /CS is low, I/O pins are in the output state. The input signals in the opposite phase leading to the outputs should not be applied.


DATA RETENTION ELECTRIC CHARATERISTIC

T_A=0°C to 70°C (Normal)

Symbol	Parameter		Test Condition		Min	Typ	Max	Unit
V_{DR}	Vcc for Data Retention		/CS ≥ Vcc - 0.2V Vss≤V_{IN}≤Vcc		2.0	-	-	V
I_{CCDR}	Data Retention Current	HY628400	Vcc = 3.0V, /CS ≥Vcc - 0.2V Vss≤V_{IN} ≤Vcc	L	-	-	50	uA
				LL	-	-	15	uA
tCDR	Chip Deselect to Data Retention Time				0	-	-	ns
tR	Operating Recovery Time				tRC(2)	-	-	ns

Notes:
1. Typical values are at the comdition of T_A = 25°C.
2. tRC is read cycle time.

DATA RETENTION TIMING DIAGRAM

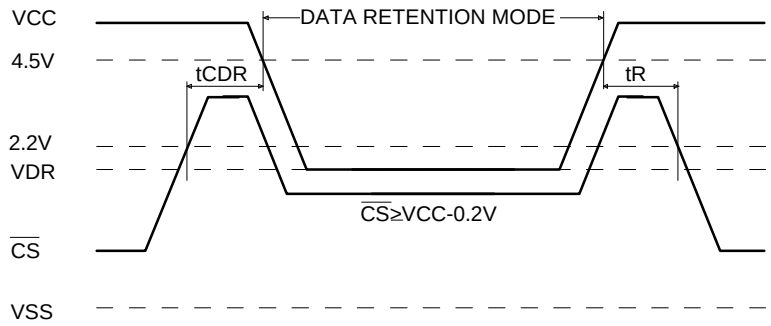


RELIABILITY SPEC.


TEST MODE		TEST SPEC.
ESD	HBM	≥ 2000V
	MM	≥ 250V
LATCH - UP		≤ -100mA
		≥ 100mA

PACKAGE INFORMATION


32pin 400mil Thin Small Outline Package Standard(T2)

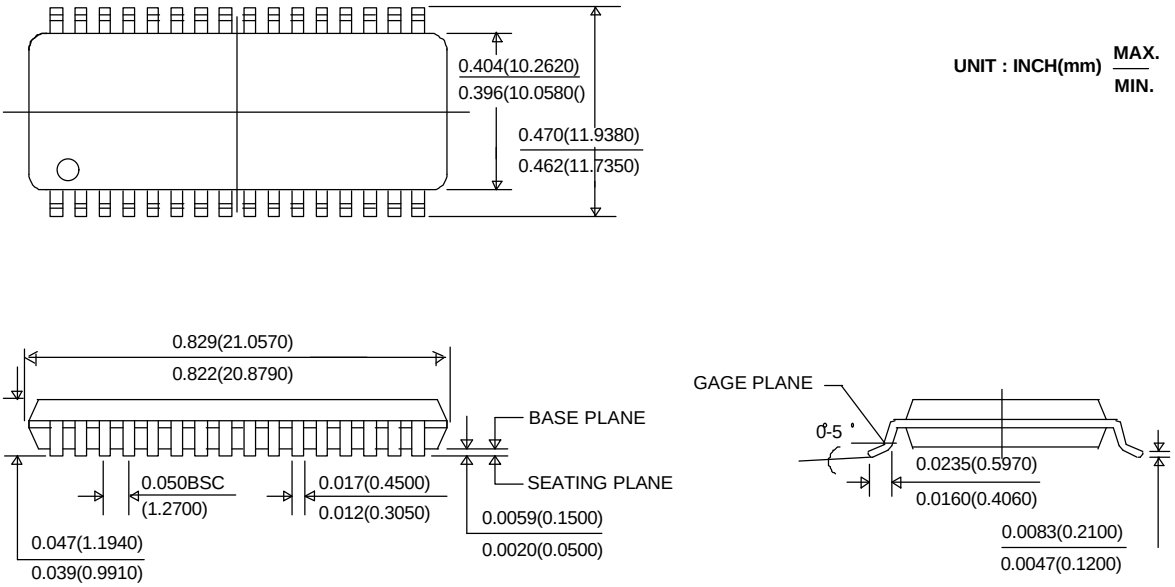


32pin 400mil Thin Small Outline Package Reversed(R2)

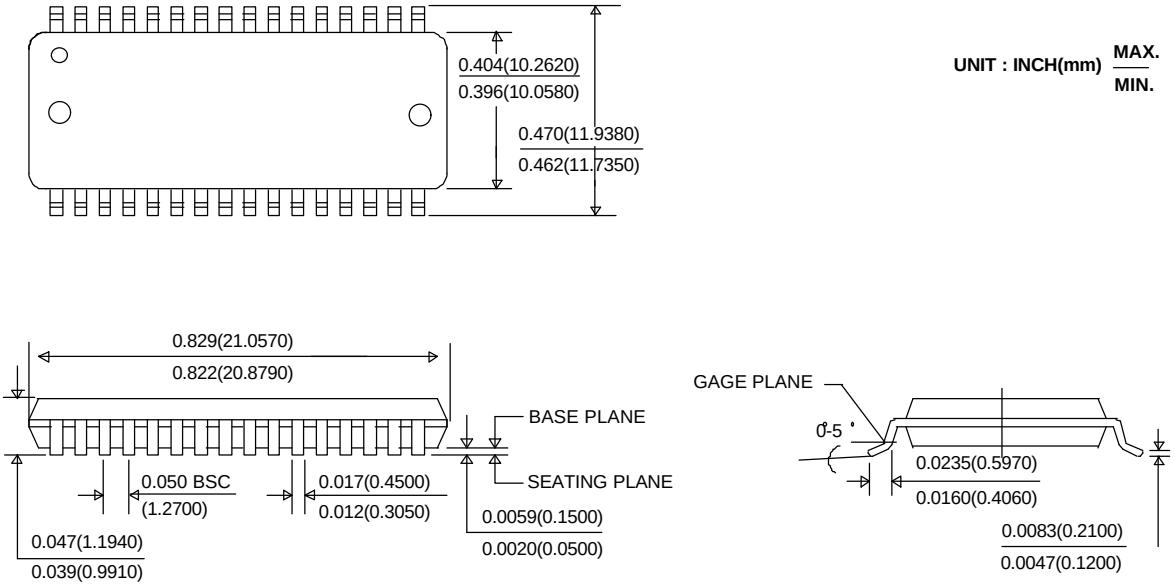


32pin 525mil Small Outline Package(G)

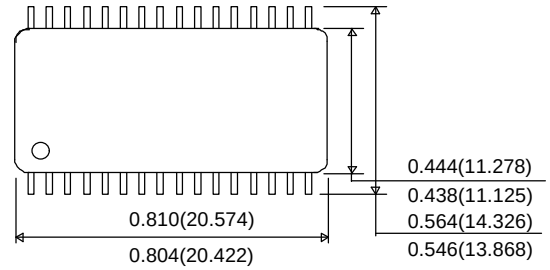

UNIT : INCH(mm)

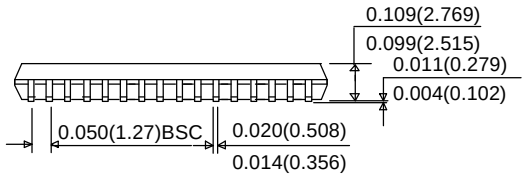

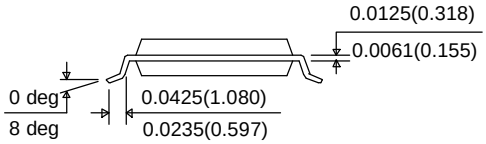

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP