

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

PW172KB

Universal 15 – 19 Watt Series

ITE Switch-Mode Power Supply

3 Year Warranty

- ***100-240VAC Universal Input***
- ***Desktop and Wall-Plug Style with either fixed blades, or Interchangeable Blades* (Kit sold separately)***
- ***5V to 48V Single Output Models, up to 19W***
- ***Modified and Custom Designs Available***
- ***Regulated Output with Low Ripple***
- ***Impact-Resistant Polycarbonate Enclosure***
- ***No load Power Consumption < 0.5W***
- ***Meets EISA Requirements (see next page for details).***
- ***Meets Energy Star Level IV***





International Safety Standard Approvals

RoHS

Specifications

All Specifications are typical at nominal input, full load at 25°C unless otherwise stated.

AC Input 100-240VAC, -/-10% (class I), +6%, -10% (class II), 47-63 Hz, 1∅.	**MTBF** >100,000 hours (calculated)
Input Current 90VAC: 0.5A	**Hold-up Time** 18 ms min. @ 115VAC
Inrush Current Inrush limiting provided.	**Overvoltage Protection** Built-in
Input Fuses Internal Primary Current Fuse is provided.	**Overload Protection** Hiccup Mode
Efficiency Meet EISA Requirements – see page 2	**Short Circuit Protection** Hiccup Mode
Output Voltage See chart.	**Topology** Switching – Fixed Frequency Flyback
Output Power See chart	**Approvals and Safety Standards** EN/IEC/CSA/UL60950-1, EMC: EN55022/55024/61000
Ripple and Noise 1% pk-pk max., 20MHz BW	**Dielectric Withstand** Input-Output: 3000VAC, Input-GND: 1500VAC, Output-GND: 500VDC
Line & Load Voltage Regulation Excluding Cord: Line: +/- 1%, Load: +/-5%.	**Operating Temperature** 0° to 40°C, no derating
Transient Response 500µs max., 50% load step, typical	**Storage Temperature** -30 to +85°C.
Minimum Load Not required.	**Relative Humidity** 5% to 95%, non-condensing
Case Material: Black 94V0 Polycarbonate	**Altitude** 0 to 10,000 ft.
Case Dimensions: See outline drawing.	**Output Connections:** Cable: 18AWG, 1800mm (5V & 6V models: 1500mm), 2 conductor. Connector: 2.5mm barrel type (Ault #3) connector, center contact (+). Other connector options are available.

Model Number Key

PW172 K B 12 03 F 01

- **01** – Modification Designator. "01" is standared part, "02" and higher denotes a modified model.
- **F** – Input Receptacle. See Below for options. "F" receptacle (IEC320, C14 type, grounded) noted above.
- **03** – Output Connector. "03" connector is standard. Other output connectors available. Contact the factory for more details
- **12** – Output Voltage
- **B** – Design Revision Changes
- **K** – Manufacturing Location
- **PW172** – Product Family

SL Power Electronics Corp • 6050 King Drive Ventura, CA 93003 • Phone 805.486.4565 • Fax 858.712.2040 • Email: info@slpower.com • www.slpower.com

PW172KB

Universal 15-19 Watt Series

ITE Switch Mode Power Supply

3 Year Warranty

Model Number	Volts (V)	Output Current (max)	Max Watts	Ripple (Vp-p max)
PW172KB0503F01	5 V	3.00 A	15.0 W	50mV
PW172KB0603F01	6 V	2.50 A	15.0 W	60mV
PW172KB0903F01	9 V	2.00 A	18.0 W	90mV
PW172KB1203F01	12 V	1.50 A	18.0 W	120mV
PW172KB1503F01	15 V	1.20 A	18.0 W	150mV
PW172KB1803F01	18 V	1.00 A	18.0 W	180mV
PW172KB2403F01	24 V	0.75 A	18.0 W	240mV
PW172KB4803F01	48 V	0.40 A	19.2 W	480mV

Note: Part numbers above include #3 output connector and IEC320 C14 grounded input receptacle. See below for other options.


Input Receptacle Options

DESKTOP OPTIONS			*WALL-PLUG OPTIONS*				
							
IEC320 C14 Grounded (F)	IEC320 C18 Ungrounded (Q)	IEC320 C8 "Shaver" (N)	N. America Japan Interchangeable (B)	N. America Japan Fixed (C)	Europe Fixed (M)	United Kingdom Fixed (G)	Australia Fixed (H)

Notes:

1. For Desktop options, choose the applicable letter above.
2. For Wall-plug options, choose the applicable letter above. The model will then be fitted only with the receptacle chosen. The North American blade version (B) will be an interchangeable blade. The other options (C), (M), (G), and (H), will be fixed blades molded in the case.
3. Blade Kit is available which will include one each of a EU, UK, and Aust blade. Kit part number is KT1027K . Can be used with (B) version only, to allow blades to be interchanged.

Output Connector

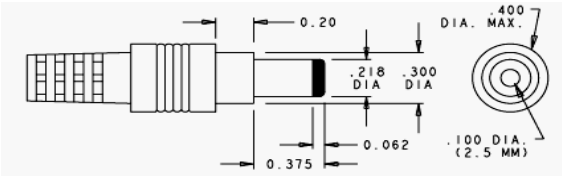

Notes:

1 Ault #3 Connector
2. Center Contact = Positive
3. Connector is Switchcraft 760 plug or equivalent.
4. Suggested Mating Connector is Switchcraft 712A jack or equivalent.
5. Other output connector options are available. Contact your local representative for details.

2007 Energy Independence and Security Act - EISA

The Energy Independence and Security Act of 2007 was passed in December of 2007 and addresses minimum efficiency standards and standby levels for Class A external power supplies that are 250 Watts and under. This law stipulates that external power supplies manufactured on July 1, 2008 and beyond meet certain minimum efficiency and standby criteria as defined below.

Minimum Efficiency Criteria:

Active mode is defined as when a power supply's input is connected to a line voltage AC and it's output is connected to a DC or AC load, drawing a portion of the product's power output. Depending upon the power rating for the power supply, it must meet the minimum efficiency criteria outlined below.

Energy-Efficiency Criteria for Active Mode:

Output Power on Adapter Label	Minimum Average Efficiency Percentage
0 to < 1 Watt	≥ 0.50 * output power on the label
> 1 watt to ≤ 51 watts	≥ [0.09 * Ln (output power on adapter label)] + 0.50
> 51 watts	≥ 0.85

Energy Consumption Criteria for No Load Mode:

The power supply must also meet a requirement for when its input is connected to line voltage AC but its output is not connected to a load. Depending upon the power output of the supply, it must keep its energy consumption below the following values:

Output Power on Adapter Label	Maximum Power Consumption in No-Load Mode
0 to < 250 Watts	≤ 0.50 watts


SL Power Electronics Corp • 6050 King Drive Ventura, CA 93003 • Phone 805.486.4565 • Fax 858.712.2040 • Email: info@slpower.com • www.slpower.com


PW172KB

Universal 15-19 Watt Series

ITE Switch Mode Power Supply ***3 Year Warranty***

Outline Drawings

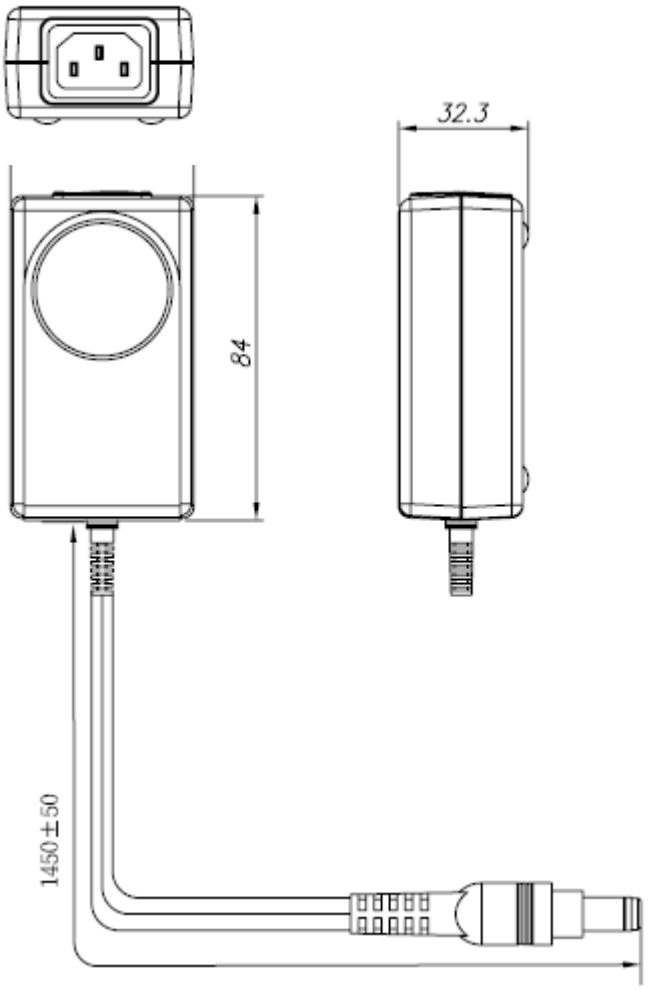

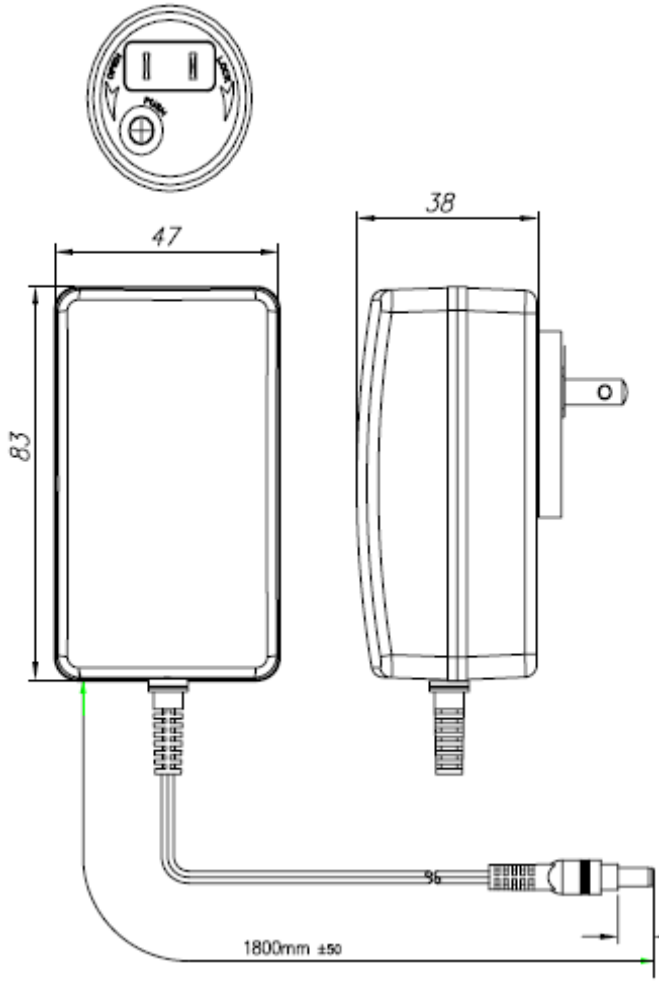

Dimensions are in mm

Desktop Style (Option “F” shown)

Wallplug Style (Option “B” shown)

Data Sheet © 2009 SL Power Electronics Corp. The information and specifications contained herein are believed to be correct at the time of publication. Rev. 8-10-2009
However, SL Power accepts no responsibility for consequences arising from reproduction errors or inaccuracies. Specifications are subject to change without notice.

SL Power Electronics Corp • 6050 King Drive Ventura, CA 93003 • Phone 805.486.4565 • Fax 858.712.2040 • Email: info@slpower.com • www.slpower.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

SL Power:

PW172KB0603B01 PW172KB2403B01 PW172KB0903F01 PW172KB1203F01 PW172KB1803F01 PW172KB4803B01 PW172KB0503F01 PW172KB0503B01 PW172KB0603F01 PW172KB1503F01 PW172KB1503B01 PW172KB1803B01 PW172KB2403F01 PW172KB4803F01 PW172KB0903B01 PW172KB1203B01 PW172KB1203N01 PW172KB0903N01 PW172KB1803N01 PW172KB0503N01 PW172KB2403N01 PW172KB4803N01 PW172KB1503N01 PW172KB0603N01

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP