ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.


Find the *SMC D-M9N* at our website: ***Click HERE***

Non-rotating Double Power Cylinder

Series MGZ

Double Power Cylinder

Series MGZR (without non-rotating mechanism)

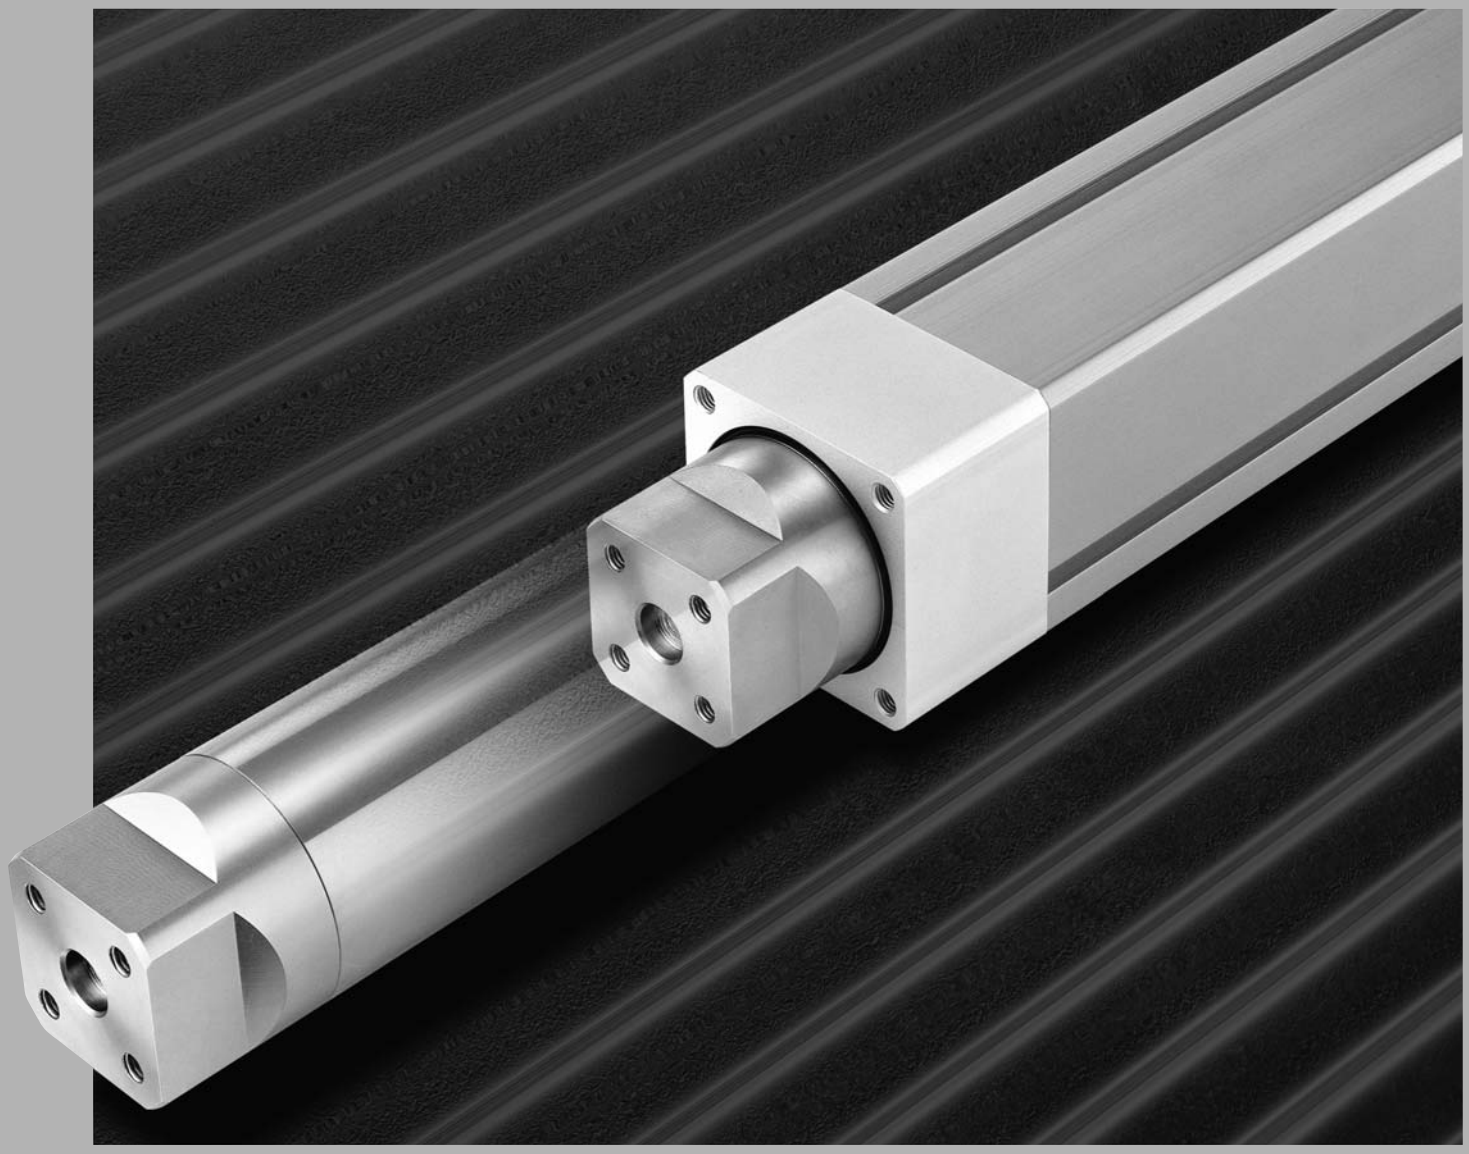



SMC
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Non-rotating Double Power Cylinder

Series MGZ

ø20, ø25, ø32, ø40, ø50, ø63, ø80

Double extension output power!!

Our unique construction doubles the extended piston area. An ideal cylinder for lifting and press applications.

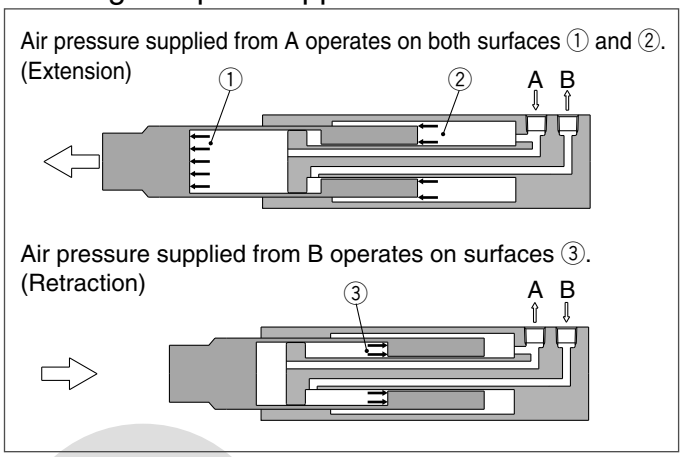




Improved workpiece mounting accuracy

Positioning holes on the workpiece mounting surface allow easy alignment.




Say goodbye to non-rotating guides!! *(Series MGZ)*

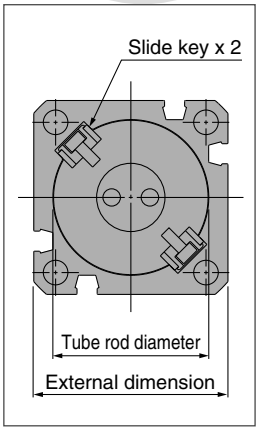

Series MGZ employs a slide bearing and a large bore tube rod that accounts for approximately 80% of the cylinder's external diameter. In addition, a built-in non-rotating mechanism using slide keys allows loads to be mounted directly.


Regulator with check valve is not required.

A regulator with check valve, normally required for a lifting circuit, is no longer necessary.

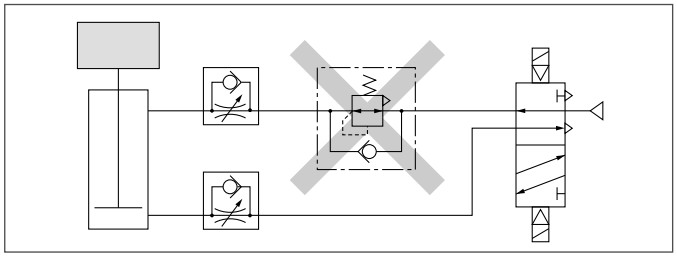

Excellent strength delivered in a small package.

Although moment resistance is equivalent to that of a guided cylinder (cylinder + 2 guide shafts), the installation area has been reduced by approximately 40% (for Series MGZ).

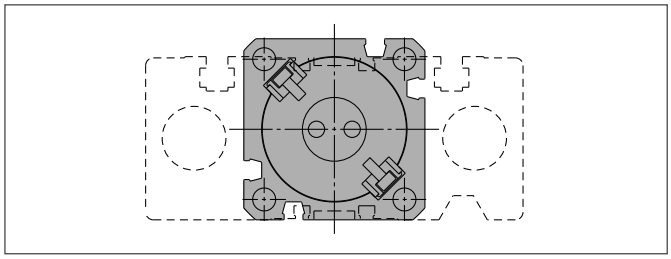

SMC
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Double Power Cylinder

Series MGZR (without non-rotating mechanism)

ø20, ø25, ø32, ø40, ø50, ø63, ø80




Flush, unencumbered appearance

Auto switches can be housed in grooves on 4 sides.




Piping is concentrated in the head cover.

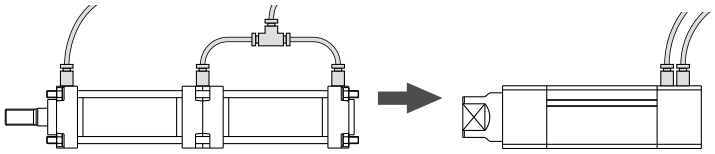


Long stroke available Space-saving

Note)
Strokes up to 1,000 mm are available. Unlike conventional tandem type double output cylinders, whose length is more than twice the stroke length, our double output cylinders are markedly more compact.

Note) Strokes up to 800 mm are available in bore sizes ø20 and ø25.

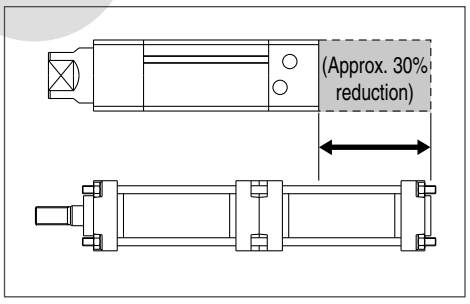

Application Example

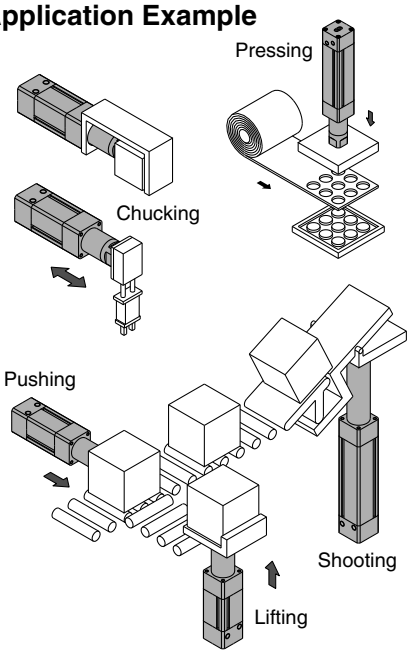

Series Variations

Name	Model	Bore size (mm)	With end lock	With coil scraper	Mounting bracket			
					Transaxial foot style	Front flange style	Rear flange style	Double clevis
Non-rotating double power cylinder	***MGZ***	20, 25, 32, 40 50, 63, 80	● Note)	●	●	●	●	—
Double power cylinder	***MGZR*** (without non-rotating mechanism)		—	●	●	●	●	●

Note) Except ø20, ø25, ø32 and ø80.

With front end lock on rod side

For drop protection
(MGZ only)



Double clevis type

For rotating applications.
(MGZR only)



With coil scraper

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com




Series MGZ/MGZR
Model Selection

⚠ Caution Theoretical output must be confirmed separately. Refer to the theoretical output table on page 429.

Series MGZ

1. Confirmation of Allowable Load Mass by Each Application


Selection conditions: Determine which of the conditions below matches your intended application, then choose one of the selection graphs that follow.

Vertical upward: Lifter			Vertical downward: Press		Horizontal: Chucking		
							
Maximum speed (mm/s)			Maximum speed (mm/s)		Load center of gravity position ℓ (mm)		
Up to 300	Up to 500	Up to 700	Up to 300	Up to 500	Up to 100	Up to 200	Up to 300
Graph (1)	Graph (2)	Graph (3)	Graph (4)	Graph (5)	Graph (6)	Graph (7)	Graph (8)


∗ ℓ: This dimension indicates the position of the load center of gravity when the cylinder is retracted.

Selection Graph (1) to (3) (Vertical Upward Mounting)


Graph (1) up to 300 mm/s Solid line: Operating pressure 0.4 MPa or more; Dotted line: Operating pressure 0.5 MPa or more

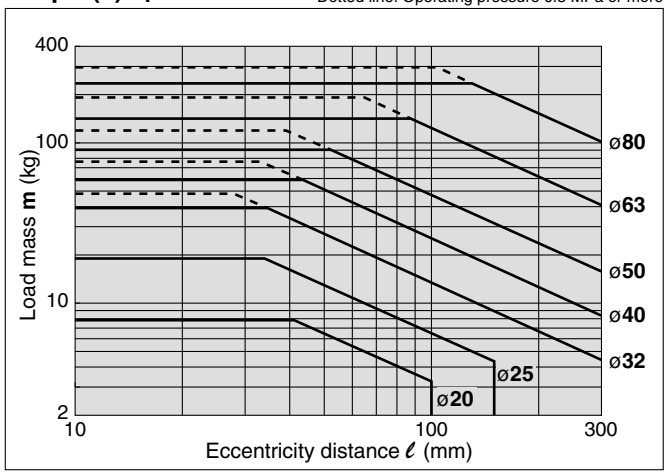

Graph (2) up to 500 mm/s Solid line: Operating pressure 0.4 MPa or more; Dotted line: Operating pressure 0.5 MPa or more

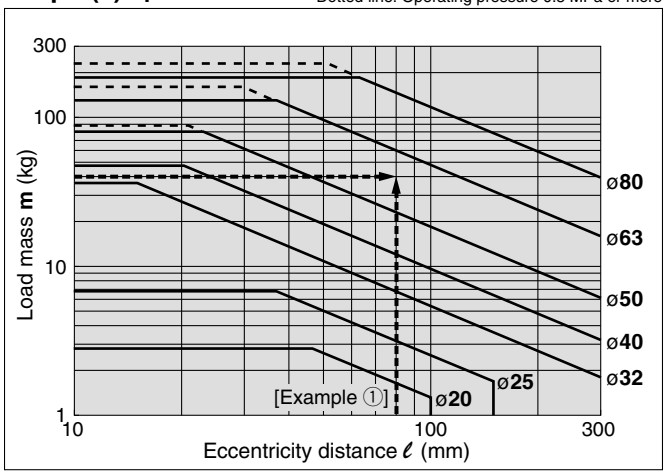

Graph (3) up to 700 mm/s Solid line: Operating pressure 0.4 MPa or more

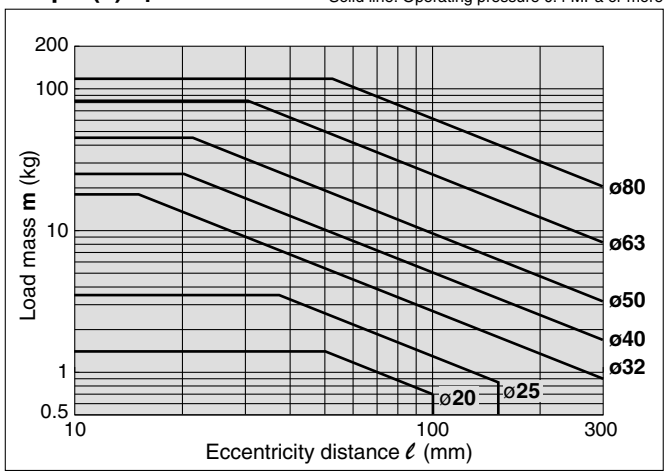

Selection Example: Vertical Upward Mounting


① Selection conditions
- Mounting: Vertical upward (Lifter)
- Maximum speed: 500 mm/s
- Load mass: 40 kg
- Eccentricity distance: 80 mm

Since the conditions are vertical upward mounting with a speed of 500 mm/s, use graph (2). In the graph, find where the lines representing a load mass of 40 kg and an eccentric distance of 80 mm intersect. From the graph, a ø63 bore size is selected.


SMC
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Selection Graph (4) and (5) (Vertical Downward Mounting)

Graph (4) up to 300 mm/s

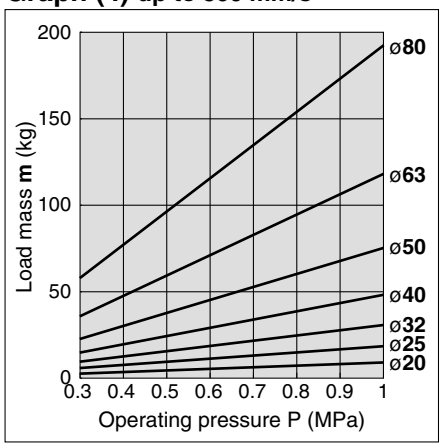

Graph (5) up to 500 mm/s

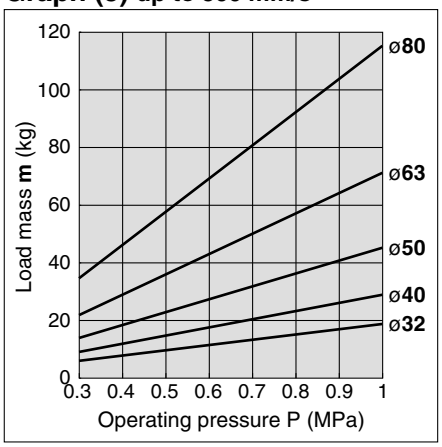

Selection Example: Horizontal Mounting


② Selection conditions

- Mounting: Horizontal (Chucking)
- Stroke: 300 mm
- Load center of gravity position: 100 mm
- Load mass: 10 kg
- Operating pressure: 0.5 MPa


Refer to graph (6) based on the horizontal mounting and the load center of gravity position. In the graph, find where the lines representing a load mass of 10 kg and a stroke of 300 mm intersect. A ø50 bore size is selected.
The theoretical output for the extension stroke is **1924 N**, from the theoretical output table on page 429.

Selection Graph (6) to (8) (Horizontal Mounting)


Graph (6) ℓ: 100 mm or less

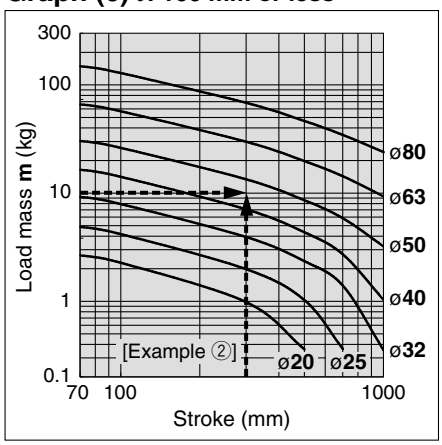


Graph (7) ℓ: 101 to 200 mm

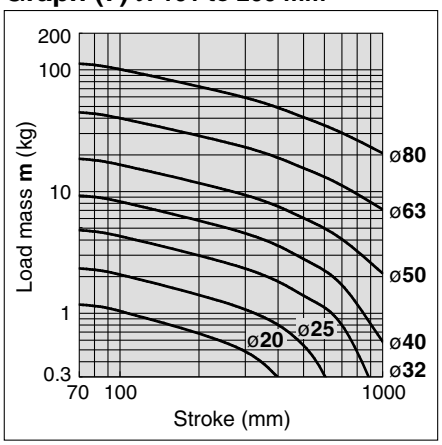

Graph (8) ℓ: 201 to 300 mm

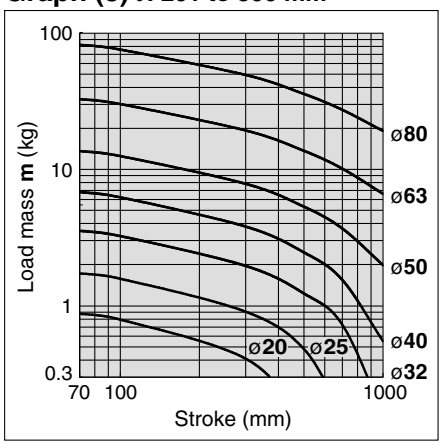

2. Confirmation of allowable rotating torque




Allowable Rotating Torque


Bore size (mm)	Allowable rotating torque T (N·m)
20	2.7
25	4
32	5
40	7
50	15
63	20
80	30

3. Confirmation of non-rotating accuracy

3-1 Rolling direction



3-2 Pitching direction



Non-rotating Accuracy

Bore size (mm)	Non-rotating accuracy (±θ°)
20	±0.4° or less
25	
32	±0.3° or less
40	
50	
63	
80	

Deflection Angle of Eccentric Load




Bore size (mm)	Non-rotating accuracy (±θ°)
20	±0.12° or less
25	
32	
40	
50	
63	
80	

SMC
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Series MGZR (without non-rotation mechanism)


1. Find the Bore Size of the Cylinder Tube

Selection conditions: Determine which of the conditions below matches your intended application, then choose one of the selection graphs that follow.


Vertical upward load			Load extended horizontally			Load retracted horizontally	
							
Maximum speed (mm/s)			Maximum speed (mm/s)			Maximum speed (mm/s)	
Up to 300	Up to 500	Up to 700	Up to 300	Up to 500	Up to 700	Up to 300	Up to 450
Graph (1)	Graph (2)	Graph (3)	Graph (4)	Graph (5)	Graph (6)	Graph (7)	Graph (8)

Selection Graph (1) to (3) (Vertical Upward Load)

Graph (1) up to 300 mm/s

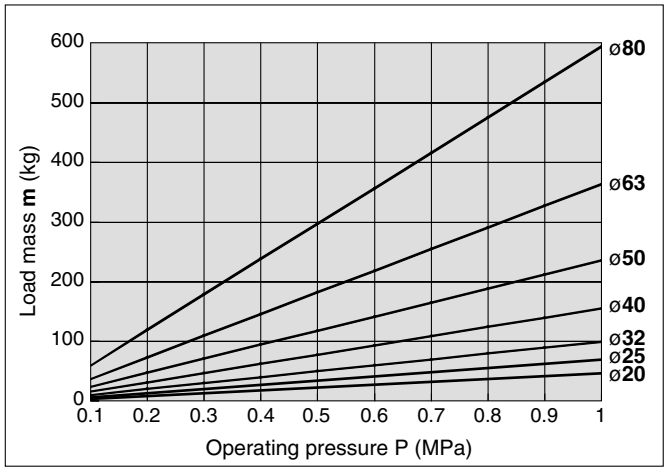


Graph (2) up to 500 mm/s

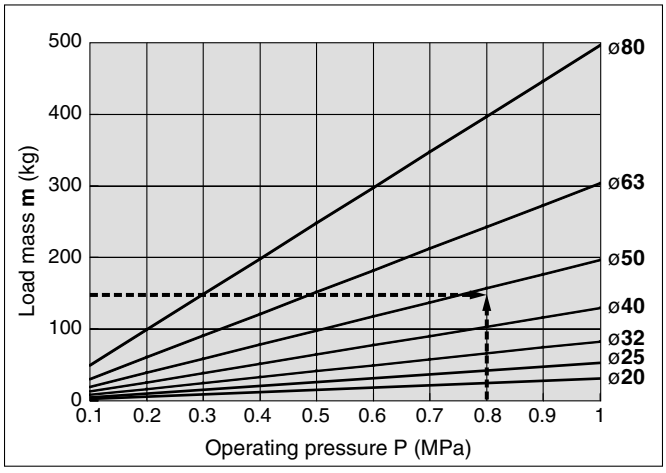

Graph (3) up to 700 mm/s

Solid line: Operating pressure 0.4 MPa or more

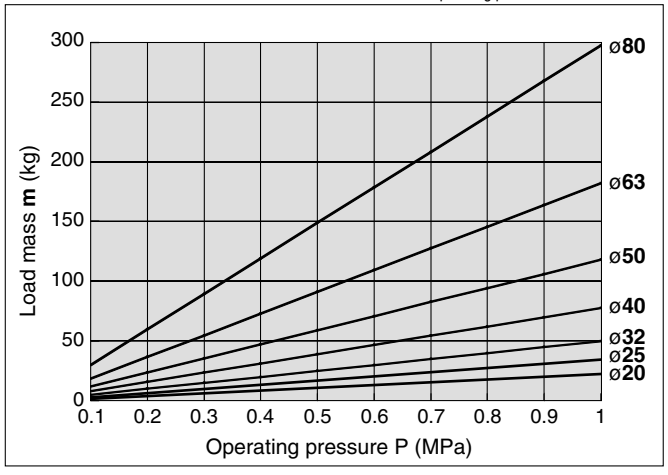

Selection Example: Vertical Upward Load


① Selection conditions
- Mounting: Vertical upward
- Maximum speed: 500 mm/s
- Operating pressure: 0.8 MPa
- Load mass: 150 kg

Since the conditions are vertical upward mounting with a speed of 500 mm/s, use graph (2). In the graph, find where the lines representing an operating pressure of 0.8 MPa and a load mass of 150 kg intersect. A ø50 bore size is selected.


SMC
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Selection Graph (4), (5), and (6) (Load Extended Horizontally)


Graph (4) up to 300 mm/s

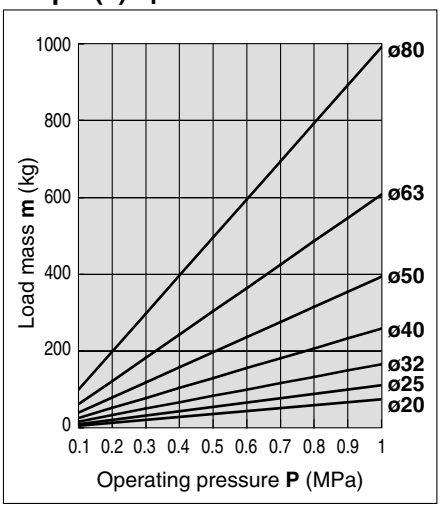

Graph (5) up to 500 mm/s

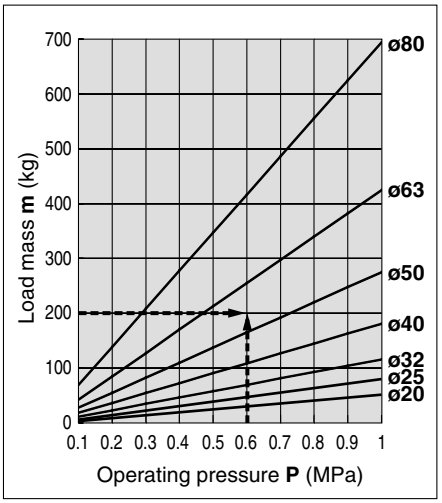


Graph (6) up to 700 mm/s

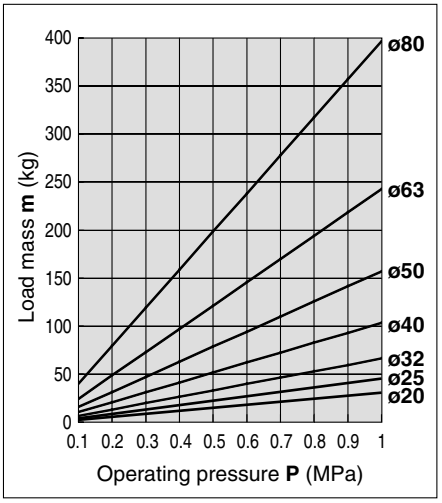


Selection Graph (7) and (8) (Load Retracted Horizontally)

Graph (7) up to 300 mm/s

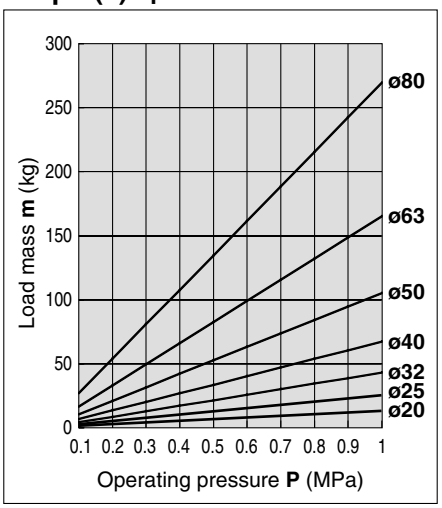

Graph (8) up to 450 mm/s

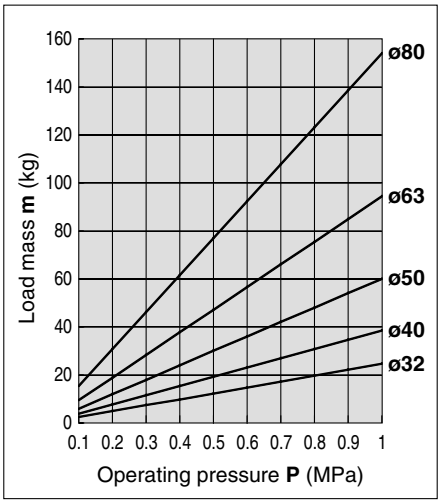

Selection Example: Load Extended Horizontally

② Selection conditions

Mounting: Horizontal extension
Maximum speed: 500 mm/s
Operating pressure: 0.6 MPa
Load mass: 200 kg


Since the conditions are horizontal extension with a speed of 500 mm/s, use graph (5). In the graph, find where the lines representing an operating pressure of 0.6 MPa and a load mass of 200 kg intersect. A ø63 bore size is selected.

2. Confirmation of allowable kinetic energy

Confirm the strength of the built-in stopper (rubber bumper) based on the correlation of load mass and the maximum speed. If the value is

Below the line in the graph: A built-in stopper can be used.

Above the line in the graph: Either use a cylinder with a larger bore size or install an external stopper

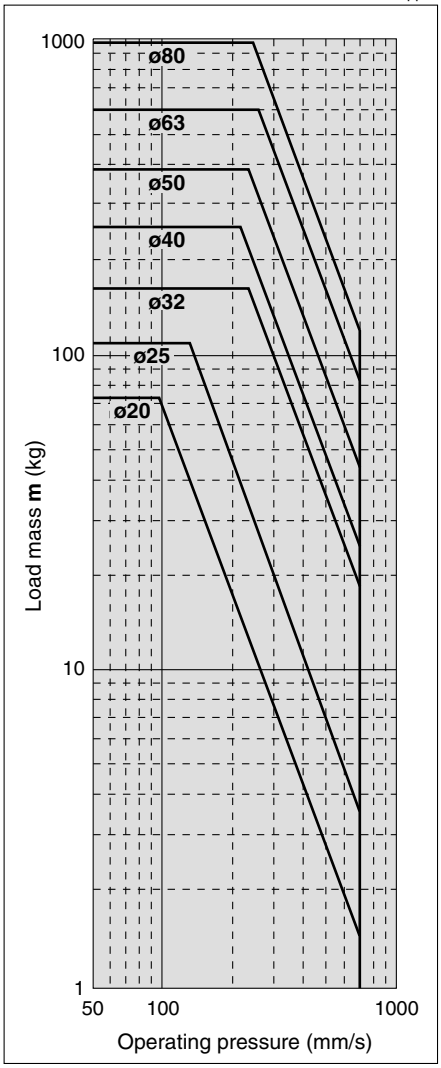

SMC
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Non-rotating Double Power Cylinder

Series MGZ

ø20, ø25, ø32, ø40, ø50, ø63, ø80

How to Order

MGZ [ ] **40** [ ] **Z** – **100** – **M9BW** [ ] – [ ]

Mounting style

Nil	Basic style
L	Transaxial foot style
F	Rod flange style
G	Head flange style

Bore size

20	20 mm
25	25 mm
32	32 mm
40	40 mm
50	50 mm
63	63 mm
80	80 mm

Thread type

Nil	M5 x 0.8	ø20
	Rc	ø25
TN	NPT	ø32
TF	G	ø40
		ø50
		ø63
		ø80

Coil scraper

Nil	None
Z	Yes

Cylinder stroke (mm)
Refer to "Standard Stroke" on page 429.

Auto switch

Nil	Without auto switch (Built-in magnet)

∗ For the applicable auto switch model, refer to the table below.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Made to Order
For details, refer to page 429.

Applicable Auto Switch/Refer to pages 1719 to 1827 for detailed specifications of auto switches.


Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage DC		Load voltage AC	Auto switch model Perpendicular	Auto switch model In-line	Lead wire length (m) 0.5 (Nil)	1 (M)	3 (L)	5 (Z)	Pre-wired connector	Applicable load	
Solid state switch	—	Grommet	Yes	3-wire (NPN)	24 V	5 V,12 V	—	**M9NV**	**M9N**	●	●	●	○	○	IC circuit	Relay, PLC
				3-wire (PNP)				**M9PV**	**M9P**	●	●	●	○	○		
				2-wire		12 V		**M9BV**	**M9B**	●	●	●	○	○	—	
	Diagnostic indication (2-color indication)			3-wire (NPN)		5 V,12 V		**M9NWV**	**M9NW**	●	●	●	○	○	IC circuit	
				3-wire (PNP)				**M9PWV**	**M9PW**	●	●	●	○	○		
				2-wire		12 V		**M9BWV**	**M9BW**	●	●	●	○	○	—	
	Water resistant (2-color indication)			3-wire (NPN)		5 V,12 V		**M9NAV**	**M9NA**	○	○	●	○	○	IC circuit	
				3-wire (PNP)				**M9PAV**	**M9PA**	○	○	●	○	○		
				2-wire		12 V		**M9BAV**	**M9BA**	○	○	●	○	○	—	
Reed switch	—	Grommet	Yes	3-wire (NPN equiv.)	—	5 V	—	**A96V**	**A96**	●	—	●	—	—	IC circuit	—
			No	2-wire	24 V	12 V	100 V	**A93V**	**A93**	●	—	●	—	—	—	Relay, PLC
							100 V or less	**A90V**	**A90**	●	—	●	—	—	IC circuit	

∗ Lead wire length symbols: 0.5 m ····· Nil (Example) M9NW
1 m ····· M (Example) M9NWM
3 m ····· L (Example) M9NWL
5 m ····· Z (Example) M9NWZ

∗ Solid state auto switches marked "○" are produced upon receipt of order.

∗ Refer to page 445 for applicable auto switches other than listed above.
∗ Refer to pages 1784 and 1785 for details of auto switches with a pre-wired connector.
∗ Auto switches are shipped together (not assembled).

SMC
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

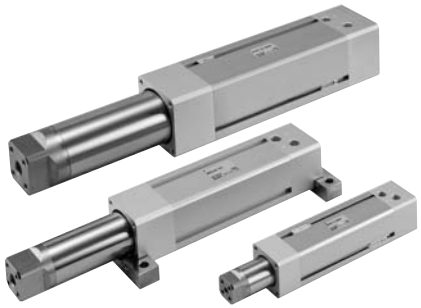

Specifications

Bore size (mm)		20	25	32	40	50	63	80
Action		Double acting, Single rod						
Fluid		Air						
Proof pressure		1.5 MPa						
Max. operating pressure		1.0 MPa						
Min. operating pressure		Standard stroke: 0.08 MPa						
		Long stroke: 0.12 MPa						
Ambient and fluid temperature		Without auto switch: –10° to 70°C (With no freezing)						
		With auto switch: –10° to 70°C (With no freezing)						
Lubrication		Non-lube						
Piston speed	**OUT**	50 to 700 mm/s						
	IN	50 to 350 mm/s		50 to 450 mm/s				
Stroke length tolerance		Up to 250$^{+1.0}_{0}$, 251 to 1000$^{+1.4}_{0}$						
Cushion		Rubber bumper						
Mounting		Basic style, Transaxial foot style, Rod flange style, Head flange style						

Made to Order

Made to Order
(Refer to page 2002 for details.)

Symbol	Specifications
-X1247	Rod end female thread: 1 pc.

Standard Stroke

Bore sizes (mm)	Standard stroke (mm)	Long stroke (mm)
20, 25	75, 100, 125, 150, 175 200, 250, 300	350, 400, 450, 500 600, 700, 800
32, 40, 50 63, 80	75, 100, 125, 150, 175 200, 250, 300	350, 400, 450, 500, 600 700, 800, 900,1000

Intermediate strokes and strokes shorter than 75 mm are also available.

Mass

(kg)

Bore size (mm)		20	25	32	40	50	63	80
Standard mass	Basic style	0.47	0.69	1.04	1.90	3.03	4.83	8.63
	Foot style	0.63	0.86	1.34	2.39	3.92	6.08	10.61
	Flange style	0.58	0.83	1.32	2.34	3.79	5.83	9.92
Mass per each 50 mm of stroke	All mounting brackets	0.18	0.21	0.28	0.39	0.59	0.78	1.17


Theoretical Output

(N)

Model	Bore size (mm)	Rod size (mm)	Operating direction	Piston area (mm²)	Operating pressure (MPa)								
					0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
MGZ20	20 x 25	10	OUT	726	145	218	290	363	436	508	581	653	726
	20		IN	236	47	71	94	118	141	165	189	212	236
MGZ25	25 x 30	12	OUT	1085	217	326	434	543	651	760	868	977	1085
	25		IN	378	76	113	151	189	227	265	302	340	378
MGZ32	36 x 32	16	OUT	1621	324	486	648	811	973	1135	1297	1459	1621
	32		IN	603	121	181	241	302	362	422	482	543	603
MGZ40	45 x 40	20	OUT	2533	507	760	1013	1267	1520	1773	2026	2280	2533
	40		IN	942	188	283	377	471	565	659	754	848	942
MGZ50	55 x 50	25	OUT	3848	770	1154	1539	1924	2309	2694	3078	3463	3848
	50		IN	1473	295	442	589	737	884	1031	1178	1326	1473
MGZ63	68 x 63	32	OUT	5945	1189	1784	2378	2973	3567	4162	4756	5351	5945
	63		IN	2313	463	694	925	1157	1388	1619	1850	2082	2313
MGZ80	87 x 80	40	OUT	9715	1943	2915	3886	4858	5829	6801	7772	8744	9715
	80		IN	3770	754	1131	1508	1885	2262	2639	3016	3393	3770

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Construction

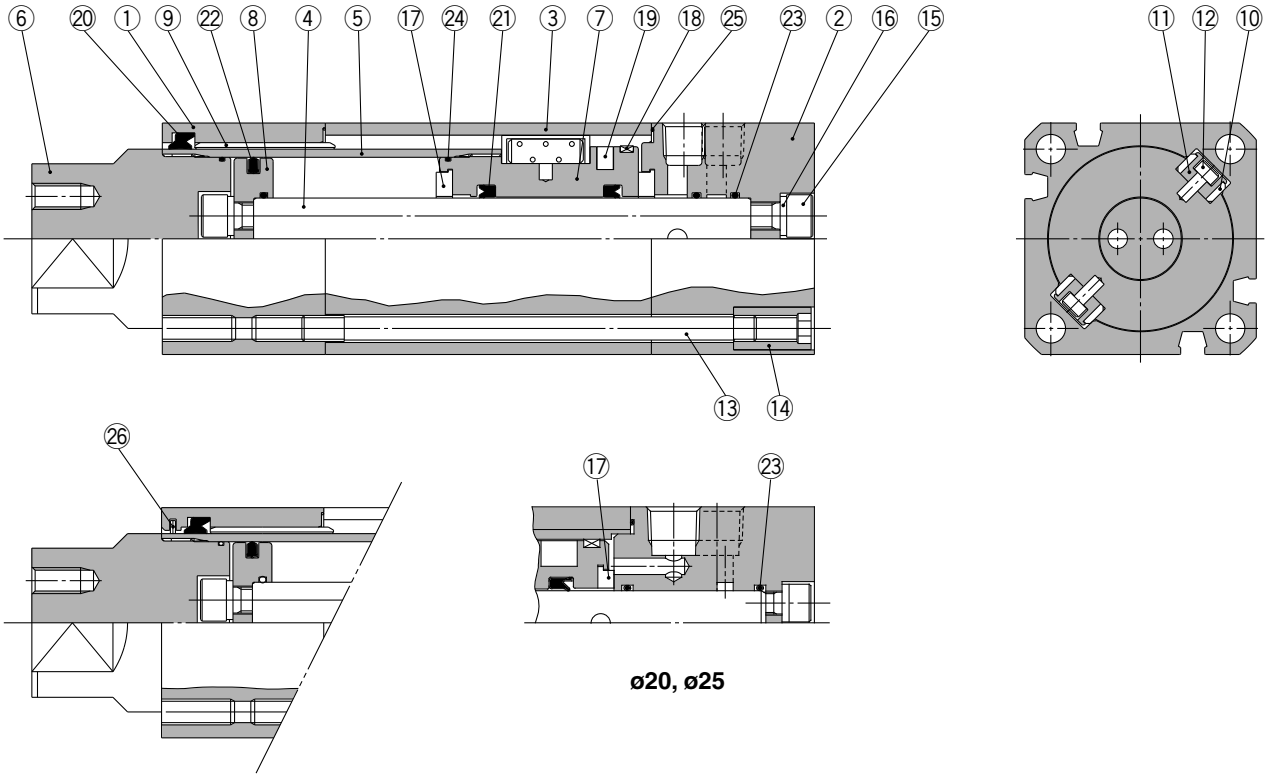

ø20, ø25

With coil scraper

Component Parts

No.	Description	Material	Note
1	**Rod cover**	Aluminum alloy	Clear anodized
2	**Head cover**	Aluminum alloy	Clear anodized
3	**Cylinder tube**	Aluminum alloy	Hard anodized
4	**Piston rod**	Aluminum alloy	Hard anodized
5	**Tube rod**	Carbon steel tube	Hard chromium electronplated
6	**Tube rod cover**	Carbon steel	Electroless nickel plated
7	**Piston**	Aluminum alloy	Chromated
8	**Stationary piston**	Aluminum alloy	Chromated
9	**Bushing**	Lead-bronze casting	
10	**Thrust plate**	Lead-bronze casting	
11	**Holder**	Aluminum alloy	Chromated
12	**Pin**	Carbon steel	Zinc chromated
13	**Tie-rod**	Carbon steel	Corrosion resistant chromated

No.	Description	Material	Note
14	**Tie-rod nut**	Carbon steel	Nickel plated
15	**Hexagon socket head screw**	Chrome molybdenum steel	Nickel plated
16	**Spring washer**	Steel wire	Nickel plated
17	**Bumper**	Urethane rubber	
18	**Wear ring**	Resin	
19	**Magnet**	—	
20*	**Rod seal A**	NBR	
21	**Rod seal B**	NBR	
22	**Piston seal**	NBR	
23	**Piston gasket**	NBR	
24	**Tube rod gasket**	NBR	
25*	**Cylinder tube gasket**	NBR	
26	**Coil scraper**	Metal	

Replacement Parts/Seal Kit

Bore size (mm)	Kit no.	Contents
20	MGZ20-PS	Items ⑳ and ㉕ from the above chart
25	MGZ25-PS	
32	MGZ32-PS	
40	MGZ40-PS	
50	MGZ50-PS	
63	MGZ63-PS	
80	MGZ80-PS	


* Seal kits consist of items ⑳ and ㉕, and can be ordered by using the seal kit number corresponding to each bore size.
* Seal kit includes a grease pack (ø20 to ø50: 10 g, ø63, 80: 20 g).

Order with the following part number when only the grease pack is needed.
Grease pack part no.: GR-S-010 (10 g), **GR-S-020** (20 g)

SMC
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Dimensions

Basic style

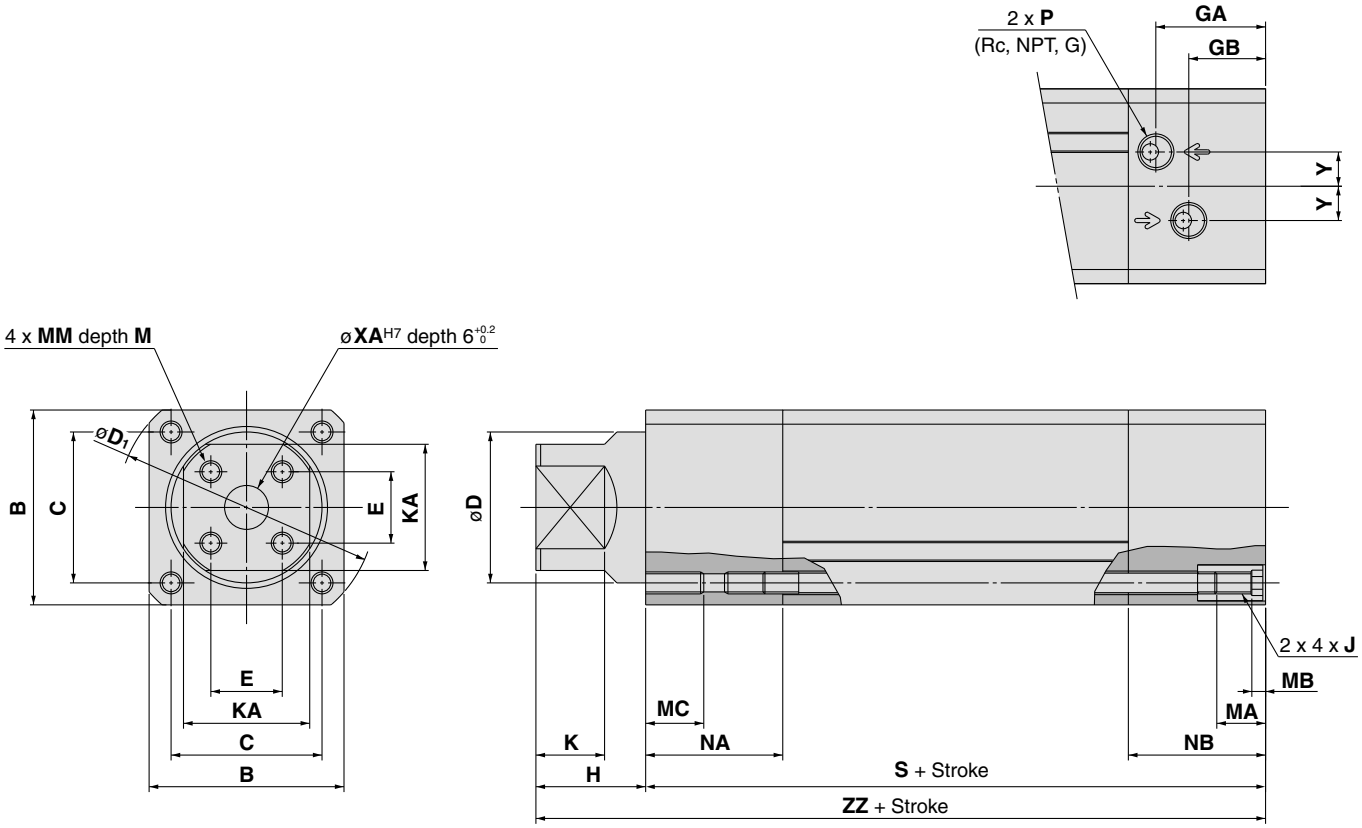

The allowable angle difference of □E to □B should be limited to ±1.5°.

(mm)


Bore size (mm)	Stroke range	B	C	D	E	KA	GA	GB	H	D_1	J	K	M
20	Up to 800	39	29	25	11	21	16	12.5	20	51	M5 x 0.8	11	8
25	Up to 800	43	33	30	12	24	26	18	21	57	M5 x 0.8	12	8
32	Up to 1000	49	38	36	16	30	28.5	19.5	35	66	M6 x 1	22	10
40	Up to 1000	59	46	45	21	36	34.5	23.5	40	78	M6 x 1	25	10
50	Up to 1000	71	55	55	26	46	40	28	45	92	M8 x 1.25	25	14
63	Up to 1000	82	66	68	32	53	46.5	34.5	50	110	M8 x 1.25	25	14
80	Up to 1000	106	86	87	36	65	54	36	50	144	M12 x 1.75	25	20


Bore size (mm)	Stroke range	MA	MB	MC	MM	NA	NB	P	S	XA	Y	ZZ
20	Up to 800	11	4	10	M5 x 0.8	19	21	M5 x 0.8	86	6	5	106
25	Up to 800	11	4	10	M5 x 0.8	26	34	1/8	107	6	6.5	128
32	Up to 1000	16	4	12	M6 x 1	37		1/8	120	12	8.5	155
40	Up to 1000	16	4	12	M6 x 1	44		1/4	138	12	9.5	178
50	Up to 1000	16	5	15	M8 x 1.25	50		1/4	150	16	12.5	195
63	Up to 1000	16	5	15	M8 x 1.25	56		1/4	171	16	15	221
80	Up to 1000	20	6	23	M12 x 1.75	66		3/8	198	20	20	248

SMC
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Dimensions: With Mounting Bracket

Transaxial foot style: (L)

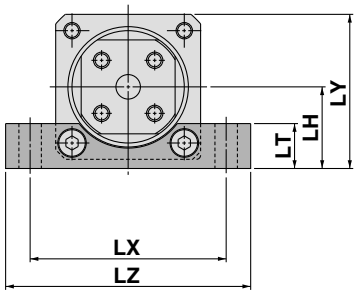


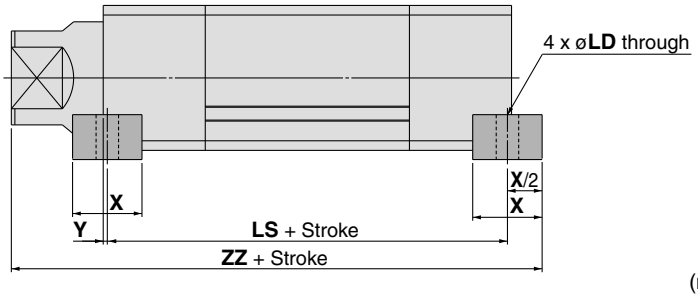


(mm)

Bore size (mm)	Stroke range	X	Y	LD	LH	LT	LX	LY	LZ	LS	ZZ
20	Up to 800	16	0	6.6	22	13	58	41.5	72	86	114
25	Up to 800	16	0	6.6	24	14	62	45.5	75	107	136
32	Up to 1000	22	0	9	27.5	16	70	52	88	120	166
40	Up to 1000	24	0	9	34	19	80	63.5	100	138	190
50	Up to 1000	32	1	11	40	22	96	75.5	120	148	210
63	Up to 1000	36	3	13	47	24	110	88	140	165	236
80	Up to 1000	40	3	17	59	30	146	112	180	192	265

Rod flange style: (F)

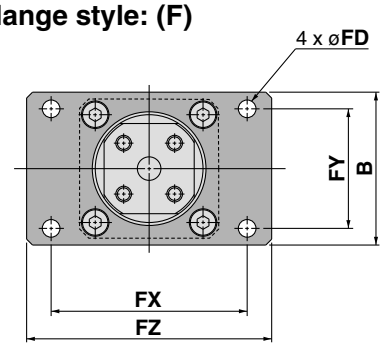


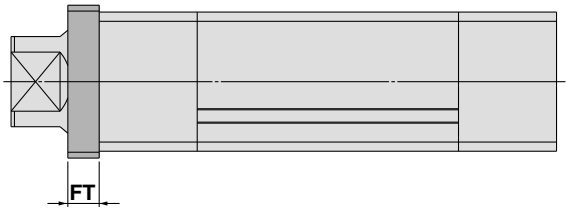


(mm)

Bore size (mm)	Stroke range	B	FD	FT	FX	FY	FZ
20	Up to 800	44	5.5	8	50	34	60
25	Up to 800	48	6.6	8	57	36	70
32	Up to 1000	60	9	12	64	46	78
40	Up to 1000	74	9	12	80	58	100
50	Up to 1000	78	9	16	100	61	125
63	Up to 1000	100	12	16	112	75	138
80	Up to 1000	120	14	16	132	95	155

Head flange style: (G)

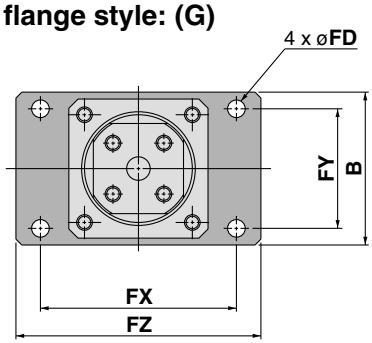

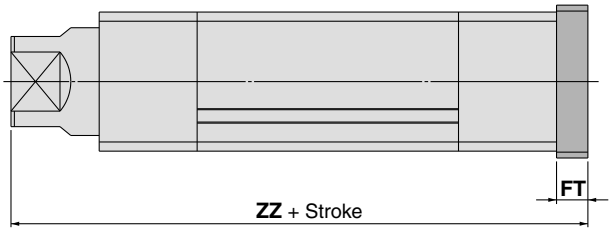

(mm)

Bore size (mm)	Stroke range	B	FD	FT	FX	FY	FZ	ZZ
20	Up to 800	44	5.5	8	50	34	60	114
25	Up to 800	48	6.6	8	57	36	70	136
32	Up to 1000	60	9	12	64	46	78	167
40	Up to 1000	74	9	12	80	58	100	190
50	Up to 1000	78	9	16	100	61	125	211
63	Up to 1000	100	12	16	112	75	138	237
80	Up to 1000	120	14	16	132	95	155	264

SMC
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Non-rotating Double Power Cylinder With End Lock on Rod Side

Series MGZ

ø40, ø50, ø63

How to Order

With end lock **MGZ** [ ] **40** [ ] – **100** **R** – **M9BW** [ ] – [ ]

Mounting style

Nil	Basic style
L	Transaxial foot style
F	Rod flange style
G	Head flange style

Bore size

40	40 mm
50	50 mm
63	63 mm

Thread type

Nil	Rc
TN	NPT
TF	G

With end lock on rod side

Cylinder stroke (mm)
Refer to "Standard Stroke" on page 434.

Auto switch

Nil	Without auto switch (Built-in magnet)

∗ For the applicable auto switch model, refer to the table below.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Made to Order
For details, refer to page 434.

Applicable Auto Switch/Refer to pages 1719 to 1827 for detailed specifications of auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage DC		Load voltage AC	Auto switch model Perpendicular	Auto switch model In-line	Lead wire length (m) 0.5 (Nil)	1 (M)	3 (L)	5 (Z)	Pre-wired connector	Applicable load	
Solid state switch	—	Grommet	Yes	3-wire (NPN)	24 V	5 V,12 V	—	M9NV	M9N	●	●	●	○	○	IC circuit	Relay, PLC
				3-wire (PNP)				M9PV	M9P	●	●	●	○	○		
				2-wire		12 V		M9BV	M9B	●	●	●	○	○	—	
	Diagnostic indication (2-color indication)			3-wire (NPN)		5 V,12 V		M9NWV	M9NW	●	●	●	○	○	IC circuit	
				3-wire (PNP)				M9PWV	M9PW	●	●	●	○	○		
				2-wire		12V		M9BWV	M9BW	●	●	●	○	○	—	
	Water resistant (2-color indication)			3-wire (NPN)		5 V,12 V		M9NAV	M9NA	○	○	●	○	○	IC circuit	
				3-wire (PNP)				M9PAV	M9PA	○	○	●	○	○		
				2-wire		12 V		M9BAV	M9BA	○	○	●	○	○	—	
Reed switch	—	Grommet	Yes	3-wire (NPN equiv.)	—	5 V	—	A96V	A96	●	—	●	—	—	IC circuit	—
			No	2-wire	24 V	12 V	100 V	A93V	A93	●	—	●	—	—	—	Relay, PLC
							100 V or less	A90V	A90	●	—	●	—	—	IC circuit	

∗ Lead wire length symbols: 0.5 m ····· Nil (Example) M9NW
1 m ····· M (Example) M9NWM
3 m ····· L (Example) M9NWL
5 m ····· Z (Example) M9NWZ

∗ Solid state auto switches marked "○" are produced upon receipt of order.

∗ Refer to page 445 for applicable auto switches other than listed above.
∗ Refer to pages 1784 and 1785 for details of auto switches with a pre-wired connector.
∗ Auto switches are shipped together (not assembled).

SMC
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com



Cylinder Specifications

Bore size (mm)	40	50	63
Action	Double acting, Single rod		
Fluid	Air		
Proof pressure	1.5 MPa		
Max. operating pressure	1.0 MPa		
Min. operating pressure	0.2 MPa*		
Ambient and fluid temperature	Without auto switch: –10° to 70°C (With no freezing)		
	With auto switch: –10° to 60°C (With no freezing)		
Lubrication	Non-lube		
Piston speed	OUT 50 to 700 mm/s		
	IN 50 to 450 mm/s		
Stroke length tolerance	Up to $250^{+1.0}_{0}$, 251 to $1000^{+1.4}_{0}$		
Cushion	Rubber bumper		
Mounting	Basic style, Transaxial foot style, Rod flange style, Head flange style		

* 0.08 MPa (or 0.12 MPa for long strokes) except the lock part.

Lock Specifications

End lock position	Rod side only		
Holding force (max) N	ø40	ø50	ø63
	1770	2690	4160
Backlash	2 mm or less		
Manual release	Non-locking type		

Adjust the switch position so that it operates upon movement to both the stroke end and backlash (2 mm) position.

Made to Order

Made to Order

(Refer to page 2002 for details.)

Symbol	Specifications
-X1247	Rod end female thread: 1 pc.

Standard Stroke

Bore sizes (mm)	Standard strokes (mm)	Long strokes (mm)
40, 50, 63	75, 100, 125, 150, 175 200, 250, 300	350, 400, 450, 500, 600 700, 800, 900,1000

Intermediate strokes and strokes shorter than 75 mm are also available.

Mass

(kg)

Bore sizes (mm)		40	50	63
Standard mass	Basic style	2.80	4.08	6.13
	Foot style	3.29	4.97	7.39
	Flange style	3.24	4.84	7.13
Mass per each 50 mm of stroke	All mounting brackets	0.41	0.61	0.80


Theoretical Output

(N)

Model	Bore size (mm)	Rod size (mm)	Operating direction	Piston area (mm^2)	Operating pressure (MPa)								
					0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
MGZ40	45 x 40	20	OUT	2533	507	760	1013	1267	1520	1773	2026	2280	2533
	40		IN	942	188	283	377	471	565	659	754	848	942
MGZ50	55 x 50	25	OUT	3848	770	1154	1539	1924	2309	2694	3078	3463	3848
	50		IN	1473	295	442	589	737	884	1031	1178	1326	1473
MGZ63	68 x 63	32	OUT	5945	1189	1784	2378	2973	3567	4162	4756	5351	5945
	63		IN	2313	463	694	925	1157	1388	1619	1850	2082	2313

SMC
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Construction

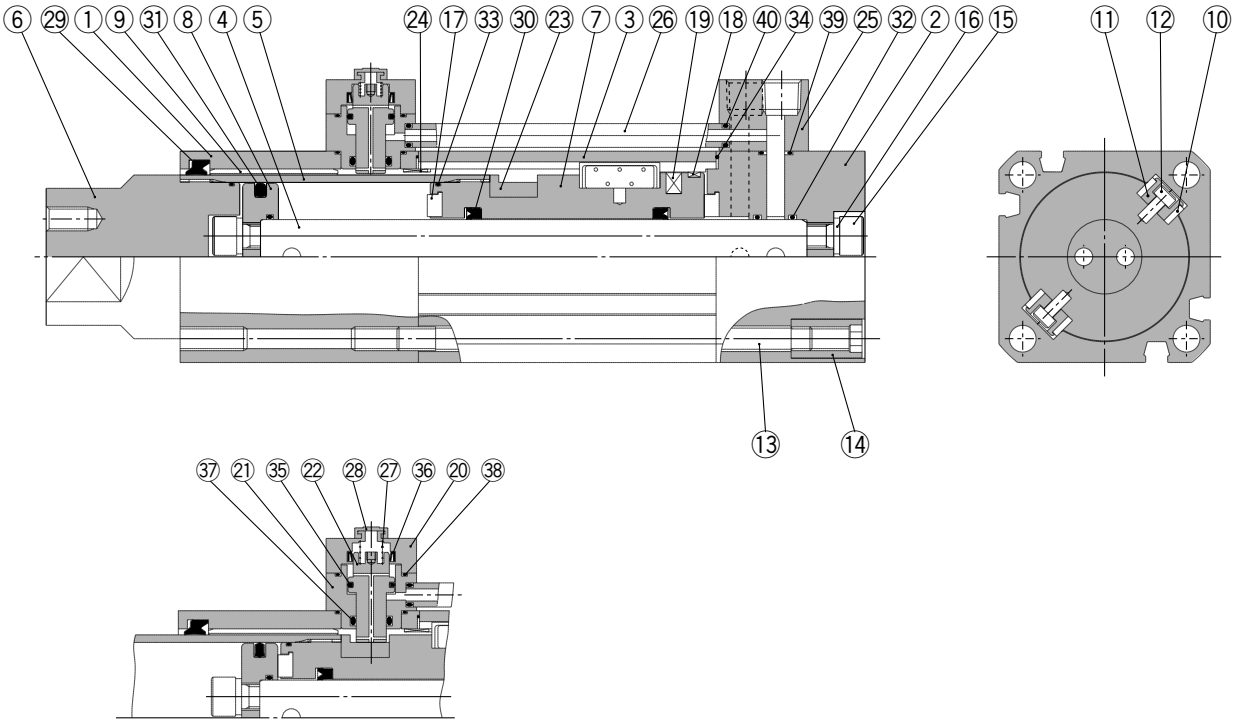

End lock

Component Parts

No.	Description	Material	Note
1	**Rod cover**	Aluminum alloy	Clear anodized
2	**Head cover**	Aluminum alloy	Clear anodized
3	**Cylinder tube**	Aluminum alloy	Hard anodized
4	**Piston rod**	Aluminum alloy	Hard anodized
5	**Tube rod**	Carbon steel tube	Hard chromium electroplated
6	**Tube rod cover**	Carbon steel	Electroless nickel plated
7	**Piston**	Aluminum alloy	Chromated
8	**Stationary piston**	Aluminum alloy	Chromated
9	**Bushing**	Lead-bronze casted	
10	**Thrust plate**	Lead-bronze casted	
11	**Holder**	Aluminum alloy	Chromated
12	**Pin**	Carbon steel	Zinc chromated
13	**Tie-rod**	Carbon steel	Corrosion resistant chromated
14	**Tie-rod nut**	Carbon steel	Nickel plated
15	**Hexagon socket head screw**	Chrome molybdenum steel	Nickel plated
16	**Spring washer**	Steel wire	Nickel plated
17	**Bumper**	Urethane rubber	
18	**Wear ring**	Resin	
19	**Magnet**	—	
20	**Cap**	Bronze alloy	Electroless nickel plated

No.	Description	Material	Note
21	**Lock holder**	Stainless steel	
22	**Lock piston**	Carbon steel	Quenched, hard chromium electroplated
23	**Stopper**	Carbon steel	Quenched
24	**Collar**	Steel piping	Zinc trivalent chromated
25	**Port block**	Bronze alloy	Electroless nickel plated
26	**Pipe**	Bronze alloy	
27	**Lock spring**	Steel wire	
28	**Rubber cap**	Synthetic rubber	
29*	**Rod seal A**	NBR	
30	**Rod seal B**	NBR	
31	**Piston seal**	NBR	
32	**Piston gasket**	NBR	
33	**Tube rod gasket**	NBR	
34*	**Cylinder tube gasket**	NBR	
35*	**Locking piston seal A**	NBR	
36*	**Locking piston seal B**	NBR	
37*	**Locking piston seal C**	NBR	
38*	**Lock holder gasket**	NBR	
39*	**Port block gasket**	NBR	
40*	**Pipe gasket**	NBR	

Replacement Parts/Seal Kit

Bore size (mm)	Kit no.	Contents
40	MGZ40R-PS	Items ㉙, and ㉞ to ㊵ from the above chart
50	MGZ50R-PS	
63	MGZ63R-PS	


* Seal kits consist of items ㉙ and ㉞ to ㊵, and can be ordered by using the seal kit number corresponding to each bore size.
* Seal kit includes a grease pack (10 g).

Order with the following part number when only the grease pack is needed.
Grease pack part no.: GR-S-010 (10 g)

SMC
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Dimensions

Basic style

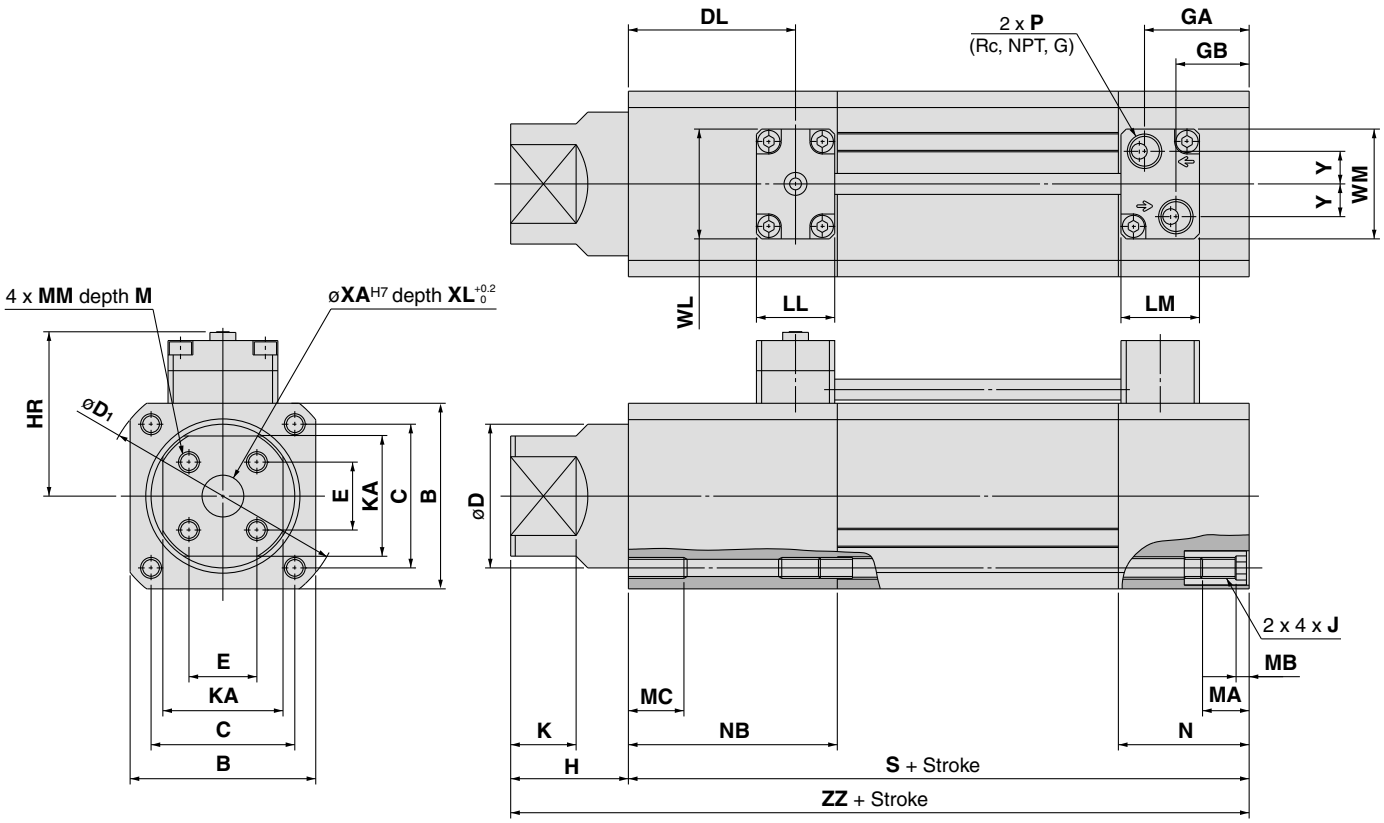

(mm)


Bore size (mm)	Stroke range	B	C	D	DL	E	GA	GB	H	HR	D_1	J	K	KA	LL	LM
40	Up to 1000	59	46	45	58	21	34.5	23.5	40	57.5	78	M6 x 1	25	36	30	30
50	Up to 1000	71	55	55	67	26	40	28	45	63.5	92	M8 x 1.25	25	46	30	30
63	Up to 1000	82	66	68	73	32	46.5	34.5	50	69	110	M8 x 1.25	25	53	30	30

Bore size (mm)	Stroke range	M	MA	MB	MC	MM	N	NB	P	S	XA	XL	Y	WL	WM	ZZ
40	Up to 1000	10	16	4	12	M6 x 1	44	74	1/4	168	12	6	9.5	42	39	208
50	Up to 1000	14	16	5	15	M8 x 1.25	50	83	1/4	183	16	6	12.5	42	42	228
63	Up to 1000	14	16	5	15	M8 x 1.25	56	89	1/4	204	16	6	15	52	52	254

SMC
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Dimensions: With Mounting Bracket


Transaxial foot style: (L)

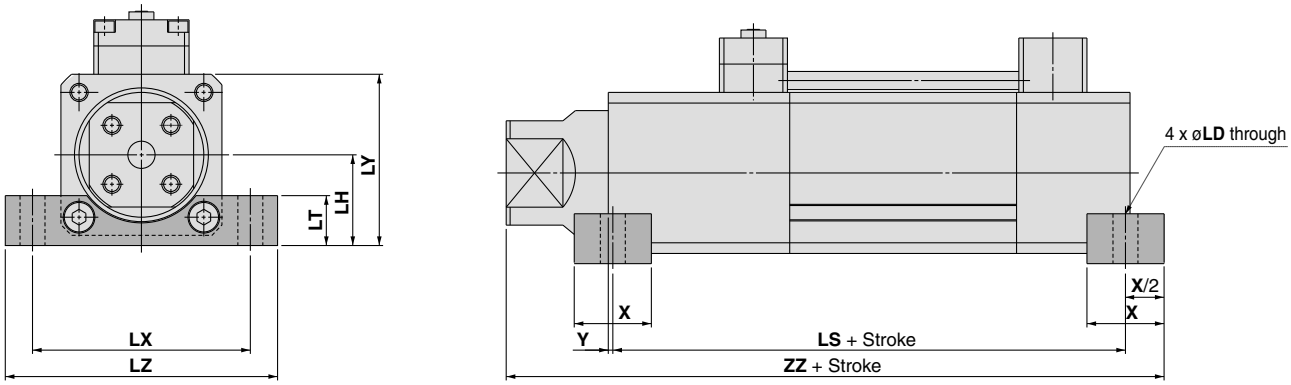

(mm)

Bore size (mm)	Stroke range	X	Y	LD	LH	LT	LX	LY	LZ	LS	ZZ
40	Up to 1000	24	0	9	34	19	80	63.5	100	168	220
50	Up to 1000	32	1	11	40	22	96	75.5	120	181	243
63	Up to 1000	36	3	13	47	24	110	88	140	198	269


Rod flange style: (F)

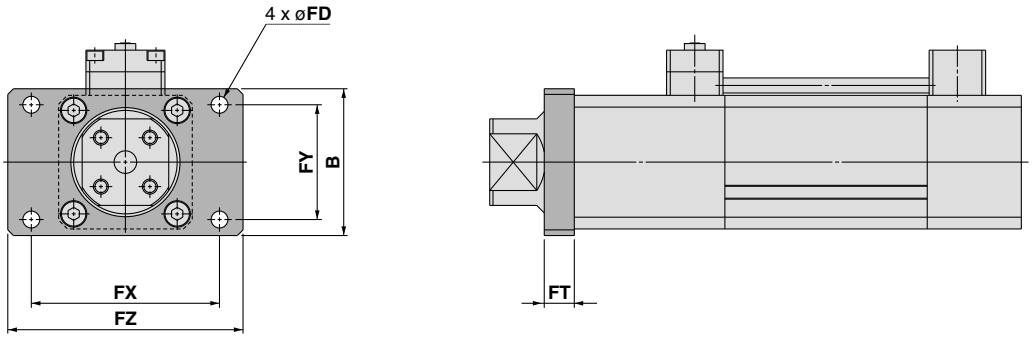

(mm)

Bore size (mm)	Stroke range	B	FD	FT	FX	FY	FZ
40	Up to 1000	74	9	12	80	58	100
50	Up to 1000	78	9	16	100	61	125
63	Up to 1000	100	12	16	112	75	138

Head flange style: (G)

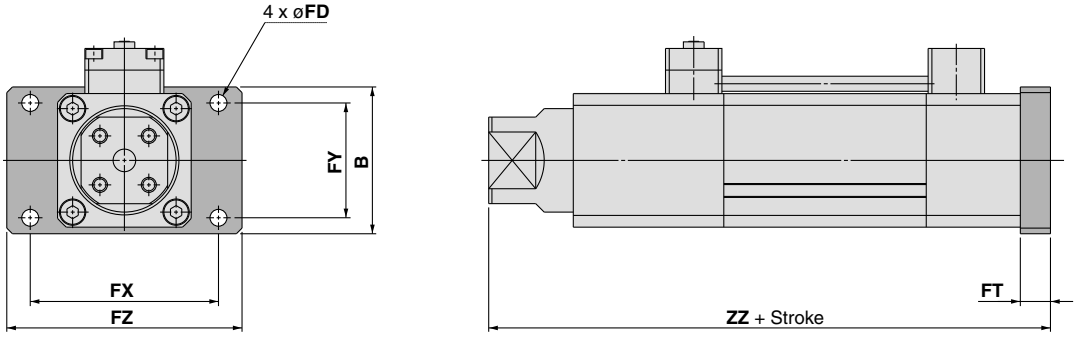

(mm)

Bore size (mm)	Stroke range	B	FD	FT	FX	FY	FZ	ZZ
40	Up to 1000	74	9	12	80	58	100	220
50	Up to 1000	78	9	16	100	61	125	244
63	Up to 1000	100	12	16	112	75	138	270

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Double Power Cylinder/ Without Non-rotating Mechanism

Series MGZR

ø20, ø25, ø32, ø40, ø50, ø63, ø80

How to Order

MGZR □ 40 □ Z – 100 – M9BW □ – □

Without non-rotating mechanism

Mounting style

Nil	Basic style
L	Transaxial foot style
F	Rod flange style
G	Head flange style
D	Double clevis style

Bore size

20	20 mm
25	25 mm
32	32 mm
40	40 mm
50	50 mm
63	63 mm
80	80 mm

Thread type

Nil	M5 x 0.8	ø20
	Rc	ø25
TN	NPT	ø32
TF	G	ø40
		ø50
		ø63
		ø80

Coil scraper

Nil	Without coil scraper
Z	With coil scraper

Cylinder stroke (mm)
Refer to "Standard Stroke" on page 439.

Auto switch

Nil	Without auto switch (Built-in magnet)

∗ For the applicable auto switch model, refer to the table below.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Made to Order
For details, refer to page 439.

Applicable Auto Switch/Refer to pages 1719 to 1827 for detailed specifications of auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage DC	Load voltage DC	Load voltage AC	Auto switch model Perpendicular	Auto switch model In-line	Lead wire length (m) 0.5 (Nil)	1 (M)	3 (L)	5 (Z)	Pre-wired connector	Applicable load	
Solid state switch	—	Grommet	Yes	3-wire (NPN)	24 V	5 V,12 V	—	M9NV	M9N	●	●	●	○	○	IC circuit	Relay, PLC
				3-wire (PNP)				M9PV	M9P	●	●	●	○	○		
				2-wire		12 V		M9BV	M9B	●	●	●	○	○	—	
	Diagnostic indication (2-color indication)			3-wire (NPN)		5 V,12 V		M9NWV	M9NW	●	●	●	○	○	IC circuit	
				3-wire (PNP)				M9PWV	M9PW	●	●	●	○	○		
				2-wire		12 V		M9BWV	M9BW	●	●	●	○	○	—	
	Water resistant (2-color indication)			3-wire (NPN)		5 V,12 V		M9NAV	M9NA	○	○	●	○	○	IC circuit	
				3-wire (PNP)				M9PAV	M9PA	○	○	●	○	○		
				2-wire		12 V		M9BAV	M9BA	○	○	●	○	○	—	
Reed switch	—	Grommet	Yes	3-wire (NPN equiv.)	—	5 V	—	A96V	A96	●	—	●	—	—	IC circuit	—
			No	2-wire	24 V	12 V	100 V	A93V	A93	●	—	●	—	—	—	Relay, PLC
							100 V or less	A90V	A90	●	—	●	—	—	IC circuit	

∗ Lead wire length symbols: 0.5 m ····· Nil (Example) M9NW
1 m ····· M (Example) M9NWM
3 m ····· L (Example) M9NWL
5 m ····· Z (Example) M9NWZ

∗ Solid state auto switches marked "○" are produced upon receipt of order.

∗ Refer to page 445 for applicable auto switches other than listed above.
∗ Refer to pages 1784 and 1785 for details of auto switches with a pre-wired connector.
∗ Auto switches are shipped together (not assembled).

SMC
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com



Made to Order

Made to Order
(Refer to page 2002 for details.)

Symbol	Specifications
-X1248	Rod end female thread: 4 pcs.

Specifications

Bore size (mm)		20	25	32	40	50	63	80
Action		Double acting, Single rod						
Fluid		Air						
Proof pressure		1.5 MPa						
Max. operating pressure		1.0 MPa						
Min. operating pressure		Standard stroke: 0.08 MPa						
		Long stroke: 0.12 MPa						
Ambient and fluid temperature		Without auto switch: –10° to 70°C (With no freezing)						
		With auto switch: –10° to 70°C (With no freezing)						
Lubrication		Non-lube						
Piston speed	**OUT**	50 to 700 mm/s						
	IN	50 to 350 mm/s		50 to 450 mm/s				
Stroke length tolerance		Up to $250^{+1.0}_{0}$, 251 to $1000^{+1.4}_{0}$						
Cushion		Rubber bumper						
Mounting		Basic style, Transaxial foot style, Rod flange style Head flange style, Double clevis style						

Standard Stroke

Bore sizes (mm)	Standard strokes (mm)	Long strokes (mm)
20, 25	75, 100, 125, 150, 175 200, 250, 300	350, 400, 450, 500 600, 700, 800
32, 40, 50 63, 80	75, 100, 125, 150, 175 200, 250, 300	350, 400, 450, 500, 600 700, 800, 900,1000

Intermediate strokes and strokes shorter than 75mm are also available.

Mass

(kg)

Bore sizes (mm)		20	25	32	40	50	63	80
Standard mass	Basic style	0.48	0.70	1.09	1.91	3.03	4.83	8.85
	Foot style	0.63	0.86	1.34	2.39	3.92	6.08	10.61
	Flange style	0.59	0.83	1.32	2.34	3.79	5.83	9.92
	Double clevis style	0.58	0.83	1.32	2.19	3.47	5.62	10.66
Mass per each 50 mm of stroke	All mounting brackets	0.19	0.22	0.29	0.39	0.59	0.78	1.21


Theoretical Output

(N)

Model	Bore size (mm)	Rod size (mm)	Operating direction	Piston area (mm^2)	Operating pressure (MPa)								
					0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
MGZ20	20 x 25	10	OUT	726	145	218	290	363	436	508	581	653	726
	20		IN	236	47	71	94	118	141	165	189	212	236
MGZ25	25 x 30	12	OUT	1085	217	326	434	543	651	760	868	977	1085
	25		IN	378	76	113	151	189	227	265	302	340	378
MGZ32	36 x 32	16	OUT	1621	324	486	648	811	973	1135	1297	1459	1621
	32		IN	603	121	181	241	302	362	422	482	543	603
MGZ40	45 x 40	20	OUT	2533	507	760	1013	1267	1520	1773	2026	2280	2533
	40		IN	942	188	283	377	471	565	659	754	848	942
MGZ50	55 x 50	25	OUT	3848	770	1154	1539	1924	2309	2694	3078	3463	3848
	50		IN	1473	295	442	589	737	884	1031	1178	1326	1473
MGZ63	68 x 63	32	OUT	5945	1189	1784	2378	2973	3567	4162	4756	5351	5945
	63		IN	2313	463	694	925	1157	1388	1619	1850	2082	2313
MGZ80	87 x 80	40	OUT	9715	1943	2915	3886	4858	5829	6801	7772	8744	9715
	80		IN	3770	754	1131	1508	1885	2262	2639	3016	3393	3770

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Construction: MGZR

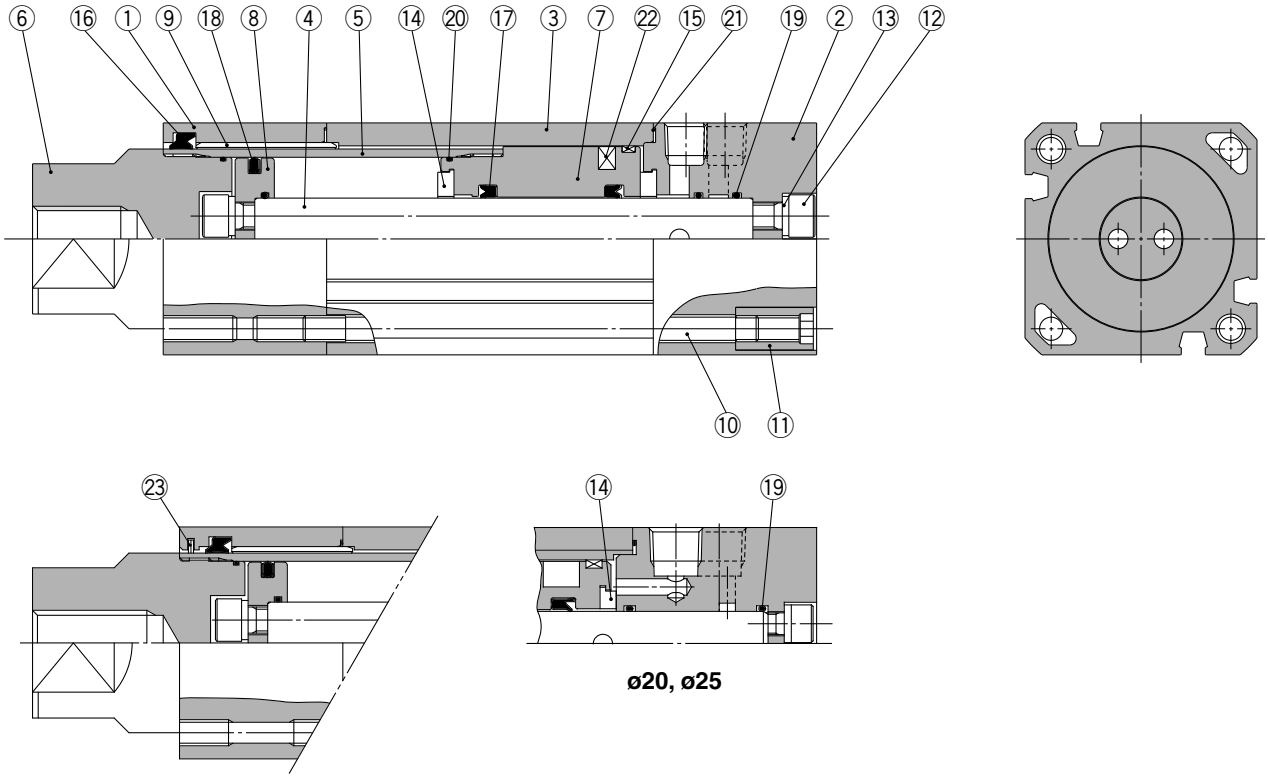

Component Parts

No.	Description	Material	Note
1	**Rod cover**	Aluminum alloy	Clear anodized
2	**Head cover**	Aluminum alloy	Clear anodized
3	**Cylinder tube**	Aluminum alloy	Hard anodized
4	**Piston rod**	Aluminum alloy	Hard anodized
5	**Tube rod**	Carbon steel	Hard chromium electroplated
6	**Tube rod cover**	Carbon steel	Electroless nickel plated
7	**Piston**	Aluminum alloy	Chromated
8	**Stationary piston**	Aluminum alloy	Chromated
9	**Bushing**	Lead bronze casted	
10	**Tie-rod**	Carbon steel	Corrosion resistant chromated
11	**Tie-rod nut**	Carbon steel	Nickel plated
12	**Hexagon socket head screw**	Chrome molybdenum steel	Nickel plated

No.	Description	Material	Note
13	**Spring washer**	Steel wire	Nickel plated
14	**Bumper**	Urethane rubber	
15	**Wear ring**	Resin	
16*	**Rod seal A**	NBR	
17	**Rod seal B**	NBR	
18	**Piston seal**	NBR	
19	**Piston gasket**	NBR	
20	**Tube rod gasket**	NBR	
21*	**Cylinder tube gasket**	NBR	
22	**Magnet**	—	
23	**Coil scraper**	Metal	

Replacement Parts/Seal Kit

Bore size (mm)	Kit no.	Contents
20	MGZ20-PS	Items ⑯ and ㉑ from the above chart
25	MGZ25-PS	
32	MGZ32-PS	
40	MGZ40-PS	
50	MGZ50-PS	
63	MGZ63-PS	
80	MGZ80-PS	


* Seal kits consist of items ⑯ and ㉑, and can be ordered by using the seal kit number corresponding to each bore size.
* Seal kit includes a grease pack (ø20 to ø50: 10 g, ø63, 80: 20 g).

Order with the following part number when only the grease pack is needed.
Grease pack part no.: GR-S-010 (10 g), **GR-S-020** (20 g)

SMC
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Dimensions

Basic style

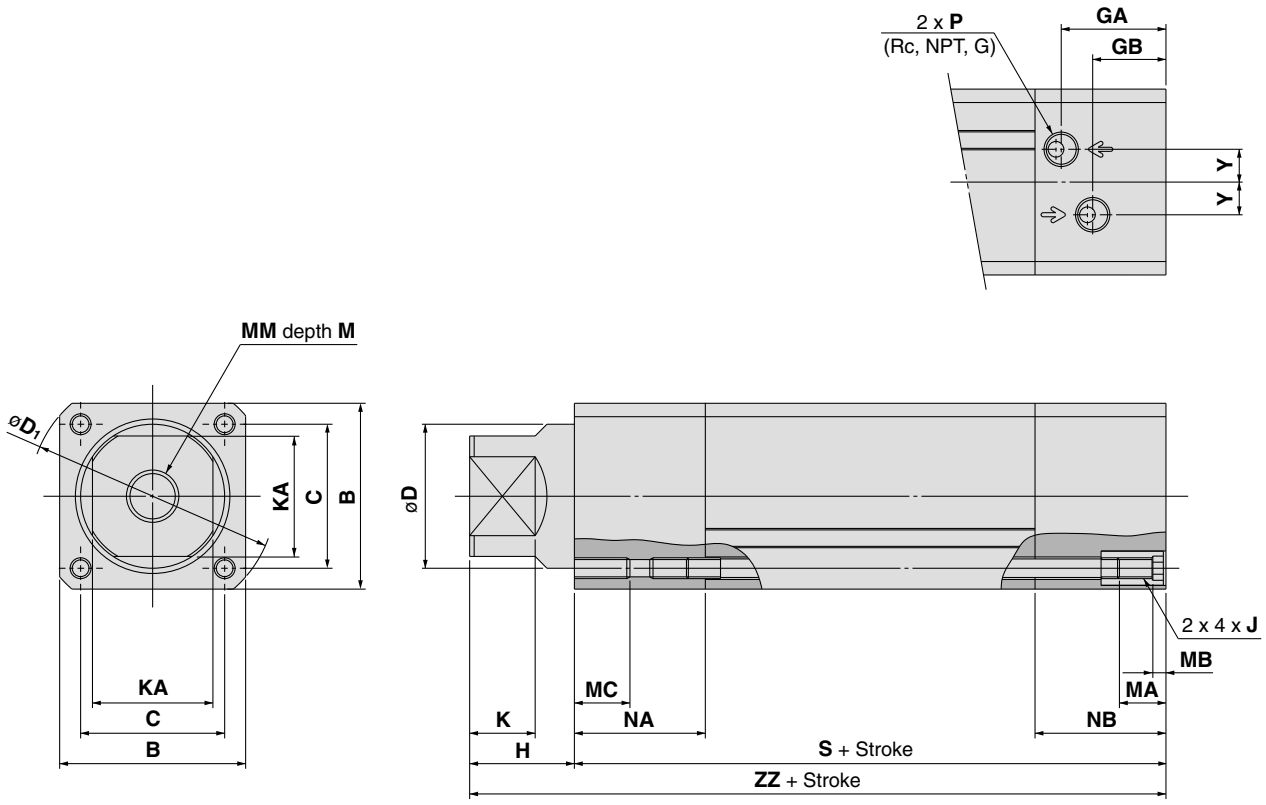


(mm)

Bore size (mm)	Stroke range	B	C	D	KA	GA	GB	H	D_1	J	K	M	MA	MB	MC	MM	NA	NB	P	S	Y	ZZ
20	Up to 800	39	29	25	21	16	12.5	20	51	M5 x 0.8	11	17	11	4	10	M8 x 1.25	19	21	M5 x 0.8	86	5	106
25	Up to 800	43	33	30	24	26	18	21	57	M5 x 0.8	12	17	11	4	10	M8 x 1.25	26	34	1/8	107	6.5	128
32	Up to 1000	49	38	36	30	28.5	19.5	35	66	M6 x 1	22	22	16	4	12	M10 x 1.5	37		1/8	120	8.5	155
40	Up to 1000	59	46	45	36	34.5	23.5	40	78	M6 x 1	25	30	16	4	12	M16 x 2	44		1/4	138	9.5	178
50	Up to 1000	71	55	55	46	40	28	45	92	M8 x 1.25	25	35	16	5	15	M20 x 2.5	50		1/4	150	12.5	195
63	Up to 1000	82	66	68	53	46.5	34.5	50	110	M8 x 1.25	25	35	16	5	15	M20 x 2.5	56		1/4	171	15	221
80	Up to 1000	106	86	87	65	54	36	50	144	M12 x 1.75	25	38	20	6	23	M22 x 2.5	66		3/8	198	20	248

SMC
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Dimensions: With Mounting Bracket


Transaxial foot style: (L)

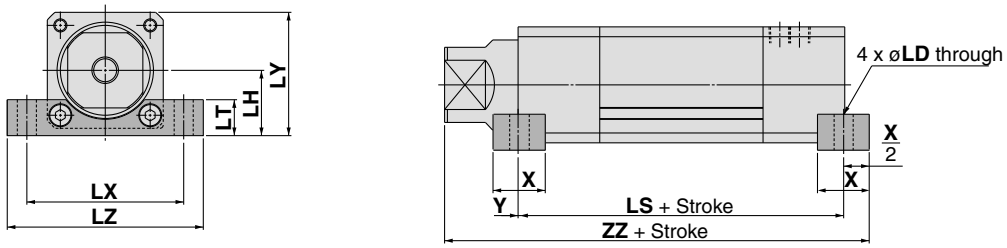

(mm)

Bore size (mm)	Stroke range	X	Y	LD	LH	LT	LX	LY	LZ	LS	ZZ
20	Up to 800	16	0	6.6	22	13	58	41.5	72	86	114
25	Up to 800	16	0	6.6	24	14	62	45.5	75	107	136
32	Up to 1000	22	0	9	27.5	16	96	52	88	120	166
40	Up to 1000	24	0	9	34	19	110	63.5	100	138	190
50	Up to 1000	32	1	11	40	22	146	75.5	120	148	210
63	Up to 1000	36	3	13	47	24	110	88	140	165	236
80	Up to 1000	40	3	17	59	30	146	112	180	192	265


Rod flange style: (F)

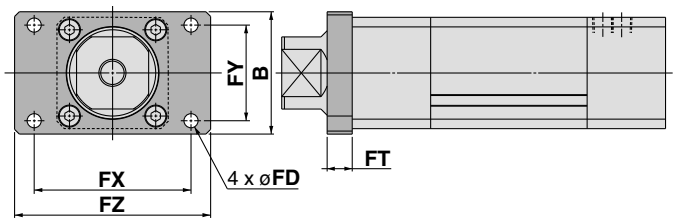

(mm)

Bore size (mm)	Stroke range	B	FD	FT	FX	FY	FZ
20	Up to 800	44	5.5	8	50	34	60
25	Up to 800	48	6.6	8	57	36	70
32	Up to 1000	60	9	12	64	46	78
40	Up to 1000	74	9	12	80	58	100
50	Up to 1000	78	9	16	100	61	125
63	Up to 1000	100	12	16	112	75	138
80	Up to 1000	120	14	16	132	95	155


Head flange style: (G)

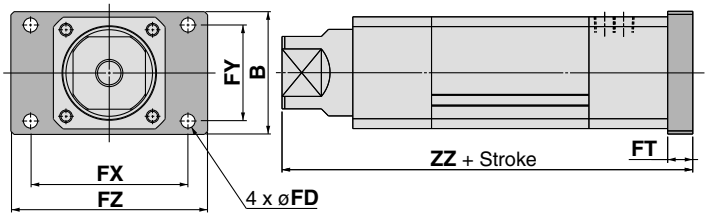


(mm)

Bore size (mm)	Stroke range	B	FD	FT	FX	FY	FZ	ZZ
20	Up to 800	44	5.5	8	50	34	60	114
25	Up to 800	48	6.6	8	57	36	70	136
32	Up to 1000	60	9	12	64	46	78	167
40	Up to 1000	74	9	12	80	58	100	190
50	Up to 1000	78	9	16	100	61	125	211
63	Up to 1000	100	12	16	112	75	138	237
80	Up to 1000	120	14	16	132	95	155	264

Double clevis style: (D)

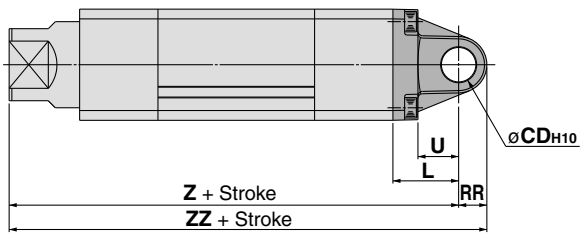




∗ A clevis pin and 2 cotter pins are included.

(mm)


Bore size (mm)	Stroke range	L	RR	U	CD_{H10}	$CX^{+0.3}_{+0.1}$	CZ	Z	ZZ
20	Up to 250	23	8.5	14	10	14	28	129	137.5
25	Up to 350	23	11	14	10	14	28	151	162
32	Up to 600	30	12	17	14	20	40	185	197
40	Up to 600	30	15	17	14	20	40	208	223
50	Up to 700	42	18	26	22	30	60	237	255
63	Up to 900	42	23	26	22	30	60	263	286
80	Up to 900	50	28	30	25	32	64	298	326

SMC
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Double Clevis Bracket

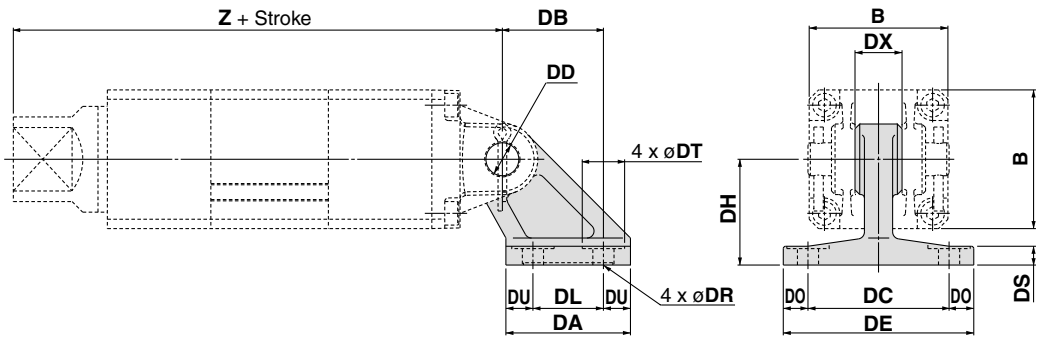


Model	Bore size (mm)	B	DA	DB	DC	DD_{H10}	DE	DH	DL	DO	DR	DS	DT	DU	DX	Z
MB-B03	**20**	39	42	32	44	$10^{+0.058}_{0}$	62	33	22	9	6.6	7	15	10	14	129
	25	43	42	32	44	$10^{+0.058}_{0}$	62	33	22	9	6.6	7	15	10	14	151
MB-B05	**32**	49	53	43	60	$14^{+0.070}_{0}$	81	45	30	10.5	9	8	18	11.5	20	185
	40	59	53	43	60	$14^{+0.070}_{0}$	81	45	30	10.5	9	8	18	11.5	20	208
MB-B08	**50**	71	73	64	86	$22^{+0.084}_{0}$	111	65	45	12.5	11	10	22	14	30	237
	63	82	73	64	86	$22^{+0.084}_{0}$	111	65	45	12.5	11	10	22	14	30	263
MB-B12	**80**	106	90	78	110	$25^{+0.084}_{0}$	136	75	60	13	13.5	14	24	15	32	298



Rotation

Bore size (mm)	A°	B°	A° + B° + 90°
20	35	50	175
25	30	50	170
32, 40	30	50	170
50, 63	35	50	175
80	30	35	155


Clevis Pin

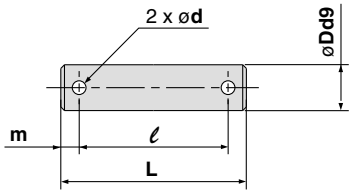

Model	Bore size (mm)	Dd9	L	ℓ	m	d (Drill through)	Cotter pin Note)
CD-M03	20, 25	$10^{-0.040}_{-0.076}$	44	36	4	3	ø3 x 18 ℓ
CD-M05	32, 40	$14^{-0.050}_{-0.093}$	60	51	4.5	4	ø4 x 25 ℓ
CD-M08	50, 63	$22^{-0.065}_{-0.117}$	82	72	5	4	ø4 x 35 ℓ
CDP-7A	80	$25^{-0.065}_{-0.117}$	88	78	5	4	ø4 x 36 ℓ

Note) Cotter pins and flat washers are included.

Floating Joint

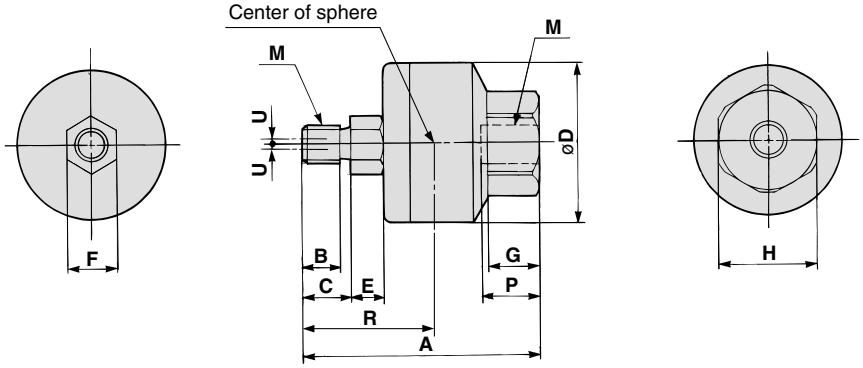

(mm)

Applicable bore size	Model	M Nominal size	M Pitch	A	B	C	D	E	F	G	H	Center of sphere R	Max. screw-in depth P	Allowable eccentricity U	Max. operating tension and compression N Compression	Max. operating tension and compression N Tension	Mass (kg)
20, 25	**JB40-8-125**	8	1.25	51	8.5	11	31	6	11	11	22	29	13	0.75	6000	1300	0.15
32	**JB63-10-150**	10	1.5	62.5	10	13	41	7.5	14	13.5	27	35.5	15	1	11000	3100	0.29
40	**JB80-16-200**	16	2	80.5	16	20	50	9.5	19	16	32	47.5	18	1.25	18000	5000	0.56
50, 63	**JB100-20-250**	20	2.5	101	21	26	59.5	11.5	24	20	41	59	24	2	28000	7900	1.04
80	**JB140-22-250**	22	2.5	129	18	22	79	14	30	22	46	71.5	38	2.5	54000	15300	2.6


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Minimum Stroke for Mounting

(mm)

Model	No. of auto switches	ø20	ø25	ø32	ø40	ø50	ø63	ø80
D-A9□	2 pcs. (Same surface)	50			50			50
	2 pcs. (Different surfaces)	15			15			15
	1 pc.	15			15			10
D-A9□V	2 pcs. (Same surface)	25			25			25
	2 pcs. (Different surfaces)	10			10			10
	1 pc.	5			5			5
D-M9□V	2 pcs. (Same surface)	30			30			30
	2 pcs. (Different surfaces)	10			10			10
	1 pc.	5			5			5
D-M9□ D-M9□W	2 pcs. (Same surface)	55			55			55
	2 pcs. (Different surfaces)	15			15			15
	1 pc.	15			15			10
D-M9□WV	2 pcs. (Same surface)	30			30			30
	2 pcs. (Different surfaces)	15			15			15
	1 pc.	10			10			10
D-M9□A	2 pcs. (Same surface)	60			60			60
	2 pcs. (Different surfaces)	20	15		15			15
	1 pc.	15			15			10
D-M9□AV	2 pcs. (Same surface)	35			35			35
	2 pcs. (Different surfaces)	15			15			15
	1 pc.	10			10			10
D-Z7□/Z80	2 pcs. (Same surface)	—			60			70
	2 pcs. (Different surfaces)	—			20			20
	1 pc.	—			20			20
D-Y59□/Y69□ D-Y7P/Y7PV	2 pcs. (Same surface)	—			60			65
	2 pcs. (Different surfaces)	—			20			20
	1 pc.	—			20			20
D-Y7□W D-Y7□WV	2 pcs. (Same surface)	—			70			65
	2 pcs. (Different surfaces)	—			25			20
	1 pc.	—			25			20
D-Y7BAL	2 pcs. (Same surface)	—			70			75
	2 pcs. (Different surfaces)	—			25			20
	1 pc.	—			25			20

Auto Switch Proper Mounting Position (Detection at Stroke End) and Its Mounting Height

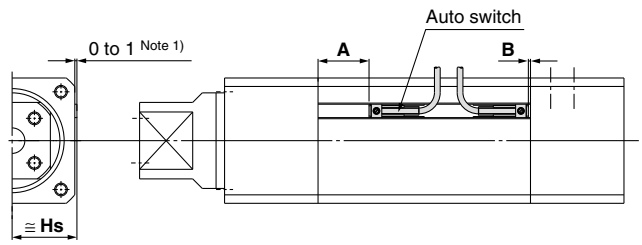

Auto Switch Proper Mounting Position

(mm)

Auto switch model / Bore size	D-A9□ D-A9□V		D-M9□/M9□V D-M9□W/M9□WV D-M9□AL/M9□AVL		D-Z7□/Z80 D-Y59□/Y69□ D-Y7P/Y7PV D-Y7□W/Y7□WV D-Y7BAL	
	A	B	A	B	A	B
20	24	3	28	7	—	—
25	24	3	28	7	—	—
32	22	4	26	8	—	—
40	24.5	2.5	28.5	6.5	23	0
50	24.5	2.5	28.5	6.5	23	0
63	33.5	2.5	37.5	6.5	32	0
80	38	5	42	9	37	4

Note) Adjust the auto switch after confirming the operating conditions in the actual setting.

Auto Switch Mounting Height

(mm)

Auto switch model / Bore size	D-A9□V Note 2) D-Y69□ D-Y7PV D-Y7□WV	D-M9□V D-M9□WV D-M9□AVL
	Hs	Hs
20	25	28
25	27	30
32	30	33
40	28.5	31.5
50	38.5	41.5
63	44	47
80	56	59

Note 1) The above figures are when the in-line electrical entry type D-A9□/M9□/M9□W/M9□AL/Z7□/Z80/Y59□/Y7P/Y7□W/Y7BAL auto switches are mounted.
Note 2) Z7□/Z80/Y59□/Y7P/Y7□W/Y7BAL cannot be mounted on ø20 to ø32.

SMC
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Operating Range

(mm)

Auto switch model	Bore size						
	20	**25**	**32**	**40**	**50**	**63**	**80**
D-A9□/A9□V	8	9.5	8	8	8.5	9.5	9.5
D-M9□/M9□V **D-M9□W/M9□WV** **D-M9□AL/M9□AVL**	4.5	4.5	5	5	5	6.5	6
D-Z7□/Z80	—	—	—	10	10	11	13
D-Y59□/Y69□ **D-Y7P/Y7PV** **D-Y7□W/Y7□WV** **D-Y7BAL**	—	—	—	6	5	6	8


∗ Hysteresis specifications are given as a guide, it is not a guaranteed range.
(Tolerance ±30%)
Hysteresis may fluctuate due to the operating environment.

Auto Switch Mounting Bracket: Part No.

Auto switch model	Bore size	
	ø20 to ø32	**ø40 to ø80**
D-A9□/A9□V **D-M9□/M9□V** **D-M9□W/M9□WV** **D-M9□AL/M9□AVL**	BMY3-016	Note) ① BMP1-032 ② BMG2-012
D-Z7□/Z80 **D-Y5□/Y7P** **D-Y7□W** **D-Y6□/Y7PV** **D-Y7□WV** **D-Y7BAL**	—	① BMP1-032

Note) Two kinds of auto switch mounting brackets are used as a set.

D-A9□V/M9□(V)/M9□W(V)/M9□A(V)L with bore sizes of ø40 to ø80.

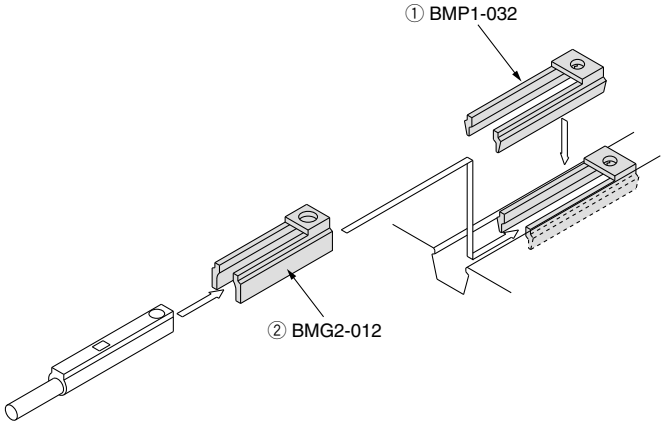

Besides the models listed in How to Order, the following auto switches are applicable.
Refer to pages 1719 to 1827 for the detailed specifications.

Auto switch type	Model	Electrical entry (Fetching direction)	Features	Applicable bore size
Reed	D-Z73, Z76	Grommet (In-line)	—	ø40 to ø80
	D-Z80		Without indicator light	
Solid state	D-Y69A, Y69B, Y7PV	Grommet (Perpendicular)	—	
	D-Y7NWV, Y7PWV, Y7BWV		Diagnostic indication (2-color indication)	
	D-Y59A, Y59B, Y7P	Grommet (In-line)	—	
	D-Y7NW, Y7PW, Y7BW		Diagnostic indication (2-color indication)	
	D-Y7BAL		Water resistant (2-color indication)	

∗ For solid state auto switches, auto switches with a pre-wired connector are also available. Refer to pages 1784 and 1785 for details.
∗ Normally closed (NC = b contact) solid state auto switches (D-F9G/F9H/Y7G/Y7H types) are also available. Refer to pages 1746 and 1748 for details.

SMC
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Series MGZ/MGZR
Specific Product Precautions 1

Be sure to read before handling.
Refer to front matters 42 and 43 for Safety Instructions and pages 3 to 11 for Actuator and Auto Switch Precautions.


Selection

⚠ Caution


1. Operate load within the range of the operating limits.
In accordance with the model selection procedure, operate within the operating limits of load weight, maximum speed, center of gravity position and allowable rotating torque. Operation beyond the operating limits can cause wear of the bearings and loosening of connections, leading to damage of machinery.

2. Compared to regular cylinders, at least twice the time is required for movement to begin in the retracting direction.
Cylinders featured in this catalog are filled with twice the amount of air at the extending compared to regular cylinders, therefore a longer time is required to exhaust the air before movement in the retracting direction begins.

3. Construct equipment so that reactive forces such as external stoppers and pressing are applied to the cylinder's central axis.
Design the external stopper or die so that when a cylinder stops before the stroke end on a stopper or press, the reactive force is applied to the cylinder's central axis. Off-center operation can cause wear of the bearings and loosening connections, leading to damage of machinery.

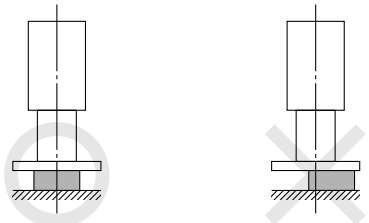

4. Under horizontal or downward operating conditions, lurch prevention measures may be required for the cylinder's extending operation.
Since the output force of the cylinders featured in this catalog in the extending direction is at least double that in the retracting direction, start-up operation for extension may exceed the control speed of the speed controller. In this case, provide a lurch prevention circuit within the pneumatic circuitry.



5. Do not over throttle the meter-in speed controller of the lurch prevention circuit.
Throttling the meter-in speed controller will make the start-up time for output in the extending direction longer.

Operation

⚠ Caution


1. Do not apply more than the allowable rotating torque to the piston rod (for Series MGZ: with non-rotating mechanism).
If more than the allowable rotating torque is applied, the slide keys for non-rotation will be deformed and non-rotating accuracy will be lost. This may cause damage to machinery.

Mounting

⚠ Caution


1. When mounting the cylinder, use mounting bolts of a suitable length, and tighten them properly within the specified range of tightening torque.
Particularly in case of frequent operation or much vibration, emply measures to prevent loosening of the bolts, such as the application of a thread locker.

Model	Bolt	Proper tightening torque N·m	L_1	L_2
MGZ/MGZR20	M5 x 0.8	2.5 to 3.1	10	11
MGZ/MGZR25	M5 x 0.8	2.5 to 3.1	10	11
MGZ/MGZR32	M6 x 1	4.1 to 6.4	12	16
MGZ/MGZR40	M6 x 1	4.1 to 6.4	12	16
MGZ/MGZR50	M8 x 1.25	8.8 to 13.8	15	16
MGZ/MGZR63	M8 x 1.25	8.8 to 13.8	15	16
MGZ/MGZR80	M12 x 1.75	30.4 to 47.5	23	20

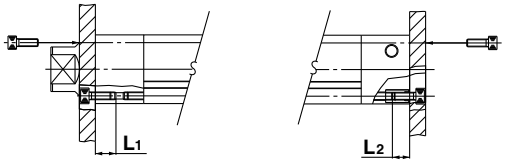


2. Do not gouge or scratch the mounting surfaces of the rod cover and head cover.
Evenness of mounting surfaces will be degraded, causing increased operating resistance and wear of the bearings etc.

3. Mounting of workpiece on the rod end
When screwing bolts into the threads of the table surface at the end of the piston rod, be sure the piston rod is fully retracted and use the wrench flats to hold the rod. Tighten the bolts in such a way that the tightening torque is not applied to the non-rotation slide keys. (for Series MGZ: with non-rotating mechanism).

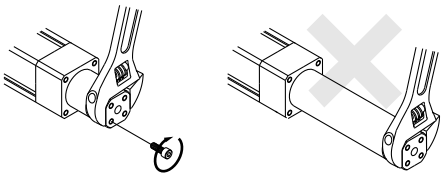

4. Allowable angle displacement of □E to □B is ±1.5°. (for Series MGZ: with non-rotating mechanism)



Applicable Floating Joint

⚠ Caution

1. When using a floating joint at the end of the tube rod, use the model specified in the table below. (for Series MGZR: without non-rotating mechanism)

Model	Applicable floating joint
MGZR20	JB40-8-125
MGZR25	
MGZR32	JB63-10-150
MGZR40	JB80-16-200
MGZR50	JB100-20-250
MGZR63	
MGZR80	JB140-22-250

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Specific Product Precautions 2


Be sure to read before handling.
Refer to front matters 42 and 43 for Safety Instructions and pages 3 to 11 for Actuator and Auto Switch Precautions.

End Lock Precautions

Use the Recommended Pneumatic Circuit.

⚠ Caution

This is necessary for proper operation and release of the lock.

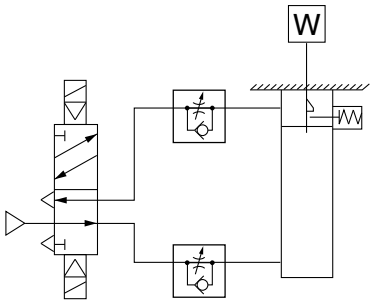

1. Do not use 3-position solenoid valve.
Avoid use in combination with 3-position selenoid valves (especially closed center metal seal types). If pressure is trapped in the port on the retracting side the cylinder cannot be locked. Furthermore, even after being locked, the lock may disengaged after some time, due to air leaking from the solenoid valve and entering the cylinder.

2. Back pressure is required when releasing the lock.
Before starting operation, be sure to control the system so that air is supplied to the extending side as shown in the figure above. Otherwise, there is a possibility that the lock may not be released. (Refer to the Releasing the Lock section.)

3. Release the lock when mounting or adjusting the cylinder.
The lock unit may be damaged if mounting or other work is performed when the cylinder is locked.

4. Operate with a load factor of 50% or less.
If the load ratio exceeds 50%, this may cause problems such as failure of the lock to release or damage to the lock unit.

5. Do not operate multiple synchronized cylinders.
Avoid applications in which two or more end lock cylinders are synchronized to move one work piece, as one of the cylinder locks may not be able to be released when required.

6. Use a speed controller with meter-out control.
It may not be possible to release the lock with meter-in control.

7. Be sure to operate completely to the cylinder stroke end on the extending side.
If the cylinder piston does not reach the end of the stroke, locking and unlocking may not be possible.

8. Adjust the auto switch's position so that it operates for movement to both the stroke end and backlash (2 mm) positions.
When a 2-color indication switch is adjusted for green indication at the stroke end, it may change to red after the backlash return, but this is not abnormal.

Operating Pressure

⚠ Caution

Apply air pressure of at least 0.20 MPa to the port on the retracting side. This is necessary to release the lock.

Exhaust Speed

⚠ Caution

Locking will occur automatically if the pressure applied to the port on the retracting side falls down to 0.05 MPa or less. In cases where the piping on the retracting side is long and thin, or the speed controller is some distance away from the cylinder port, the exhaust speed will be reduced and the lock may not engage right away. Furthermore, clogging of a silencer mounted on the exhaust port of the solenoid valve can produce the same result.

Releasing the Lock

⚠ Warning

Before releasing the lock, be sure to supply air to the extending side, so that there is no load applied to the lock mechanism when it is released. (Refer to the recommended pneumatic circuit.) If the lock is released when the port on the extending side is in an exhaust state and with a load applied to the lock mechanism, the lock mechanism may be subjected to an excessive force and be damaged. Also, remember that sudden erratic movement of the tube rod is very dangerous.

Manual Release


⚠ Caution

Non-locking type manual release

Insert the accessory bolt from the top of the rubber cap (it is not necessary to remove the rubber cap), and after screw it into the lock piston, pull it to release the lock. If you stop pulling the bolt, the lock will return to an operational state. Thread sizes, pulling force and stroke are shown below.

Bore size (mm)	Screw size	Pulling force (N)	Stroke (mm)
40, 50, 63	M3 x 0.5 x 30ℓ or more	10	3

∗ Remove the bolt for normal operation, otherwise it can cause lock malfunction or faulty release.

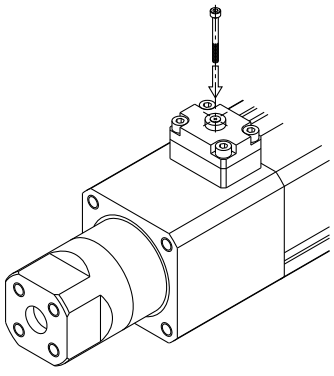

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP