

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*




NAFM4000



NAFM3000

ANSI Symbol



Specifications

Model		NAFM2000	NAFM3000	NAFM4000	NAFM4000-N06
Port size NPT		1/8 • 1/4	1/4 • 3/8	1/4 • 3/8 • 1/2	3/4
Proof pressure psig (MPa)		220 (1.5)			
Max. operating pressure psig (MPa)		150 (1.0)			
Min. operating pressure psig (MPa)		7 (0.05)			
Flow capacity scfm*		7	16	39	39
Filtration		0.3µm			
Bowl material		Polycarbonate			
Bowl capacity oz(cm^3)		.27 (8)	.78 (23)	1.52 (45)	1.52 (45)
Weight lbs. (kgf)		0.42 (0.19)	0.64 (0.29)	1.19 (0.54)	1.28 (0.58)
Accessory (standard)	Bowl guard	●	●	●	●

* Conditions: Supply pressure: 100psig.

Accessories (Optional)

Type		Part No.			
		NAFM2000	NAFM3000	NAFM4000	NAFM4000-N06
Bracket		B240A	B340A	B440A	B540A
Float type auto drain*	N.O.	—	NAD43	NAD44	NAD44
	N.C.	—	NAD53	NAD54	NAD54
Differential type auto drain*		NAD62-C	—	—	—

* Min. operating pressure: N .O. - 15 psig, N.C. - 22 psig.

Precautions

Installation

❶ Flush piping before installation.

Atmosphere

❶ Polycarbonate bowls may be damaged and possibly fail if exposed to synthetic oils, thinner solvents, trichlorethylene, kerosene or other aromatic hydrocarbons. When used in above atmosphere, please use a metal bowl.

Auto Drain

❶ Float type (Normally open) drain line should be 5/16 in. (8mm) or more and should be less than 16.5 ft. (5m). Be sure not to have any upward turns in the drain line which would prevent drainage.

❷ Unsuitable for flow below 3.5scfm (100Nℓ/min).

❸ Min. operating pressure 15psi (0.1MPa).

Differential type

❶ Min. operating pressure 15psi (0.1MPa).


❷ Soft nylon tube of more than 3/32 in. (2.5mm)is recommended for drain piping. The overall length should be less than 16.5 ft. (5m). Be sure not to have any upward turns in the piping.

❸ Install vertically.

Maintenance

❶ Filter element to be changed after 1 year or when a pressure drop of 15psi (0.1MPa) is reached.

How to Order

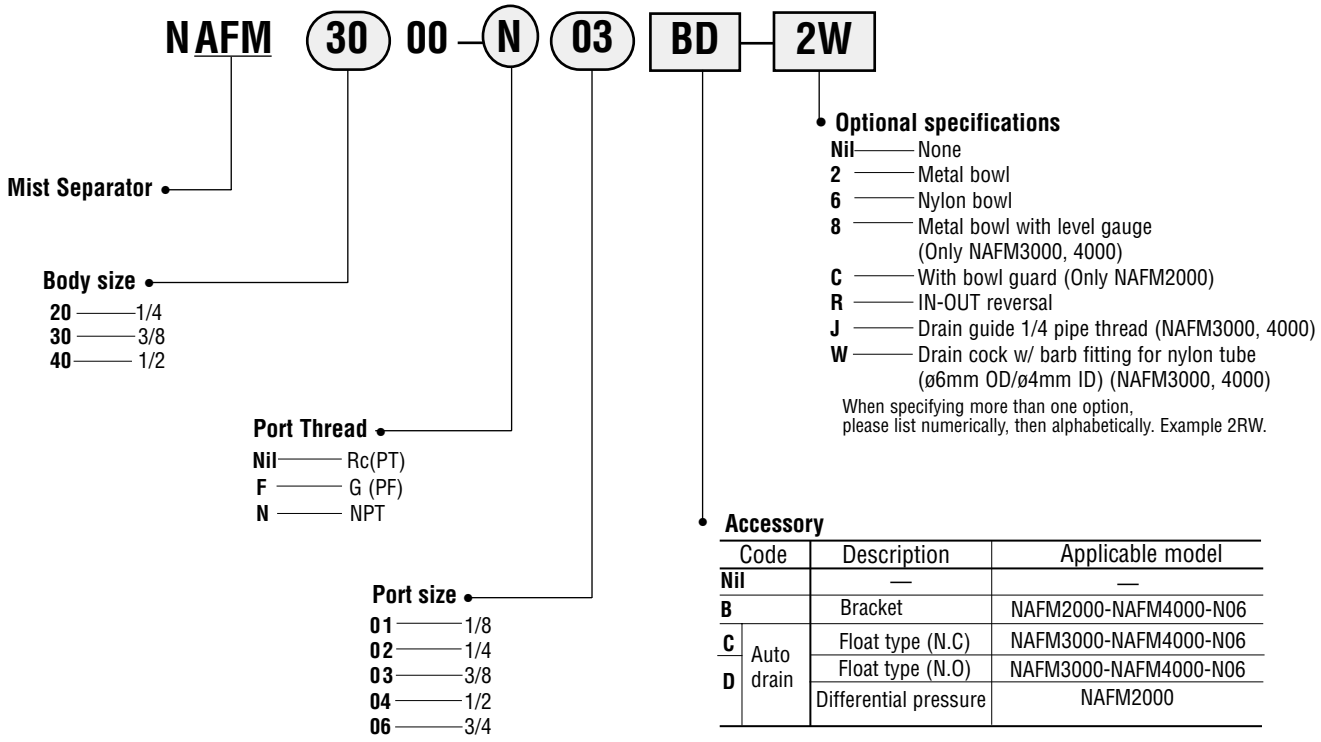

Accessory

Code		Description	Applicable model
Nil		—	—
B		Bracket	NAFM2000-NAFM4000-N06
C	Auto drain	Float type (N.C)	NAFM3000-NAFM4000-N06
D	Auto drain	Float type (N.O)	NAFM3000-NAFM4000-N06
	Auto drain	Differential pressure	NAFM2000


▼ Combination
□ No Combination
● Refer to "How to order"

Accessories and Combination Table


Accessory	Suffix	D	D	C	2	6	8	C	J	R	W	Applicable model		
												NAFM2000	NAFM3000	NAFM4000 NAFM6000
Differential pressure auto drain	D				▼	▼		●		▼		▼		
Float auto drain (N.O.)	D				▼	▼	●			▼			▼	▼
Float auto drain (N.C.)	C				▼	▼	●			▼			▼	▼
Metal bowl	-2	▼	▼	▼					●	▼		▼	▼	▼
Nylon bowl	-6	▼	▼	▼				●	●	▼	●	▼	▼	▼
Metal bowl with level gauge	-8		▼	▼					●	▼			▼	▼
With bowl guard	-C	▼				▼				▼		▼		
Drain guide (1/4)	-J				▼	▼	●			▼			▼	▼
In-Out reversal	-R	▼	▼	▼	▼	▼	●	●	●		●	▼	▼	▼
Drain cock, with barb fitting	-W					▼				▼			▼	▼

Flow Characteristics


NAFM2000 — — Initial state ——— State saturated with oil

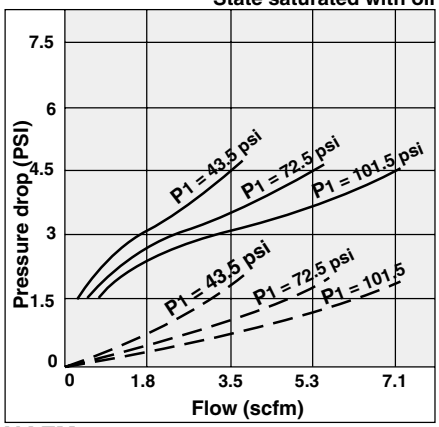

NAFM3000

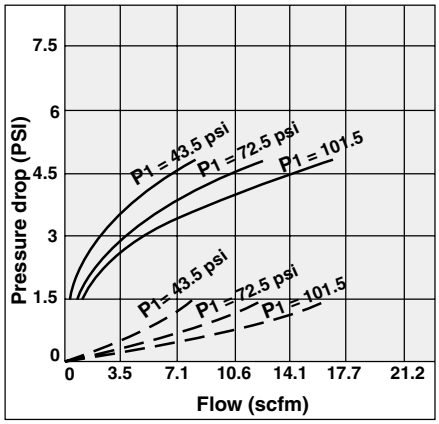



NAFM4000

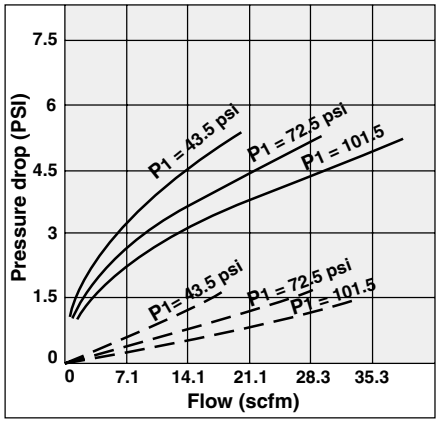

Construction/Parts List


Symbol **NAFM2000**



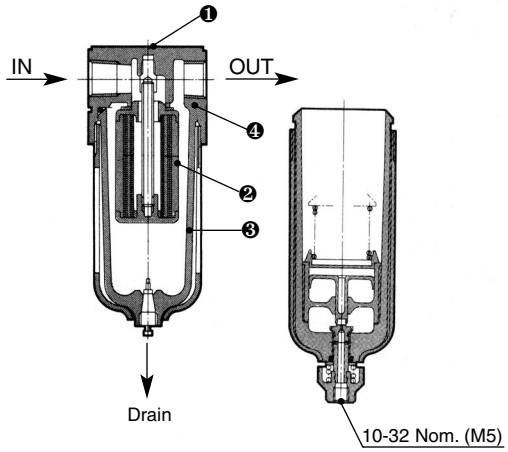

Differential pressure auto drain

NAFM3000•4000

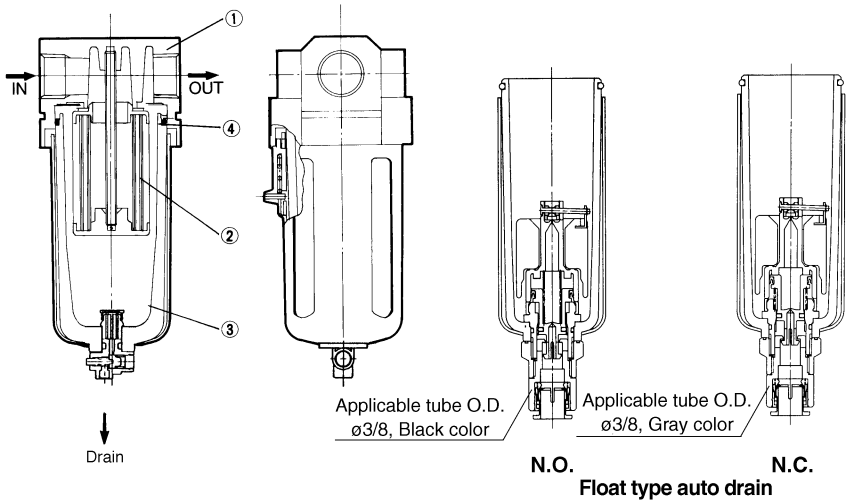

Float type auto drain

Main Parts

No.	Name	Material		Note
		NAFM2000	NAFM3000,NAFM4000,4000-N06	
❶	Body	Zinc die casting	Aluminum die casting	Platinum silver painting


Component Parts List

No.	Parts Name	Material	Part No.		
			NAFM2000	NAFM3000	NAFM4000,NAFM4000-N06
❷	Element ass'y	–	630611	630617	630623
❸	Bowl ass'y	Polycarbonate	NC200F-C	NC300F	NC400F
❹	O-ring	NBR	11297	111512	111636

✻Bowl assemblies of NAFM3000•4000 are fitted with bowl guard (SPCE).

Dimensions
NAFM 2000, 3000, 4000,


NAFM2000

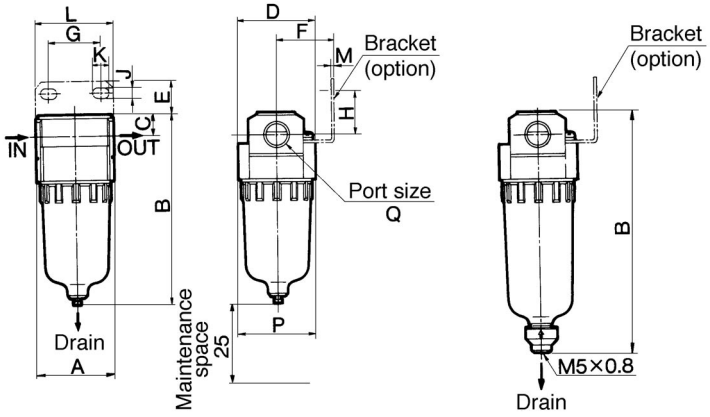


Differential pressure type auto drain

Option


Metal bowl




Drain guide



Drain cock/Barb fitting




Level gauge



Model	Barb fitting	Drain guide	Metal bowl	Metal bowl with level gauge
	B	B	B	B
NAFM2000	—	—	3.84 (97.5)	—
NAFM3000	5.41 (137.5)	5.31 (135)	5.59 (142)	6.38 (162)
NAFM4000	6.83 (173.5)	6.73 (171)	7.01 (178)	7.80 (198)
NAFM4000-06	6.99 (177.5)	6.89 (175)	7.17 (182)	7.95 (202)

NAFM3000•4000

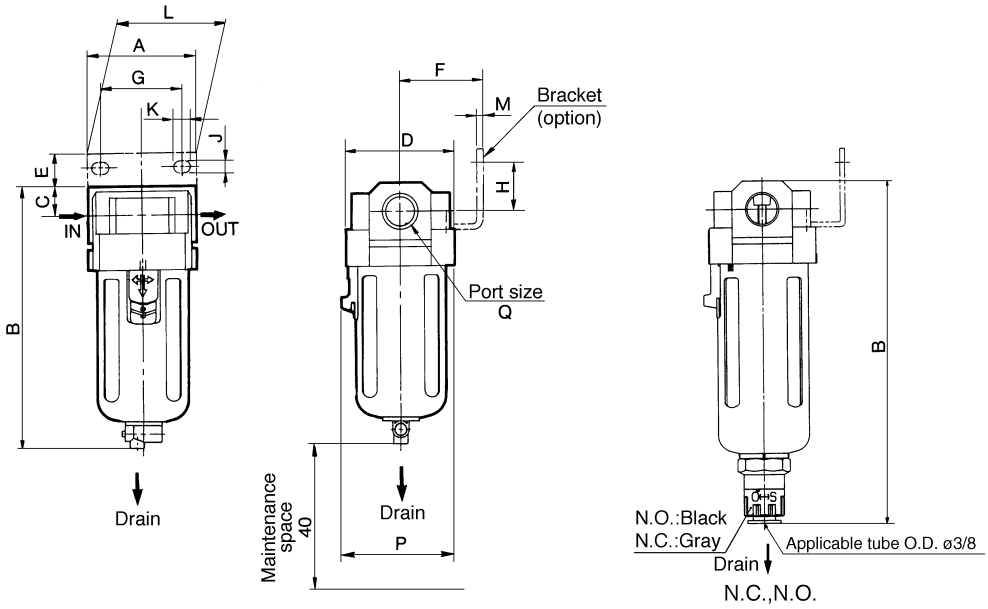

Float type auto-drain

Inch (mm)

Model	Port size	A	B	C	D	E	F	G	H	J	K	L	M	P	With auto drain	
															Float	Differential pressure
															B	B
NAFM2000	1/8 • 1/4	1.57 (40)	3.84 (97.5)	.43 (11)	1.57 (40)	.67 (17)	1.18 (30)	1.06 (27)	.87 (22)	.21 (5.4)	.33 (8.4)	1.57 (40)	.09 (2.3)	1.57 (40)	—	4.74 (120.5)
NAFM3000	1/4 • 3/8	2.09 (53)	5.08 (129)	.55 (14)	2.09 (53)	.63 (16)	1.61 (41)	1.57 (40)	0.91 (23)	0.26 (6.5)	0.31 (8)	2.09 (53)	0.09 (2.3)	2.20 (56)	6.69 (170)	—
NAFM4000	1/4 • 3/8 • 1/2	2.76 (70)	6.50 (165)	.71 (18)	2.76 (70)	0.67 (17)	1.97 (50)	2.13 (54)	1.02 (26)	0.33 (8.5)	0.41 (10.5)	2.76 (70)	0.09 (2.3)	2.87 (73)	8.11 (206)	—
NAFM4000-N06	3/4	2.95 (75)	6.65 (169)	0.79 (20)	2.76 (70)	0.55 (14)	1.97 (50)	2.13 (54)	0.98 (25)	0.33 (8.5)	.41 (10.5)	2.76 (70)	0.09 (2.3)	2.87 (73)	8.27 (210)	—

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP