

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

XC-HR70

Non-TV Output | Progressive Scan | 1/3 Type CCD | Square Pixels | C Lens Mount | VS Output | XGA Output | Partial Scan

HD VD External Sync | 1/30 Sec 1lit: Non-interlace | Restart Reset | Long Exposure | Normal Shutter | Mode 1 (Non-Reset Mode) External Trigger Shutter | Mode 2 (Non-Reset Mode) External Trigger Shutter

Switch setting P72

Connection Diagram P74



Outline

The XC-HR70 is an ultra-compact monochrome camera module ideal for high-resolution image capturing applications. A 1/3 type progressive scan CCD incorporated in the XC-HR70 allows the output of XGA resolution (1024 × 768) images at a rate of 30 frames/sec. In addition, the XC-HR70 has a “high rate scanning” function to enable the output of up to 120 frames/sec. for high-speed image capturing. The compact and light-weight body of the XC-HR70 makes it easy to install in space-restricted areas. With high-speed capturing capability offered in a compact body, the XC-HR70 is the ideal camera module for demanding applications such as the inspection of semiconductor production lines and high-speed assembly lines.

Features


- 1/3-type PS IT CCD with square pixels
  - XGA resolution (1,024 (H) × 768 (V) pixels) image capturing at a speed of 30 fps.
  - Square pixel/Full pixel read-out
- Compact and light weight
  29 (W) x 29 (H) x 30 (D) mm, Approx. 50 g
- Partial scan (at restart/reset ON, Binning OFF)
  Up to 120 fps (Effective line: 152 lines)
- Various mode settings are selectable by changing the setting of a rear panel
- External trigger shutter
  - Restart/Reset
  - Mode 1 (non-reset mode)
  - Mode 2 (Reset mode)
- High Shock and Vibration Resistance
- C-mount

Accessories

- Compact camera adaptor
  - DC-700/700CE
- 12-pin camera cable (CE standard)
  - CCXC-12P02N (2 m)
  - CCXC-12P05N (5 m)
  - CCXC-12P10N (10 m)
  - CCXC-12P25N (25 m)
- Tripod adaptor
  - VCT-333I

Dimensions

Camera body of all XC-HR models

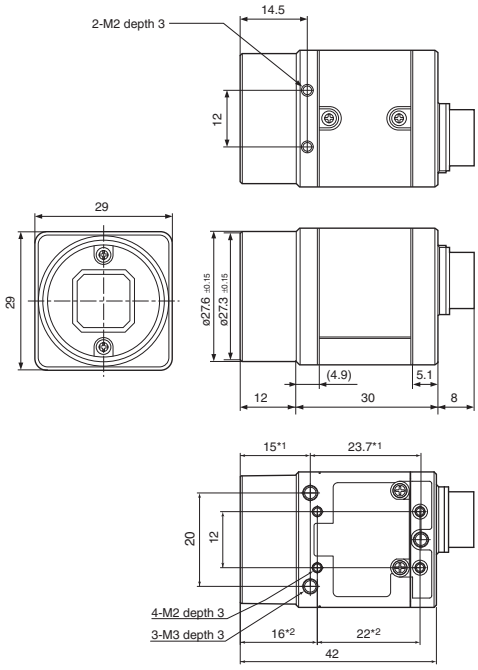


Unit: mm

*1: for 3-M3 screw
*2: for 4-M2 screw


Spectral Sensitivity Characteristics

- **XC-HR70**
  (Typical Values)

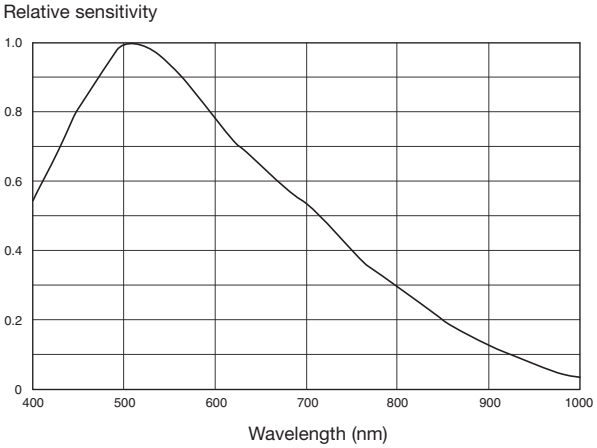

(Lens characteristics and light source characteristics excluded.)


Location and Function of Parts and Controls

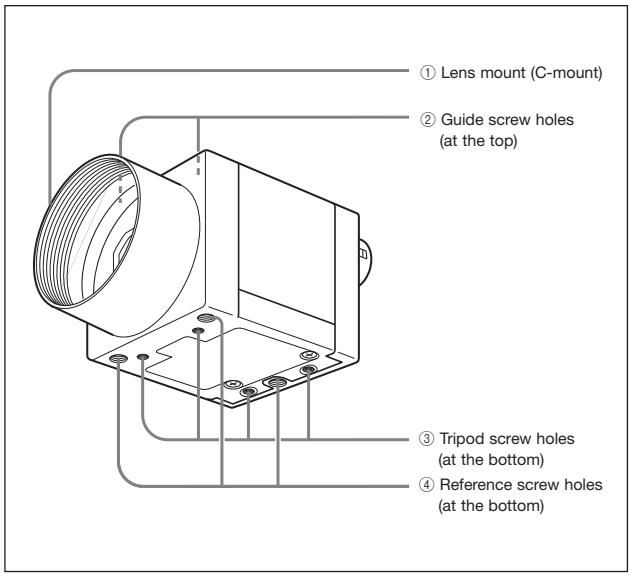

① **Lens mount (C-mount)**
Attach any C-mount lens, suitable for XGA-compatible resolution or other optical equipment.

Note

Be sure that the lens does not project more than 10 mm from the lens mount.



② **Guide screw holes (at the top)**
These screw holes help to lock the camera module.

③ **Tripod screw holes (at the bottom)**
These four screw holes on the bottom are for installing the camera module on a tripod. To install on a tripod, you will need to install the VCT-333I tripod adaptor using these holes on the bottom of the camera.

④ **Reference screw holes (at the bottom)**
These precision screw holes are for locking the camera module. Locking the camera module using these holes secures the optical axis alignment.

Specifications

	XC-HR70
Image size	XGA
Image device	1/3-type PS IT CCD
Effective picture elements (H × V)	1,034 × 779
Effective lines (H × V)	1,024 × 768
Cell size (H × V)	4.65 μm × 4.65 μm
Lens mount	C-mount
Sync system	Internal/External (Automatically switched according to input signal)
External sync signal input	HD/VD (HD/VD level: 2 V to 5 Vp-p, 75 Ω)
Allwable frequency deviation of external synchronization	±1% (in horizontal synchronous frequency)
H Jitter	Less than 20 nsec
Scanning system	Non-interlace Progressive scan
Video output mode	Binning: 2-line combined output 58.4 fps/Normal: 1-line sequential output 29.2 fps
Video output	1.0 Vp-p, sync negative, 75 Ω, unbalanced
Horizontal frequency	23.23 kHz
Vertical frequency	29.2 Hz (normal mode), 58.4 Hz (binning mode)
Horizontal resolution	800 TV lines
Sensitivity	400 lx F5.6 (γ=1, FIX GAIN (0 dB))
Minimum illumination	1 lx (F1.8, γ=1, GAIN 18 dB)
SNR	56 dB (0 dB GAIN)
Gain	Manual (0 dB to 18 dB)/Fix (0 dB) (adjustable on the rear panel)
Gamma	1 (fixed)
White clip	820 mV ±70 mV (F1.8, FIX GAIN (0 dB))
Shutter	Normal shutter, Restart/Reset, External trigger shutter (Mode 1/Mode 2)
Normal shutter speed (s)	1/100, 1/125, 1/250, 1/500, 1/1,000, 1/2,000, 1/4,000, 1/10,000, 1/20,000
External trigger shutter speed (s)	DIP switch settings: 1/100, 1/125, 1/250, 1/500, 1/1,000, 1/2,000, 1/4,000, 1/10,000, 1/25,000, 1/50,000, 1/100,000 Trigger pulse width settings: 1/4 to 1/100,000
External trigger	Polarity: +, Width: 2 μs to 250 ms, Input impedance: 10 kΩ or more (H: 2 V to 5.0 V, L: 0 V to 0.6 V)
Partial scan	R/R mode Binning off: max 120 fps (effective line: 152 lines) Binning on: max 180 fps (effective line: 89 lines)
	External trigger shutter mode (MODE 1) Binning off: max 120 fps (effective line: 153 lines) Binning on: max 180 fps (effective line: 90 lines)
Power requirements	DC 12 V (10.5 V to 15.0 V)
Power consumption	2.0 W
Dimensions (W × H × D)	29 × 29 × 30 mm (excluding protrusions)
Mass	Approx. 50 g
Operating temperature	–5°C to +45°C
Storage temperature	–30°C to +60°C
Performance guarantee temperature	0°C to 40°C
Operating humidity	20% to 80% (no condensation)
Storage humidity	20% to 95% (no condensation)
Vibration resistance	10 G (20 Hz to 200 Hz 20 minutes for each direction–x, y, z)
Shock resistance	70 G
MTBF	88,044 hours (Approx. 10.1 years)
Regulatory compliance	UL6500, FCC/ICES-003: Class A, CE: EN61326, AS/NZ: EN61326, KC: KN22/KN24: Class A
Supplied accessories	Lens mount cap (1), Operating instructions (1)

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP