



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

90-375 Watt, Benchtop Linear Power Supplies

The L Series is a family of linear DC power supplies designed for benchtop and portable applications. The family comprises fourteen models; outputs range from 0-8V to 0-300V at power levels from 90W to 375W. The supplies may be used as either voltage sources or current sources. Features such as isolated outputs, series/parallel operation, and tracking operation provide the flexibility for a variety of applications.



Features

◆ **Constant Voltage/Constant Current Operation**

The power supplies may be operated as either precisely regulated voltage sources or current sources. Crossover between modes is automatic, dependent only on load demand. Front panel LEDs indicate operating mode.

◆ **Series/Parallel Operation**

Multiple power supplies may be connected in series to extend the output voltage range. The LS and LT Series have the capability to operate outputs in parallel for increased current range.

◆ **3½ Digit LED**

LED displays are provided for each adjustable output. The LM and LH Series have two separate displays, one each for voltage and current. The LS and LT Series display is switch-selectable between voltage and current.

◆ **Universal AC Input**

The AC input is externally switch-selectable for 100V/120V/220V/ 240V at 50/60 Hz

◆ **CE Mark (excluding LH Series)**

◆ **1 Year Warranty**



L Series - Specifications

OUTPUT

Voltage and Current

Model	Voltage	Current
LH 8-30	0-8	0-30
LM 18-10	0-18	0-10
LS 18-5	0-18	0-5
LT 18-5	0-18	0-5
LH 18-20	0-18	0-20
LS 30-3	0-30	0-3
LT 30-3	0-30	0-3
LM 30-6	0-30	0-6
LH 35-10	0-35	0-10
LM 60-3	0-60	0-3
LH 60-6	0-60	0-6
LH 75-5	0-75	0-5
LH 110-3	0-110	0-3
LH 300-1	0-300	0-1

* LM, LS and LT series are CE marked.

Constant Voltage Mode

Ripple (Bandwidth 5 Hz to 1 MHz):
 ≤ 1.0 mV RMS

Line Regulation: $\leq 0.01\% + 3$ mV
 (LT models used in series $\leq 0.01\% + 5$ mV)

Load Regulation: See table
 (LT models in series operation ≤ 300 mV)

Transient Response: ≤ 100 μ s for 50% load change, 0.5A minimum load

Temperature Coefficient: ≤ 300 PPM/ $^{\circ}$ C

Constant Current Mode

Ripple: ≤ 3 mA RMS; LH Series
 ≤ 5 mA RMS; LH 8-30 ≤ 10 mA RMS

Line Regulation: $\leq 0.2\% + 3$ mA

Load Regulation: $\leq 0.2\% + 3$ mA;
 LH models $\leq 0.2\% + 5$ mA

INPUT

Voltage and Frequency:

100V/120V/220V/240V, $\pm 10\%$ (externally switch-selectable), 50-60 Hz

GENERAL

Operating Temperature: 0° C to 40° C

Storage Temperature: -10° C to 70° C

Operating Humidity: $< 80\%$ RH,
 non condensing

Storage Humidity: $< 70\%$ RH

Isolation Voltage: ± 300 VDC or peak AC,
 either output lead to chassis ground

Display Type: $3\frac{1}{2}$ digit LED

Display Accuracy: $\pm 0.5\%$ of reading +
 2 digits

Display Parameters: LM/LH models have separate displays for voltage and current; LS/LT models have a single display for voltage and current (switch-selectable) on each adjustable output; two display ranges for current on LS models

Indicators: LH/LM/LS models: CV and CC LEDs; LT models: CV, CC, parallel mode and overload (5V output) LEDs

Output Termination: Front panel binding posts, rated ≤ 10 A; LH 8-30 and LH 18-20 provide an additional rear panel terminal block

Regulatory Compliance: CE Mark (does not include the LH Series)

Dimensions

LH: 5.7" (144 mm) H x 10" (254 mm) W x 17.6" (419 mm) D

LM: 5.7" (144 mm) H x 10" (254 mm) W x 13.7" (335 mm) D

LS: 5.7" (144 mm) H x 5" (127 mm) W x 11.2" (284 mm) D

LT: 5.7" (114 mm) H x 10" (254 mm) W x 13.7" (335 mm) D

Weight: See table

ACCESSORIES

One set of test leads for each output (except LH 8-30 and LH 18-20), grounding strap for each output, AC input line cord

LS SERIES

Analog Programming: Full scale remote programming of output voltages and/or current by a 0-10V control signal varies the output proportionally from 0 to 100%

LT SERIES

5V, 3A Fixed Output

Voltage: $5V \pm 0.25V$

Current: 3A (foldback current limit)

Ripple: ≤ 2 mV RMS

Line Regulation: ≤ 5 mV

Load Regulation: ≤ 10 mV

Operating Mode-Adjustable Output

Independent: Two independent and isolated outputs continuously adjustable, 0 to 100% of rating

Series: Master/slave configuration with a single or dual polarity output continuously adjustable by the master control
 LT 18-5: 0-36V, 0-5A; LT 30-3: 0-60V, 0-3A

Parallel: Master/slave configuration with a single output continuously adjustable by the master control
 LT 18-5: 0-18V, 0-10A;
 LT 30-3: 0-30V, 0-6A


Slave Tracking Error: $\leq 0.5\% + 10$ mV of the master output voltage

L Series - Table Data


Model	Output Power		Voltage Load Regulation	Weight lb/kg
	Voltage VDC	Current ADC		
LH 8-30	0 to 8	0 to 30	< 0.02% + 5 mV	40.8/18.5
LM 18-10	0 to 18	0 to 10	< 0.01% + 5 mV	23.5/11.5
LS 18-5	0 to 18	0 to 5	< 0.01% + 5 mV	12.1/5.5
LT 18-5	0 to 18 (2 ea); 5	0 to 5 (2 ea); 3	< 0.02% + 5 mV	23.5/11.5
LH 18-20	0 to 18	0 to 20	< 0.02% + 5 mV	40.8/18.5
LS 30-3	0 to 30	0 to 3	< 0.01% + 3 mV	11.0/5.0
LT 30-3	0 to 30 (2 ea); 5	0 to 3 (2 ea); 3	< 0.01% + 5 mV	23.5/11.5
LM 30-6	0 to 30	0 to 6	< 0.01% + 5 mV	23.5/11.5
LH 35-10	0 to 35	0 to 10	< 0.01% + 5 mV	40.8/18.5
LM 60-3	0 to 60	0 to 3	< 0.01% + 5 mV	23.5/11.5
LH 60-6	0 to 60	0 to 6	< 0.01% + 5 mV	40.8/18.5
LH 75-5	0 to 75	0 to 5	< 0.01% + 5 mV	40.8/18.5
LH 110-3	0 to 110	0 to 3	< 0.01% + 5 mV	29.8/13.5
LH 300-1	0 to 300	0 to 1	< 0.01% + 5 mV	29.8/13.5

L Series - LS, LT, LM, and LH Cases


LS Series



Side View




Front View




Rear View


LT Series

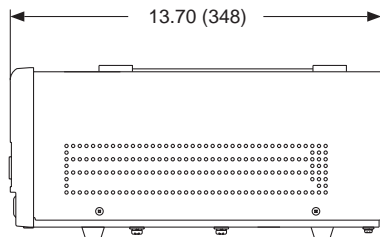

Side View

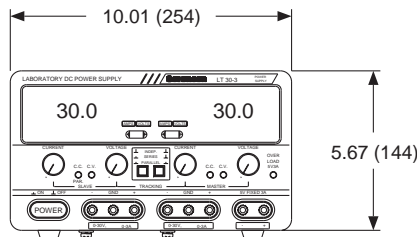


Front View

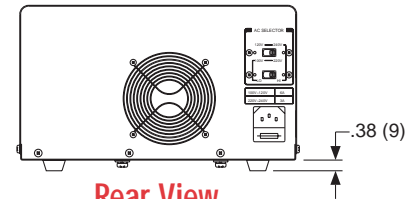


Rear View


LM Series

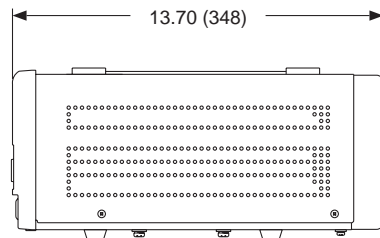

Side View

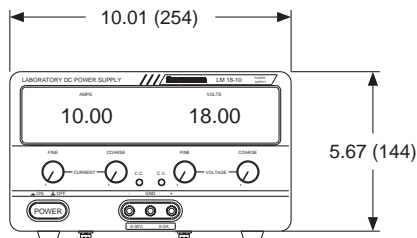


Front View

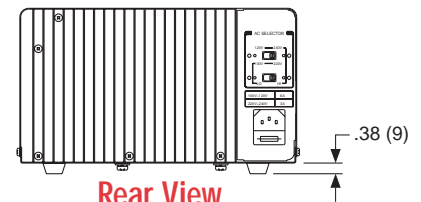


Rear View


LH Series

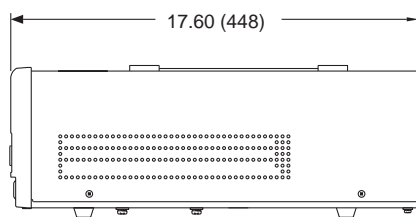


Side View

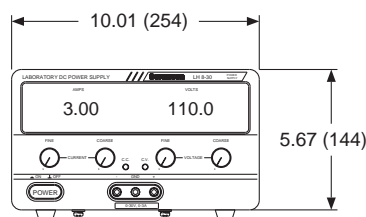

Front View

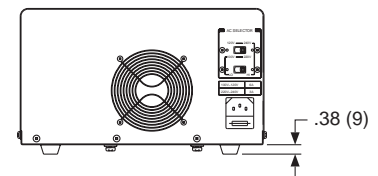

Rear View: 35V to 300V Models



Rear View: LH 8-30 & LH 18-20

Dimensions in inches (millimeters)



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com