

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

**Artisan Technology Group**
(217) 352-9330 | sales@artisantg.com | artisantg.com

**Full-service, independent repair center**
with experienced engineers and technicians on staff.

**We buy your excess, underutilized, and idle equipment**
along with credit for buybacks and trade-ins.

**Custom engineering**
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

**Expert team | Trust guarantee | 100% satisfaction**

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

**Visit our website - *Click HERE***

# POWER SOURCES

## WALLPLUG-IN/DESK-TOP



### ADVANTAGES

- Keeps hazardous line voltage out of the product.
- Increases space for other components in the product.
- Improves aesthetic appearance and portability.
- Reduces size and weight of the product.
- Keeps power supply heat out of the product for increased life.
- Reduces product design time.

### FEATURES

- Domestic Units
  - -- U.L. Listed
    U.L.-1310 Class 2 Power Units
  - -- C.S.A. Certified
- European Units
  - -- CE Marked
- Output Cords 6 feet long
- Rated for Continuous Duty
- Available in A.C. and D.C. outputs



### SPECIFICATIONS

- Input Voltages
  - -- Domestic (120V 60Hz), European (230V 50Hz)
  - -- Other voltages available as custom designs.
- Operating Temperature
  -- -10° to +40° C
- Output Voltages Range from 2.5V to 24V
- Output Current Range from 50mA to 3400mA



## CUSTOM DESIGN CAPABILITIES

- Various Case Colors
  -- Pantone Number Required
- Varied length and style of output cord
- Custom nameplates and labels
- Primary input voltages for various countries
- 500 pieces minimum order and release for custom designs
- Optional output plug sizes, styles & polarities.

## APPLICATIONS

- Computer Peripherals
- Portable Games
- Portable Consumer Products
- Telephone Answering Machines
- Laptop Computers
- Equipment Rechargers



# DOMESTIC POWER SOURCES

**Domestic Desk-Top**





**Domestic Wall Plug-In**

RoHS

Output power plug compatible for use with Switchcraft 722A or PC-722A

Input for All Domestic Models is 120 Volts A.C., 60 Hz.

| SEC. | STANCOR PART NUMBER | Rated Output Volts | AC/DC | mA | Regulated/ Unregulated | Case Style | DIMENSIONS Length (inches) | Length (mm) | Width (inches) | Width (mm) | Height (inches) | Height (mm) | Weight (lbs.) | Output Plug 2.1x5.5mm Inside Polarity | Agency ✳ Certification |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| A | STA-4125T | 2.5 | DC | 500 | Unregulated | Wall Plug-in | 2.5 | 63.0 | 2.0 | 51.0 | 1.6 | 41.0 | 0.47 | Negative | UL/CSA |
| | STA-4130 | 3.0 | DC | 350 | Regulated | Wall Plug-in | 2.5 | 63.0 | 2.0 | 51.0 | 1.6 | 41.0 | 0.48 | Negative | UL |
| | STA-3530 | 3.0 | DC | 500 | Unregulated | Wall Plug-in | 2.2 | 55.0 | 1.8 | 44.6 | 1.5 | 37.2 | 0.37 | Negative | UL/CSA |
| | STA-3540 | 4.4 | DC | 400 | Unregulated | Wall Plug-in | 2.2 | 55.0 | 1.8 | 44.6 | 1.5 | 37.2 | 0.35 | Negative | UL/CSA |
| B | STA-3545B | 4.5 | AC | 300 | Unregulated | Wall Plug-in | 2.2 | 55.0 | 1.8 | 44.6 | 1.5 | 37.2 | 0.34 | ★ | UL/CSA |
| | STA-4850 | 5.0 | DC | 600 | Regulated | Wall Plug-in | 3.5 | 89.0 | 2.4 | 61.0 | 1.9 | 47.0 | 0.90 | Negative | UL/CSA |
| | STA-3560B | 6.0 | DC | 100 | Unregulated | Wall Plug-in | 2.2 | 55.0 | 1.8 | 44.6 | 1.5 | 37.2 | 0.35 | Negative | UL/CSA |
| | STA-3560 | 6.0 | DC | 200 | Unregulated | Wall Plug-in | 2.2 | 55.0 | 1.8 | 44.6 | 1.5 | 37.2 | 0.35 | Negative | UL/CSA |
| C | STA-3560A | 6.0 | DC | 300 | Unregulated | Wall Plug-in | 2.2 | 55.0 | 1.8 | 44.6 | 1.5 | 37.2 | 0.35 | Negative | UL/CSA |
| | STA-4160 | 6.0 | DC | 600 | Unregulated | Wall Plug-in | 2.5 | 63.0 | 2.0 | 51.0 | 1.6 | 41.0 | 0.47 | Negative | UL/CSA |
| | STA-4160A | 6.0 | DC | 800 | Unregulated | Wall Plug-in | 2.5 | 63.0 | 2.0 | 51.0 | 1.6 | 41.0 | 0.56 | Negative | UL/CSA |
| | STA-4860 | 6.0 | DC | 1000 | Unregulated | Wall Plug-in | 2.8 | 70.5 | 2.3 | 57.0 | 1.8 | 44.6 | 0.84 | Negative | UL/CSA |
| D | STA-4860-4 | 6.0 | DC | 1000 | Unregulated | Wall Plug-in | 2.8 | 70.5 | 2.3 | 57.0 | 1.8 | 44.6 | 0.84 | Positive | UL/CSA |
| | STA-4860A | 6.0 | DC | 1200 | Unregulated | Wall Plug-in | 2.8 | 70.5 | 2.3 | 57.0 | 1.8 | 44.6 | 0.90 | Negative | UL/CSA |
| | STA-5760 | 6.0 | DC | 2000 | Unregulated | Wall Plug-in | 3.4 | 86.1 | 2.6 | 66.5 | 2.2 | 55.0 | 1.50 | Negative | UL/CSA |
| | STA-5760A | 6.0 | AC | 3300 | Unregulated | Desk-Top | 3.4 | 86.1 | 2.6 | 66.5 | 2.2 | 55.0 | 1.67 | ★ | UL |
| E | STA-3575A | 7.5 | DC | 300 | Unregulated | Wall Plug-in | 2.2 | 55.0 | 1.8 | 44.6 | 1.5 | 37.2 | 0.36 | Negative | UL/CSA |
| | STA-4875 | 7.5 | DC | 1000 | Unregulated | Wall Plug-in | 2.8 | 70.5 | 2.3 | 57.0 | 1.8 | 44.6 | 0.84 | Negative | UL/CSA |
| | STA-4875-4 | 7.5 | DC | 1000 | Unregulated | Wall Plug-in | 2.8 | 70.5 | 2.3 | 57.0 | 1.8 | 44.6 | 0.84 | Positive | UL/CSA |
| | STA-4175A | 7.5<br>9.0 | DC<br>DC | 500<br>300 | Unregulated | Wall Plug-in | 2.5 | 63.0 | 2.0 | 51.0 | 1.6 | 41.0 | 0.50 | Negative | UL/CSA |
| F | STA-3590 | 9.0 | DC | 200 | Unregulated | Wall Plug-in | 2.2 | 55.0 | 1.8 | 44.6 | 1.5 | 37.2 | 0.35 | Negative | UL/CSA |
| | STA-4190C | 9.0 | DC | 200 | Regulated | Wall Plug-in | 2.5 | 63.0 | 2.0 | 51.0 | 1.6 | 41.0 | 0.48 | Negative | UL |
| | STA-3590A | 9.0 | DC | 300 | Unregulated | Wall Plug-in | 2.2 | 55.0 | 1.8 | 44.6 | 1.5 | 37.2 | 0.35 | Negative | UL/CSA |
| | STA-4190B | 9.0 | AC | 300 | Unregulated | Wall Plug-in | 2.5 | 63.0 | 2.0 | 51.0 | 1.6 | 41.0 | 0.47 | ★ | UL/CSA |
| G | STA-4890B | 9.0 | DC | 400 | Regulated | Wall Plug-in | 3.5 | 89.0 | 2.4 | 61.0 | 1.9 | 47.0 | 0.90 | Negative | UL/CSA |
| | STA-4190A | 9.0 | DC | 500 | Unregulated | Wall Plug-in | 2.5 | 63.0 | 2.0 | 51.0 | 1.6 | 41.0 | 0.56 | Negative | UL/CSA |
| | STA-4190D | 9.0 | AC | 500 | Unregulated | Wall Plug-in | 2.5 | 63.0 | 2.0 | 51.0 | 1.6 | 41.0 | 0.45 | ★ | UL/CSA |
| | STA-4190F | 9.0 | DC | 700 | Unregulated | Wall Plug-in | 2.5 | 63.0 | 2.0 | 51.0 | 1.6 | 41.0 | 0.62 | Negative | UL/CSA |
| H | STA-4890 | 9.0 | DC | 1000 | Unregulated | Wall Plug-in | 2.8 | 70.5 | 2.3 | 57.0 | 1.8 | 44.6 | 1.00 | Negative | UL/CSA |
| | STA-4890A | 9.0 | DC | 1200 | Unregulated | Wall Plug-in | 2.8 | 70.5 | 2.3 | 57.0 | 1.8 | 44.6 | 1.03 | Negative | UL/CSA |
| | STA-4890A-4 | 9.0 | DC | 1200 | Unregulated | Wall Plug-in | 2.8 | 70.5 | 2.3 | 57.0 | 1.8 | 44.6 | 1.03 | Positive | UL/CSA |
| | STA-5790 | 9.0 | AC | 3400 | Unregulated | Desk-Top | 3.4 | 86.1 | 2.6 | 66.5 | 2.2 | 55.0 | 1.84 | ★ | UL/CSA |


★ AC output

*For outline drawings refer to page 35.*


✳ Agency Certification Note: UL LISTED U.L. 1310 Listed or U.L. 1012 Listed

SP® CSA Certified

## Wall Plug-In

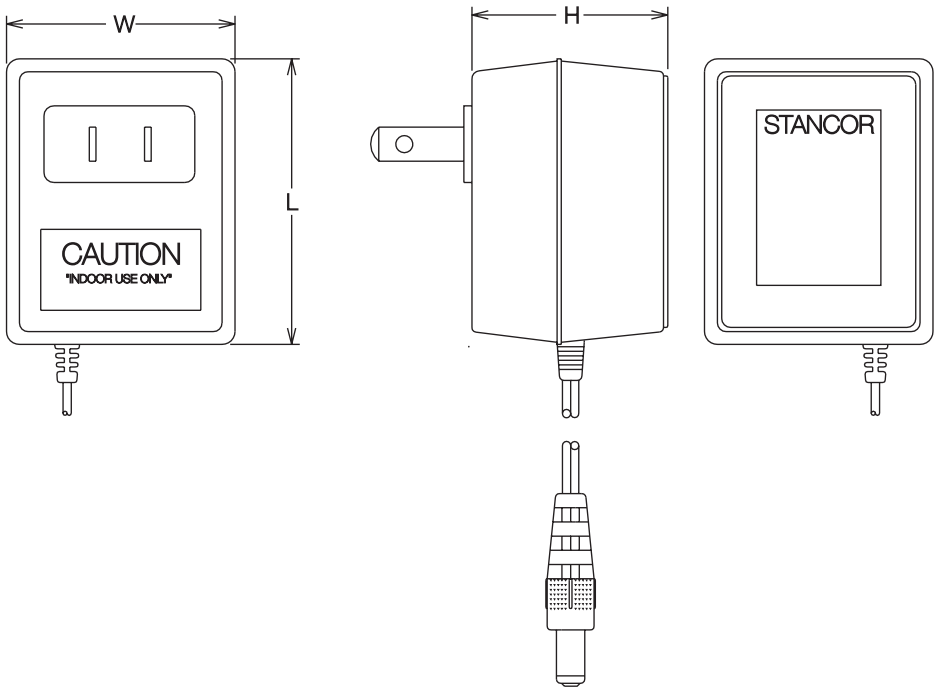


## Desk-Top

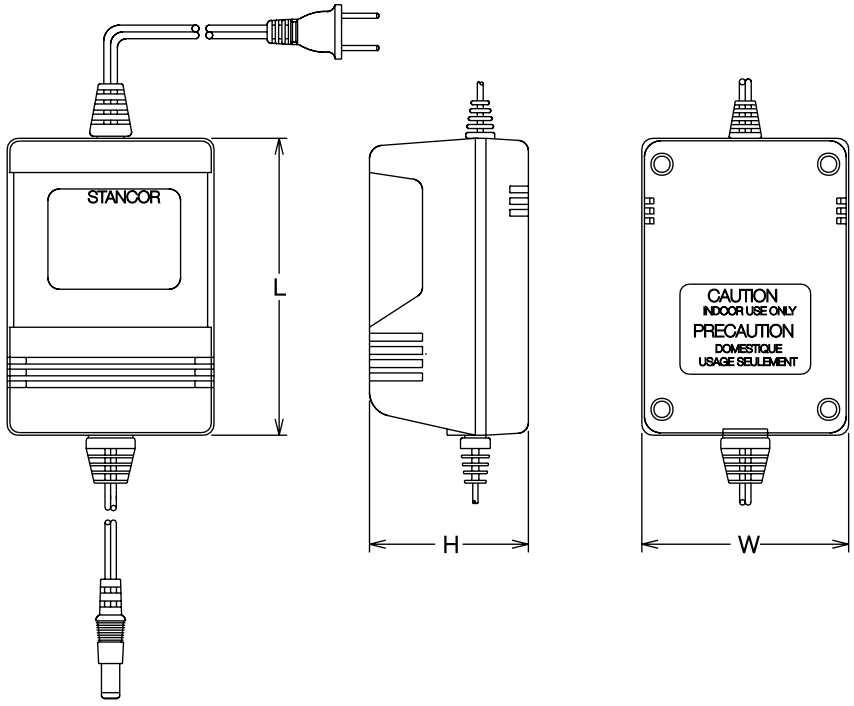

**Artisan Technology Group** is an independent supplier of quality pre-owned equipment

## Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

## Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP