ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.


- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Struthers-Dunn / MagneCraft W88KADX2* at our website: *Click HERE*

CLASS 88




CLASS 88UKD

30 AMPS (SPST-NO-DM)
DC OR AC OPERATION 50/60 Hz
QUICK-CONNECT AND/OR
SOLDER TERMINALS
HIGH CURRENT
SWITCHING
IN MINIMUM SPACE
1 HP UP TO 600VAC

30 AMPS

UL RECOGNIZED
FILE NO.
E43641


CSA CERTIFIED
FILE NO.
LR38337
LR37547

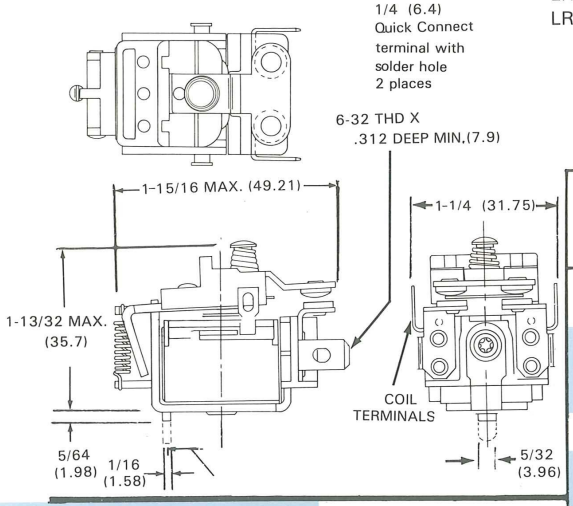

SPECIFICATIONS (Same As Class 88 Except...)


Contact Ratings: 30 amps up to 300VAC, or 28VDC, resistive load; 5 amps at 600VAC resistive load; 1 HP at 120 thru 600VAC, motor load.
Contact Material: Silver alloy gold flashed, ¼" dia.
Dielectric Withstanding Voltage: 1000VAC RMS, between open contacts (terminal to terminal), 3000VAC RMS between all other mutually insulated conductive elements.
Terminals: Dual purpose - for direct soldering or quick-connect. Contact terminals will accept ¼" x .032 "AMP "Faston" 250 series receptacle or equivalent and coil terminals will accept 3/16" x .020" AMP 187 series receptacle or equivalents.
Contact Insulation: Moveable and stationary contacts are mounted on a molded plastic barrier insulator.
Easy Mounting: One 6-32 mtg. hole and locating lug.
Weight: 3 ozs. -- 85.0 grams

STOCK NUMBER 88UKD (UL RECOGNIZED CSA CERTIFIED)	STOCK NUMBER 88KD	CONTACTS 30 AMPS	COIL		
			†VOLTS	*OHMS	NOMINAL POWER
AC OPERATED					
W88UKADX-3	W88KADX-2	SPST-NO-DM	24VAC	—	3VA
W88UKADX-4		SPST-NO-DM	120VAC	—	3VA
W88UKADX-5		SPST-NO-DM	240V60Hz/-220V50Hz	—	3VA
DC OPERATED					
W88UKDX-1	W88KDX-2 W88KDX-3	SPST-NO-DM	6VDC	25	1.5W
W88UKDX-2		SPST-NO-DM	12VDC	100	1.5W
W88UKDX-3		SPST-NO-DM	24VDC	400	1.5W
W88UKDX-4		SPST-NO-DM	110VDC	8,000	1.5W



CLASS 88KD

30 AMPS (SPST-NO-DM)
DC OR AC OPERATION 50/60 Hz
QUICK-CONNECT AND/OR
SOLDER TERMINALS
HIGH CURRENT SWITCHING
IN MINIMUM SPACE
1 HP UP TO 600VAC

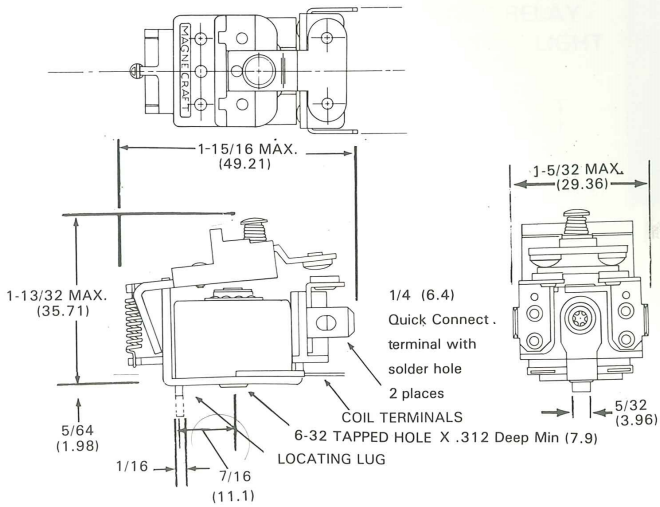

SPECIFICATIONS
(Same As Class 88 Except...)

Contact Ratings: 30 amps up to 300VAC, 28VDC resistive load; 5 amps at 600VAC resistive load. 50 amps intermittent at 120VAC, 28VDC, resistive load, 1 minute max. "on time." 1 HP up to 600VAC, motor load.
Contact Material: Silver alloy gold flashed, 1/4" dia.,
Dielectric Withstanding Voltage: 1000VAC RMS between Mutually insulated conductive elements except 500VAC RMS between open contacts.
Terminals: Dual purpose - for direct soldering or quick-connect. Contact terminals will accept 1/4" x .032" AMP "Faston" 250 series receptacle or equivalent and coil terminals will accept 3/16" x .020" AMP 187 series receptacle.
Contact Insulation: Moveable and stationary contacts are mounted on a molded plastic barrier insulator.
Weight: 3 ozs.—85.0 grams.

*Resistance values ± 10% measured at 25°C.
†Voltage specified relays pull in at 80% of nominal or less for DC relays and 85% of nominal or less for AC relays, at 25°C.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP