

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

Check Valves



C, CA, CH, CP, and CPA Series

- Working pressures up to 6000 psig (413 bar)
- Adjustable and fixed cracking pressures
- Variety of end connections
- 316 stainless steel and brass materials

Contents


Features 2
Technical Data 3
Pressure-Temperature Ratings 3
Cracking and Reseal Pressures 4
Materials of Construction 5
Flow Data 7
Testing 10
Cleaning and Packaging 10
Ordering Information and Dimensions 11
Options and Accessories 14
Maintenance Kits 15

Features


Fixed Cracking Pressures

From 1/3 to 25 psi (0.03 to 1.8 bar)


C Series

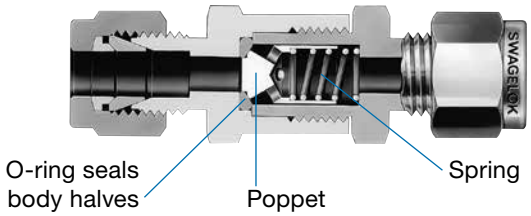

CH Series

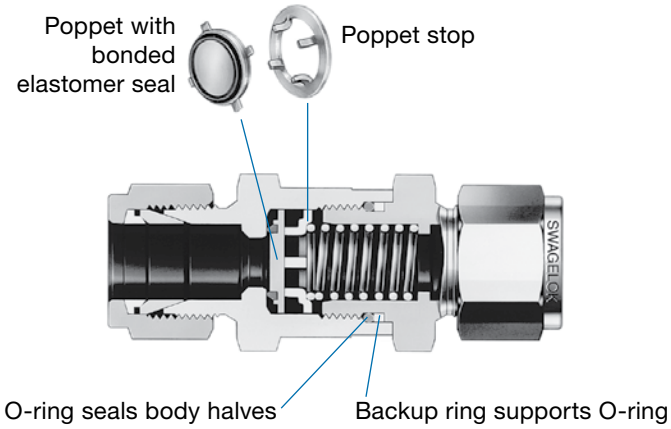

CP Series

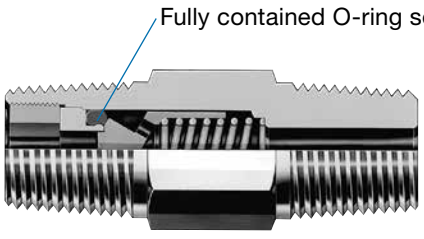


Compact, one-piece body


Adjustable Cracking Pressures

From 3 to 600 psi (0.21 to 41.4 bar)

CA Series

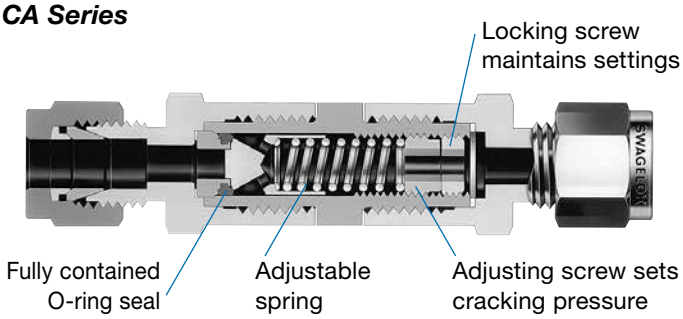

CPA Series

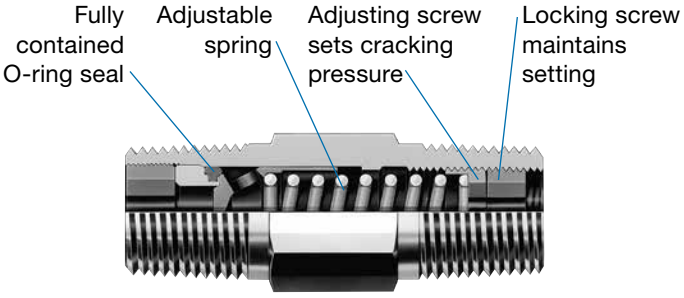

Compact, one-piece body

Technical Data

Cracking pressure—the inlet pressure at which the first indication of flow occurs (steady stream of bubbles).

Reseal pressure—the pressure at which there is no indication of flow.

Back pressure—the differential pressure between the inlet and outlet pressures.

⚠ **For valves not actuated for a period of time, initial cracking pressure may be higher than the set cracking pressure.**

Series	Maximum Flow Coefficient (C_v)	Nominal Cracking Pressure① psi (bar)	Maximum Back Pressure at 70°F (20°C) psig (bar)
Fixed Cracking Pressure			
2C	0.10	1/3, 1, 10 and 25 (0.03, 0.07, 0.69, and 1.8)	1000 (68.9)②
4C	0.47		
6C	1.47		200 (13.7)
8C	1.68		
12C, 16C	4.48		
CH4	0.67	1/3, 1, 5, 10 and 25 (0.03, 0.07, 0.35 0.69, and 1.8)	6000 (413)③
CH8	1.8		
CH16	4.7		5000 (344)③
4CP	0.35	1/3, 1, 10 and 25 (0.03, 0.07, 0.69, and 1.8)	3000 (206)
8CP	1.20		
Adjustable Cracking Pressure			
CA	0.37	3 to 50 (0.21 to 3.5) 50 to 150 (3.5 to 10.4) 150 to 350 (10.4 to 24.2) 350 to 600 (24.2 to 41.4)	3000 (206)
4CPA	0.35		
8CPA	1.20		

For more information about pressure ratings of valves with tube fitting end connections, see Swagelok® *Tubing Data* (MS-01-107), page 224.

① Other cracking pressures are available; contact your authorized Swagelok sales and service representative.

② For cracking pressure of 25 psi (1.8 bar), maximum back pressure is 3000 psig (206 bar).

③ Maximum back pressure may be limited by the end connection. See **Dimensions,** page 12.

Pressure-Temperature Ratings

C (2C, 4C, 6C, and 8C), CA, CP, and CPA Series

Ratings based on fluorocarbon FKM O-rings in 316 stainless steel valves and Buna N O-rings in brass valves.

Material	316 SS	Brass
Temperature, °F (°C)	**Working Pressure,** psig (bar)①	
–10 (–23) to 100 (37)	3000 (206)	3000 (206)
200 (93)	2575 (177)	2600 (179)
250 (121)	2450 (168)	2405 (165)
300 (148)	2325 (160)	—
375 (190)	2185 (150)	—

① To reduce the possibility of dislodging the O-ring in systems where pressure surges, shock, or pulses occur, for all 2C and 4C series valves and for 6C and 8C series valves with cracking pressures lower than 50 psi (3.5 bar), an optional inlet gasket is available. See page 14 for ordering information. Cracking and reseal pressures may decrease slightly from the ranges listed in this catalog.

Alternatively, CH or CP series valves should be considered.

CH Series

Ratings based on fluorocarbon FKM seals.

Material	316 SS	
Series	**CH4, CH8**	**CH16**
Temperature, °F (°C)	**Working Pressure,** psig (bar)	
–10 (–23) to 100 (37)	6000 (413)①	5000 (344)①
200 (93)	5160 (355)	4290 (295)
250 (121)	4910 (338)	4080 (281)
300 (148)	4660 (321)	3875 (266)
400 (204)	4280 (294)	3560 (245)

For more information about pressure ratings of valves with tube fitting end connections, see Swagelok *Tubing Data* (MS-01-107), page 224.

① Pressure ratings may be limited by the end connection. See **Dimensions**, page 12.

C Series (12C and 16C)

Ratings based on fluorocarbon FKM O-rings in 316 stainless steel valves and Buna N O-rings in brass valves.

Material	316 SS	Brass
Temperature, °F (°C)	**Working Pressure,** psig (bar)	
–10 (–23) to 100 (37)	2000 (137)	1500 (103)
200 (93)	1715 (118)	1300 (89.5)
250 (121)	1630 (112)	1200 (82.6)
300 (148)	1545 (106)	—
375 (190)	1450 (99.9)	—

Cracking and Reseal Pressures at 70°F (20°C)

Cracking pressure—the inlet pressure at which the first indication of flow occurs (steady stream of bubbles).

Reseal pressure—the pressure at which there is no indication of flow.

Back pressure—the differential pressure between the inlet and outlet pressures.

⚠ For valves not actuated for a period of time, initial cracking pressure may be higher than the set cracking pressure.

C Series

Nominal Cracking Pressure psi (bar)	Cracking Pressure Range psi (bar)	Reseal Pressure psi (bar)
1/3 (0.03)	Up to 3 (0.21)	Up to 6 (0.42) back pressure
1 (0.07)	Up to 4 (0.28)	Up to 6 (0.42) back pressure
10 (0.69)	7 to 15 (0.49 to 1.1)	3 (0.21) or more inlet pressure
25 (1.8)	20 to 30 (1.4 to 2.1)	17 (1.2) or more inlet pressure


CH Series

Nominal Cracking Pressure psi (bar)	Cracking Pressure Range psi (bar)	Reseal Pressure psi (bar)
1/3 (0.03)	Up to 3 (0.21)	Up to 6 (0.42) back pressure
1 (0.07)	Up to 4 (0.28)	Up to 5 (0.35) back pressure
5 (0.35)	3 to 9 (0.21 to 0.63)	Up to 2 (0.14) back pressure
10 (0.69)	7 to 15 (0.49 to 1.1)	3 (0.21) or more inlet pressure
25 (1.8)	20 to 30 (1.4 to 2.1)	17 (1.2) or more inlet pressure

CP Series

Nominal Cracking Pressure psi (bar)	Cracking Pressure Range psi (bar)	Reseal Pressure psi (bar)
1/3 (0.03)	Up to 3 (0.21)	Up to 20 (1.4) back pressure
1 (0.07)	Up to 4 (0.28)	Up to 20 (1.4) back pressure
10 (0.69)	7 to 13 (0.49 to 0.90)	Up to 10 (0.69) back pressure
25 (1.8)	21 to 29 (1.5 to 2.0)	5 (0.35) or more inlet pressure

CA and CPA Series

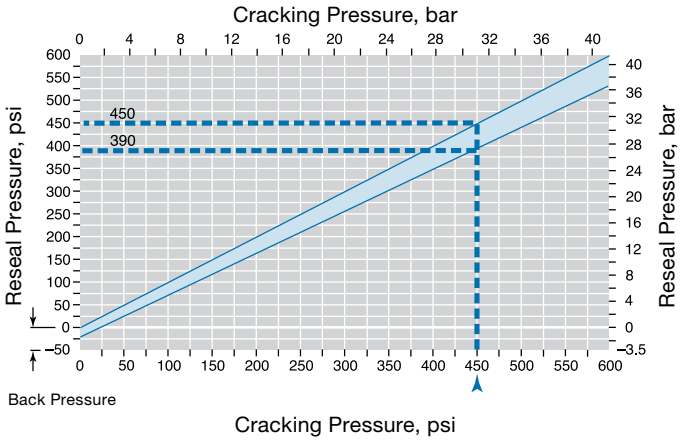


Materials of Construction

C and CA Series

Component	Valve Body Materials	
	316 SS	Brass
	Material Grade/ASTM Specification	
1 *Inlet body*	*316 SS/A479*	*Brass 360/B16*
2 *Inlet gasket (CA series)*	*PTFE-coated 316 SS/A240*	
Inlet gasket (standard for 6C and 8C series with ≥ 50 psi [3.5 bar] spring; optional for 2C and 4C series and all other 6C and 8C series)		
Inlet gasket (12C and 16C series)	*PTFE-coated 316 SS/A240*	*PTFE-coated aluminum/B209*
3 *Insert (CA series)*	*316 SS/A479*	*Naval brass 485/ B21*
4 *O-ring*	*Fluorocarbon FKM*	*Buna N*
5 *Poppet*	*316 SS/A479*	*Brass 360/B16*
6 *Spring*	*302 SS/A313*	
7 *Center body (CA series)*	*316 SS/A479*	*Brass 360/B16*
8 *Adjusting screw (CA series)*	*316 SS/A276*	
9 *Locking screw (CA series)*		
10 *Outlet gasket (CA series)*	*PTFE-coated 316 SS/A240*	
11 *Outlet body*	*316 SS/A479*	*Brass 360/B16*
Wetted lubricant	*Silicone-based (C series); PTFE-based (CA series)*	
Nonwetted lubricant	Molybdenum disulfide-based	—

Wetted components listed in *italics*.

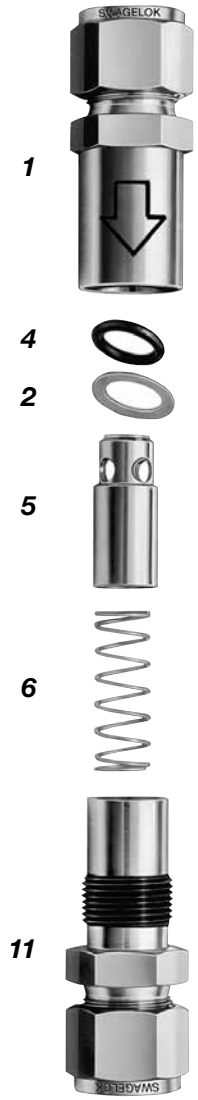

12C Series shown




CA Series

CH Series

Component	Material Grade/ ASTM Specification
1 *Inlet body*	*316 SS/A479*
2 *Poppet*	*Fluorocarbon FKM-bonded① 316 SS/A479*
3 *Poppet stop*	*316 SS/A240*
4 *Spring*	*302 SS/A313*
5 *O-ring*	*Fluorocarbon FKM*
6 Backup ring	PTFE/D1710
7 *Outlet body*	*316 SS/A479*
Lubricant	*PTFE-based*


Wetted components listed in *italics*.

① Material Safety Data Sheet for bonding agent available on request.

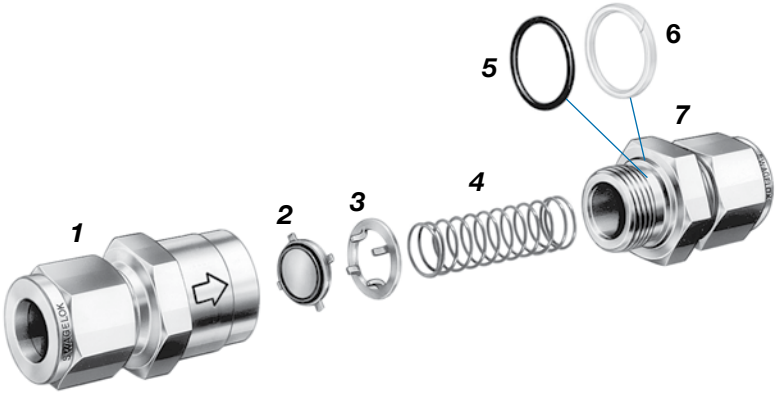


Materials of Construction

CP Series

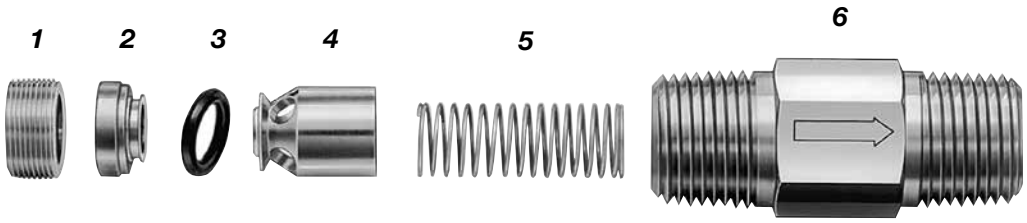

CPA Series

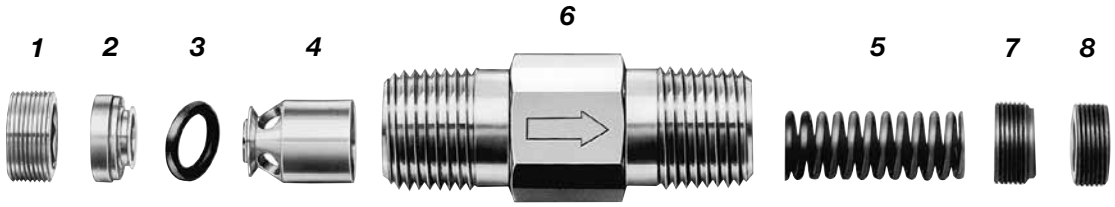

Component	Valve Body Materials				
	316 SS	Brass			
		4CP	8CP	4CPA	8CPA
	Material Grade/Specification				
1 *Insert lock screw*	*316 SS/ASTM A276 or A479*	*Brass CW710R/ EN 12163*	*Brass 360/ ASTM B16*	*Brass CW710R/ EN 12163*	*Brass 360/ ASTM B16*
2 *Insert*	*316 SS/ASTM A479*				
3 *O-ring*	*Fluorocarbon FKM*	*Buna N*			
4 *Poppet*	*316 SS/ASTM A479*	*Brass 360/ASTM B16*			
5 *Spring*	*302 SS①/ASTM A313*				
6 *Body*	*316 SS/ASTM A479*	*Brass 360/ASTM B16*			
7 *Adjusting screw (CPA series)*	*316 SS/ASTM A276*	—		*316 SS/ ASTM A276*	*Brass 360②/ ASTM B16*
8 *Locking screw (CPA series)*					
Lubricant	*Silicone-based and PTFE-based (CP series) PTFE-based (CPA series)*	*Silicone-based and PTFE-based*		*PTFE-based*	

Wetted components listed in *italics.*

① Spring in 316 SS and brass 8CPA series valves is PTFE coated.

② Adjusting screw in valve with 150 or 350 psi (10.4 or 24.2 bar) spring is 316 SS.

Flow Data at 70°F (20°C)

The flow curves shown here were generated in optimal laboratory conditions. Flow results in individual applications may vary due to specific system parameters.


C Series

Nominal Cracking Pressures


2C, 6C, 12C, 16C Series	1 psi (0.07 bar)	10 psi (0.69 bar)	25 psi (1.8 bar)
4C, 8C Series	1 psi (0.07 bar)	10 psi (0.69 bar)	25 psi (1.8 bar)

Air


2C, 4C Series

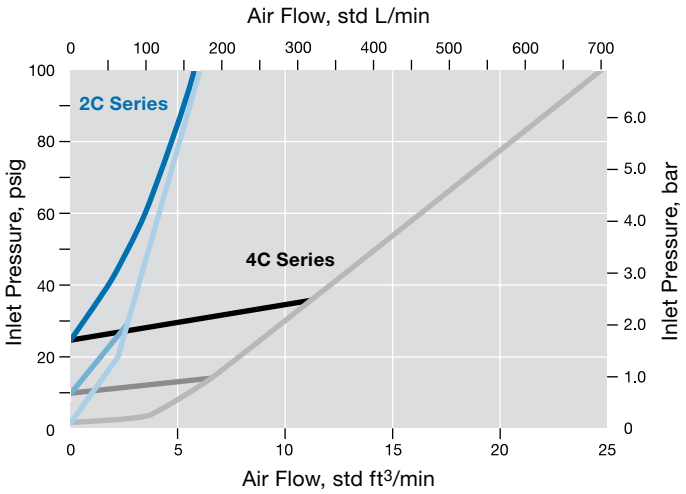

6C, 8C Series

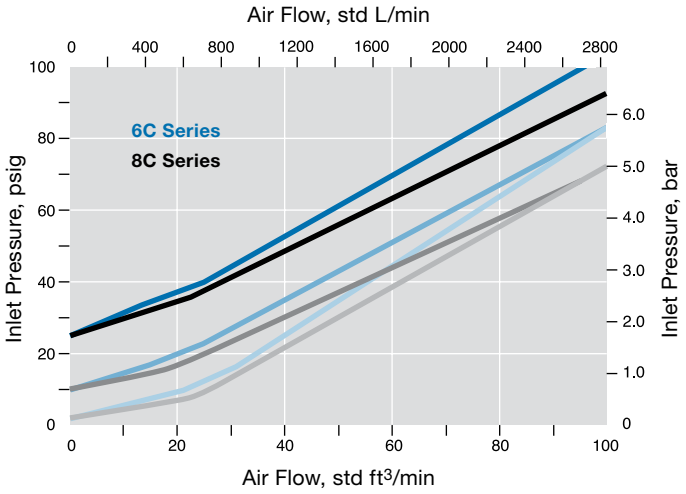


12C, 16C Series

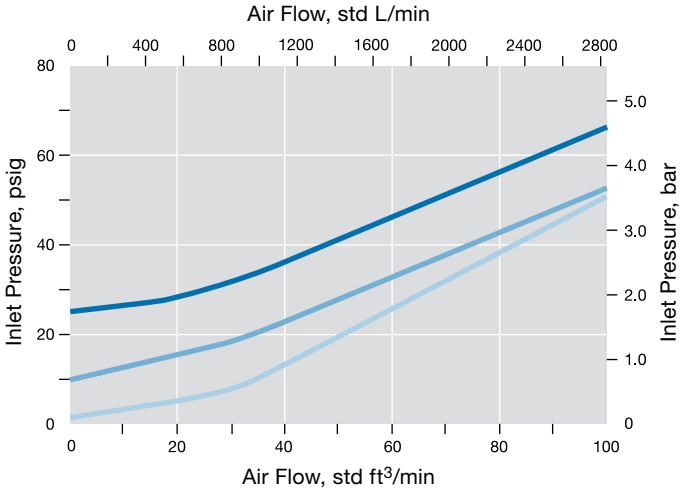


Water


2C, 4C Series

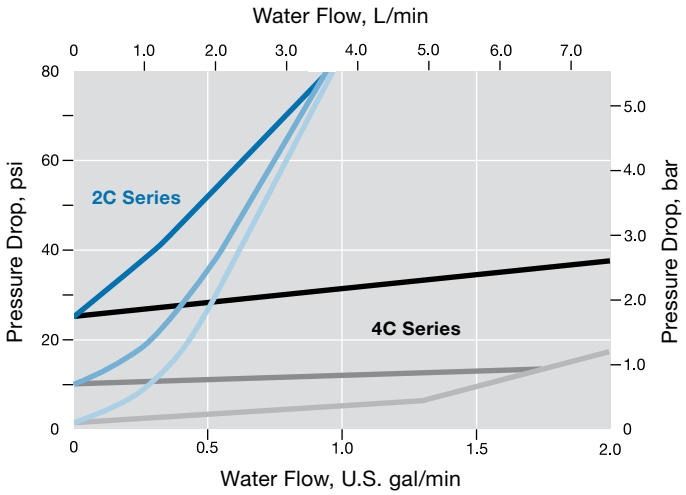

6C, 8C Series

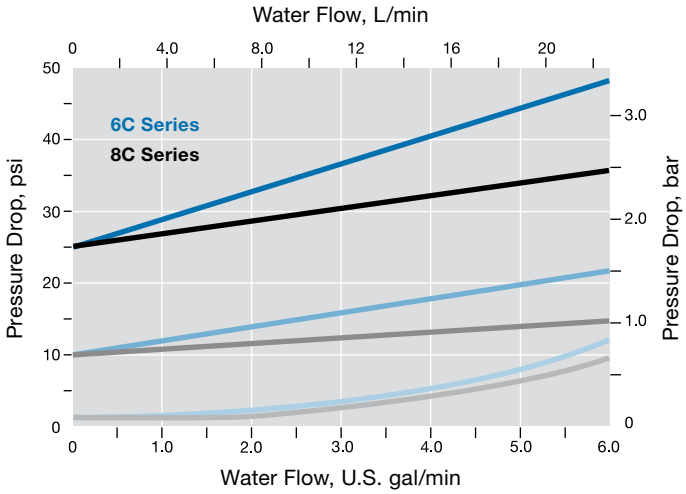

12C, 16C Series

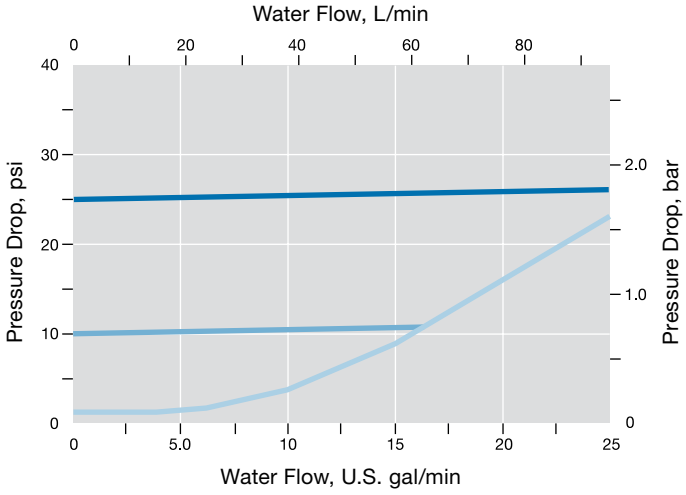

Flow Data at 70°F (20°C)

The flow curves shown here were generated in optimal laboratory conditions. Flow results in individual applications may vary due to specific system parameters.


CH Series

Nominal Cracking Pressures


1 psi (0.07 bar) 10 psi (0.69 bar) 25 psi (1.8 bar)

Air


CH4 Series

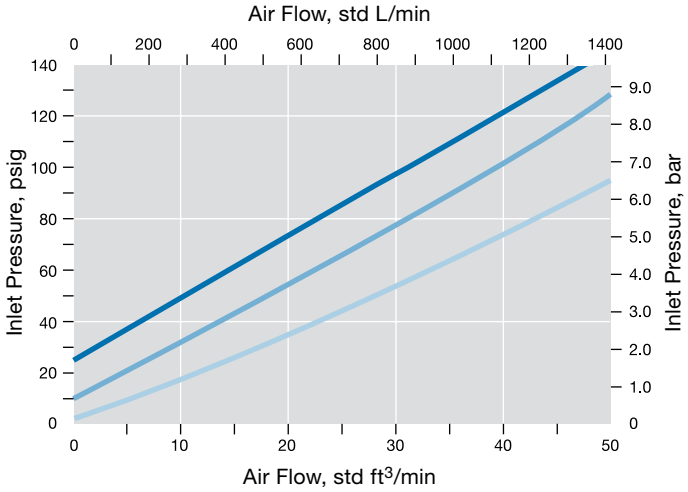

CH8 Series

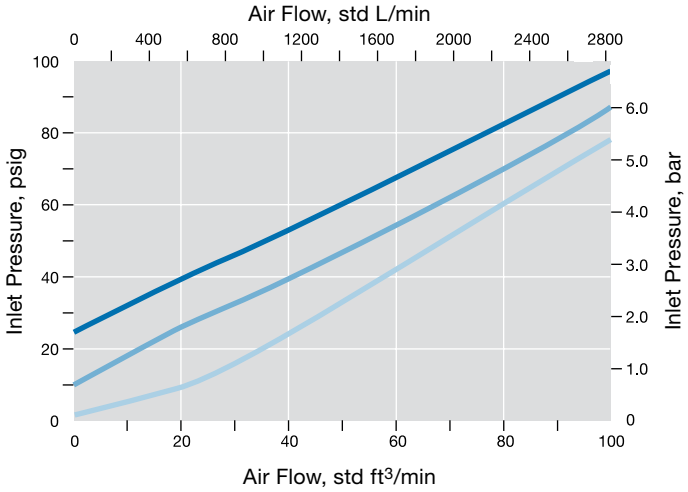


CH16 Series

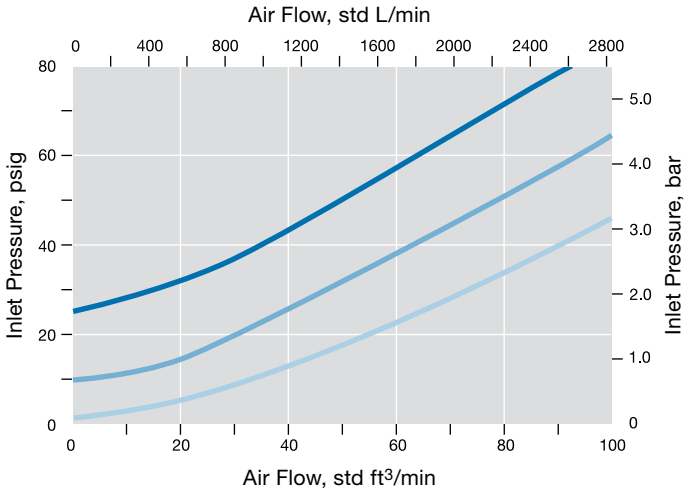


Water


CH4 Series

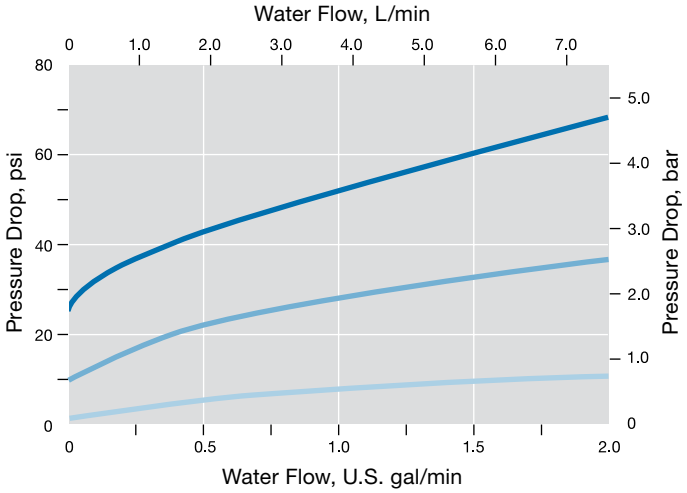

CH8 Series

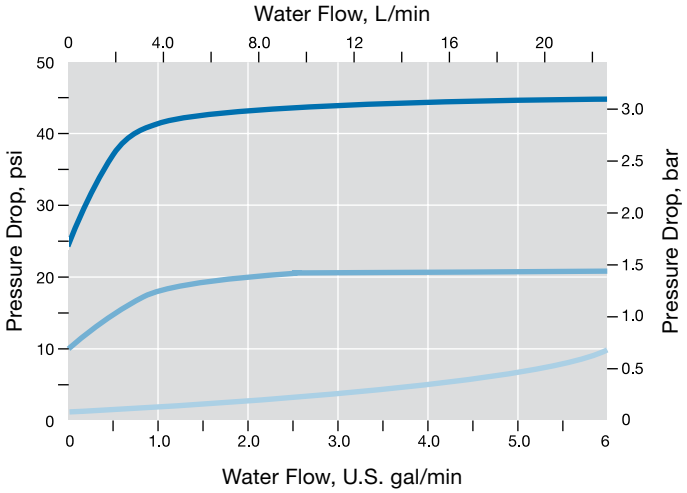

CH16 Series

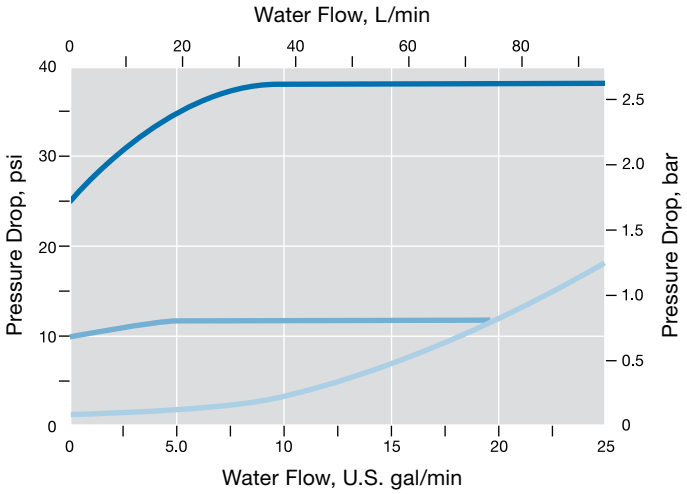

Flow Data at 70°F (20°C)

The flow curves shown here were generated in optimal laboratory conditions. Flow results in individual applications may vary due to specific system parameters.


CA and CPA Series

Nominal Cracking Pressures


3 psi (0.21 bar) 50 psi (3.5 bar) 150 psi (10.4 bar) 350 psi (24.2) bar

Air


CA Series

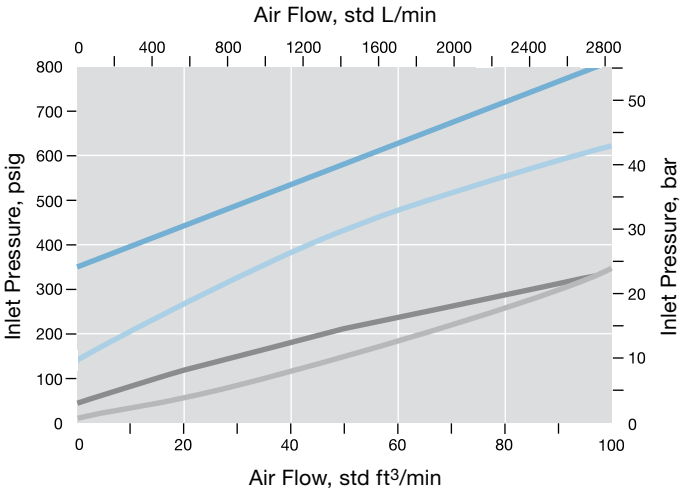

4CPA Series

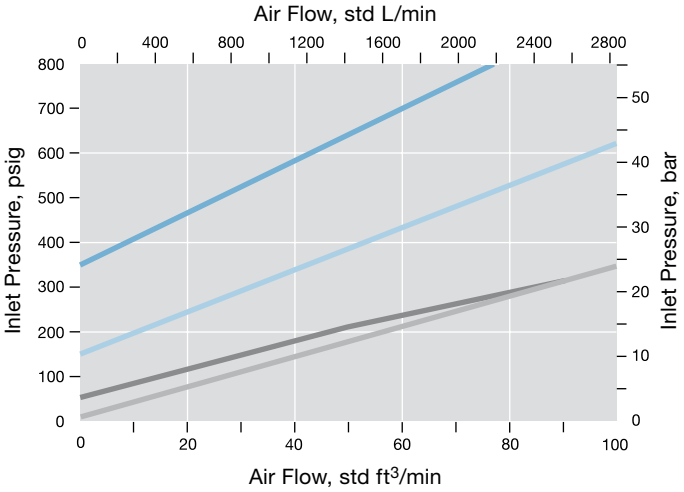


8CPA Series

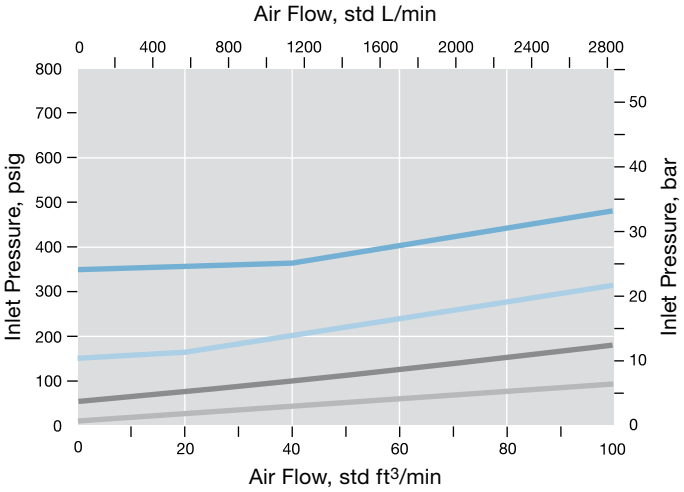


Water


CA Series

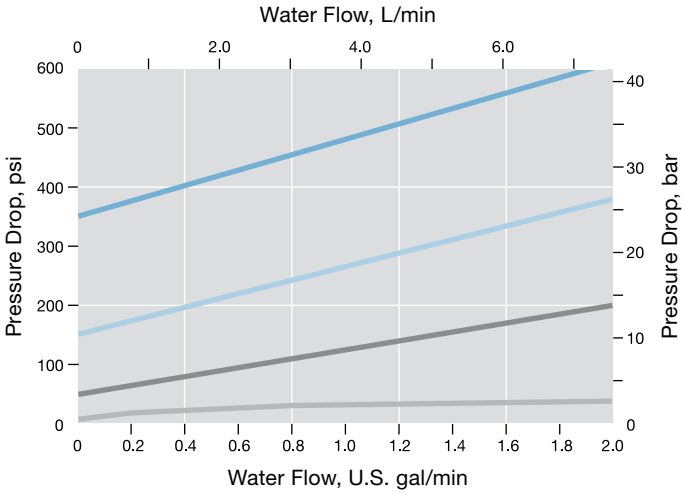

4CPA Series

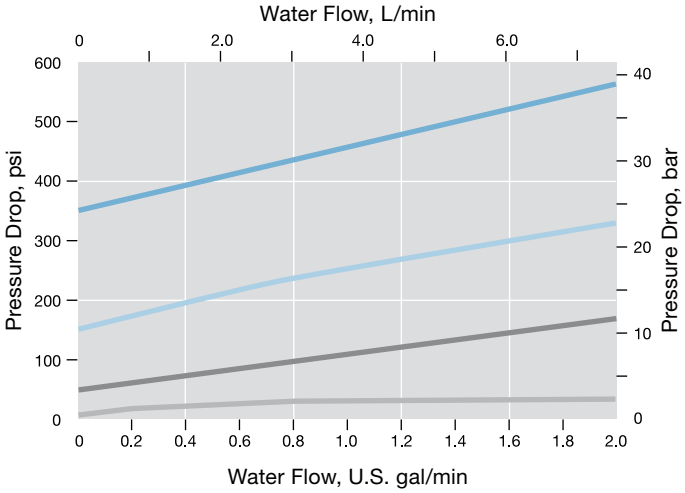

8CPA Series

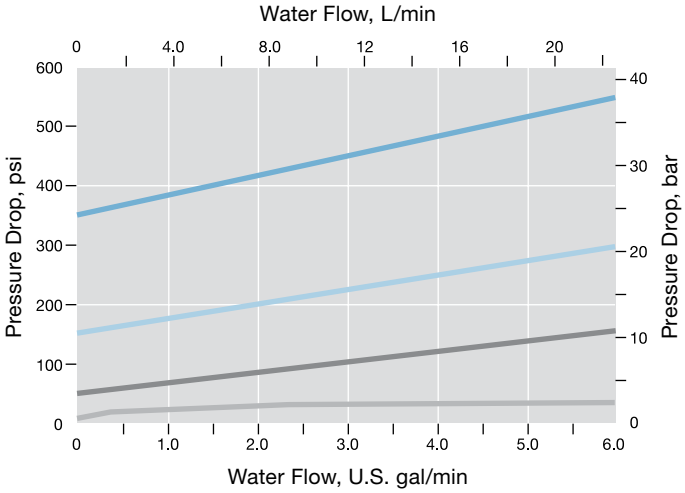

Flow Data at 70°F (20°C)

The flow curves shown here were generated in optimal laboratory conditions. Flow results in individual applications may vary due to specific system parameters.


CP Series

Nominal Cracking Pressures


1 psi (0.07 bar) 10 psi (0.69 bar) 25 psi (1.8 bar)

Air

4CP Series

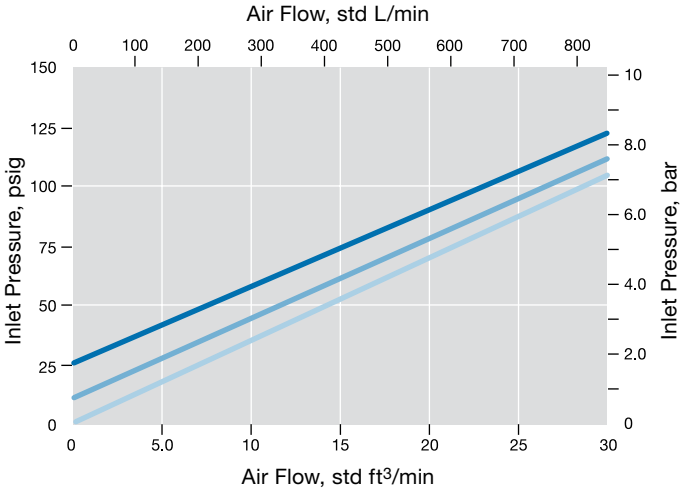


8CP Series

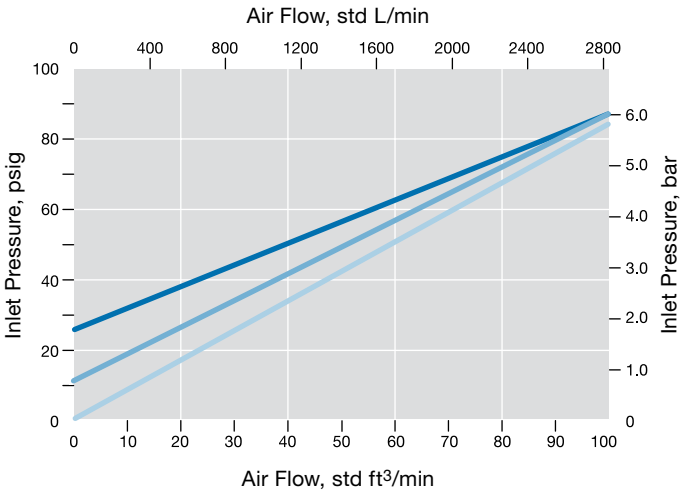


Water

4CP Series

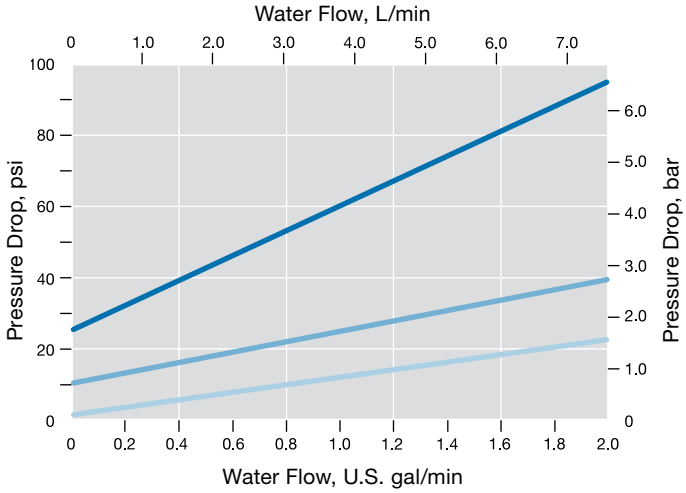

8CP Series

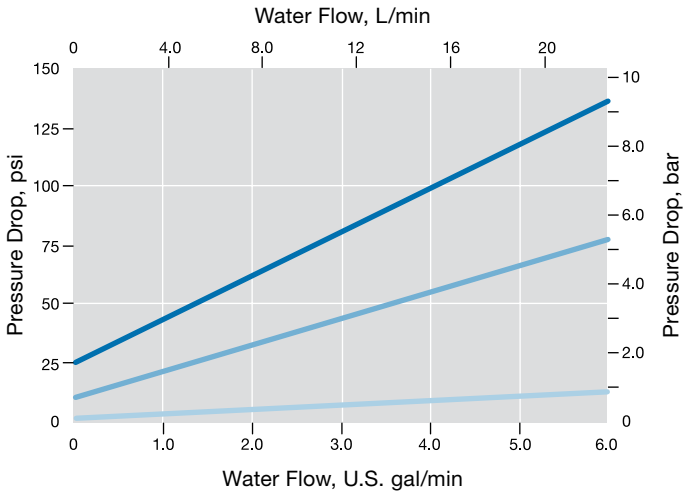

Testing

Every C, CA, CH, CP, and CPA series check valve is factory tested for crack and reseal performance with a liquid leak detector.

Check valves with fixed cracking pressures, C, CP, and CH series, are cycled six times prior to testing. Every valve is tested to ensure it seals within 5 seconds at the appropriate reseal pressure.

Check valves with adjustable cracking pressures, CA and CPA series, are tested at two pressure points. Every valve is tested at a low-pressure setting and at a high-pressure setting. All valves must seal within 5 seconds at the appropriate reseal pressure.

Cleaning and Packaging


Every C, CA, and CH series check valve with VCR® or VCO® end connections is processed in accordance with Swagelok *Special Cleaning and Packaging (SC-11)* (MS-06-63), to ensure compliance with product cleanliness requirements as stated in ASTM G93 Level C.

All other C, CA, and CH series check valves, as well as every CP and CPA series check valve, are cleaned in accordance with Swagelok *Standard Cleaning and Packaging (SC-10)* (MS-06-62).


Dimensions

Dimensions, shown with Swagelok tube fitting nuts finger-tight, are for reference only and are subject to change.

C Series

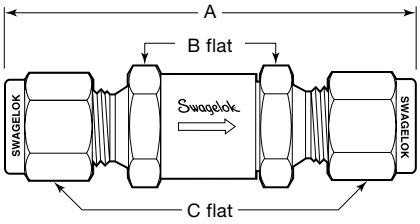

CA Series

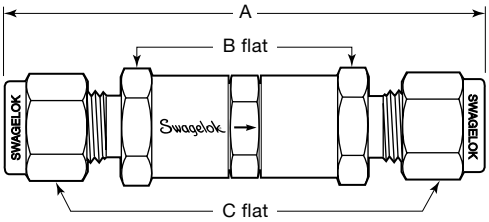

End Connections		Basic Ordering Number	Series	Dimensions, in. (mm)		
Inlet/Outlet	Size			A	B	C
Fixed Cracking Pressure, C Series						
Fractional Swagelok tube fittings	1/8 in.	SS-2C-	2C	2.14 (54.3)	5/8	7/16
	1/4 in.	SS-4C-	4C	2.35 (59.7)		9/16
	3/8 in.	SS-6C-	6C	3.17 (80.5)	7/8	11/16
	1/2 in.	SS-8C-	8C	3.42 (86.9)		7/8
	3/4 in.	SS-12C-	12C	4.32 (110)	1 1/4	1 1/8
	1 in.	SS-16C-	16C	4.74 (120)	1 3/8	1 1/2
Metric Swagelok tube fittings	6 mm	SS-6C-MM-	4C	2.36 (59.9)	5/8	(14)
	10 mm	SS-10C-MM-	8C	3.32 (84.3)	7/8	(19)
	12 mm	SS-12C-MM-		3.42 (86.9)		(22)
Female NPT	1/8 in.	SS-2C4-	2C	1.89 (48.0)	5/8	—
	1/4 in.	SS-4C4-	4C	2.15 (54.6)	3/4	
	3/8 in.	SS-6C4-	6C	2.98 (75.7)	7/8	
	1/2 in.	SS-8C4-	8C	3.58 (90.9)	1 1/16	
	3/4 in.	SS-12C4-	12C	4.08 (104)	1 1/4	
	1 in.	SS-16C4-	16C	4.84 (123)	1 5/8	
Male NPT	1/8 in.	SS-2C2-	2C	1.71 (43.4)	5/8	
	1/4 in.	SS-4C2-	4C	2.09 (53.1)		
	3/8 in.	SS-6C2-	6C	2.78 (70.6)	7/8	
	1/2 in.	SS-8C2-	8C	3.16 (80.3)		
	3/4 in.	SS-12C2-	12C	4.08 (104)	1 1/4	
	1 in.	SS-16C2-	16C	4.52 (115)	1 5/8	
Male NPT/ Swagelok tube fitting	1/4 in.	SS-4C1-	4C	2.22 (56.4)	5/8	9/16
Male VCR fittings	1/4 in.	SS-4C-VCR-	4C	2.21 (56.1)	5/8	—
	1/2 in.	SS-8C-VCR-	8C	3.56 (90.4)	15/16	
	3/4 in.	SS-12C-VCR-	12C	4.64 (118)	1 5/8	
	1 in.	SS-16C-VCR-	16C	4.76 (121)		
Adjustable Cracking Pressure, CA Series						
Swagelok tube fittings	1/4 in.	SS-4CA-	CA	3.23 (82.0)	5/8	9/16
	6 mm	SS-6CA-MM-				(14)
	8 mm	SS-8CA-MM-		3.32 (84.3)		(16)
Male NPT/ Swagelok tube fitting	1/4 in.	SS-4CA1-		3.12 (79.2)		9/16
Male VCR fittings	1/4 in.	SS-4CA-VCR-		3.09 (78.5)		—

Ordering Information

Basic ordering numbers specify stainless steel material. To order brass, replace **SS** with **B** in the basic ordering number.

Example: **B**-2C-

C Series

To order, add a cracking pressure designator to the basic ordering number.

Cracking Pressure psi (bar)	Designator
1/3 (0.03)	1/3
1 (0.07)	1
10 (0.69)	10
25 (1.8)	25

Example: SS-2C-**1/3**

CA Series

To order, add a cracking pressure range designator to the basic ordering number.

Cracking Pressure psi (bar)	Designator
3 to 50 (0.21 to 3.5)	3
50 to 150 (3.5 to 10.4)	50
150 to 350 (10.4 to 24.2)	150
350 to 600 (24.2 to 41.4)	350

Example: SS-4CA-**3**

⚠ **Check valves are designed for directional flow control only. Swagelok check valves should never be used as code safety relief devices.**


Dimensions

Dimensions, shown with Swagelok tube fitting nuts finger-tight, are for reference only and are subject to change.

End Connections		Pressure Rating at 100°F (37°C) psig (bar)	Basic Ordering Number	Series	Dimensions in. (mm)	
Type	Size				A	B
Fractional Swagelok tube fitting	1/8 in.	6000 (413)	SS-CHS2-	CH4	2.27 (57.7)	11/16
	1/4 in.		SS-CHS4-		2.43 (61.7)	
	3/8 in.		SS-CHS6-	CH8	2.75 (69.9)	1
	1/2 in.		SS-CHS8-		2.96 (75.2)	
	3/4 in.	5000 (344)	SS-CHS12-	CH16	3.52 (89.4)	1 5/8
	1 in.	4700 (323)	SS-CHS16-		3.88 (98.6)	
Metric Swagelok tube fitting	6 mm	6000 (413)	SS-CHS6MM-	CH4	2.43 (61.7)	11/16
	8 mm		SS-CHS8MM-	CH8	2.70 (68.6)	1
	10 mm		SS-CHS10MM-		2.80 (71.1)	
	12 mm		SS-CHS12MM-		2.96 (75.2)	
	22 mm	4900 (337)	SS-CHS22MM-	CH16	3.48 (88.4)	1 5/8
	25 mm	4600 (316)	SS-CHS25MM-		3.88 (98.6)	
Female NPT	1/4 in.	6000 (413)	SS-CHF4-	CH4	2.13 (54.1)	11/16
	3/8 in.	5300 (365)	SS-CHF6-	CH8	2.55 (64.8)	1
	1/2 in.	4900 (337)	SS-CHF8-		3.03 (77.0)	1 1/16
	3/4 in.	4600 (316)	SS-CHF12-	CH16	3.23 (82.0)	1 5/8
	1 in.	4400 (303)	SS-CHF16-		3.83 (97.3)	
Male NPT	1/8 in.	6000 (413)	SS-CHM2-	CH4	1.79 (45.5)	11/16
	1/4 in.		SS-CHM4-		2.17 (55.1)	
	3/8 in.		SS-CHM6-	CH8	2.36 (59.9)	1
	1/2 in.		SS-CHM8-		2.73 (69.3)	
	3/4 in.	5000 (344)	SS-CHM12-	CH16	3.29 (83.6)	1 5/8
	1 in.		SS-CHM16-		3.67 (93.2)	
Female ISO①	1/4 in.	6000 (413)	SS-CHF4RT-	CH4	2.28 (57.9)	11/16
	1/2 in.	5100 (351)	SS-CHF8RT-	CH8	3.29 (83.6)	1 1/16
	3/4 in.	4800 (330)	SS-CHF12RT-	CH16	3.55 (90.2)	1 5/8
	1 in.	4400 (303)	SS-CHF16RT-		3.83 (97.3)	
Male ISO①	1/4 in.	6000 (413)	SS-CHM4RT-	CH4	2.17 (55.1)	11/16
	1/2 in.		SS-CHM8RT-	CH8	2.73 (69.3)	1
	3/4 in.	5000 (344)	SS-CHM12RT-	CH16	3.29 (83.6)	1 5/8
	1 in.		SS-CHM16RT-		3.67 (93.2)	
Female SAE/MS	1/2 in.	4600 (316)	SS-CHF8ST-	CH8	2.74 (69.6)	1
Male SAE/MS	1/2 in.	4600 (316)	SS-CHM8ST-		2.48 (63.0)	
Male VCO fitting	1/4 in.	6000 (413)	SS-CHVCO4-	CH4	1.98 (50.3)	11/16
	1/2 in.		SS-CHVCO8-	CH8	2.35 (59.7)	1
	3/4 in.	5000 (344)	SS-CHVCO12-	CH16	2.90 (73.7)	1 5/8
	1 in.		SS-CHVCO16-			
Male VCR fitting	1/4 in.	6000 (413)	SS-CHVCR4-	CH4	2.28 (57.9)	11/16
	1/2 in.	4300 (296)	SS-CHVCR8-	CH8	2.73 (69.3)	1
	3/4 in.	3700 (254)	SS-CHVCR12-	CH16	3.78 (96.0)	1 5/8

① See specifications ISO 7/1, BS EN 10226-1, DIN 2999, JIS B0203.

CH Series

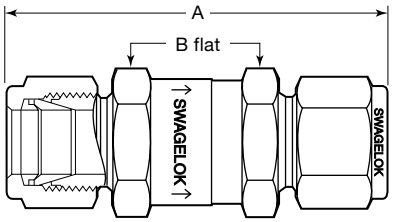

Ordering Information

To order, add a cracking pressure designator to the basic ordering number.

Cracking Pressure psi (bar)	Designator
1/3 (0.03)	1/3
1 (0.07)	1
5 (0.35)	5
10 (0.69)	10
25 (1.8)	25


Example: SS-CHS2-**1/3**

⚠ **Check valves are designed for directional flow control only. Swagelok check valves should never be used as code safety relief devices.**

Dimensions

Dimensions, shown with Swagelok tube fitting nuts finger-tight, are for reference only and are subject to change.

CP and CPA Series

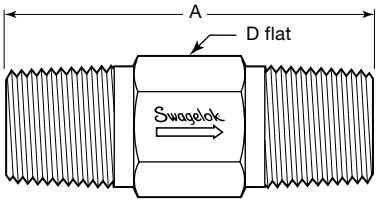

End Connections		Basic Ordering Number	Series	Dimensions, in. (mm)	
Inlet/Outlet	Size			A	D
Fixed Cracking Pressure, CP Series					
Female NPT	1/4 in.	SS-4CP4-	4CP	2.41 (61.2)	3/4
	1/2 in.	SS-8CP4-	8CP	3.71 (94.2)	1 1/16
Male NPT	1/4 in.	SS-4CP2-	4CP	1.62 (41.1)	9/16
	1/2 in.	SS-8CP2-	8CP	2.28 (57.9)	7/8
Female/male NPT	1/4 in.	SS-4CP6-	4CP	2.29 (58.2)	3/4
Male/female NPT	1/4 in.	SS-4CP5-		1.75 (44.4)	3/4
	1/2 in.	SS-8CP5-	8CP	2.83 (71.9)	1 1/16
Female ISO①	1/4 in.	SS-4CP4-RT-	4CP	2.54 (64.5)	3/4
Male ISO①	1/4 in.	SS-4CP2-RT-		1.62 (41.1)	9/16
Adjustable Cracking Pressure, CPA Series					
Female NPT	1/4 in.	SS-4CPA4-	4CPA	2.98 (75.7)	3/4
Male NPT	1/4 in.	SS-4CPA2-		1.62 (41.1)	9/16
	1/2 in.	SS-8CPA2-	8CPA	2.56 (65.0)	7/8
Male ISO①	1/4 in.	SS-4CPA2-RT-	4CPA	1.62 (41.1)	9/16
	1/2 in.	SS-8CPA2-RT-	8CPA	2.56 (65.0)	7/8

① See specifications ISO 7/1, BS EN 10226-1, DIN 2999, and JIS B0203.

Ordering Information

Basic ordering numbers specify stainless steel material. To order brass, replace **SS** with **B** in the basic ordering number.

Example: **B**-4CP4-

CP Series

To order, add a cracking pressure designator to the basic ordering number.

Cracking Pressure psi (bar)	Designator
1/3 (0.03)	1/3
1 (0.07)	1
10 (0.69)	10
25 (1.8)	25

Example: B-4CP4-**1/3**

CPA Series

To order, add a cracking pressure range designator to the basic ordering number.

Cracking Pressure psi (bar)	Designator
3 to 50 (0.21 to 3.5)	3
50 to 150 (3.5 to 10.4)	50
150 to 350 (10.4 to 24.2)	150
350 to 600 (24.2 to 41.4)	350

Example: SS-4CPA4-**3**

⚠ **Check valves are designed for directional flow control only. Swagelok check valves should never be used as code safety relief devices.**

Options and Accessories

Seal Materials (All Series)

Fluorocarbon FKM O-rings are standard in 316 stainless steel valves; Buna N O-rings are standard in brass valves. Other elastomer seals (poppet bonding material and O-ring) are available. To order, insert the seal material designator into the valve ordering number.

Seal Material	Designator	Temperature Rating °F (°C)
Buna N	-BU	–10 to 250 (–23 to 121)
Ethylene propylene	-EP	–50 to 300 (–45 to 148)
Fluorocarbon FKM	-VI	–10 to 375 (–23 to 190)①
Neoprene	-NE	–40 to 250 (–40 to 121)

① –10 to 400°F (–23 to 204°C) for CH series.

Example: B-2C-**VI**-1/3

Additional seal materials are available. Contact your authorized Swagelok representative for details.

Special Alloys (All Series)

Springs of alloy 400 or alloy C-276 are available in some sizes. Valve bodies of alloy 400, carbon steel, aluminum, or other alloys are available in some sizes. Contact your authorized Swagelok representative for more information.

PTFE-Coated Springs (C, CA, CP, and CPA Series)

Springs with PTFE coating are available in some sizes. Contact your authorized Swagelok representative for more information.

Inlet Gaskets (2C, 4C, 6C, and 8C Series)

PTFE-coated 316 stainless steel inlet gaskets are available for 2C, 4C, 6C, and 8C series valves to reduce the possibility of dislodging the O-ring in systems where pressure surges, shock, or pulses occur. Gaskets are standard for select valves; see the table below for details.

Cracking Pressure psig (bar)	Inlet Gasket		
	2C, 4C Series	6C, 8C Series	12C, 16C Series
< 50 (3.5)	Optional	Optional	Standard
> 50 (3.5)	Optional	Standard	Standard

To order an inlet gasket, if it is not standard, insert **-FG** into the valve ordering number.

Example: SS-4C-**FG**-1

Deflector Caps (4C, 8C, CP, and CPA Series)

A polyethylene deflector cap is available for 4C, 8C, CP, and CPA series valves with male NPT end connections. The deflector cap deflects flow from direct contact with personnel and prevents atmospheric contaminants from entering the valve. The deflector cap screws easily onto the male NPT outlet end of the valve. Maximum rating is 300 psig at 100°F (20.6 bar at 37°C).



To order, insert **-DG** for a green cap or **-DR** for a red cap into the ordering number.

Example: SS-4CPA2-**DR**-3

Sour Gas Valves (CH Series)

CH series valves are available for sour gas service. Materials are selected in accordance with NACE MR0175/ISO 15156.

Technical Data

Pressure Rating at 70°F (20°C)
5000 psig (344 bar)

Temperature Rating
–50 to 300°F (–45 to 148°C)

Nominal Cracking Pressures
1/3, 1, and 5 psi (0.03, 0.07, and 0.35 bar)

End Connections
1/4, 3/8, and 1/2 in. Swagelok tube fittings

Materials of Construction
Body, poppet—alloy 400/B164
Seals—ethylene propylene
Backup ring—PTFE
Spring—alloy X-750/AMS 5699
All other materials and lubricant same as standard product.
See **Materials of Construction,** page 5.

Ordering Information

To order, replace **SS** with **M** and insert **-SG** into the ordering number.

Example: **M**-CHS4-**SG**-1/3

Valves With ECE R110-Type Approval (CH Series)

Stainless steel CH series check valves with Buna C seals are available with ECE R110-type approval for use in alternative fuel service.

- Temperature rating: –40 to 185°F (–40 to 85°C)
- Pressure rating within the range: 3770 psig (260 bar)

To order, add **-11670** to a standard valve ordering number.

Example: SS-CHS8-1/3-**11670**

Special Cleaning and Packaging (SC-11)

Every C, CA, and CH series check valve with VCR or VCO end connections is processed in accordance with Swagelok *Special Cleaning and Packaging (SC-11)* (MS-06-63), to ensure compliance with product cleanliness requirements stated in ASTM G93 Level C.

To order special cleaning and packaging for C, CA, and CH series check valves with other end connections, add **-SC11** to the ordering number.

Example: SS-2C-1/3-**SC11**

Oxygen Service Hazards

For more information about hazards and risks of oxygen-enriched systems, see the Swagelok *Oxygen System Safety* technical report (MS-06-13).

Maintenance Kits



C, CP, CA, and CPA Series Seal Kits

Kits contain O-ring and instructions. Select a kit ordering number. To order PTFE seal kits, replace the material designator with **T** and *omit* the durometer number.

Example: **T**-4C-K4

Valve Series	Uniform O-Ring Size	Kit Ordering Number
Fixed Cracking Pressures: 1/3, 1, 10, and 25 psi (0.03, 0.07, 0.69, and 1.8 bar)		
2C, 4C	009	NEO70-4C-K4
		VI70-4C-K4
		BU80-4C-K4
		EP80-4C-K4
4CP	009	NEO60-4C-K4
		VI60-4C-K4
		BU60-4C-K4
		EP60-4C-K4
6C, 8C	111	NEO70-8C-K4
		VI70-8C-K4
		BU70-8C-K4
		EP70-8C-K4
8CP	110	NEO70-8CP-K4
		VI70-8CP-K4
		BU70-8CP-K4
		EP70-8CP-K4
12C, 16C	114	NEO70-14C-K4
		VI70-14C-K4
		BU70-14C-K4
		EP70-14C-K4
Adjustable Cracking Pressures: 3 to 150 psi (0.21 to 10.4 bar)		
CA, 4CPA	009	NEO70-4C-K4
		VI70-4C-K4
		BU70-4C-K4
		EP70-4C-K4
8CPA	110	NEO70-8CP-K4
		VI70-8CP-K4
		BU70-8CP-K4
		EP70-8CP-K4
Adjustable Cracking Pressures: 150 to 600 psi (10.4 to 41.4 bar)		
CA, 4CPA	009	NEO90-4C-K4
		VI90-4C-K4
		BU90-4C-K4
		EP90-4C-K4
8CPA	110	NEO90-8CP-K4
		VI90-8CP-K4
		BU90-8CP-K4
		EP90-8CP-K4



CH Series Seal Kits

Kits contain bonded poppet, body seal O-ring, PTFE backup ring, and instructions. Select a basic kit ordering number and add a seal material designator.

Example: SS-3K-CH4-**VI**

Valve Series	Valve Body Material	Basic Kit Ordering Number
CH4	316 SS	SS-3K-CH4-
	Alloy 400	M-3K-CH4-
CH8	316 SS	SS-3K-CH8-
	Alloy 400	M-3K-CH8-
CH16	316 SS	SS-3K-CH16-

Seal Material	Designator
Buna N	BN
Ethylene propylene	EP
Fluorocarbon FKM	VI
Neoprene	NE



CA and C Series Metal Gasket Kits

Kits contain PTFE-coated gasket(s) and instructions. Select a basic kit ordering number and add a gasket material designator.

Example: **SS**-8C-K6

Valve Series	Basic Kit Ordering Number
2C, 4C (1 gasket)①	-4C-K6
6C, 8C (1 gasket)①	-8C-K6
12C, 16C (1 gasket)	-14C-K6
CA (1 inlet gasket, 1 outlet gasket)	-4CA-K6

① Gasket is available for 2C, 4C, 6C, and 8C series valves for use in systems where pressure surges, shock, or pulses occur and is required in 6C and 8C series valves with 50 psi (3.5 bar) or higher spring cracking pressure.

Gasket Material	Designator
316 SS	SS
Alloy 400①	M
Aluminum②	A

① Not available for 6C, 8C, and CA series valves.

② Not available for 2C, 4C, 6C, 8C, and CA series valves.

Maintenance Kits



C, CP, CA, and CPA Series Spring Kits

Kits contain spring, two cracking pressure labels, and instructions. Select a basic kit ordering number and add a spring material designator.

Example: **302**-4C-K2-1/3

To order a kit with a PTFE-coated spring, add **T** to the kit ordering number.

Example: 302-4C-K2-1/3**T**

Valve Series	Cracking Pressure psi (bar)	Basic Kit Ordering Number
2C, 4C 4CP	1/3 (0.03)	-4C-K2-1/3
	1 (0.07)	-4C-K2-1
	10 (0.69)	-4C-K2-10
	25 (1.8)	-4C-K2-25
6C, 8C, 8CP	1/3 (0.03)	-8C-K2-1/3
	1 (0.07)	-8C-K2-1
	10 (0.69)	-8C-K2-10
	25 (1.8)	-8C-K2-25
12C, 16C	1/3 (0.03)	-14C-K2-1/3
	1 (0.07)	-14C-K2-1
	10 (0.69)	-14C-K2-10
	25 (1.8)	-14C-K2-25

Valve Series	Cracking Pressure psi (bar)	Basic Kit Ordering Number
CA, 4CPA	3 to 50 (0.21 to 3.5)	-4CA-K2-3
	50 to 150 (3.5 to 10.4)	-4CA-K2-50
	150 to 350 (10.4 to 24.2)	-4CA-K2-150
	350 to 600 (24.2 to 41.4)	-4CA-K2-350
8CPA	3 to 50 (0.21 to 3.5)	-8CA-K2-3
	50 to 150 (3.5 to 10.4)	-8CA-K2-50
	150 to 350 (10.4 to 24.2)	-8CA-K2-150
	350 to 600 (24.2 to 41.4)	-8CA-K2-350

Spring Material	Designator
302 SS	302
Alloy 400①	M

① Not available for CA or CPA series valves.



CH Series Spring Kits

Kits contain spring, two cracking pressure labels, and instructions. Select a basic kit ordering number and add a cracking pressure designator.

Example: 302-13K-CH4-**1/3**

Valve Series	Valve Body Material	Basic Kit Ordering Number
CH4	316 SS	302-13K-CH4-
	Alloy 400	M-13K-CH4-
CH8	316 SS	302-13K-CH8-
	Alloy 400	M-13K-CH8-
CH16	316 SS	302-13K-CH16-

Cracking Pressure psi (bar)	Designator
1/3 (0.03)	1/3
1 (0.07)	1
5 (0.35)	5
10 (0.69)	10
25 (1.8)	25



4C, 8C, CP, and CPA Series Deflector Cap Kits

Each kit contains one polyethylene deflector cap in red or green.

Male NPT	Kit Ordering Number	
	Red	Green
1/4 in.	P-4CP4-K12-RD	P-4CP4-K12-GR
1/2 in.	P-8CP4-K12-RD	P-8CP4-K12-GR

Caution: Do not mix or interchange parts with those of other manufacturers.

About this document

Thank you for downloading this electronic catalog, which is part of General Product catalog Swagelok published in print. This type of electronic catalog is updated as new information arises or revisions, which may be more current than the printed version.

Swagelok Company is a major developer and provider of fluid system solutions, including products, integration solutions and services for industry research, instrumentation, pharmaceutical, oil and gas, power, petrochemical, alternative fuels, and semiconductor. Our manufacturing facilities, research, service and distribution facilities support a global network of more than 200 authorized sales and service centers in 57 countries.

Visit www.swagelok.com to locate your Swagelok representative and obtain any information on features, technical information and product references, or to learn about the variety of services available only through authorized sales centers and service Swagelok.

Safe Product Selection

When selecting a product, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user.

Warranty Information

Swagelok products are backed by The Swagelok Limited Lifetime Warranty. For a copy, visit your Swagelok Web site or contact your authorized Swagelok representative.

Swagelok, Ferrule-Pak, Goop, Hinging-Colleting, IGC, Kenmac, Micro-Fit, Nupro, Snoop, Sno-Trik, SWAK, VCO, VCR, Ultra-Torr, Whitey—TM Swagelok Company
Aflas—TM Asahi Glass Co. Ltd.
AL-6XN—TM Allegheny Ludlum Corporation
AutoCAD—TM Autodesk, Inc.
CSA—TM Canadian Standards Association
DeviceNet—TM ODVA
Kalrez, Krytox—TM DuPont
Elgiloy—TM Elgiloy Specialty Metals
FM—TM FM Global
Grafoil—TM GrafTech International Holdings, Inc.
MAC—TM MAC Valves Inc.
Microsoft, Windows—TM Microsoft Corp.
NACE—TM NACE International
Nitronic—TM AK Steel Corporation
picofast—TM HansTurck KG
Pillar—TM Nippon Pillar Packing Company, Ltd.
Rapid Tap—TM Relton Corporation
15-7 PH, 17-7 PH—TM AK Steel Corp.
Sandvik—TM SandvikAB
Silconert—TM Silcotek Corporation
Simriz—TM Freudenberg-NOK
SolidWorks—TM SolidWorks Corporation
© 2017 Swagelok Company

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP