ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *TC Communications TC1200* at our website: *Click HERE*

"Pocket Rocket" RS-232 Async w/Handshake Fiber Optic Modem

TC1200

- **Async Data Rates up to 120 Kbps**
- **3 Independent Channels (or 1-chan w/ handshake)**
- **5 Control Signals (RTS, CTS, DTR, DSR & CD)**
- **Multimode or Single Mode (850/1300/1550nm)**
- **Six Diagnostic LEDs**
- **Local & Remote Loopback**
- **Hardened Temperature Version (optional)**
- **Distances up to 80 Km**



TC1200 Wallmount Base Unit

The TC1200 is a 3-channel asynchronous RS-232 fiber optic modem that provides up to five bi-directional control (or handshake) signals (RTS, CTS, DTR, DSR and CD). It offers the versatility of linking three data communications devices over a single duplex fiber or one device with a bi-directional control.

The TC1200 supports data rates up to 120 Kbps. A hardened temperature version (-20°C to 70°C) is optional. Six Diagnostic indicators indicate power, electrical signal status and optic sync. It is a DCE device only and performs Local & Remote loopbacks (for diagnostics) with the flip of a switch.

The TC1200 is compatible with all popular types and sizes of multimode (850/1300nm) or single mode (1300/1550nm) fiber optic cable. Fiber optic connector are ST or FC. Electrical connector is DB25 Female. Standard power is 12 VDC or 115/230 VAC with an external power cube.

Because the TC1200 can also function as a 3-channel multiplexer by using the control signal channels as data channels, it is particularly cost effective.

Note: The term "Pocket Rocket" refers to the TC Communications family of small, durable and reliable Fiber Optic Modems. Available with a wide variety of interfaces and features, Pocket Rockets combine to provide solutions for most applications encountered in a general purpose fiber optic network.


TC COMMUNICATIONS®
FIBER OPTIC CONNECTIVITY

Applications

Typical applications include linking remote terminals or printers to host computers, tail circuits to existing multiplexers and extending data communications links.


Fiber Optic Modems are also ideal for connecting data communications devices in harsh manufacturing or outdoor environments where EMI or RFI interference, ground loops and lightning are prevalent.

TC Communications, Inc.
17881 Cartwright Rd. Irvine, CA 92614 U.S.A.
Tel: (949) 852-1972, Fax: (949) 852-1948
Sales: (800) 569-4736
Web Site: www.tccomm.com
E-mail: sales@tccomm.com

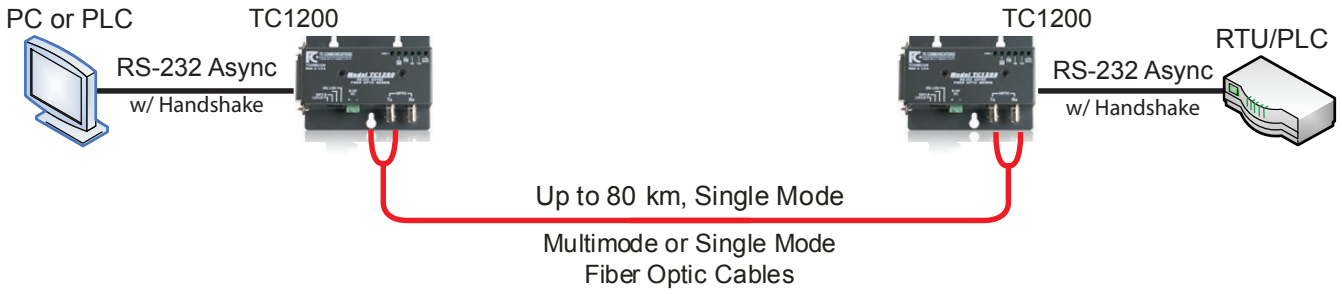

Typical Point-to-Point Application Using TC1200 Async w/Handshake Fiber Optic Modems

Virtual Connection
(connect two DTE devices)

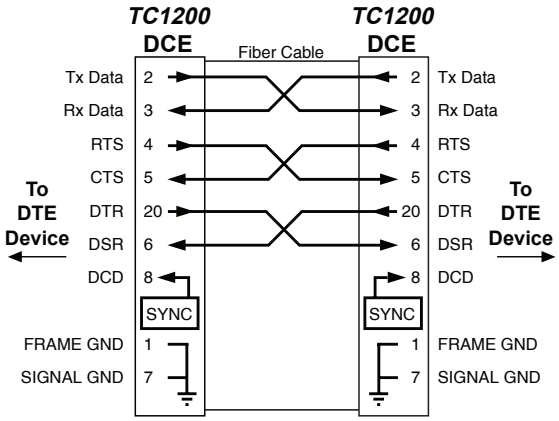

Data Rates
Async.....up to 120 Kbps

Optical
Transmitter.....LED/ELED
Receiver.....PIN Diode
Wavelength.....850/1300nm MM
.....1300/1550nm SM
Fiber Optic Connectors
.....ST, Optional FC
Loss Budget* - 850/1300/1550nm
Multimode @62.5/125µm.....15dB
Single Mode @9/125µm.....20dB

Electrical
Connector.....DB25 Female
Interface.....(DCE ONLY) RS-232

System
Bit Error Rate.....1 in 10^9 or better

Visual Indicators
LEDs..... PWR, DTR, DSR, RTS, CTS,
.....RD, TxD, DCD (SYNC)

Power
Standard.....12VDC @250mA
Optional....115/230VAC w/power cube
*Can be powered through DB25 Pin 9 with sufficent power (12VDC @250mA)

Temperature
Operating.....–10°C to 50°C
Hi-Temp (optional).....–20°C to 70°C
Storage.....–40°C to 90°C
Humidity.....95% non-condensing

Physical (Standalone Unit)
Height.....(2.24 cm) 0.88"
Width.....(10.05 cm) 3.96"
Depth.....(7.77 cm) 3.06"
Weight.....(104.0 gm) 3.67 oz
**Contact factory for higher requirements*

TC COMMUNICATIONS®
FIBER OPTIC CONNECTIVITY

Certified System™
ISO 9001
QMI-SAI Global
#1045959

TC Communications, Inc.
17881 Cartwright Road
Irvine, CA 92614 U.S.A.
Factory Tel: (949) 852-1972
Fax: (949) 852-1948

Sales Office
U.S.A. Domestic (800) 569-4736
International: (949) 852-1973

Web Site: www.tccomm.com
E-mail: sales@tccomm.com

Note: Information contained in this data sheet is subject to change without prior notice.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP