ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *TDK CXA-0217* at our website: *Click HERE*

TDK

DC to AC Inverters
Connector type, Dimming, 7W, for 2 Bulbs

Conformity to RoHS Directive

CXA Series CXA-0217

FEATURES


- For 2 bulbs.
- Applicable panel size* : 10 to 15-inch
- With brightness control function.
- The high-voltage terminals are coated with silicone so as to avoid the defects caused by dust.
- It is a product conforming to RoHS directive.

* The applicable panel size is for typical reference dimensions.

TEMPERATURE AND HUMIDITY RANGES

Temperature range (°C)	Operating	0 to +70
	Storage	–30 to +85
Humidity range(%)RH		95max. [Maximum wet-bulb temperature 38°C. No dew.]

SHAPES AND DIMENSIONS

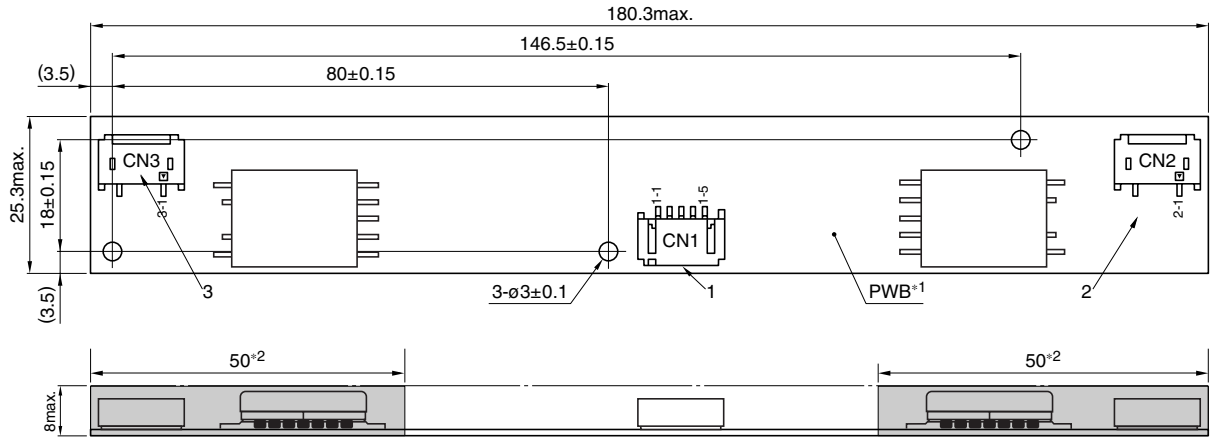

*1 Substrate(PWB: Printed wiring board): Flame retardant material UL94V-0(FR-4 or CEM-3) t=1mm

*2 ▭: High-voltage generator (The entire surface within a range of 50mm away from the end of the base in the output)

Weight: 21g typ.

Dimensions in mm

		Connector manufacturer's company and type		Symbol
1	Input connector	Japan Solderless Terminal Co., Ltd.	S5B-PH-SM4	CN1
2	Output connector	Japan Solderless Terminal Co., Ltd.	SM02(8.0)B-BHS-1	CN2
3	Output connector	Japan Solderless Terminal Co., Ltd.	SM02(8.0)B-BHS-1	CN3

TERMINAL NUMBERS AND FUNCTIONS

CN1

Terminal No.	Function	Symbol
CN1-1	Input voltage Edc: 9.6 to 14.4V/12V[nom.]	Vin
CN1-2	0V	GND
CN1-3	Brightness dimmer voltage Edc: 0 to 3.4V(Maximum brightness on 0V)	Vbr
CN1-4	Used in the internal circuits, do not connect.	N.C.
CN1-5	Remote voltage Edc 0V: off/5 to 7V:on	Vrmt

CN2

Terminal No.	Function		Symbol
CN2-1	Output 1[High voltage] Irms	2 to 6mA	V_{HIGH1}
CN2-2	—	—	N.C.
CN2-3	Output 1[Low voltage]	(2V)	V_{LOW1}

CN3

Terminal No.	Function		Symbol
CN3-1	Output 2[High voltage] Irms	2 to 6mA	V_{HIGH2}
CN3-2	—		N.C.
CN3-3	Output 2[Low voltage]	(2V)	V_{LOW2}

- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.


CXA-0217

ELECTRICAL CHARACTERISTICS


Item	Unit	Symbol	Specification			Condition				Brightness
			min.	typ.	max.	Vin(V)	Vbr(V)	Ta(°C)	RL(kΩ)	
Output current Irms	mA	Iout1	5.3	6	6.7	12±2.4	0	0 to +70	76 to 114	Maximum
		Iout2	5.3	6	6.7	12±2.4	0	0 to +70	76 to 114	Maximum
		Iout1	5.5	6	6.5	12±1.2	0	0 to +70	95	Maximum
		Iout2	5.5	6	6.5	12±1.2	0	0 to +70	95	Maximum
		Iout1	1.7	2	2.4	12±1.2	3.4	0 to +70	250	Minimum
		Iout2	1.7	2	2.4	12±1.2	3.4	0 to +70	250	Minimum
Input current Idc	A	Iin	—	0.76	1.3	12±2.4	0 to 3.4	0 to +70	76 to 114	
Oscillation frequency	kHz	FL	52	58	64	12±2.4	0	0 to +70	95	
Open circuit output voltage Erms	V	Vopen	1400	1500	2000	12±2.4	0 to 3.4	0 to +70	∞	

TYPICAL CONNECTIONS


EXAMPLE OF VOLTAGE DIMMER CONTROL

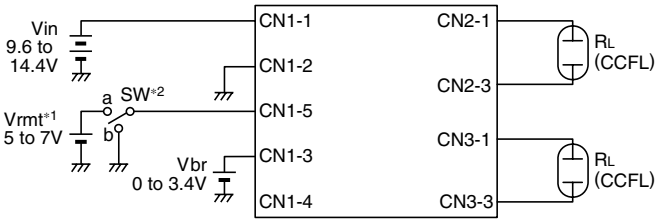

EXAMPLE OF POTENTIOMETER DIMMER CONTROL

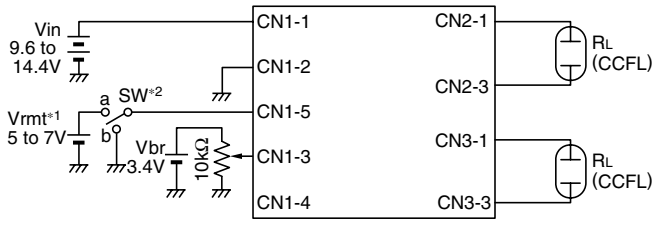



NO DIMMER CONTROL(BRIGHTNESS MAX.)

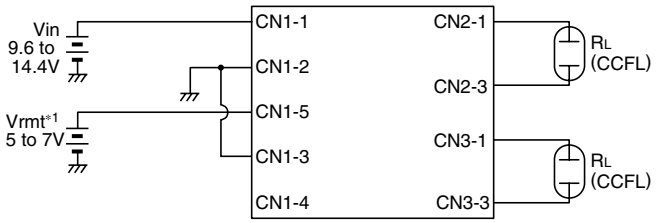

*1 Vrmt (remote voltage) shall be ON after Vin is ON.
*2 SW a:on, b:off

BRIGHTNESS DIMMER VOLTAGE- OUTPUT CURRENT CHARACTERISTICS

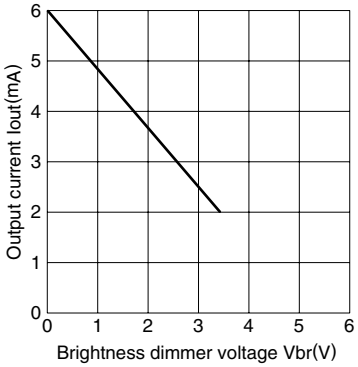

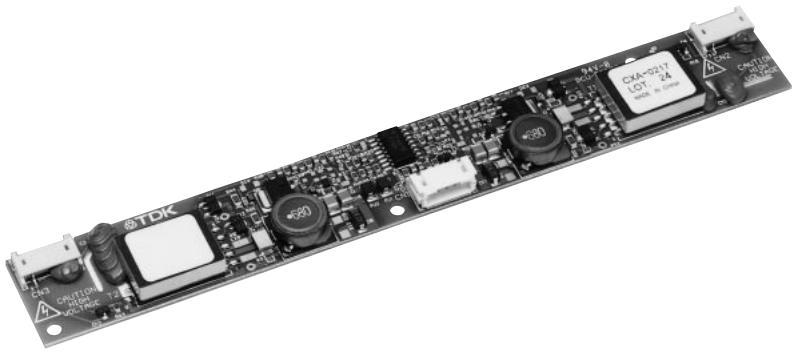

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP