

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.


Visit our website - *Click HERE*


K41 Series Make & Break Load Switching — 5.0 kV Relays

K41A, K41B Product Facts

- High current carry rating
- Vacuum dielectric for power switching low current loads
- Glazed ceramics for low current leakage
- Compact, space-saving design
- Meets requirements of MIL-R-83725
- QPL versions available, M83725/21 & M83725/22

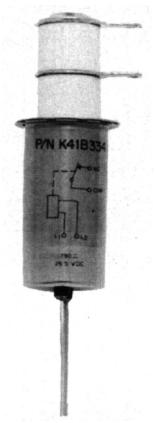


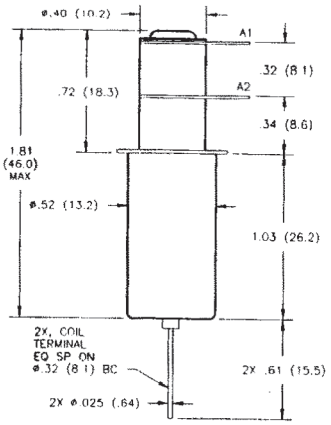


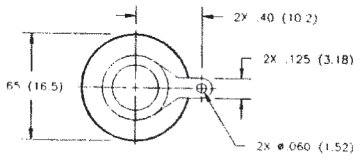


K41C Product Facts

- Single pole, double throw version
- Vacuum dielectric for power switching low current loads
- RF ratings to 32 MHz
- Long life: 2 million cycles
- Meets requirements of MIL-R-83725
- QPL version available, M83725/23

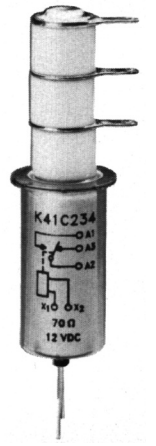

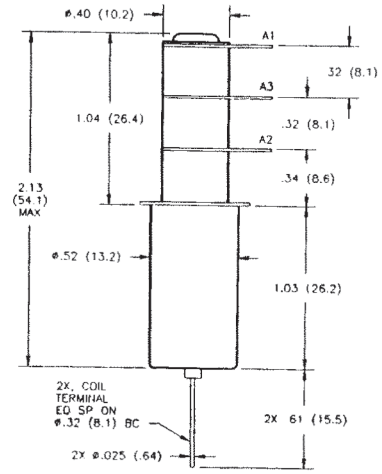

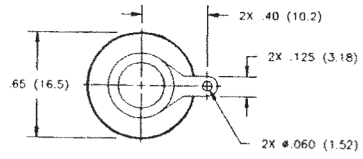

Product Specifications for K41A, K41B and K41C

Contact Arrangement —
K41A — SPST-NO
K41B — SPST-NC
K41C — SPDT

Contact Form —
K41A — A
K41B — B
K41C — C

Test Voltage, DC or 60 Hz (Peak) — 6 kV

Rated Operating Voltage (Peak) —
DC or 60 Hz — 5 kV
2.5 MHz — 4.5 kV
16 MHz — 3.5 kV
32 MHz — 2.8 kV

Continuous Carry Current, Max. —
DC or 60 Hz — 30 A
2.5 MHz — 24 A
16 MHz — 16 A
32 MHz — 12 A
Coil Hi-Pot (Vrms, 60 Hz) — 500 A

For factory-direct application assistance, dial 800-253-4560, ext. 2055, or 805-220-2055.

Contact Capacitance —
Between Open Contacts — 1.2 pF
Open Contacts to Ground — 1.2 pF

Contact Resistance, Max. — 0.02 ohm

Operate Time, Max. — 10 ms

Release Time, Max. — 10 ms

Shock, 11ms, 1/2 Sine (Peak) — 50 g

Vibration —
Peak — 10 g (55 to 2000 Hz)

Operating Ambient Temperature Range — -55°C to +125°C

Mechanical Life — 2 million cycles

Weight, Nominal —
28.35 g (1.0 oz.)

***See page 7-87 for turret terminal dimensions and mounting methods.**

Coil Data

Nominal Volts DC	12 Vdc	26.5 Vdc	115 Vdc
Pickup, Max.	8 Vdc	16 Vdc	80 Vdc
Dropout	.5-5 Vdc	1-10 Vdc	5-50 Vdc
Coil Resistance (±10%)	70 Ω	290 Ω	4700 Ω

Ratings listed are for 25°C, sea level conditions

Ordering Information

Sample Part Number ▶ **K41 A 3 3 4**

Series:

Contact Form:
A = SPST-NO B = SPST-NC C = SPDT

Coil Voltage:
2 = 12 Vdc, Bus Wire
3 = 26.5 Vdc, Bus Wire
5 = 115 Vdc, Bus Wire
7 = 12 Vdc, Turret Terminal*
8 = 26.5 Vdc, Turret Terminal*
9 = 115 Vdc, Turret Terminal*

High Voltage Connections:
3 = Solder Connection

Mounting:
2 = Flanged 4 = Standard

Catalog 5-1773450-5
Revised 3-13

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in millimeters unless otherwise specified.

USA: +1 800 522 6752
Asia Pacific: +86 0 400 820 6015
UK: +44 800 267 666


For additional support numbers please visit www.te.com


K41 Series Make & Break Load Switching — 5.0 kV Relays


K41P

Product Facts

- **Fast, 6 millisecond operate time**
- **Vacuum dielectric for power switching low current loads**
- **Latching actuator for low power consumption**
- **Ideal for frequency agile communication systems**
- **Meets requirements of MIL-R-83725**
- **QPL version available, M83725/24**

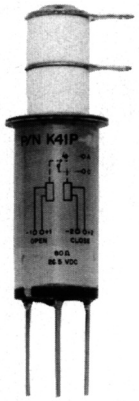

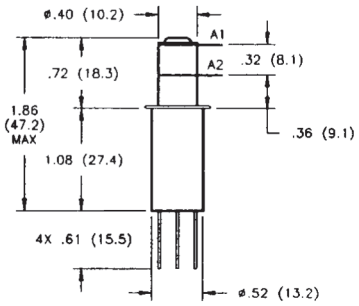


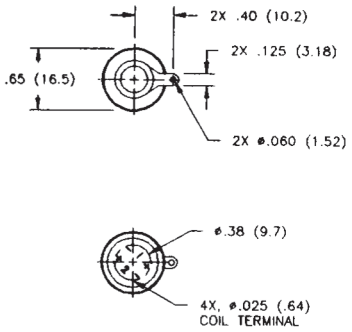



K41R

Product Facts

- **Latching actuator for low power consumption**
- **Vacuum dielectric for power switching low current loads**
- **Meets requirements of MIL-R-83725**
- **Latching version of K41C**

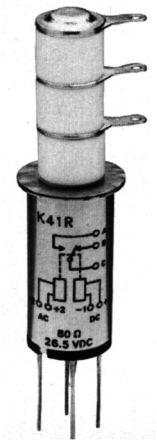

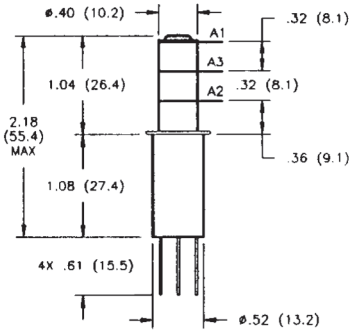

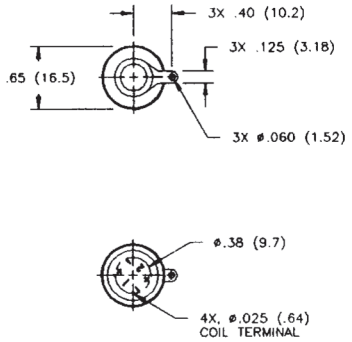

Product Specifications for K41P and K41R

Contact Arrangement —
K41P — SPST-Latching
K41R — SPDT-Latching

Contact Form —
K41P — P
K41R — R

Test Voltage, DC or 60 Hz (Peak) —
6 kV

Rated Operating Voltage (Peak) —
DC or 60 Hz — 5 kV
2.5 MHz — K41P — 4.5 kV
K41R — 4.0 kV
16 MHz — K41P — 3.5 kV
K41R — 3.2 kV
32 MHz — K41P — 2.8 kV
K41R — 2.5 kV

Continuous Carry Current, Max. —
DC or 60 Hz — 30 A
2.5 MHz — K41P — 20 A
K41R — 16 A
16 MHz — K41P — 13 A
K41R — 10 A
32 MHz — K41P — 10 A
K41R — 6 A
Coil Hi-Pot (Vrms, 60 Hz) — 500 A

For factory-direct application assistance, dial 800-253-4560, ext. 2055, or 805-220-2055.

Contact Capacitance —
Between Open Contacts —
K41P — 1.2 pF
K41R — 1.6 pF
Open Contacts to Ground —
K41P — 1.2 pF
K41R — 1.6 pF

Contact Resistance, Max. —
0.02 ohm

Operate Time, Max. — 6 ms

Release Time, Max. — N/A

Shock, 11ms, 1/2 Sine (Peak) —
K41P — 50 g
K41R — 30 g

Vibration —
Peak — 10 g (55 to 2000 Hz)

Operating Ambient Temperature Range — -55°C to +125°C

Insulation Resistance —
Initial — 10 gigaohms

Mechanical Life — 1 million cycles

Weight, Nominal —
28.35 g (1.0 oz.)

Coil Data

Volts, Nominal	26.5 Vdc
Reset & Latch, Max.	16 Vdc
Dropout	N/A
Coil Resistance (±10%)	80 Ω

Ratings listed are for 25°C, sea level conditions.

Ordering Information

Sample Part Number ▶ **K41 P 3 3 4**

Series:

Contact Form:
P = SPST-Latching R = SPDT-Latching

Coil Voltage:
3 = 26.5 Vdc, Bus Wire

High Voltage Connections:
3 = Solder Connection

Mounting:*
2 = Flanged 4 = Standard

***See page 7-87 for mounting methods.**

Catalog 5-1773450-5
Revised 3-13

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in millimeters unless otherwise specified.

USA: +1 800 522 6752
Asia Pacific: +86 0 400 820 6015
UK: +44 800 267 666

For additional support numbers please visit www.te.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP