



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?


Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

➤ cPCI-MXP64GX

➤ 6U CompactPCI® 64-bit Peripheral Processor

Pentium® III Processor – Low Power 500 MHz and 1.5 GB SDRAM

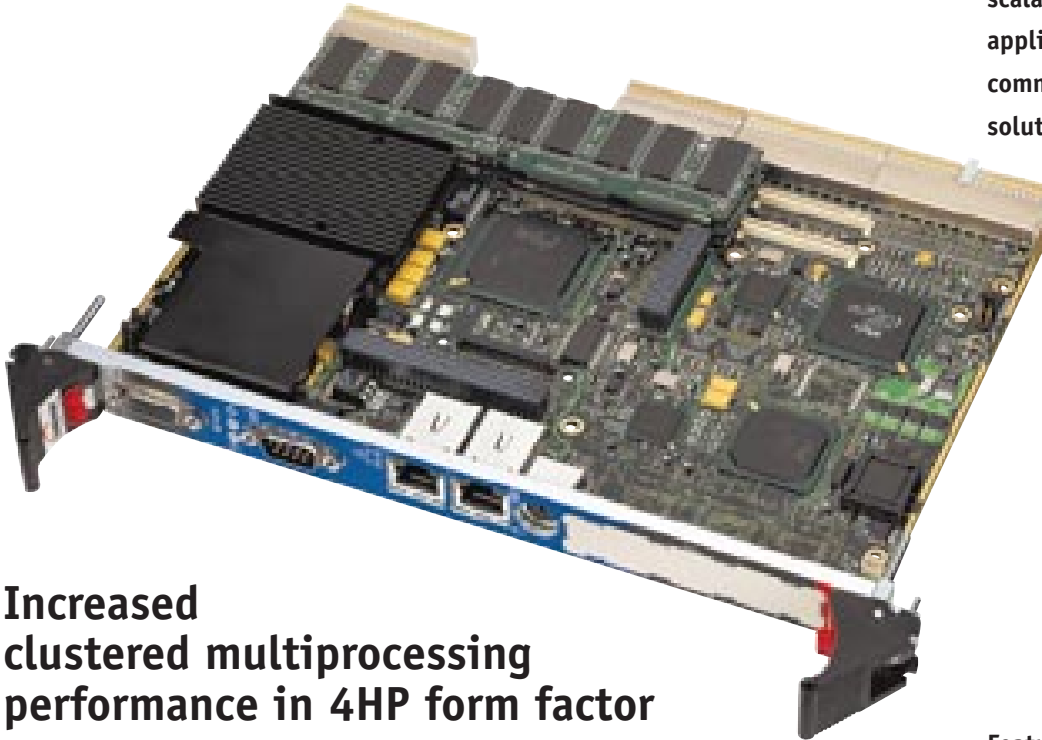

➤ Increased clustered multiprocessing performance in 4HP form factor

The cPCI-MXP64GX is Kontron's next generation peripheral processor that combines state-of-the-art CompactPCI® technology with an enhanced feature-set designed into a single slot 4HP form factor. Hot swappable and exceptionally reliable, the cPCI-MXP64GX is ideal for solution providers who deliver mission critical applications in both the data communications and telecommunications markets.

The cPCI-MXP64GX is built with an ultra high performance Intel® Pentium® III processor - Low Power with a 100 MHz Front Side Bus and clock speeds of up to 500 MHz and higher frequencies when they become available. Other performance enhancements include the integration of a 64-bit CPCI bus, a unique standalone circuitry which enables it to be independent of the system processor, and now up to

1.5 GB of SDRAM. The end result is a solution with superb performance, increased MTBF (Mean-Time-Between-Failure), and a very high density feature-set.

With greater market demand for higher density designs, the cPCI-MXP64GX significantly enhances clustered multiprocessing using Kontron's IPTalky™ technology (IP on CompactPCI bus) for Windows® NT, VxWorks, pSOS and Linux-based applications. It also provides dual Ethernet support for routing LAN traffic or for VoIP applications that require complete redundancy. Additional on-board features include Intelligent Platform Management Interface (IPMI) implemented using FPGA logic, one multiple mode parallel port (SPP, EPP, ECP), two serial ports, and a 64-bit AGP CRT SVGA controller with 2 MB video memory.

- Kontron's cPCI-MXP64GX is a hot-swappable, passive cooled peripheral processor that incorporates a comprehensive set of performance-enhancing features into one single slot footprint capable of high performance scalable multiprocessing applications for CTI and communications gateway solution providers.

Features include:

- Up to Pentium III processor - Low Power, 500 MHz with on-die 256KB L2 Cache
- Intel 440GX AGPset
- Hot-Swappable
- Up to 1.5 GB SDRAM even in single slot form factor
- PCI-to-PCI non-transparent bridge, multiprocessing using IPTalky™
- PMC, USB, Serial and Parallel Ports, PCI EIDE
- Dual 10/100Base-TX Ethernet and one AGP Video Controller



► cPCI-MXP64GX - Technical Specifications

CPU

- Pentium III processor - Low Power 400, 500 MHz
- Intel 440GX AGPset

Bus Interfaces

- Front side bus up to 100 MHz
- CompactPCI® Bus, 64-bit (33 MHz) J1 and J2
- PCI-to-PCI non-transparent bridge: Intel's 21554; supports up to 7 REQ/GNT for fully loaded CompactPCI® system
- PCI mezzanine (PMC)
- Kontron mezzanine with Floppy Drive and EIDE support
- SMBus (for system management of CPU temperature monitoring, DRAM control, Clock buffers and power control)

Cache

- 16/16 KB Instruction / Data CPU-internal Level 1
- 256 KB 64-bit wide on-die Level 2 pipelined burst

Memory

- Three 168-pin latching DIMM sockets, 64/72-bit
- Up to 1.5 GB of SDRAM with parity or ECC (for single bit error correction and double bit error detection) in single and dual slot form factor

Data Path

- 64-bit CPU bus; 32-bit AGP bus; 32-bit on local PCI and 64-bit on CPCI bus

Interrupts

- 11 edge sensitive and configurable
- 4 PCI level sensitive, configurable to any interrupt vector for PnP compatibility

Flash Memory

- 512 KB for BIOS field upgrade; Silicon Serial ID TAG for unique board identification accessible via software

I/O

I/O: SMC FDC37C672

USB Ports: Two

Serial Ports: Two (one RS-232, COM1, COM2 configurable as RS-422/485)

Parallel Port: One bi-directional with all IEEE 1284 protocols supported with BIOS selectable IRQs and addressing

Floppy Disk: Support for two drives (360 KB to 1.44 MB)

EIDE: Support for two IDE drives (master/slave configuration); LBA, PIO Mode 0-4 and Ultra DMA/33

CompactFlash Module: Optional bootable CompactFlash™ disk interfaces to primary EIDE channel, user upgradeable, master / slave

Ethernet: Two 10/100 Mb/s Ethernet, PCI 10/100Base-TX ports (Intel 82559 controller)

HD / FD Mezzanine Card: Optionally onboard using Kontron's cMC series mezzanine cards

Video

- 64-bit AGP video controller (Intel 69000) with 2 MB video memory
- CRT resolutions up to 800 x 600, 16.8 M colors; 1024 x 768, 64K colors; or 1280 x 1024, 256 colors, non-interlaced

Clock / Calendar

- Real-time clock with (replaceable) battery backup, CMOS RAM Connectors in "Front" configuration

Connectors

Front

- CRT (15-pin D-sub); serial COM 1 (9-pin D-sub); two Ethernets (RJ-45 with link / activity indicators); PS/2 mouse / keyboard (6-pin mini-Din)

Rear

- Interfaces on J3/J5 (Rear-panel transition module, cTM80-STD (available in 4HP and 8HP) available separately)
- CRT; 2 x serial; 2 x USB; 1 x parallel; SMBus; I2C; speaker I/F; Reset; IR; 2 x Ethernet; PS/2 mouse/keyboard; 2 x EIDE; floppy disk interface; fan fail monitoring 2 x EIDE; floppy disk interface.

BIOS

- Award Elite BIOS in Boot Block Flash with recovery code; save CMOS in Flash option, and boot from LAN capability
- Auto configuration, extended setup;
- CC000-E0000 address blocking; PnP tables
- Setup console redirection to serial port (VT100 mode) with CMOS setup access
- Software enable/disable of onboard Ethernet; hardware enable/disable of onboard video
- Diskless, keyboardless, and videoless operation extensions;
- System, video, and LAN BIOS shadowing
- Programmable memory wait states
- Advanced security feature for floppy and HDD; DMI & HDD S.M.A.R.T. support
- Advanced Configuration and Power Interface (ACPI 1.0), Advanced Power Management (APM 1.2), advanced thermal management (resume, overheat alarm and auto slow down), and Green support

Supervisory

- Two-stage software programmable Watchdog timer drives NMI on 1st stage and system reset on 2nd stage
- Programmable CPU temperature monitor/alarm
- Power failure / low battery detector
- Front Panel LEDs: IDE activity, SCSI activity, Ethernet activity & link, and 'Ready to Swap' blue LED

OS Compatibility

- MS-DOS™, Windows® 95/98, Windows® NT, Windows® 2000, VxWorks™, pSOS™, QNX™, Solaris and Linux

Mechanical (compliant to IEEE 1101.10; compliant to PICMG 2.0 Rev 3.0)

- 233 x 160 x 41 mm / 9.2 x 6.3 x 1.6 in; 6U x 8HP (dual slot) Mechanically
- 233 x 160 x 20.5 mm / 9.2 x 6.3 x 0.8 in; 6U x 4HP (single slot) Mechanically

Power Requirements

Supply Voltages: +3.3V ±5% / +5V ±5% / +12V ±5%

Supply Current: * 3.3V 5 Amps max.
5V 3.5 Amps max.
12V 0.1 Amps max.

Power Dissipation: 40W max.

* This is with a Pentium III processor 500 Mhz and 768MB DRAM.

Environmental

	Operating	Storage and Transit
Temp.:	0-60°C/32-140°F (w/airflow)	-40° to +70°C / -40 to 158°F
Humidity:	5% to 95% @ 40°C/104°F non-condensing	5% to 95% @ 40°C/104°F non-condensing
Altitude:	4,572 m / 15,000 ft	15,240 m / 50,000 ft
Shock:	Designed to meet IEC 68-2-27	
Vibration:	Designed to meet IEC 68-2-6	

Reliability

- MTBF: > 100,000 hours @ 55°C / 131°F (MIL-HDBK-217F)
- Board serial number in EEPROM
- USB, keyboard, mouse and voltage protected by self-resetting fuses
- 2 year limited warranty

Designed to meet or exceed:

Safety: UL 1950; CSA C22.2 No 950; EN 60950; IEC950

EMI/EMC: FCC 47 CFR Part 15/CISPR22, Class B; CE Mark to EN55022/EN50082



Corporate Offices

US / Canada
616 Curé-Boivin
Boisbriand (Québec) Canada J7G 2A7
Tel. (450) 437-5682
Fax (450) 437-8053
sales@us.kontron.com

Europe, Middle East and Africa
Oskar-von-Miller-Straße 1
85386 Eching/Munich Germany
Tel. +49 81-65 77 0
Fax +49 81-65 77 219
sales@de.kontron.com

Asia Pacific
6F, No.9, Lane 235, Pao-Chiao Rd.,
Hsin-Tien, Taipei Hsien, 231 Taiwan
Tel. +886-2-2910 3532
Fax +886-2-2910 3482
sales@tw.kontron.com



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com