

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

NEW

DC to 70 MHz 10X

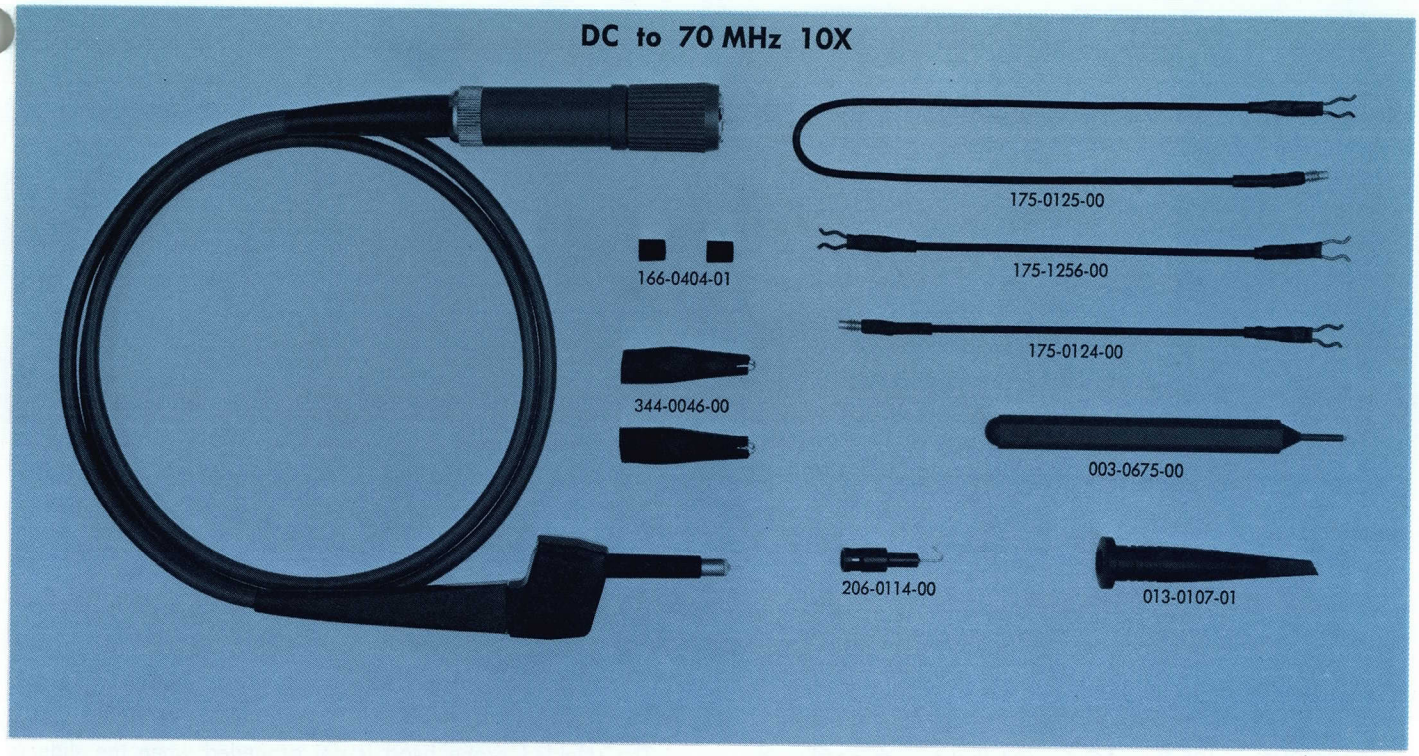

The P6055 is a miniature low-capacitance, 10X Probe designed for use with Tektronix differential amplifiers having nominal input capacitances from 20 pF to 47 pF. The attenuation ratio is adjustable to 10X to compensate for differences in input resistance of the amplifier (the amplifier input resistance must be 1 MΩ ± 2%). A special locking type readout connector allows the probe to be used with instruments with or without readout capability.

When two P6055 Probes are used to drive the two inputs of a differential amplifier, the ability to change the attenuation ratio of one probe versus the other is helpful in maintaining the CMRR of the system. Another feature of this probe is the special cable used to prevent loss of CMRR, if the probes are moved.

ATTENUATION is adjustable to 10X.

INPUT RESISTANCE is 1 MΩ ±0.5%.

INPUT CAPACITANCE is approx 10 pF when used with an instrument having 20 pF input capacitance; 12.5 pF when used with an instrument having 47 pF input capacitance.

TYPICAL RISETIME of probe with 7A13 and 7704 Oscilloscopes is 5.4 ns.

VOLTAGE RATING is 500 V (DC + peak AC).*

CMRR is 20,000:1 from DC to 1 kHz derating to 100:1 at 20 MHz, measured at probe tip using probe pair with 7A13 or 1A5.

CABLE is 3.5 ft long, terminated in a BNC locking readout connector.

NET WEIGHT is approx 5 ounces.

P6055 PROBE, order 010-6055-01 . . . . . **$75**
Includes: input compensation adjusting tool (003-0675-00); retractable hook tip (013-0107-01); 5.5-inch ground lead (175-0124-00); 12.5-inch ground lead (175-0125-00); 6-inch probe-to-probe ground strap (175-1256-00); hook tip (206-0114-00); two minigator clips (344-0046-00); two insulating tubes (166-0404-01); instruction manual (070-1115-00).

*Peak-to-peak voltage derating is necessary for CW frequencies higher than 12 MHz. At 70 MHz, the maximum allowable peak-to-peak voltage is 100 V.

U.S. Sales Price FOB Beaverton, Oregon
Please refer to General Information page

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP