



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

Search

Test & Measurement

- Oscilloscopes
- Real-Time Spectrum Analyzers
- Logic Analyzers
- Signal Generators
- Accessories
- Applications

Communications

- Communications Home
- Technologies Overview
- Network Diagnostics Products
- Network Management Products

Video Test

- Video Test Home
- Signal Analyzers, Generators & Monitors
- MPEG Analyzers, Generators & Monitors
- Content Verification
- Industries
- Applications



TDS460A 400MHz, four channel, personal lab scope.

This product is discontinued.
View alternative products.

Check product support status.

Product Information


[Introduction](#)

> Characteristics/Specs

Digital Storage Oscilloscopes

TDS400 Series

CHARACTERISTICS

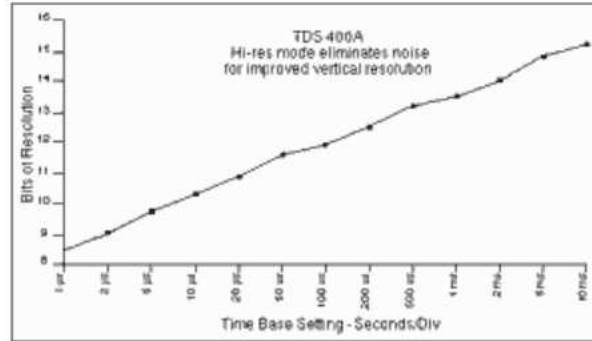

TDS400A Theoretically achievable resolution with TDS400A Hi-res mode.

Signal Acquisition System

Bandwidth - 200MHz (TDS420A), 400MHz (TDS430A, TDS460A).

Channels - 4 (2 on TDS430A).

Sample Rate - 100MS/s on all channels.

Sensitivity - 1mV to 10V/div (with calibrated fine adjust).

Position Range - ± 5 Divisions.

Offset Range - ± 1V from 1mV/div to 99.5mV/div; ± 10V from 100mV/div to 995mV/div; ± 100V from 1V/div to 10V/div.

DC Gain Accuracy - ± 1.5%.

Vertical Resolution - 8-Bit (256 levels over 10.24vertical divisions).

Analog Bandwidth Selections - 20MHz, 100MHz and full.

Input Coupling - AC, DC or GND.

Input Impedance Selections - 1M Ω in parallel with 15pF or 50 Ω (AC and DC coupling).

Maximum InputVoltage - 300V CATII ± 400V_p. Derate at 20dB/decade above 1MHz. 1megaohm or GND coupled.

Channel Isolation - > 100:1 at 100MHz for any two channels.

AC Coupled Low Frequency Limit - ≤ 10Hz when AC 1M Ω coupled. ≤ 200kHz when AC 50 Ω coupled.

Acquisition Modes

Peak Detect - High frequency and random glitch capture. Captures glitches of 10ns using acquisition hardware at all real-time sampling rates.

Sample - Sample data only.

Envelope - Max/min values acquired over one or more acquisitions, selectable from 2 to 2000, infinite.

Average - Waveform averages selectable from 2 to 10,000.

Hi-res - Vertical resolution improvement and noise reduction on low-frequency signals, e.g. 12-Bit at 10ms/div and slower. Enhanced vertical resolution (>12-Bit) for noise reduction, on low frequency signals. Make precise low-level signal measurements (up to 5 μ V) with differential amplifier (ADA400A).

Time Base System

Time Bases - Main, Delayed.

Time/Division Range - 1ns to 20s/div.

Time Base Accuracy - 0.015% over any interval \geq 1ms.

Record Length (Real Time and Equivalent Time) - Sample points per channel: 500 to 120,000 points (with Opt.XL).

Pre-trigger Position - Selectable from 0 to 100% of record.

Triggering System

Triggers - Main, Delayed.

Main Trigger Modes - Auto, Normal, Single Sequence.

Delayed Trigger - Delayed by time or events.

Time Delay Range - 0ns to 20s.

Events Delay Range - 2 to 10,000,000 events.

External Rear Input - > 1.5k Ω ; max input voltage is \pm 6V (DC+ACpeak).

Video Trigger Types - NTSC, PAL, SECAM and custom; TV field, field2 or both, any line within a field. Line rates - 10kHz to 64kHz, interlaced, noninterlaced, composite.

Video Trigger Sensitivity - 0.6divisions of composite SYNC will achieve a stable display.

Display

Waveform Style - Dots or vectors. Infinite and variable persistence from 250ms to 10s.

Gray Scaling - With variable persistence selected, waveform points gradually decay through 16levels of intensity, providing "z-axis" information about rapidly changing waveforms.

Update Rate - 200ea. 500point wfms/s with infinite persistence mode selected.

Graticules - Full, grid, cross hair, frame.

Format - YT and XY.

VGA Out - Drives VGA display monitors.

Zoom

The zoom feature allows waveforms to be expanded, compressed and positioned in both vertical and horizontal axes. Allows precise comparison and study of fine waveform detail without affecting ongoing acquisitions. When used with Hi-res or Average acquisition modes, Zoom provides an effective vertical dynamic range of 1000divisions or 100screens.

Measurement System

Automatic waveform measurements	
Period	Frequency
High	Low
+ Width	- Width
Maximum	Minimum
Rise	Fall
Peak to Peak	Amplitude
+ Duty cycle	- Duty cycle
+ Overshoot	- Overshoot
Propagation delay	Burst width
Mean	Cycle mean
RMS	Cycle RMS
Area	Cycle area
Phase	-

Continuous update of up to four measurements on any combination of waveforms.

Thresholds - Settable in percentage or voltage.

Gated - Any region of the record may be isolated for measurement using vertical bars.

Snapshot - Performs all measurements on any one waveform showing results from one instant in time.

Cursor Measurements - Absolute, Delta, Volts, Time, Frequency.

Cursor Types - Horizontal bars (volts); vertical bars (time); paired; operated independently or in tracking mode.

Waveform Processing

Waveform Functions - Interpolate-selectable $\sin(x)/x$ or linear, Average, Envelope.

Advanced Waveform Functions - FFT, Integration, Differentiation (Opt.XL).

Arithmetic Operators - Add, Subtract, Multiply, Invert.

Autosetup - Single button, automatic setup on selected input signal for vertical, horizontal and trigger systems.

Waveform Limit Testing - Compares incoming waveform to a reference waveform's upper and lower limits.

Computer Interface

GPIB (IEEE 488.2) Programmability - Full talk/listen modes. Control of all modes, settings and measurements.

Hardcopy/Desktop Publishing

Printer - HP ThinkJet, Epson, PostScript, Interleaf, DeskJet, LaserJet, TIFF, PCX, BMP (Microsoft Windows).

Plotter - HPGL.

Interface - GPIB standard.

Hardcopy Interface - Centronics Type and RS-232 (Opt.XL).

Storage

Waveforms - 120,000 waveform points of nonvolatile storage (with Opt.XL).

Floppy Drive - 3.5in. 1.44MB or 720KB MSDOS compatible (store waveforms, screen data, and setups)*¹.

Setups - 10 front-panel setups.

CRT

Type - 7in. diagonal, magnetic deflection. Horizontal raster - scan. P31green phosphor.

Resolution - 640 horizontal by 480 vertical displayed pixels.

Power Requirements

Line Voltage Range - 90 to 250V_{RMS}.

Line Frequency - 48 to 440Hz.

Power Consumption - 240W max.

Environmental and Safety

Temperature - Operating: 0 °C to +50 °C. Nonoperating: -40 °C to +75 °C.

Humidity - Operating and nonoperating: Up to 95% relative humidity at or below +40 °C; to 75% relative humidity from +41 °C to +50 °C.

Altitude - Operating: 15,000ft., nonoperating: 40,000ft.

Electromagnetic Compatibility - 89/336/EEC.

Safety - UL3111-1, CSA1010.1, EN61010-1, IEC61010-1.

Physical Characteristics

Dimensions	mm	in.
Height	165	6.4
w/acc. pouch	191	7.5
Width	362	14.25
Depth w/front cover installed	490	19.28
Depth w/handle extended	569	22.4
Weight	kg	lbs.
Net approximately	10.2	22.5
Shipping approximately	14.5	32

* 1 Waveforms can be stored to file in MathCAD and Spreadsheet (Excel®, Lotus1 -2-3®) formats for analysis.



Product(s) complies with IEEE Standard 488.1-1987, RS-232-C, and with Tektronix Standard Codes and Formats.



Product(s) are manufactured in ISO registered facilities.



[▲ back to top](#)

[Introduction](#)

[> Characteristics/Specs](#)

3GW-10375-4B,13 -NOV-2006



[Request Sales Contact](#)



[Request a Demo](#)



[Email This Page](#)



[Printable Page](#)

Tektronix Site

[Home](#) | [Products](#) | [Support](#) | [Buy](#) | [Contact Us](#) | [Investors](#) | [Careers](#) | [International](#) | [myTek](#)

© Copyright Tektronix, Inc. | [Terms of Use](#) | [Privacy Statement](#) | [Sitemap](#) | [RSS](#) [Learn More](#)



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com