

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

MODEL 30

1% STAINLESS STEEL PRESSURE GAUGES - DRY OR LIQUID FILLED

Designed for heavy duty service in process and industrial applications such as chemical, petrochemical, power, food processing and biotechnology.

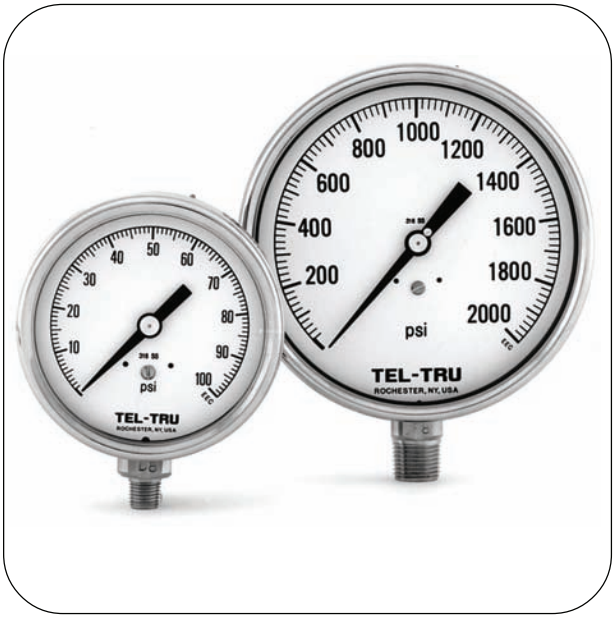

SPECIFICATIONS:

Dial Size:	2-1/2", 4" or 6"
Accuracy:	±1% FS - ANSI Grade 1A
Case:	304SS
Bezel:	304SS Bayonet Lock Type
Socket:	316SS or Monel
Bourdon Tube:	316SS or Monel
Movement:	316SS or Monel with Overload/ Underload Stops
Lens:	Laminated Safety Glass
Pointer:	2-1/2": Non-Adjustable 4": Friction Adjustable 6": Micrometer Adjustable
Dial:	Heavy Gage Aluminum
Connection:	2-1/2": 1/4" NPT Lower or Center Back 4": 1/4" NPT & 1/2" NPT Lower or Lower Back 6": 1/2" NPT Lower or Lower Back
Range:	See Range Chart
Scales:	psi (metric available)
Protection Standard:	IP65 in accordance with NF EN 60529

➤ AVAILABLE OPTIONS:

- U-Clamp (2-1/2"- 4")
- Front Flange (back mount only)
- Back Flange
- Fill (Glycerine Standard)
- Other Fluids Available
- Drag Pointer (4" & dry only)
- Oxygen Cleaning (dry only)


MODEL CODES:

Model 30S	316SS Tube and Socket
Model 30M	Monel Tube and Socket


Estimated Shipping Weights		
DIAL SIZE	DRY	FILLED
2-1/2"	6 oz.	9 oz.
4"	1 lb. 3 oz.	2 lbs.
6"	2 lbs. 1 oz.	3 lbs. 6 oz.

➤ AVAILABLE CASE STYLES AND DIMENSIONS:


LOWER & BACK




FRONT FLANGE




BACK FLANGE




U-CLAMP



FRONT FLANGE FRONT VIEW



BACK FLANGE FRONT VIEW



*NOTE: **DRAWINGS FOR LOWER BACK MOUNT BASED ON 4" AND 6"**

DIAL	A	B	C	D	E	F	G	J	K	L	M	P	R	S
2-1/2"	2.66" (67,6mm)		3.19" (81mm)	2.95" (75mm)		.43" (11mm)		.14" (3,6mm)		.69" (17,5mm)	1.46" (37mm)	2.48" (63mm)	1.12" (28,5mm)	.55" (14mm)
4"	4.18" (106,2mm)	2.48" (63mm)	5.12" (130mm)	4.65" (118mm)	1.00" (25,5mm)	.91" (23mm)	1.24" (31,5mm)	.22" (5,5mm)	2.22" (56,5mm)	1.55" (39,3mm)	2.70" (68,5mm)	3.86" (98mm)	2.15" (54,5mm)	.87" (22mm)
6"	5.91" (150,2mm)	3.35" (85mm)	7.09" (180mm)	6.61" (168mm)	1.00" (25,5mm)	.91" (23mm)	1.24" (31,5mm)	.22" (5,5mm)	2.22" (56,5mm)	1.55" (39,3mm)	2.70" (68,5mm)	5.59" (142mm)	2.15" (54,5mm)	.87" (22mm)

Tel-Tru Manufacturing Company
408 St. Paul Street, Rochester, New York 14605 USA
Phone: 585.232.1440 • 800.232.5335 • Fax: 585.232.3857 • E-mail: info@teltru.com • Web: www.teltru.com

➤ HOW TO ORDER:

To Build A Part Number: Select one code from each column to build your gauge.

DIAL	MODEL CODE	TUBE & SOCKET	CASE	CONN. SIZE	CONN. LOCATION	CONN. TYPE	RANGE & SCALE	OPTIONS
2-1/2"	**25 30**	**S** = 316SS **M** = Monel	**S** = Stainless Steel	**4** = 1/4"	**L** = Lower **C** = Center Back	**1** = NPT **2** = BSPT **3** = BSP straight	See Range Chart (Up to range of 10,000 psi)	**E** = Back Flange **F** = Front Flange***** **G** = Glycerine Fill **R** = Restrictor **S** = Silicone Fill U-Clamp ****** (sold separately) Oxygen Cleaning ***
4"	**40 30**	**S** = 316SS **M** = Monel	**S** = Stainless Steel	**2** = 1/2" **4** = 1/4"	**L** = Lower **B** = Lower Back	**1** = NPT **2** = BSPT **3** = BSP straight	See Range Chart	**D** = Drag Pointer **E** = Back Flange **F** = Front Flange***** **G** = Glycerine Fill **R** = Restrictor **S** = Silicone Fill **V** = U-Clamp Oxygen Cleaning ***
6"	**60 30**	**S** = 316SS **M** = Monel	**S** = Stainless Steel	**2** = 1/2" **4** = 1/4"	**L** = Lower **B** = Lower Back	**1** = NPT **2** = BSPT **3** = BSP straight	See Range Chart	**E** = Back Flange **F** = Front Flange***** **G** = Glycerine Fill **S** = Silicone Fill **R** = Restrictor Oxygen Cleaning ***

***** Front Flange available on Back Mount only
****** U-clamp on 2-1/2" dial is sold separately. Order part number 95-1701
*** Oxygen cleaning is sold separately. Order part number 10000006.

Example:

Specs: 2-1/2", Model 30, 316SS,1/4" Lower, NPT, 0-1500 psi, Glycerine

Select:	25 30	S	S	4	L	1	H2A	G

Ordering Format: 2530SS4L1H2AG

➤ STANDARD RANGES:

CODE = RANGE (psi)	INTERVALS (Hg)	INTERVALS (psi)	DIVISIONS (Hg)	DIVISIONS (psi)
V1K = 30" Hg	5"		.2"	
Z1A = 30-0-15	5"	5	.5"	.2
Z2A = 30-0-30	5"	5	1"	.5
Z3A = 30-0-60	10"	10	1"	1
Z4A = 30-0-100	30"	10	5"	2
Z5A = 30-0-160	30"	20	5"	2
Z6A = 30-0-200	30"	20	5"	2

CODE = RANGE (psi)	INTERVALS (psi)	DIVISIONS (psi)
B7A = 0-15	3	.1
C6A = 0-30	5	.2
D6A = 0-60	10	.5
D9A = 0-100	10	1
E4A = 0-160	20	2
E5A = 0-200	20	2
E8A = 0-300	50	2
F2A = 0-400	50	5
F4A = 0-600	100	5
F7A = 0-800	100	10

CODE = RANGE (psi)	INTERVALS (psi)	DIVISIONS (psi)
F8A = 0-1000	100	10
H2A = 0-1500	300	10
H5A = 0-2000	200	20
H9A = 0-3000	500	20
J4A = 0-4000	500	50
J8A = 0-5000	500	50
K4A = 0-10,000	1000	100
K7A = 0-15,000	3000	100

NOTE: ***INTERVALS AND DIVISION BASED ON 4" DIAL SIZE. CONTACT FACTORY TO REQUEST INFORMATION ON OTHER DIAL SIZES.***
NOTE: ***ABOVE 15,000 PSI AVAILABLE ONLY WITH 1/2" BSP STRAIGHT CONNECTION (G$^{1}/_{2}$).***
NOTE: ***OTHER RANGES AND SCALES AVAILABLE. CONSULT FACTORY.***

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP