ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Tempco TEC-9100* at our website: ***Click HERE***

www.tempco.com

Model TEC-9100 1/16 DIN Temperature Controller



Configurable for 4 Programmable Outputs and optional NEMA 4X/IP65 Front Panel!

Agency Approvals: RoHS

Design Features

- *1/16 DIN size – 48 mm × 48 mm*
- *Fuzzy Logic PID Autotune heat & cool control*
- *Short panel depth – only 4-1/8" (105 mm) required*
- *Universal input, field configurable (Type J T/C default, PT100, mA, V) with high accuracy 18-bit D-A*
- *Highly versatile – 6 types of output available*
- *Output 2 can be programmed as output or alarm*
- *Universal input power – 90-250 VAC or 11-26 VAC/VDC*
- *Highly accurate universal input*
- *Optional NEMA 4X/IP65 front panel*
- *Bumpless transfer to manual mode during sensor failure*
- *Wide variety of alarm mode selections*
- *Optional RS-232 or RS-485 communications interface*
- *Bright 0.40" (10 mm) red LED process display 0.31" (8 mm) green LED setpoint display*
- *High performance at a very low price*

Power Input *BOX 1*

4 = 90-264 VAC
5 = 11-26 VAC / VDC
9 = Other

Hardware Code: TEC-9100-

1	2	3	4	5	6	7

A Part Number based on the hardware code and any software pre-programming will be issued at time of order.

Standard lead time is stock to 2 weeks.

Signal Input— *BOX 2*

Universal, can be programmed in the field for item 5 or 6

5 = Thermocouple: *J, K, T, E, B, R, S, N, L 0-60mV
6 = RTD: *PT100 DIN, PT100 JIS
7 = 0-1 VDC
8 = *0-5, 1-5 VDC
A = 0-10 VDC
B = *4-20, 0-20 mA
9 = Other

* indicates default value

Output 1 *BOX 3*

1 = Relay: 2A / 240 VAC
2 = Pulse dc for SSR drive: 5 VDC (30 mA max)
3 = Isolated, 4-20 mA (default), 0-20 mA
4 = Isolated, VDC, 1-5 (default), 0-5, 0-1
5 = Isolated, VDC, 0-10
6 = Triac-SSR output 1A / 240 VAC
C = Pulse DC for SSR drive: 14 VDC (40 mA max)
9 = Other

Output 2 *BOX 4*

0 = None
1 = Relay: 2A / 240 VAC
2 = Pulse DC for SSR drive: 5 VDC (30 mA max)
3 = Isolated, 4-20 mA (default), 0-20 mA
4 = Isolated VDC, 1-5 (default), 0-5, 0-1
5 = Isolated VDC, 0-10
6 = Triac-SSR output 1A / 240 VAC
7 = Isolated 20V @ 25 mA DC, Output Power Supply
8 = Isolated 12V @ 40 mA DC, Output Power Supply
9 = Isolated 5V @ 80 mA DC, Output Power Supply
C = Pulse DC for SSR drive: 14 VDC (40 mA max)
A = Other

Alarm *BOX 5*

0 = None
1 = Relay: 2A / 240 VAC, SPDT
9 = Other

Communication *BOX 6*

0 = None
1 = RS-485 Interface
2 = RS-232 Interface
3 = Retransmission 4-20 mA (default), 0-20 mA
4 = Retransmission 1-5 VDC (default), 0-5 VDC
5 = Retransmission 0-10 VDC
9 = Other

Case Options *BOX 7*

0 = Panel mount standard
1 = Panel mount with NEMA 4X/IP65 front panel
2 = DIN rail mount adapter

Note: **Detailed information on features common to digital microprocessor-based TEC temperature controls and the complete Table of Input Range and Accuracy can be found on page 13-46.**

View Product Inventory @ www.tempco.com

Model TEC-9100 Specifications (1/16 DIN)

Power Input

Standard: 90-250 VAC, 47-63 Hz, 10 VA, 5W maximum
Optional: 11-26 VAC / VDC, 10 VA, 5W maximum

Signal Input

Resolution: 18 bits **Sampling Rate**: 5 samples / second

Accuracy: ±.24% of span typical

Maximum Rating: -2 VDC minimum, 12 VDC maximum (1 minute for mA input)

Temperature Effect: ±1.5 μV / °C for all inputs except mA input ±3.0 μV / °C for mA input

Sensor Lead Resistance Effect: T/C: 0.2μV/ohm
3-wire RTD: 2.6°C/ohm of resistance difference of two leads

Burn-out Current: 200nA

Common Mode Rejection Ratio (CMRR): 120 dB

Normal Mode Rejection Ratio (NMRR): 55 dB

Sensor Break Detection: Sensor open for TC, RTD and mV inputs; sensor short for RTD input; below 1 mA for 4-20 mA input; below 0.25V for 1-5V input; unavailable for other inputs

Sensor Break Response Time: Within 4 seconds for TC, RTD and mV inputs; 0.1 second for 4-20 mA and 1-5 V inputs

Output 1 / Output 2

Relay Rating: 240 VAC, 2 Amp

Pulsed Voltage: Source voltage 5V, Current limiting resistance 66Ω

Linear Output — Characteristics

Type	Zero Tolerance	Span Capacity	Load
4-20 mA	3.6-4.0 mA	20-21 mA	500Ω max
0-20 mA	0 mA	20-21 mA	500Ω max
0-5 VDC	0 VDC	5-5.25 VDC	10 KΩ min
1-5 VDC	0.9-1.0 VDC	5-5.25 VDC	10 KΩ min
0-10 VDC	0 VDC	10-10.5 VDC	10 KΩ min

Resolution: 15 bit analog to digital converter

Output Regulation: 0.02% for full load change

Output Settling Time: 0.1 sec. (stable to 99.9%)

Isolation Breakdown Voltage: 1000 VAC

Temperature Effect: ±0.01 % of span/°C

Solid State Relay (Triac) Output

Rating: 1A / 240 VAC

Inrush Current: 20A for 1 cycle

Min. Load Current: 50 mA rms


Max. Off-state Leakage: 3 mA rms

Max. On-state Voltage: 1.5 VAC rms

Insulation Resistance: 1000 Megohms minimum at 500 VDC

Dielectric Strength: 2500 VAC for 1 minute

Rear Terminal Connections

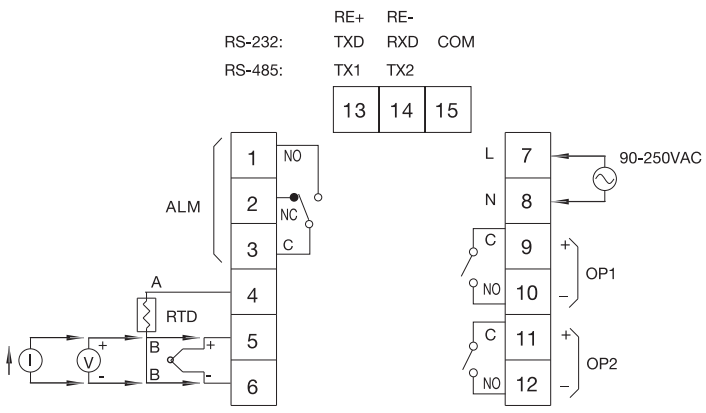

Output 2 / Alarm 1 — Programmable

Alarm 1 Relay: Form A, (NO)
Maximum rating: 240 VAC, 2 Amp

Alarm Functions: Dwell timer
Deviation High / Low Alarm
Deviation Band High / Low Alarm
Process High / Low Alarm
Sensor Break Alarm

Alarm Mode: Normal, Latching, Hold, Latching / Hold

Dwell Timer: 0 - 4553.6 minutes

Data Communications

Interface: RS-232 (1 unit), RS-485 (up to 247 units)

Protocol: Modbus Protocol – RTU mode

Address: 1-247 **Baud Rate**: 0.3 - 38.4 Kbits/sec
Data Bits: 7 or 8 bits **Parity Bit**: None, Even or Odd
Stop Bit: 1 or 2 bits **Communication Buffer**: 160 bytes

User Interface

Dual 4-digit LED Display: 0.40" (10 mm) Red Process Display
0.31" (8 mm) Green Setpoint Display

Keypad: 4 keys

Programming Port: For automatic setup, calibration and testing

Control Mode

Output 1: Reverse (heating) or direct (cooling) action

Output 2: PID cooling control, cooling P band 50-300% of PB, dead band -36.0 to 36.0% of PB

On-Off: 0.1 - 90.0°F hysteresis control (P band = 0)

P or PD: 0 - 100.0% offset adjustment

PID: Fuzzy logic modified
Proportional band: 0.1 - 900°F
Integral time: 0 - 1000 seconds
Derivative time: 0 - 360 seconds

Cycle Time: 0.1 - 90 seconds

Manual Control: Heat (MV1) and Cool (MV2)

Auto-tuning: Cold start and warm start

Failure Mode: Auto-transfer to manual mode with sensor break or A-D converter damage

Ramping Control: 0 - 900°F/min or 0 - 900°F/hr ramp rate

Environmental and Physical

Operating Temperature: 14 to 122°F (-10 to 50°C)

Humidity: 0 to 90% RH, non-condensing

Dielectric Strength: 2000 VAC, 50/60 Hz for 1 minute

Dimensions: 1-7/8 × 1-7/8 × 4-9/16" (48 × 48 × 116 mm) H×W×D
Depth behind panel: 4-1/8" (105 mm)

Panel Cutout: 1-25/32 × 1-25/32" (45 × 45 mm) H×W

Weight: 0.33 lb. (150 grams)

Approval Standards

Safety: UL61010C-1, CSA C22.2 No. 24-93
EN61010-1 (IEC1010-1)

EMC: EN61326

Protective Class: Front Panel: IP50, optional NEMA 4X/IP65
Housing and Terminals: IP 20

Stock and Common Part Numbers

(Power Input: 90-250 VAC, no data com, no NEMA 4X)

Part Number	Signal Input	Output 1	Output 2	Alarm
TEC14001	tc	relay	relay	none
TEC14002	tc	relay	none	none
TEC14003	tc	relay	none	relay
TEC14004	tc	4-20 mA	none	none
TEC14005	RTD	relay	none	none
TEC14006	RTD	relay	none	relay
TEC14007	RTD	DC pulse	none	none
TEC14008	RTD	DC pulse	none	relay

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP