ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *ThorLabs FGA01FC* at our website: ***Click HERE***

InGaAs High Speed Photodiode with FC/PC Bulkhead



FGA01FC

Description

The Thorlabs FGA01FC photodiode is ideal for measuring both pulsed and CW fiber light sources, by converting the optical power to an electrical current. The detector is housed in a TO-46 (mod) package with an anode, cathode, and case connection and mounted in an FC bulkhead connector. The photodiode anode produces a current, which is a function of the incident light power and the wavelength. The responsivity $\Re(\lambda)$, can be read from Figure 1 to estimate the amount of photocurrent to expect. This can be converted to a voltage by placing a load resistor (R_L) from the photodiode anode to the circuit ground. The output voltage is derived as:

$$V_o = P \times \Re \times R_L$$

The bandwidth, f_{BW}, and the rise time response, t_R, are determined from the diode capacitance, C_J, and the load resistance, R_L, as shown below. The diode capacitance can be lowered by placing a bias voltage from the photodiode cathode to the circuit ground.

$$f_{BW} = \frac{1}{(2\pi)R_L C_J}, \; t_R = \frac{0.35}{f_{BW}}$$

Specifications

Specification		Value
Wavelength Range	λ	800 - 1700 nm
Peak Wavelength	λ_P	1550 nm
Responsivity	$\Re(\lambda)$	1.003 A/W
Active Area Diameter	Ø	0.12 mm
Rise/Fall Time (R_L=50 Ω, 5 V)	t_r/t_f	0.30 ns
NEP, Typical (1550 nm)	W/√Hz	4.50×10^{-15}
Dark Current (5 V)	I_d	0.05 nA (Typ.) 2.00 nA (Max)
Capacitance (5 V)	C_j	2.0 pF (Typ.)
Optical Power Damage Threshold		18 mW
Package		TO-46 (FC/PC)
Sensor Material		InGaAs


Maximum Rating	
Bias Voltage (Reverse)	20 V
Reverse Current	2 mA
ESD	500 V
Operating Temperature	-40 to +75 °C
Storage Temperature	-55 to +125 °C






Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Typical Spectral Intensity Distribution

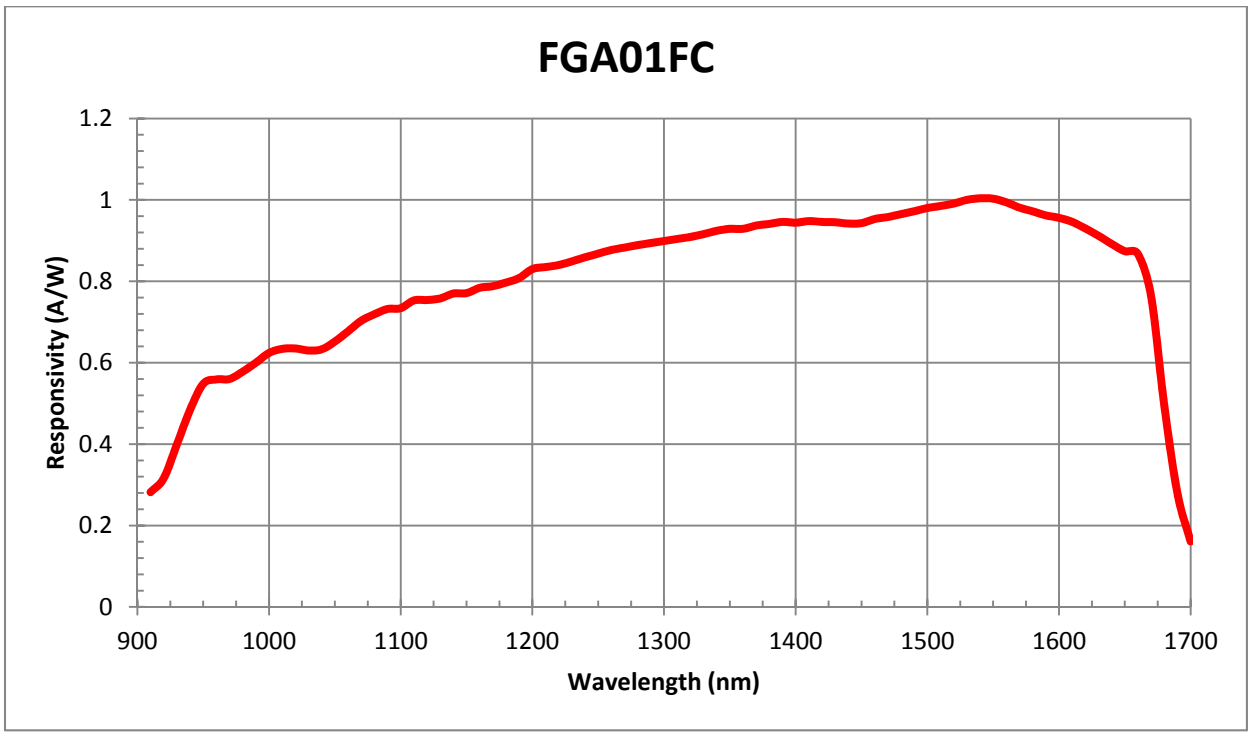


Recommended Circuit

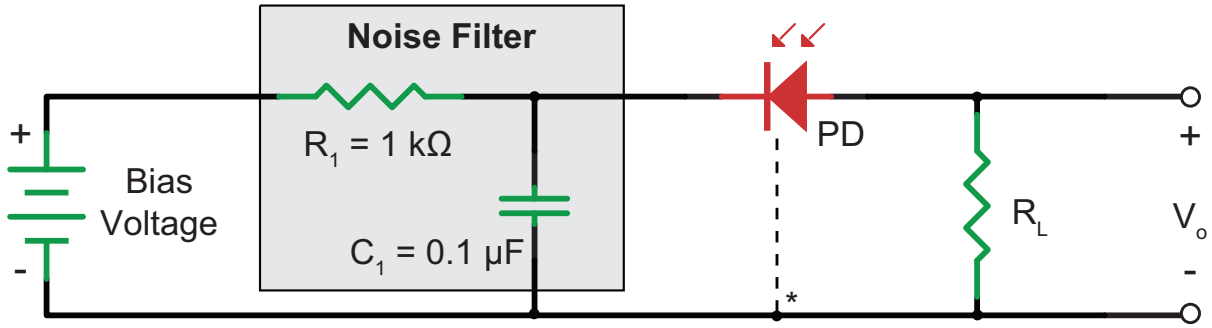

* *Case ground for PD with a third lead.*

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Drawing

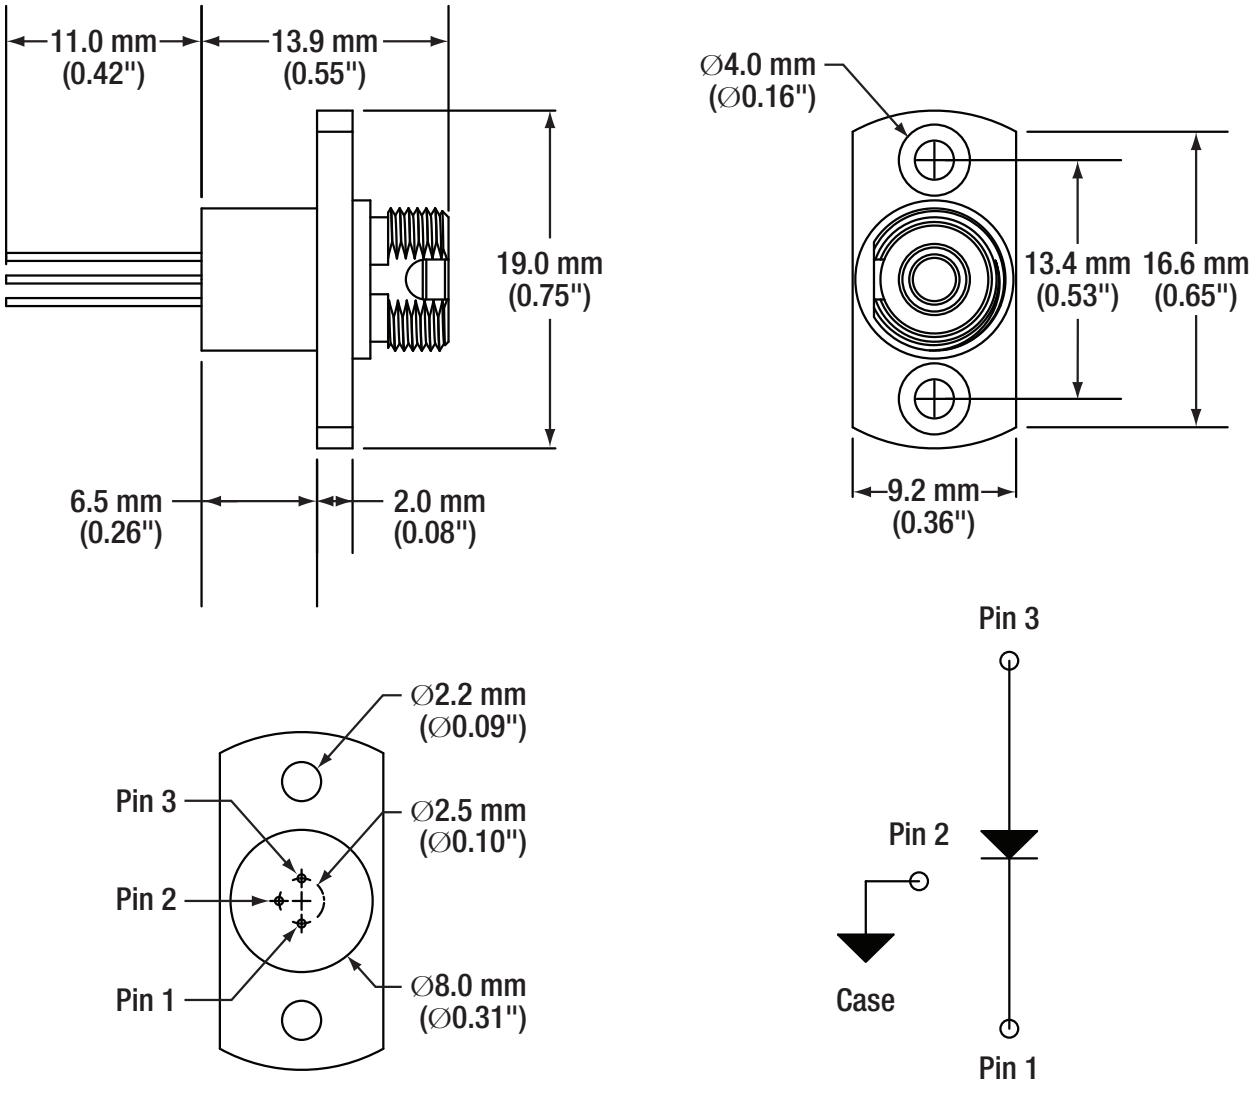

Specifications Subject
to Change without Notice

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Precautions and Warranty Information

These products are ESD (electro static discharge) sensitive and as a result are not covered under warranty. In order to ensure the proper functioning of a photodiode care must be given to maintain the highest standards of compliance to the maximum electrical specifications when handling such devices. The photodiodes are particularly sensitive to any value that exceeds the absolute maximum ratings of the product. Any applied voltage in excess of the maximum specification will cause damage and possible complete failure to the product. The user must use handling procedures that prevent any electro static discharges or other voltage surges when handling or using these devices.

Thorlabs, Inc. Life Support and Military Use Application Policy is stated below:

THORLABS' PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS OR IN ANY MILITARY APPLICATION WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF THORLABS, INC. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.

2. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

3. The Thorlabs products described in this document are not intended nor warranted for usage in Military Applications.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP