

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

EPENDENT RELAY OUTPUT


erview

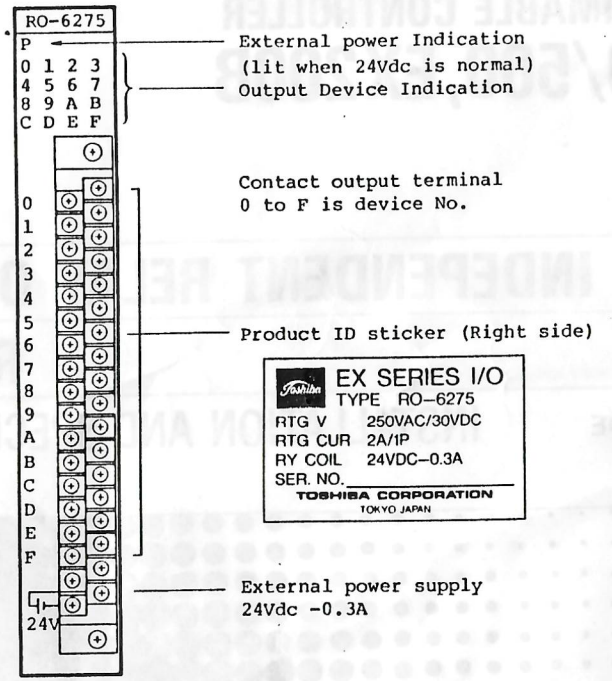


nctional
ecifications

Item	specification
Output voltage	250Vac / 30Vdc (MAX)
Output current	2A / point, 16A / 16points
Output points	16points (independent)
ON delay	10ms (MAX)
OFF delay	15ms (MAX)
Isolation between output points	respective point to External power supply and Internal circuit
Voltage protection	1500Vac for 1 min.
Internal current consumption	120mA at 5Vdc
External power supply	24Vdc ±10% -300mA (MAX)
Minimum load	50mW
Leakage current at OFF	None
Contact life	100,000 operations per contact
Weight	650g (22.9oz)

Circuit configuration

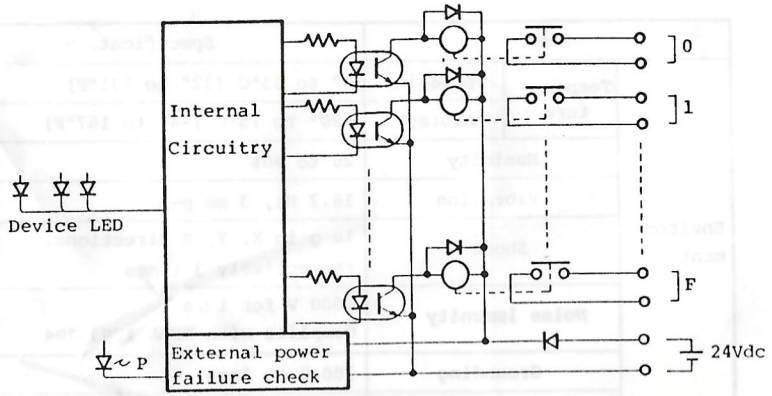


Terminal connection

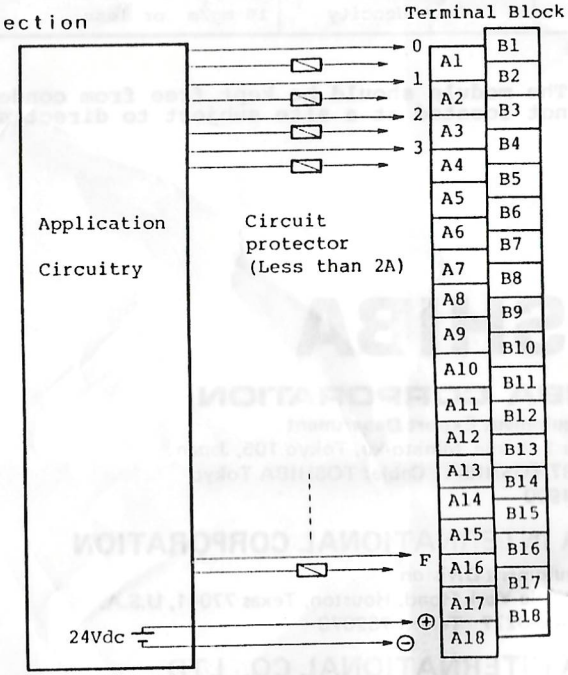

CAUTION ▼△▼

- Failure to properly protect the circuits with a circuit protector could result in damage to the module.
- A surge protector is needed for the inductive load in the module.



General specifications

Item			Specification
Environment	Temperature	Operating	0° to 55°C (32° to 131°F)
		Storage	-20° to 75°C (-4° to 167°F)
	Humidity		20 to 90%
	Vibration		16.7 Hz, 3 mm p-p
	Shock		10 g in X, Y, Z directions, respectively 3 times
	Noise immunity		1000 V for 1 μs Complies with NEMA ICS3-304
	Grounding		100 Ω or less
	Atmosphere		No corrosive/flammable gases
	Dust dencity		10 mg/m or less

NOTE ▼△▼ The module should be kept free from condensation and not located at a site subject to direct sunlight.

TOSHIBA

TOSHIBA CORPORATION

Industrial Equipment Export Department
1-1, Shibaura 1-chome, Minato-ku, Tokyo 105, Japan
Telex: J22587 TOSHIBA Cable: TOSHIBA Tokyo
Phone: 457-4900

TOSHIBA INTERNATIONAL CORPORATION

Industrial Equipment Division
13131 West Little York Road, Houston, Texas 77041, U.S.A.
Phone: 713/466-0277 Telex: 762078

TOSHIBA INTERNATIONAL CO., LTD.

4th Floor, Newspaper House, 8-16 Great New Street, London EC4A 3BN, England
Phone: 01-353-6545 Telex: 265062
Cable: TOSHIBA TIC

TOSHIBA INTERNATIONAL CORPORATION PTY, LTD.

Industrial Division
23 Leeds Street, Rhodes, N.S.W. 2138, Australia
Phone: 736-3322 Telex: AA72970

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP